


FCC PART 15.249  
EMI MEASUREMENT AND TEST REPORT

For

Shenzhen Xinjuyuan Electronic Technology Co., Ltd.  
Huafeng high-tech industrial zone, Song'Yu Road, Song'Gang, Bao'An, Shenzhen, China

**FCC ID: ZCW-B305**

August 22, 2012

This Report Concerns: Original Report	Equipment Type: Slim Bluetooth Keyboard
Test Engineer:	Eric Li <i>Eric Li</i>
Test Engineer of performing the tests:	Adam Yang <i>Adam Yang</i>
Report No.:	BST12081018Y-1ER-3
Receive EUT Date/Test Date:	August 10, 2012/ August 11-18, 2012
Reviewed By:	Christina Deng <i>Christina Deng</i>
Prepared By:	 <b>Shenzhen BST Technology Co.,Ltd.</b> 3F, Weames Technology Building, No. 10 Kefa Road, Science Park, Nanshan District, Shenzhen, Guangdong, China Tel: 0755-26747751 ~ 3 Fax: 0755-26747751 ~ 3 ext.826

**Note:** The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of Shenzhen BST Technology Co.,Ltd. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

## TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>3</b>
1.1.	Report information .....	3
1.2.	Measurement Uncertainty .....	3
<b>2.</b>	<b>PRODUCT DESCRIPTION .....</b>	<b>4</b>
2.1.	EUT Description .....	4
2.2.	Block Diagram of EUT Configuration.....	4
2.3.	Support Equipment List .....	5
2.4.	Test Conditions .....	5
<b>3.</b>	<b>FCC ID LABEL.....</b>	<b>6</b>
<b>4.</b>	<b>TEST RESULTS SUMMARY .....</b>	<b>7</b>
	Modifications .....	7
<b>5.</b>	<b>TEST EQUIPMENT USED .....</b>	<b>8</b>
<b>6.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>9</b>
6.1.	Standard Applicable.....	9
6.2.	Antenna Connected Construction .....	9
6.3.	Result .....	9
<b>7.</b>	<b>CONDUCTED POWER LINE TEST .....</b>	<b>10</b>
7.1.	Test Equipment .....	10
7.2.	Test Procedure .....	10
7.3.	Test Setup.....	10
7.4.	Conducted Power line Emission Limits.....	10
7.5.	Conducted Power Line Test Result.....	11
<b>8.</b>	<b>RADIATED EMISSION TEST .....</b>	<b>13</b>
8.1.	Test Equipment .....	13
8.2.	Test Procedure .....	13
8.3.	Radiated Test Setup .....	13
8.4.	Radiated Emission Limit.....	15
8.5.	Radiated Emission Test Result .....	16
<b>9.</b>	<b>BAND EDGE .....</b>	<b>18</b>
9.1.	Test Equipment .....	18
9.2.	Test Procedure .....	18
9.3.	Band Edge FCC 15.249(d) Limit.....	18
9.4.	Band Edge Test Result.....	19

## **1. GENERAL INFORMATION**

### **1.1. Report information**

1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BST approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BST in any way guarantees the later performance of the product/equipment.

1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BST therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BST, unless the applicant has authorized BST in writing to do so.

#### Test Facility -

The test site used to collect the radiated data is located on the address of Shenzhen Certification Technology Service Co., Ltd (FCC Registered Test Site Number: 197647) on 2F, Building B, East Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, shenzhen 518126, China  
The Test Site is constructed and calibrated to meet the FCC requirements.

### **1.2. Measurement Uncertainty**

Available upon request.

## 2. PRODUCT DESCRIPTION

### 2.1. EUT Description

Description	: Slim Bluetooth Keyboard
Applicant	: Shenzhen Xinjuyuan Electronic Technology Co., Ltd. Huafeng high-tech industrial zone, Song'Yu Road, Song'Gang, Bao'An, Shenzhen, China
Manufacturer	: Shenzhen Xinjuyuan Electronic Technology Co., Ltd. Huafeng high-tech industrial zone, Song'Yu Road, Song'Gang, Bao'An, Shenzhen, China
Model Number	: B305, B303, B306, B307, B308
Trade Name	: N/A
Frequency	: 2402-2480MHz
Power Supply	: DC 3.7V Li-ion Battery

### 2.2. Block Diagram of EUT Configuration



Figure 1 EUT Setup of TX mode

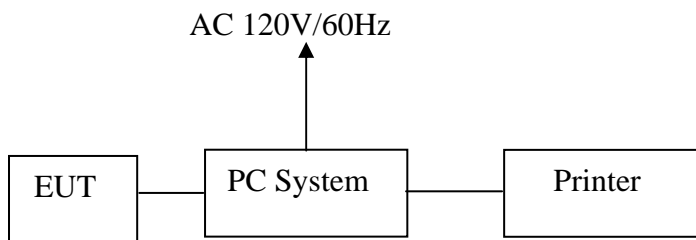


Figure 2 EUT Setup of Charging mode

### 2.3. Support Equipment List

Name	Model No	S/N	Manufacturer	Used “ ”
PC system	AM1830	N/A	Acer	
Printer	HP1020	N/A	HP	

### 2.4. Test Conditions

Temperature: 20~25

Relative Humidity: 50~63 %

### 3. FCC ID LABEL

**FCC ID: ZCW-B305**

**This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1. This device may not cause harmful interference, and 2. This device must accept any interference received, including interference that may cause undesired operation.**

#### Label Location on EUT

#### EUT View/ FCC ID Label Location



#### 4. TEST RESULTS SUMMARY

##### FCC 15 Subpart C, Paragraph 15.249

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	Compliant
Section 15.249(a)	The fundamental field strength and the harmonics	Compliant
Section 15.209 Section 15.249(d)	Radiated Emission	Compliant
Section 15.249(d)	Band Edge	Compliant
Section 15.203	Antenna Requirement	Compliant

Remark: "N/A" means "Not applicable".

Statement: All testing was performed using the test procedures found in ANSI C63.4-2003.

##### Modifications

No modification was made.

## 5. TEST EQUIPMENT USED

Equipment/Facilities	Manufacturer	Model	Serial no.	Date of Cal.	Cal. Interval
3m Semi-Anechoic Chamber	Changzhou Chengyu	EC3048	N/A	May 5, 2012	1 Year
Broadband antenna	SCHWARZBECK	VULB 9168	VULB916 8-438	Aug. 14, 2012	1 Year
Horn antenna	R&S	HF906	10027	Aug. 14, 2012	1 Year
ETS Horn Antenna	ETS	3160	SEL0076	May 8, 2012	1 Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	Apr. 6, 2012	1 Year
Spectrum analyzer	Agilent	E4443A	MY461856 49	Apr. 6, 2012	1 Year
Test receiver	R&S	ESCI	100492	Apr. 6, 2012	1 Year
Test receiver	R&S	ESCI	101202	Apr. 6, 2012	1 Year
L.I.S.N.	SCHWARZBECK	NSLK8126	8126466	Apr. 6, 2012	1 Year
L.I.S.N.	SCHWARZBECK	NSLK8126	8126487	Apr. 6, 2012	1 Year
Cable	Resenberger	N/A	NO.1	Apr. 6, 2012	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Apr. 6, 2012	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Apr. 6, 2012	1 Year
Pre-amplifier	SCHWARZBECK	BBV9743	9743-019	Apr. 6, 2012	1 Year
Pre-amplifier	R&S	AFS33-1800 2650-30-8P- 44	SEL0080	Apr. 6, 2012	1 Year



## **6. ANTENNA REQUIREMENT**

### **6.1. Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **6.2. Antenna Connected Construction**

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The antenna used in this product is PCB antenna. The antenna is permanently attached. Refer to the product photo.

### **6.3. Result**

Compliance

## 7. CONDUCTED POWER LINE TEST

### 7.1. Test Equipment


Please refer to section 5 this report.

### 7.2. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uh coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uh coupling impedance with 50ohm termination.

Both sides of A.C. Line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ASIN C63.4:2003 on conducted measurement. Conducted emissions were measured over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9KHz.

### 7.3. Test Setup

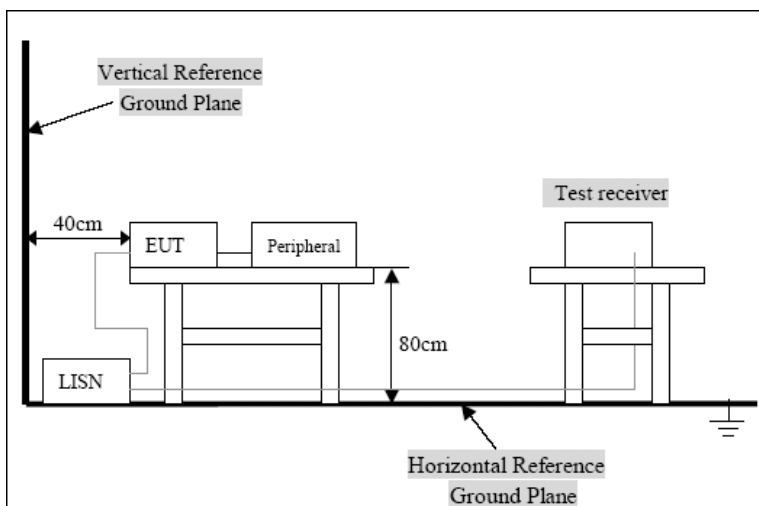

For the actual test configuration, please refer to the related items-Photos of testing

### 7.4. Conducted Power line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHZ)	Class A QP/AV	Class B QP/AV
0.15-0.5	79/66	65-56/56-46
0.5-5.0	73/60	56-46
5.0-30.0	73/60	60-50


**Note:** In the above table, the tighter limit applies at the band edges.

### 7.5. Conducted Power Line Test Result

**Pass.**

Date of Test:	<u>August 16, 2012</u>	Temperature:	<u>23°C</u>
EUT:	<u>Slim Bluetooth Keyboard</u>	Humidity:	<u>54%</u>
Model No.:	<u>B305</u>	Power Supply:	<u>DC 5V power by PC USB port PC power: AC120V/60Hz</u>
Test Mode:	<u>Charging</u>	Test Engineer:	<u>Eric Li</u>

L Line

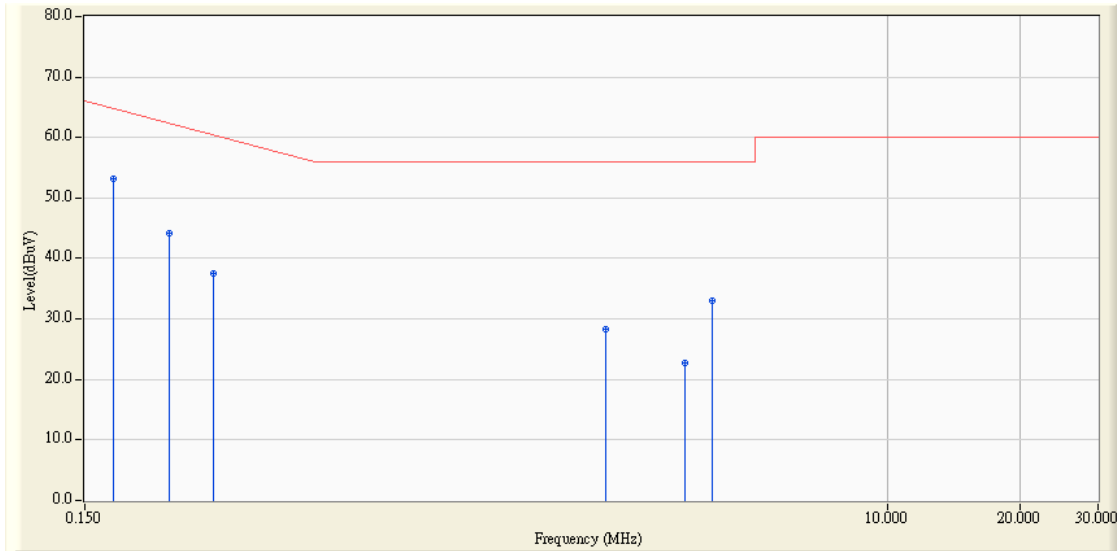

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.174	9.929	43.200	53.129	-11.638	64.767	QUASIPeAK
2		0.234	9.450	34.800	44.250	-18.057	62.307	QUASIPeAK
3		0.294	9.498	28.000	37.498	-22.913	60.411	QUASIPeAK
4		2.282	9.708	18.600	28.308	-27.692	56.000	QUASIPeAK
5		3.450	9.780	13.000	22.780	-33.220	56.000	QUASIPeAK
6		3.978	9.813	23.200	33.013	-22.987	56.000	QUASIPeAK


  

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.174	9.929	33.500	43.429	-11.338	54.767	AVERAGE
2		0.234	9.450	24.100	33.550	-18.757	52.307	AVERAGE
3		0.294	9.498	21.900	31.398	-19.013	50.411	AVERAGE
4		2.282	9.708	16.000	25.708	-20.292	46.000	AVERAGE
5		3.450	9.780	7.700	17.480	-28.520	46.000	AVERAGE
6		3.978	9.813	16.100	25.913	-20.087	46.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

N Line

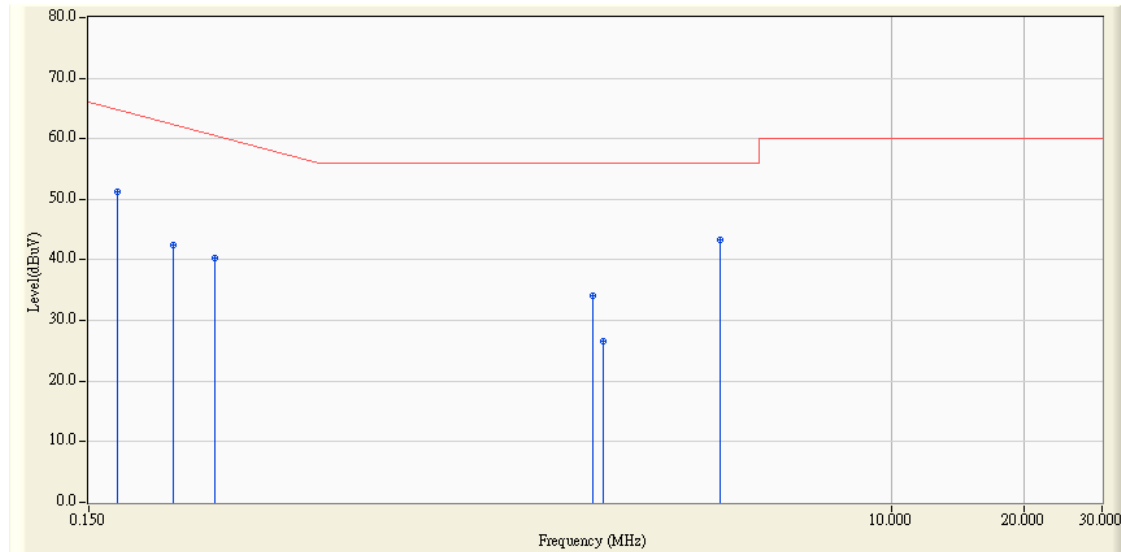

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.174	9.929	41.400	51.329	-13.438	64.767	QUASPEAK
2		0.234	9.450	33.000	42.450	-19.857	62.307	QUASPEAK
3		0.290	9.494	30.800	40.294	-20.230	60.524	QUASPEAK
4		2.090	9.684	24.400	34.084	-21.916	56.000	QUASPEAK
5		2.210	9.700	16.800	26.500	-29.500	56.000	QUASPEAK
6	*	4.062	9.820	33.600	43.420	-12.580	56.000	QUASPEAK
		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.174	9.929	33.600	43.529	-11.238	54.767	AVERAGE
2		0.234	9.450	27.300	36.750	-15.557	52.307	AVERAGE
3		0.290	9.494	25.100	34.594	-15.930	50.524	AVERAGE
4		2.090	9.684	22.500	32.184	-13.816	46.000	AVERAGE
5		2.210	9.700	18.900	28.600	-17.400	46.000	AVERAGE
6		4.062	9.820	23.600	33.420	-12.580	46.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " \* ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

## 8. RADIATED EMISSION TEST

### 8.1. Test Equipment

Please refer to section 5 this report.

### 8.2. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level.

Calibrated Loop antenna is used as receiving antenna for frequencies below 30MHz, Calibrated Bilog antenna is used as receiving antenna for frequencies between 30 MHz and 1 GHz, Calibrated Horn antenna is used as receiving antenna for frequencies above 1000MHz. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver is set at 9kHz in below 30MHz. and set at 120kHz in 30-1000MHz, and 1MHz in above 1000MHz.


The frequency range from 9kHz to 25GHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Peak detector and Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.


Through three orthogonal axes to determine which attitude and equipment arrangement produces the highest emission relative to the limit.

### 8.3. Radiated Test Setup


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

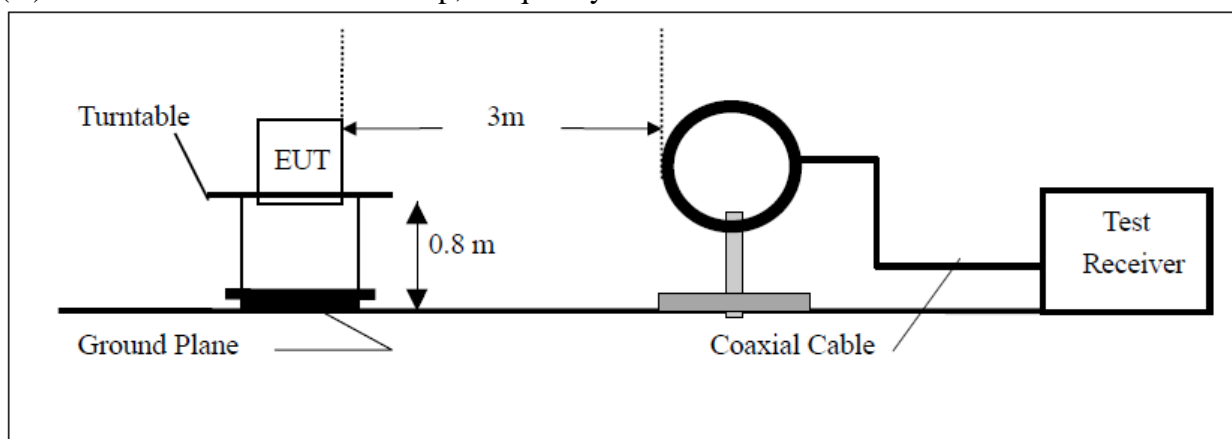

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

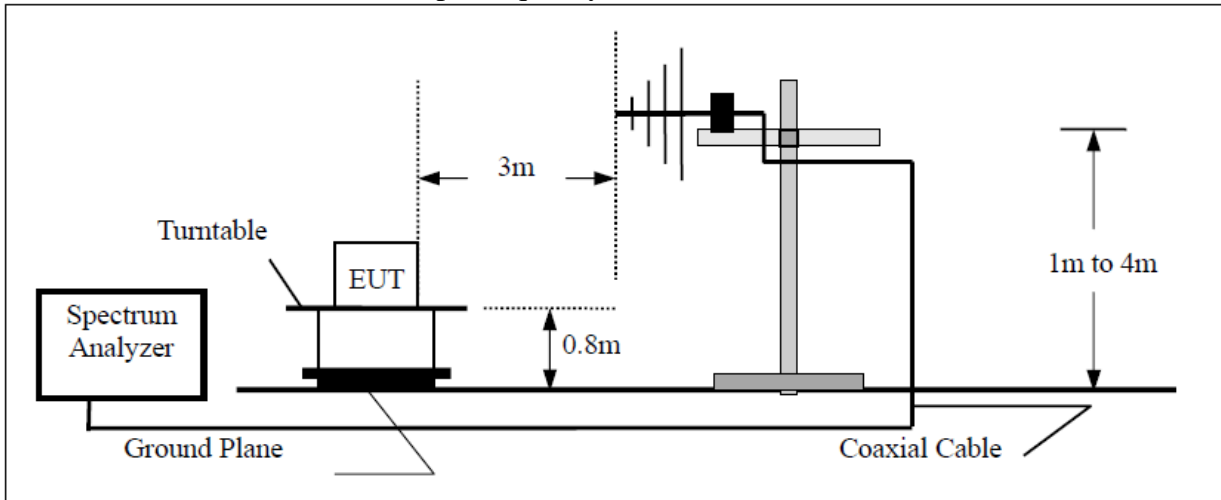

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

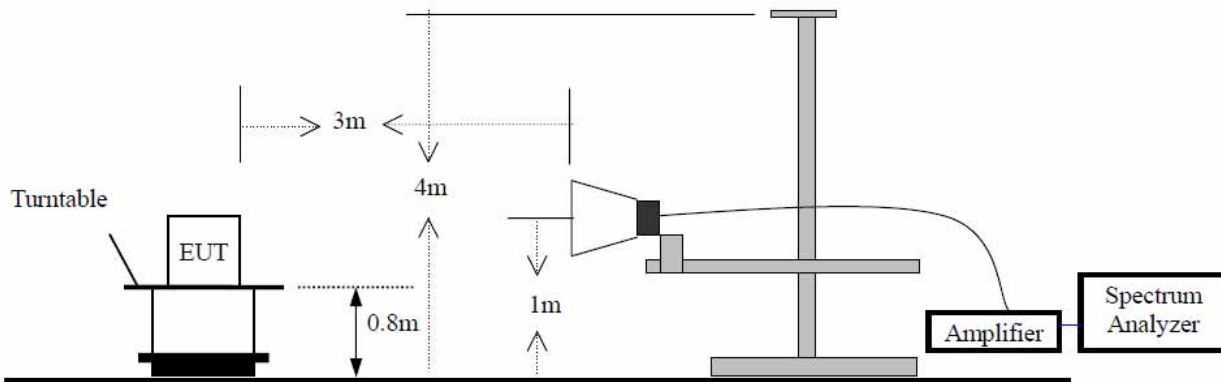

### 8.4. Radiated Emission Limit

All emission from a digital device,including any network of conductors and apparatus connected thereto,shall not exceed the level of field strength specified below :

#### A . Fundamental and Harmonics Radiated Emissions 15.249(a) Limit

Fundamental Frequency (MHZ)	Field as trength of Fundamental(3m)			Field as trength of Harmonics(3m)		
	mV/m	dBuV/m		uV/m	dBuV/m	
902~928	50	94(AV)	114(Peak )	500	54(AV)	74(Peak)
2400~2483.5	50	94(AV)	114(Peak )	500	54(AV)	74(Peak)

Note: (1) RF Voltage (dBuV)=20 log Voltage(uV)

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

(3) The emission limit in this paragraph os based on measurement instrumentation employing an average detector.Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.

#### B. Spurious Radiated Emissions.

Frequency (MHz)	Limit			The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dBμV/m)	Measurement distance (m)	
0.009 - 0.490	2400/F(kHz)	/	300	
0.490 - 1.705	24000/F(kHz)	/	30	
1.705-30	30	29.5	30	
30 - 88	100	40	3	
88 - 216	150	43.5	3	
216 - 960	200	46	3	
Above 960	500	54	3	

Note: (1) RF Voltage (dBuV)=20 log Voltage(uV)

(2) In the Above Table,the tighter limit applies at the band edges.

(3) Distaqnce refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

**8.5. Radiated Emission Test Result**

Pass

**A. Fundamental Radiated Emissions Data****CH Low**

Freq. (MHz)	Emission(dBuV/m) AV/PK	HORIZ/ VERT	Limits(dBuV/m) AV/PK	Margin (dB)
2402	83.74/95.63	VERT	94/114	10.26/18.37
2402	81.08/93.18	HORIZ	94/114	12.92/20.82

**CH Middle**

Freq. (MHz)	Emission(dBuV/m) AV/PK	HORIZ/ VERT	Limits(dBuV/m) AV/PK	Margin (dB)
2441	82.42/94.71	VERT	94/114	11.58/19.29
2441	81.26/93.53	HORIZ	94/114	12.74/20.47

**CH High**

Freq. (MHz)	Emission(dBuV/m) AV/PK	HORIZ/ VERT	Limits(dBuV/m) AV/PK	Margin (dB)
2480	81.37/93.59	VERT	94/114	12.63/20.41
2480	80.72/92.68	HORIZ	94/114	13.28/21.32



**B. Harmonics Radiated Emissions Data**

**CH Low**

Freq. (MHz)	Emission(dBuV/m) AV/PK	HORIZ/ VERT	Limits(dBuV/m) AV/PK	Margin (dB)
4804.0	44.52/56.73	VERT	54.0/74.0	9.48/17.27
4804.0	43.14/55.08	HORIZ	54.0/74.0	10.86/18.92

Emissions attenuated more than 20 dB below the permissible value are not reported.

**CH Middle**

Freq. (MHz)	Emission(dBuV/m) AV/PK	HORIZ/ VERT	Limits(dBuV/m) AV/PK	Margin (dB)
4882.0	43.47/55.36	VERT	54.0/74.0	10.53/18.64
4882.0	43.23/55.11	HORIZ	54.0/74.0	10.77/18.89

Emissions attenuated more than 20 dB below the permissible value are not reported.

**CH High**

Freq. (MHz)	Emission(dBuV/m) AV/PK	HORIZ/ VERT	Limits(dBuV/m) AV/PK	Margin (dB)
4960.0	42.87/54.49	VERT	54.0/74.0	11.13/19.51
4960.0	41.76/53.91	HORIZ	54.0/74.0	12.24/20.09

Emissions attenuated more than 20 dB below the permissible value are not reported.

**C. General Radiated Emissions Data**

Freq. (MHz)	Emission(dBuV/m) AV/PK	HORIZ/ VERT	Limits(dBuV/m) AV/PK	Margin (dB)
-	-	HORIZ	-	-
-	-	VERT	-	-

Emissions attenuated more than 20 dB below the permissible value are not reported.

## **9. BAND EDGE**

### **9.1. Test Equipment**

Please refer to Section 5 this report.

### **9.2. Test Procedure**

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement. The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz respectively.

### **9.3. Band Edge FCC 15.249(d) Limit**

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50dB below that in the 100kHz bandwidth within the band that contains the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**9.4. Band Edge Test Result****Pass****TX 2402MHz**

Frequency (MHz)	Result(dB $\mu$ V/m)		Limit(dB $\mu$ V/m)		Margin(dB)		Polarization
	PEAK	AV	PEAK	AV	PEAK	AV	
2390.000	61.15	48.39	74	54	12.85	5.61	Vertical
2390.000	61.32	48.35	74	54	12.68	5.65	Horizontal

Note:

1. The average measurement was not performed when the peak measured data under the limit of average detection.


**TX 2480MHz**

Frequency (MHz)	Result(dB $\mu$ V/m)		Limit(dB $\mu$ V/m)		Margin(dB)		Polarization
	PEAK	AV	PEAK	AV	PEAK	AV	
2383.500	61.86	48.81	74	54	12.14	5.19	Vertical
2383.500	62.26	48.85	74	54	11.74	5.15	Horizontal


Note:

1. The average measurement was not performed when the peak measured data under the limit of average detection.


Vertical (PK) TX 2402MHz

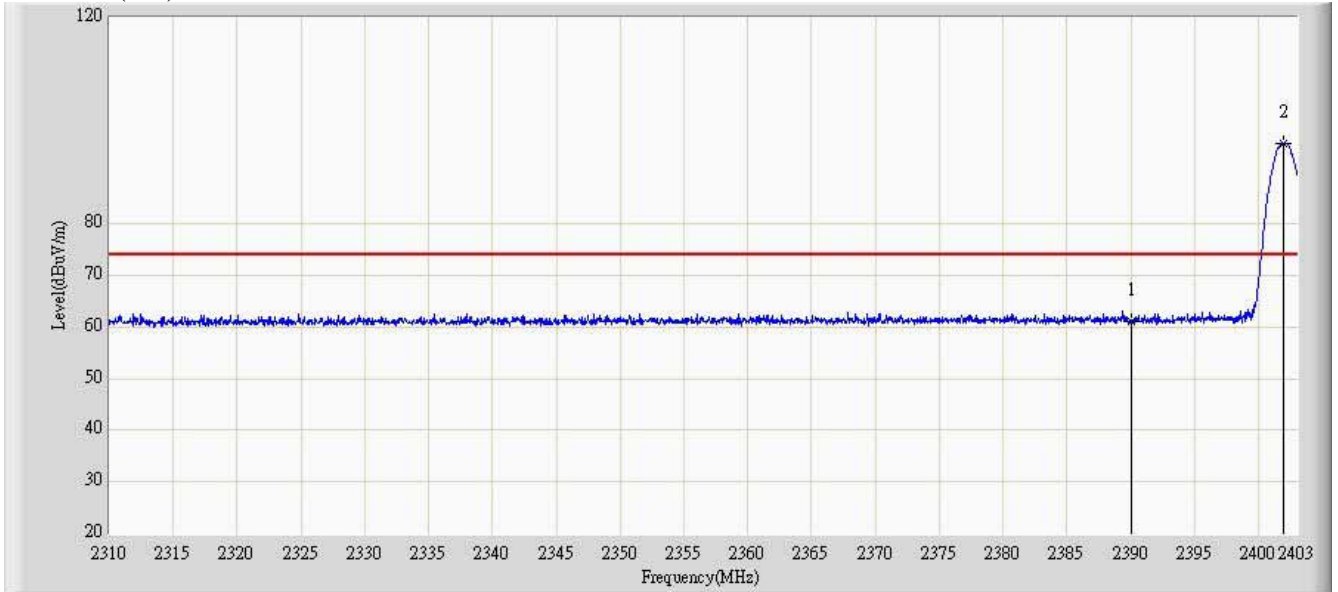


Vertical (AV) TX 2402MHz

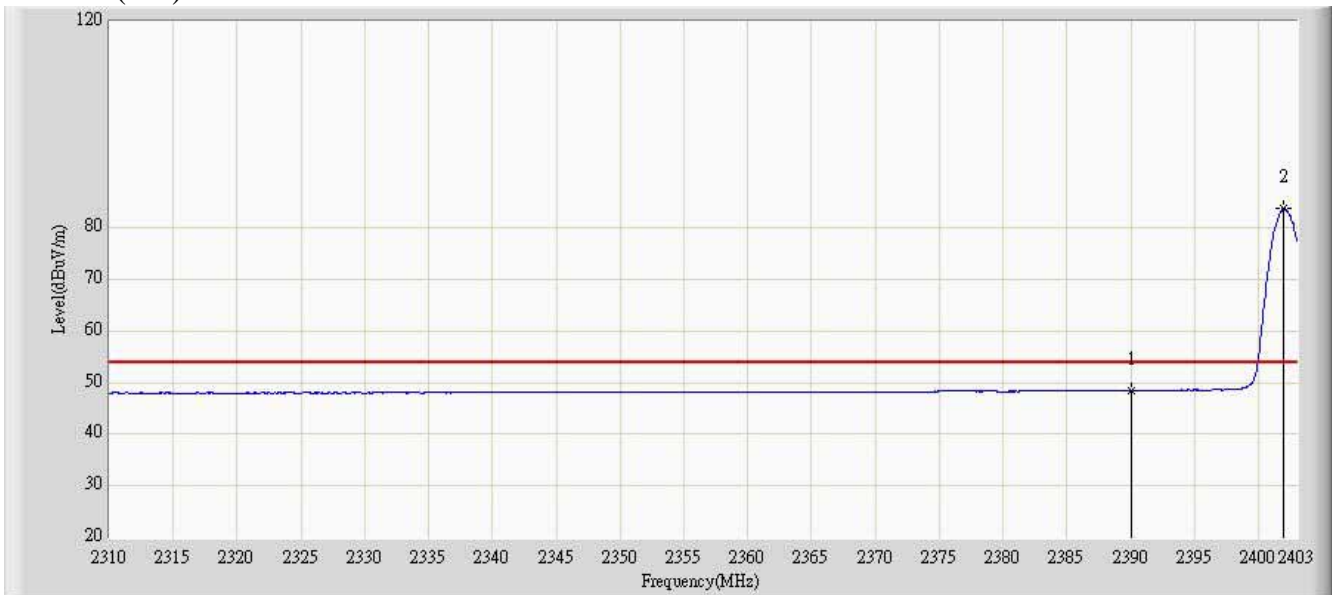


Horizontal (PK) TX 2402MHz

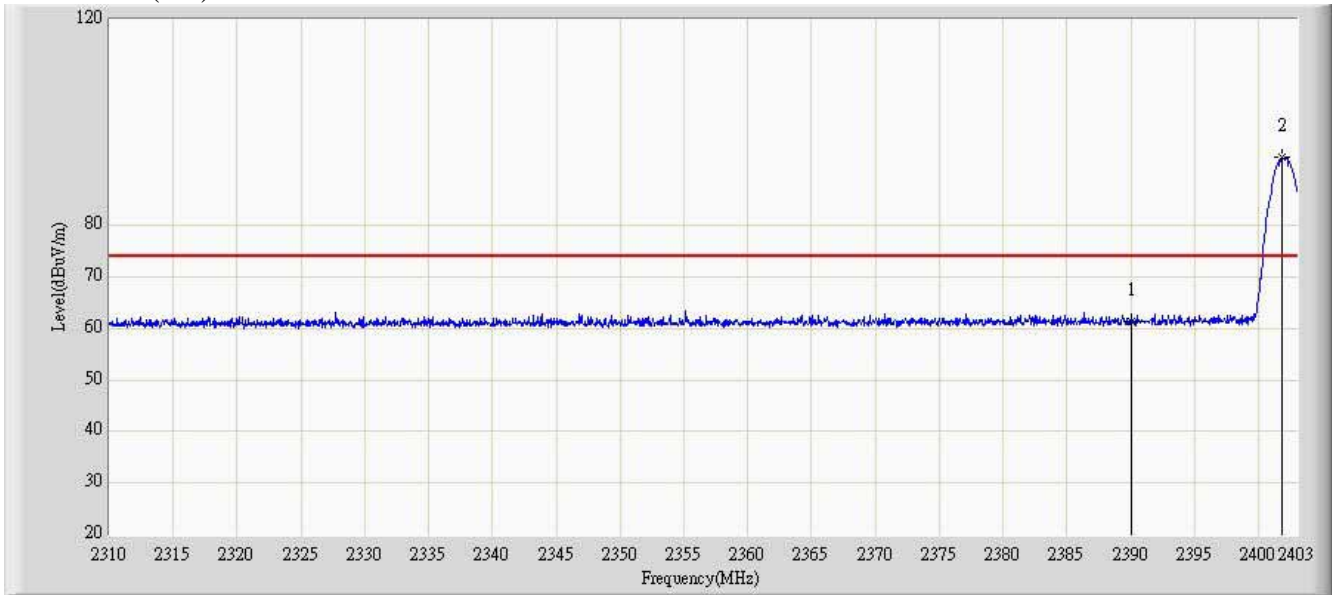


Horizontal (AV) TX 2402MHz

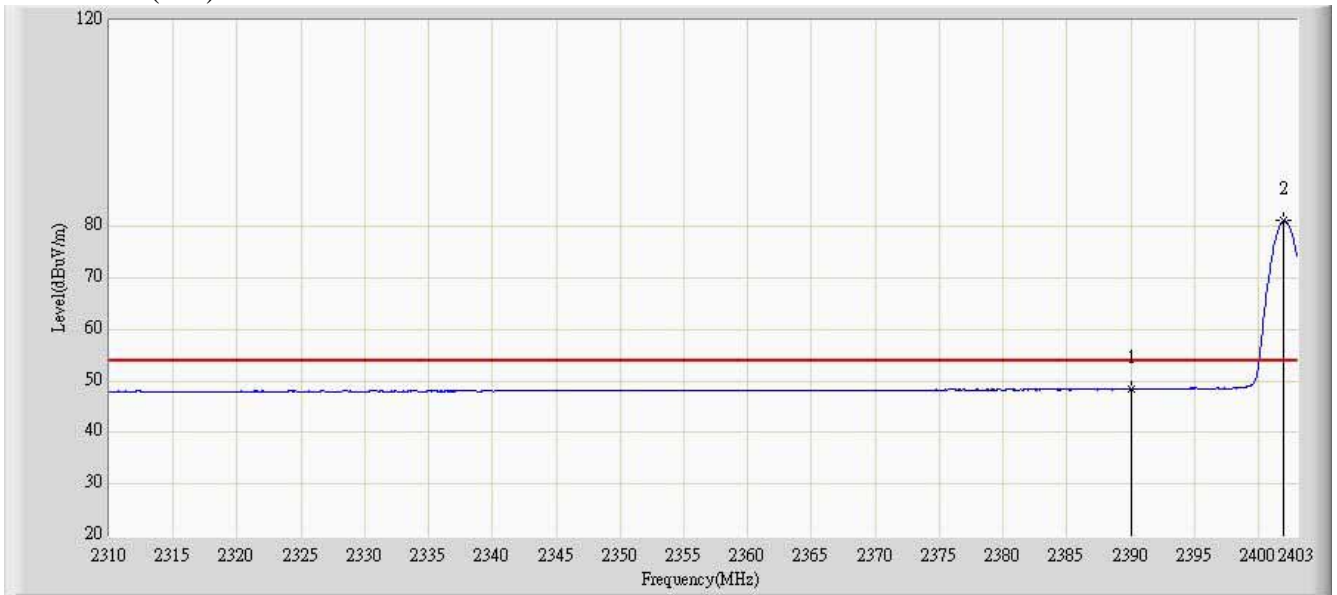


Vertical (PK) TX 2480MHz

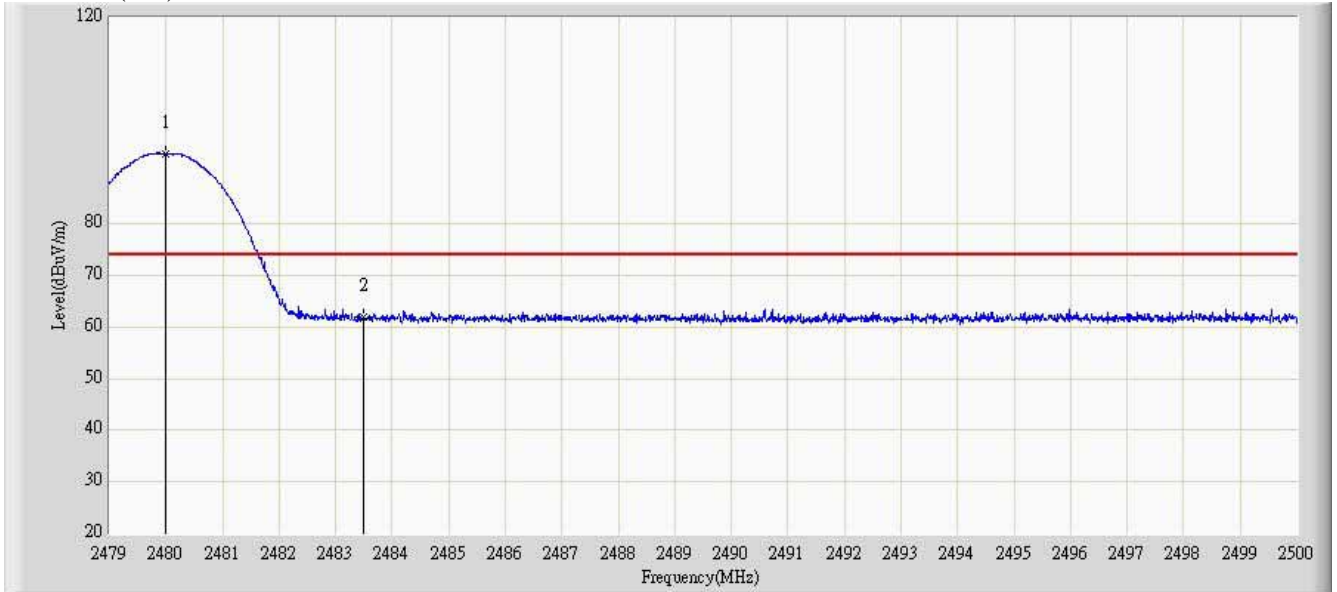

Vertical (AV) TX 2480MHz

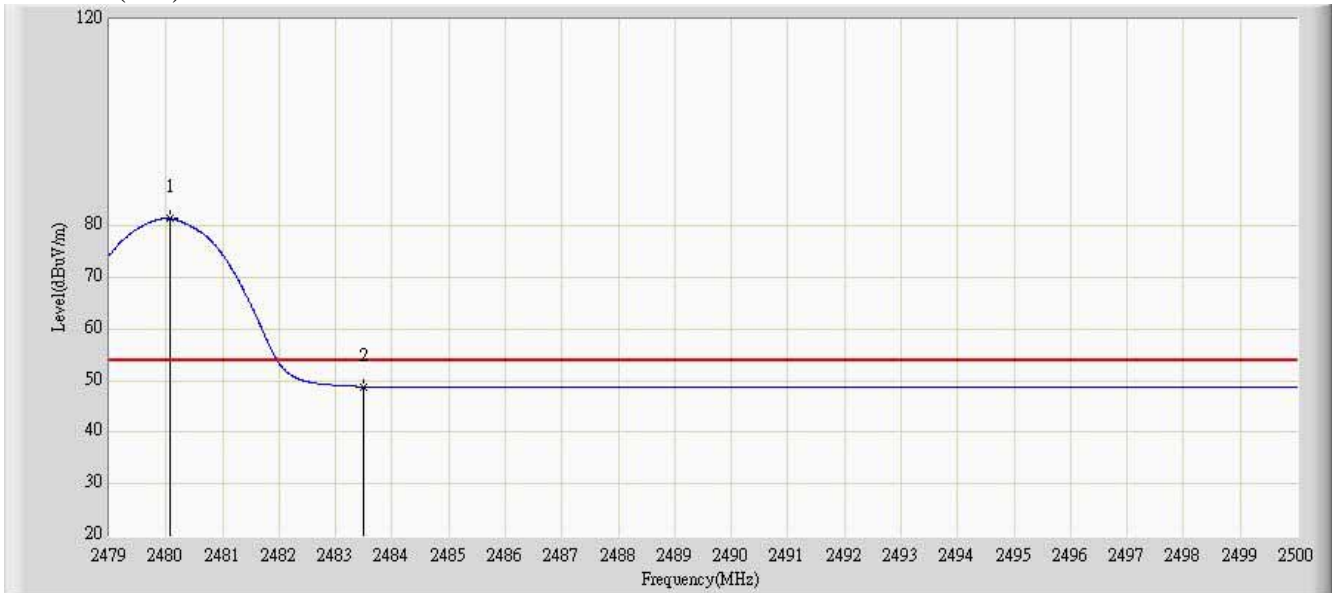

Horizontal (PK) TX 2480MHz

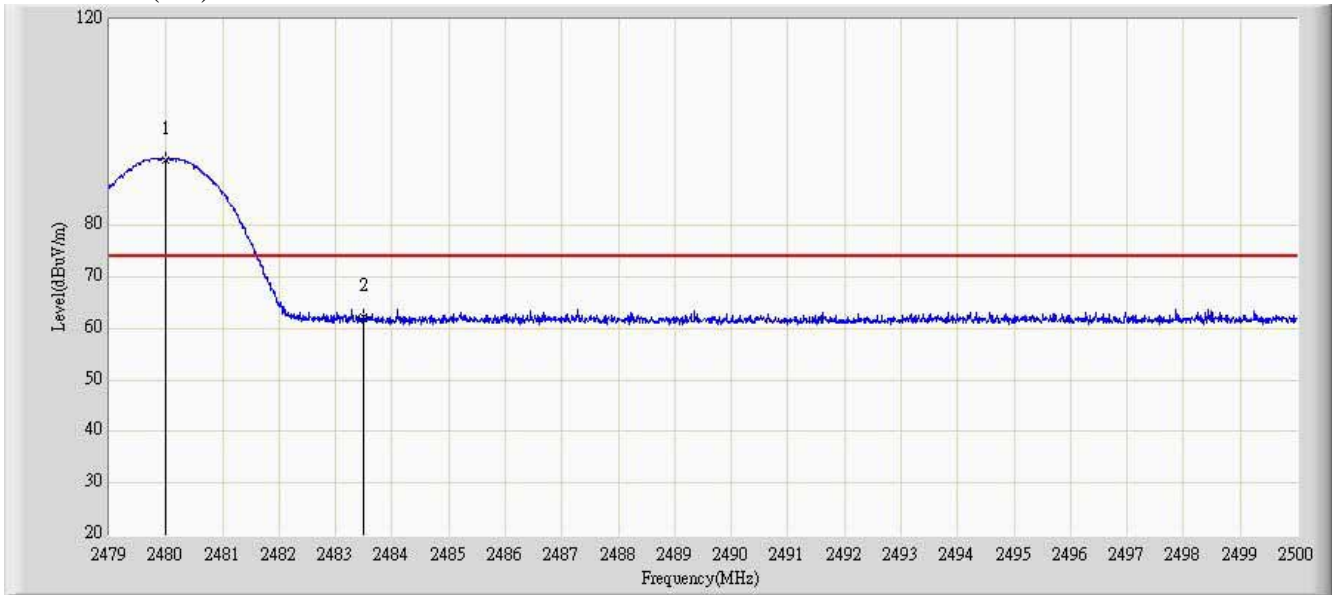

Horizontal (AV) TX 2480MHz

