



# FCC PART 15.225

## TEST REPORT

For

### Feitian Technologies Co., Ltd.

Floor 17th, Tower B, Huizhi Mansion, No.9 Xueqing Road, Haidian District, Beijing, China

**FCC ID: ZD3FTF310P**

<b>Report Type:</b> Original Report	<b>Product Name:</b> Android POS Terminal
<b>Report Number:</b>	RKSA240112001-00E
<b>Report Date:</b>	2024-07-15
<b>Reviewed By:</b>	Jenny Yang Jenny Yang
<b>Approved By:</b>	Kyle Xu Kyle Xu
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S.Government.

## TABLE OF CONTENTS

<b>REPORT REVISION HISTORY.....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE.....	5
TEST METHODOLOGY.....	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY.....	6
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
JUSTIFICATION.....	7
EUT EXERCISE SOFTWARE.....	7
EQUIPMENT MODIFICATIONS.....	7
SUPPORT EQUIPMENT LIST AND DETAILS.....	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP.....	8
<b>TEST EQUIPMENT LIST.....</b>	<b>10</b>
<b>SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>FCC§1.1310 &amp; §2.1093 - RF EXPOSE.....</b>	<b>12</b>
APPLICABLE STANDARD.....	12
MEASUREMENT RESULT:.....	12
<b>FCC§15.203 - ANTENNA REQUIREMENT.....</b>	<b>13</b>
APPLICABLE STANDARD.....	13
ANTENNA CONNECTED CONSTRUCTION.....	13
<b>FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS.....</b>	<b>14</b>
APPLICABLE STANDARD.....	14
TEST SYSTEM SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE.....	14
TEST RESULTS SUMMARY.....	15
TEST DATA: SEE APPENDIX.....	15
<b>FCC§15.225, §15.205 &amp; §15.209 - RADIATED EMISSIONS TEST.....</b>	<b>16</b>
APPLICABLE STANDARD.....	16
TEST SYSTEM SETUP.....	16
EMI TEST RECEIVER SETUP.....	18
TEST RESULTS SUMMARY.....	18
TEST DATA: SEE APPENDIX.....	18
<b>FCC§15.225(E) - FREQUENCY STABILITY.....</b>	<b>19</b>
APPLICABLE STANDARD.....	19
TEST PROCEDURE.....	19
TEST DATA: SEE APPENDIX.....	20
<b>§15.215(C) - 20DB EMISSION BANDWIDTH TESTING.....</b>	<b>21</b>
REQUIREMENT.....	21
TEST PROCEDURE.....	21
TEST DATA: SEE APPENDIX.....	21
<b>EUT PHOTOGRAPHS.....</b>	<b>22</b>

---

---

<b>TEST SETUP PHOTOGRAPHS .....</b>	<b>23</b>
<b>APPENDIX - TEST DATA.....</b>	<b>24</b>
AC LINE CONDUCTED EMISSIONS .....	25
RADIATED EMISSIONS TEST .....	27
FREQUENCY STABILITY .....	37
20dB EMISSION BANDWIDTH TESTING.....	38

## REPORT REVISION HISTORY

---

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA240112001-00E	R1V1	2024-07-15	Initial Release

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant:	Feitian Technologies Co., Ltd.
Tested Model:	F310 P
Series Model:	F310
Model Difference:	Model name, see the declaration letter for details
Product Name:	Android POS Terminal
Power Supply:	DC 3.8V from battery or DC 5V charging by adapter
RF Function:	NFC
Operating Band/Frequency:	13.56 MHz
Antenna Type:	Coil Antenna
★Maximum Antenna Gain:	Unknown

#### Adapter Information

Model: TEKA-UCA20US

Input: 100-240V~50/60Hz, 0.35A MAX

Output: 5.0V, 2.0A

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RKSA240112001-1 (Assigned by the BAACL (Kunshan). The EUT supplied by the applicant was received on 2024-01-12.)

### Objective

This Type approval report is prepared for *Feitian Technologies Co., Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commission's rules.

The objective is to determine the Compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

**Measurement Uncertainty**

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
Radiated emission	9kHz~30MHz	3.19dB
	30MHz~1GHz	6.11dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN5055.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

### EUT Exercise Software

The EUT is tested in the engineering mode.

### Equipment Modifications

No modification on the EUT.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Earphone	Unknown	Unknown
Unknown	TF Card	Unknown	Unknown
Unknown	NFC Card	Unknown	Unknown

### External I/O Cable

Cable Description	Length (m)	From Port	To
Power Cable	1.0	AC Source/LISN	Adapter
USB Cable	1.5	Adapter	EUT
Audio Cable	1.0	EUT	Earphone


### Block Diagram of Test Setup

For Conducted Emissions:

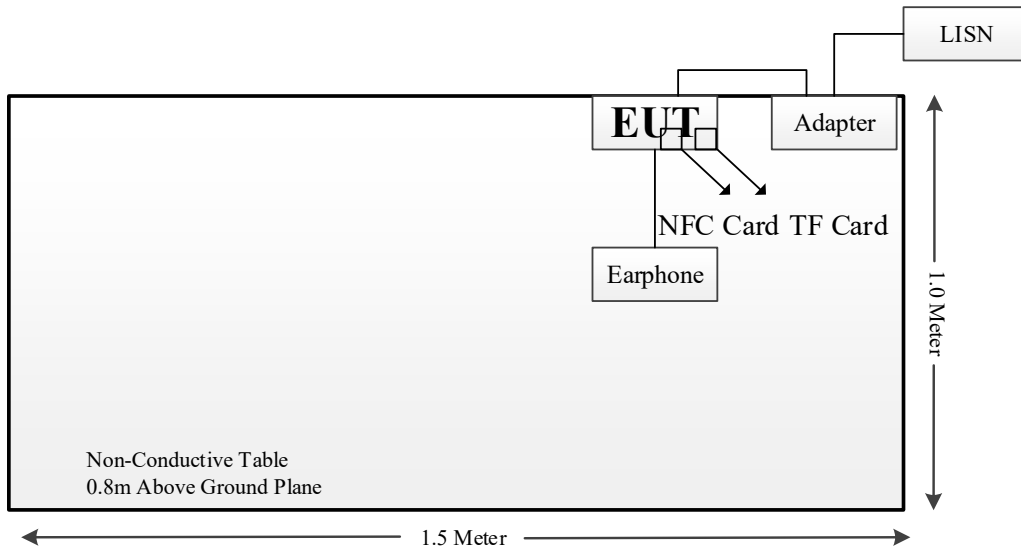



For Radiated Emissions (Below 30 MHz & Above 30 MHz):

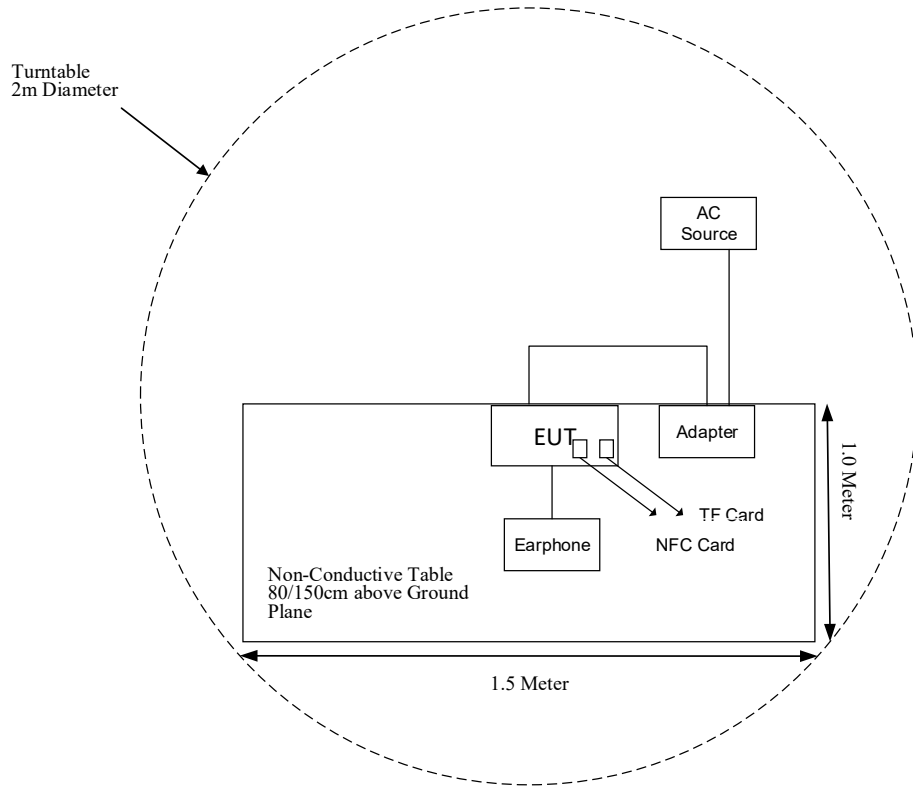

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2023-05-23	2024-05-22
Sunol Sciences	Hybrid Antenna	JB3	A090314-1	2023-11-11	2024-11-10
Sonoma Instrument	Amplifier	310N	171205	2023-05-23	2024-05-22
Narda	6dB Attenuator	773-6	10690812-2-1	2023-11-11	2024-11-10
ETS-LINDGREN	Loop Antenna	6512	00108100	2023-05-23	2024-05-22
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-10	010	2023-05-23	2024-05-22
<b>Frequency Stability</b>					
BACL	Temperature & Humidity Chamber	BTH-150	30023	2023-05-23	2024-05-22
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2023-05-23	2024-05-22
ETS-LINDGREN	Loop Antenna	6512	108100	2023-11-09	2024-11-08
MICRO-COAX	Coaxial Cable	Cable-10	010	2023-05-23	2024-05-22
EAST	Regulated DC Power Supply	MCH-303D-II	14070562	2023-10-10	2024-10-09
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESR	101746	2024-04-23	2025-04-22
Rohde & Schwarz	LISN	ENV216	101115	2024-04-23	2025-04-22
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2024-04-23	2025-04-22
MICRO-COAX	Coaxial Cable	Cable-15	015	2024-04-23	2025-04-22

**Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1310 & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.225 §15.209 §15.205	Radiated Emission Test	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.215(c)	20dB Emission Bandwidth Testing	Compliant

## FCC§1.1310 & §2.1093 - RF Exposure

---

### Applicable Standard

According to KDB447498 D01 General RF Exposure Guidance v06: 4.3. General SAR test exclusion Guidance

c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

- 1) For test separation distances  $> 50$  mm and  $< 200$  mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by  $[1 + \log(100/f(\text{MHz}))]$
- 2) For test separation distances  $\leq 50$  mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by  $\frac{1}{2}$
- 3) SAR measurement procedures are not established below 100 MHz.

### Measurement Result:

For NFC, the power of EUT: E Field@3m is 81.13dBuV/m = -14.07 dBm(0.04mW)

Note:  $E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$  for  $d = 3$  m.

SAR test exclusion threshold for NFC(13.56MHz) separation distance  $< 50$ mm

$$= [474 * (1 + \log(100/f(\text{MHz})))] / 2$$

$$= 443\text{mW}$$

$$> 0.04\text{mW}$$

**Result: Compliant.**

---

## **FCC§15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connected Construction**

The EUT has a loop antenna for 13.56 MHz, the antenna was permanently attached, fulfill the requirement of this section, please refer to the EUT photos.


**Result:** Compliant.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC§15.207(a)

**Test System Setup**

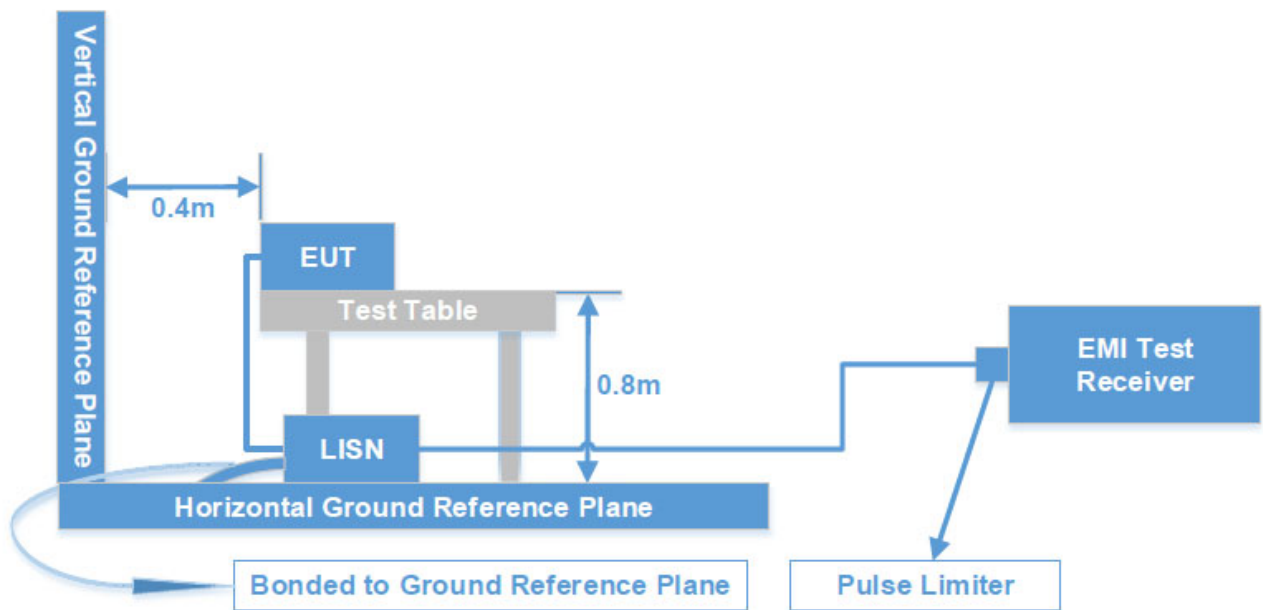

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW
150 kHz - 30 MHz	9 kHz	30 kHz

**Test Procedure**

During the conducted emission test, the EUT or adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

### Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

$$\text{Level (dB}\mu\text{V)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Level (dB}\mu\text{V)} - \text{Limit (dB}\mu\text{V)}$$

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

**Test Data: See Appendix**

## FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST


### Applicable Standard

As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.


### Test System Setup

9k - 30MHz:

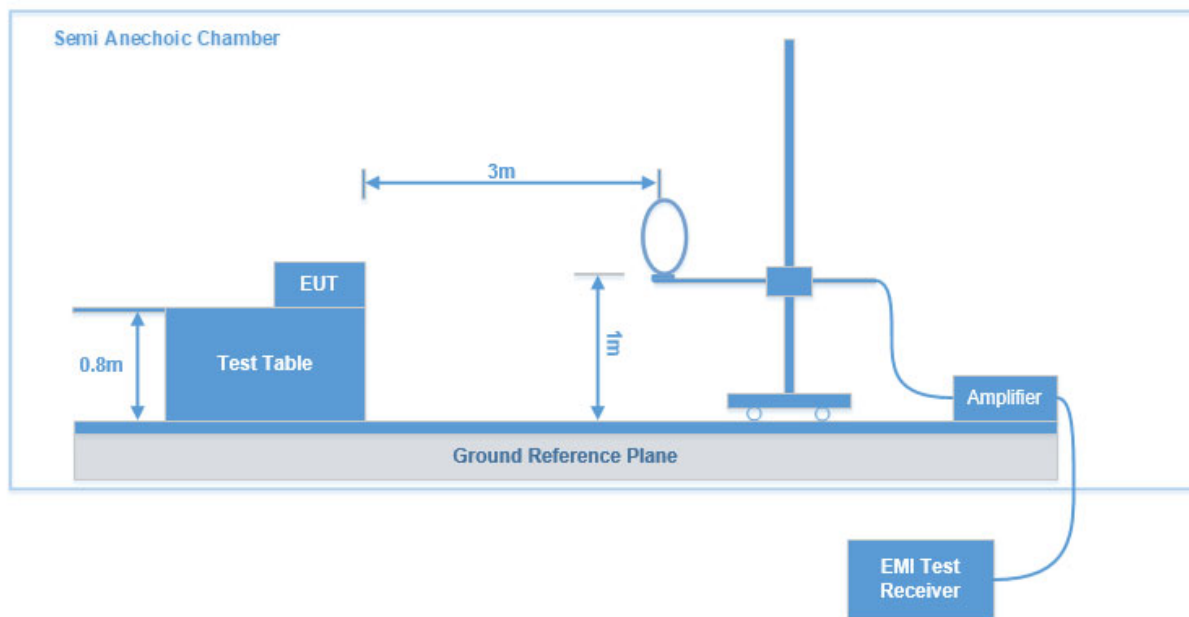



**30 MHz - 1 GHz:**

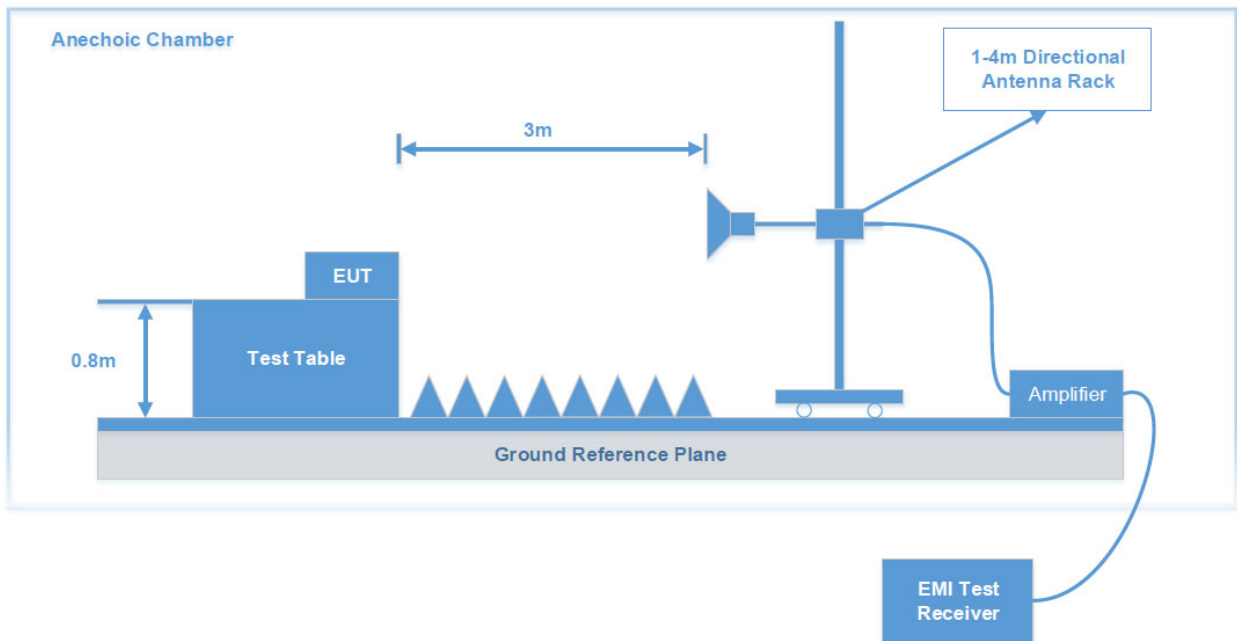

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.10. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz – 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz – 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz – 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB $\mu$ V/m) = Meter Reading (dB $\mu$ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB $\mu$ V/m) – Corrected Amplitude (dB $\mu$ V/m)

### Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209, 15.205, 15.225.

**Test Data: See Appendix**

## **FCC§15.225(e) - FREQUENCY STABILITY**

---

### **Applicable Standard**

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### **Test Procedure**

a) Supply the EUT with a nominal ac voltage or install a new or fully charged battery in the EUT. If possible, a dummy load shall be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, then the EUT shall be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn ON the EUT and tune it to one of the number of frequencies shown in 5.6.

b) Couple the unlicensed wireless device output to the measuring instrument by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away), or by connecting a dummy load to the measuring instrument, through an attenuator if necessary.  
NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory agency is the recommended measuring instrument.

c) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

d) Turn the EUT OFF and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.

e) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.


f) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

g) Measure the frequency at each of frequencies specified in 5.6.

h) Switch OFF the EUT but do not switch OFF the oscillator heater.

i) Lower the chamber temperature by not more than  $10$  °C, and allow the temperature inside the chamber to stabilize.

j) Repeat step f) through step i) down to the lowest specified temperature.

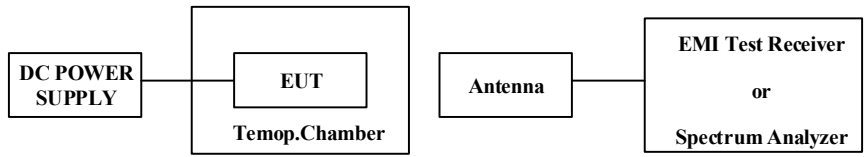

**Test Data: See Appendix**


## §15.215(c) - 20dB EMISSION BANDWIDTH TESTING

### Requirement

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### Test Procedure

1. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

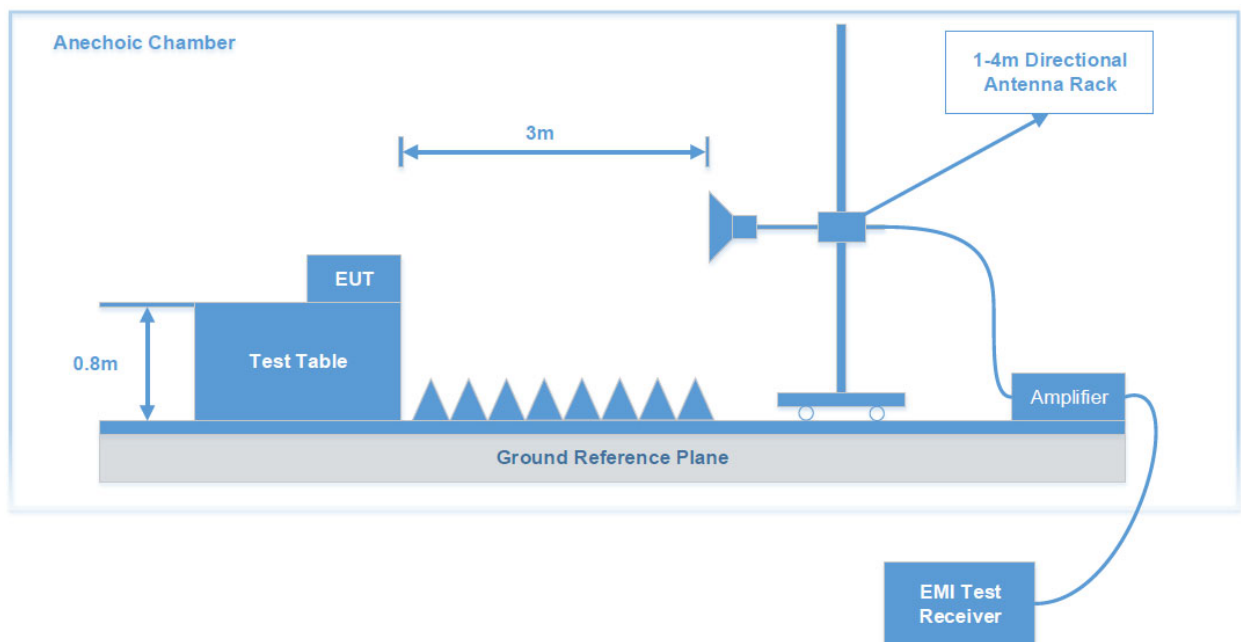

**Test Data: See Appendix**

## **EUT PHOTOGRAPHS**

---

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

## **TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment EXHIBIT E - TEST SETUP PHOTOGRAPHS.

**Appendix - TEST DATA**


Test Item:	AC LINE CONDUCTED EMISSIONS	RADIATED EMISSIONS		FREQUENCY STABILITY	20dB EMISSION BANDWIDTH TESTING
		9 kHz - 30 MHz	30 MHz - 1 GHz		
Test Date:	2024-07-15	2024-04-17	2024-03-30	2024-03-30	2024-05-15
Temperature:	25.4 °C	23.9 °C	16.7 °C	16.7 °C	22.5 °C
Relative Humidity:	60 %	46 %	60 %	60 %	45 %
ATM Pressure:	101.0 kPa	102.9 kPa	101.1 kPa	101.1 kPa	101.6 kPa
Test Result:	Pass	Pass	Pass	Pass	Pass
Test Engineer:	Leah Li	Leah Li	Leah Li	Leah Li	Leah Li



### AC LINE CONDUCTED EMISSIONS

EUT operation mode: Transmitting

AC 120V/60 Hz, Line

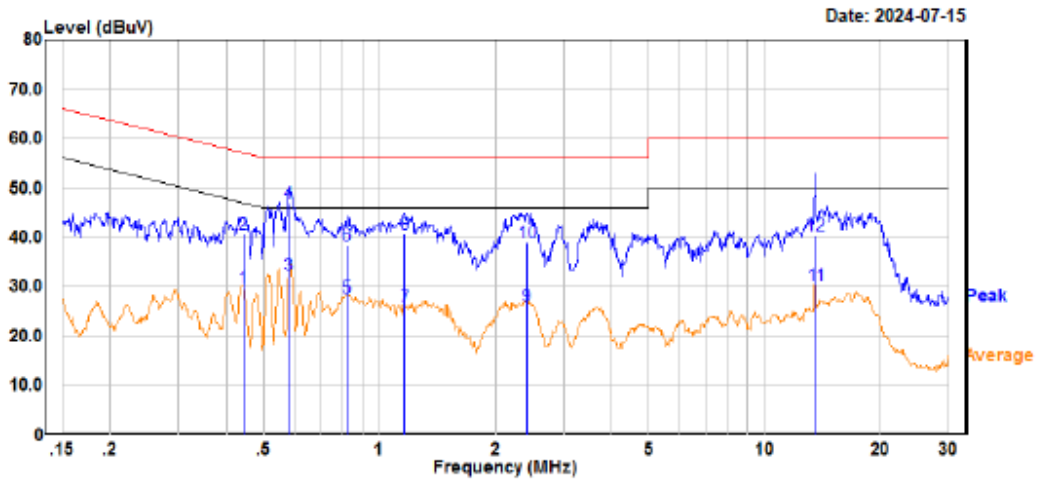


Trace: 1

Site : CE  
 Condition : limit\FCC PART 15.207  
 : DET:Peak  
 Project : RKSA240112001  
 Model : F310 P  
 Phase : L  
 Voltage : 120V/60Hz  
 Mode : NFC  
 Test Equipment : ENV216,ESR  
 Temperature : 25.4°C  
 Humidity : 60%  
 Atmospheric pressure: 101.0kPa  
 Test Engineer : Leah Li

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.442	9.60	20.09	29.69	47.02	-17.33	Average
2	0.442	20.50	20.09	40.59	57.02	-16.43	QP
3	0.579	12.20	20.09	32.29	46.00	-13.71	Average
4	0.579	26.80	20.09	46.89	56.00	-9.11	QP
5	0.821	7.79	19.93	27.72	46.00	-18.28	Average
6	0.821	18.39	19.93	38.32	56.00	-17.68	QP
7	1.158	6.00	19.85	25.85	46.00	-20.15	Average
8	1.158	20.70	19.85	40.55	56.00	-15.45	QP
9	2.409	5.91	20.22	26.13	46.00	-19.87	Average
10	2.409	18.71	20.22	38.93	56.00	-17.07	QP
11	13.514	10.40	19.86	30.26	50.00	-19.74	Average
12	13.514	20.40	19.86	40.26	60.00	-19.74	QP

AC 120V/60 Hz, Neutral

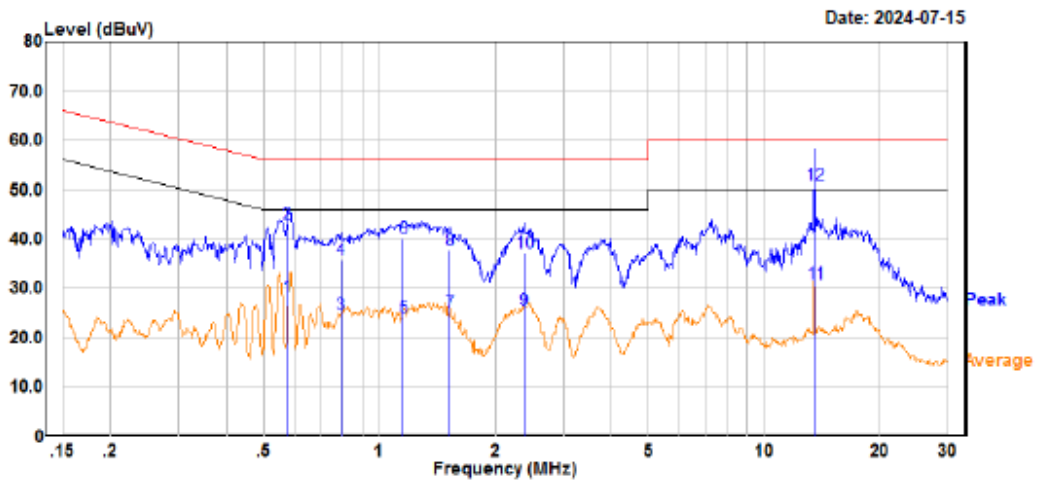

Trace: 1

Site : CE  
 Condition : limit\FCC PART 15.207  
 : DET:Peak  
 Project : RKSA240112001  
 Model : F310 P  
 Phase : N  
 Voltage : 120V/60Hz  
 Mode : NFC  
 Test Equipment : ENV216,ESR  
 Temperature : 25.4°C  
 Humidity : 60%  
 Atmospheric pressure: 101.0kPa  
 Test Engineer : Leah Li


	Read Freq	Read Level	Read Factor	Limit Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.576	8.20	20.09	28.29	46.00	-17.71	Average
2	0.576	23.00	20.09	43.09	56.00	-12.91	QP
3	0.793	4.60	19.95	24.55	46.00	-21.45	Average
4	0.793	15.80	19.95	35.75	56.00	-20.25	QP
5	1.152	4.29	19.85	24.14	46.00	-21.86	Average
6	1.152	20.29	19.85	40.14	56.00	-15.86	QP
7	1.523	5.01	20.02	25.03	46.00	-20.97	Average
8	1.523	17.61	20.02	37.63	56.00	-18.37	QP
9	2.373	5.51	20.22	25.73	46.00	-20.27	Average
10	2.373	17.01	20.22	37.23	56.00	-18.77	QP
11	13.514	11.00	19.86	30.86	50.00	-19.14	Average
12	13.514	31.20	19.86	51.06	60.00	-8.94	QP

**RADIATED EMISSIONS TEST**

Test mode: Transmitting

For Ground-parallel

1) 9 kHz~150 kHz:

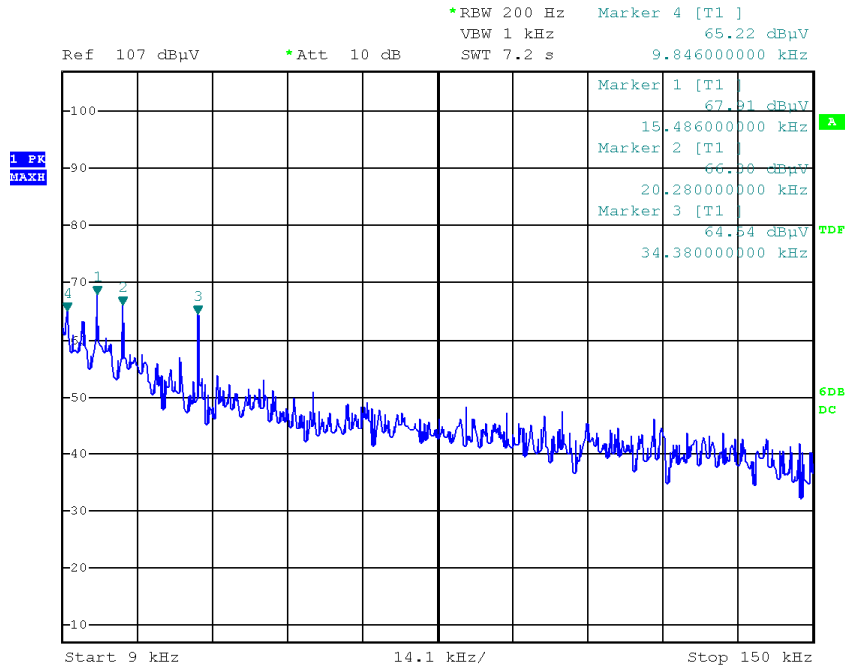


Project No. RKSA240112001

Tester: Leah Li

Date: 17.APR.2024 18:15:09

Frequency (MHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m)@3m	Margin (dB)
0.009846	65.22	PK	54.00	127.74	62.52
0.015486	67.91	PK	50.72	123.81	55.90
0.02028	66.30	PK	47.99	121.46	55.16
0.03438	64.54	PK	43.47	116.88	52.34

2) 150 kHz~30 MHz:

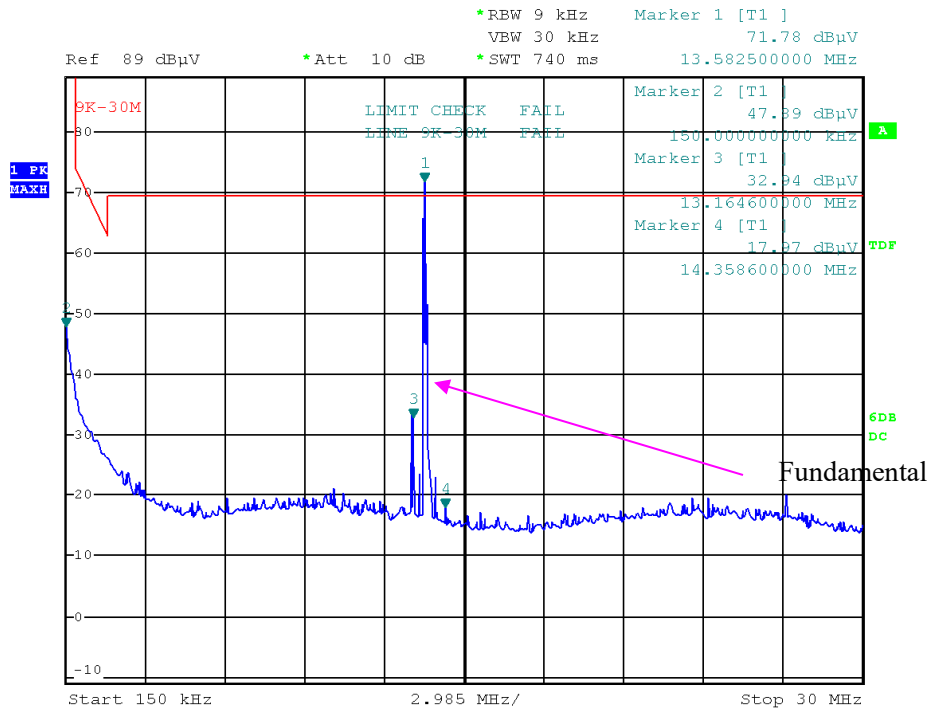


Project No. RKSA240112001

Tester: Leah Li

Date: 30.MAR.2024 14:40:54

Frequency (MHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m)@3m	Margin (dB)
0.1500	47.89	PK	31.73	104.08	56.19
13.1646	32.94	PK	3.67	69.54	36.60
14.3586	17.97	PK	3.55	69.54	51.57

3) 13.11 MHz~14.01 MHz:

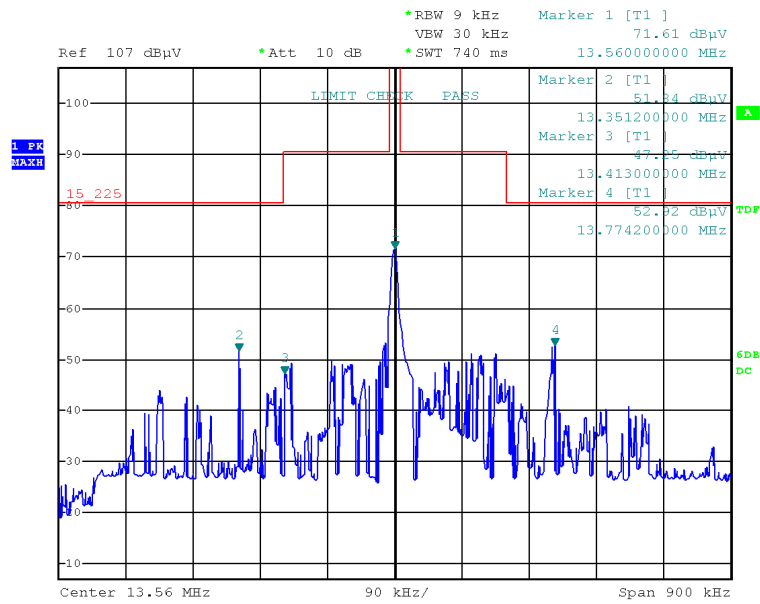


Project No. RKSA240112001

Tester: Leah Li

Date: 30.MAR.2024 14:45:44

Frequency (MHz)	Corrected Amplitude (dBµV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBµV/m)@3m	Margin (dB)
13.351	51.84	PK	3.66	80.50	28.66
13.413	47.25	PK	3.65	90.50	43.25
13.56	71.61	PK	3.63	124.00	52.39
13.774	52.92	PK	3.61	80.50	27.58


For Perpendicular  
1) 9 kHz~150 kHz:

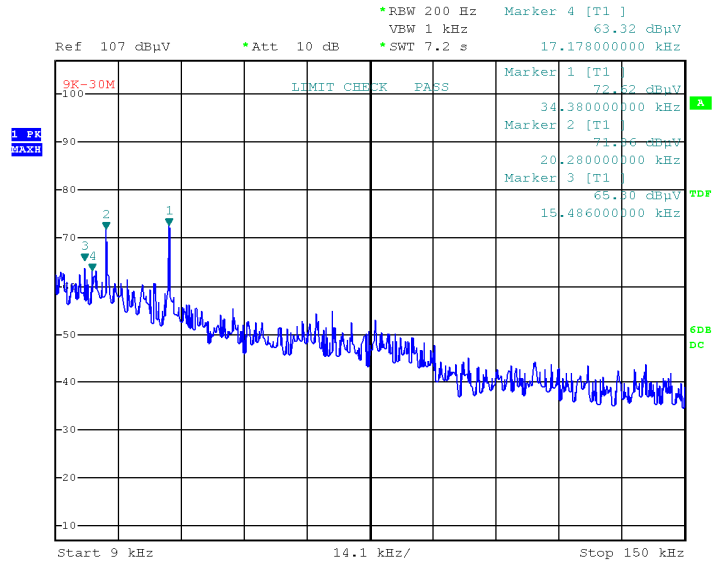

Project No. RKSA240112001      Tester: Leah Li  
Date: 30.MAR.2024 15:17:15

Frequency (MHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m)@3m	Margin (dB)
0.015486	65.30	PK	50.72	123.81	58.51
0.017178	63.32	PK	49.73	122.91	59.59
0.02028	71.86	PK	47.99	121.46	49.60
0.03438	72.62	PK	43.47	116.88	44.26

2) 150 kHz~30 MHz:

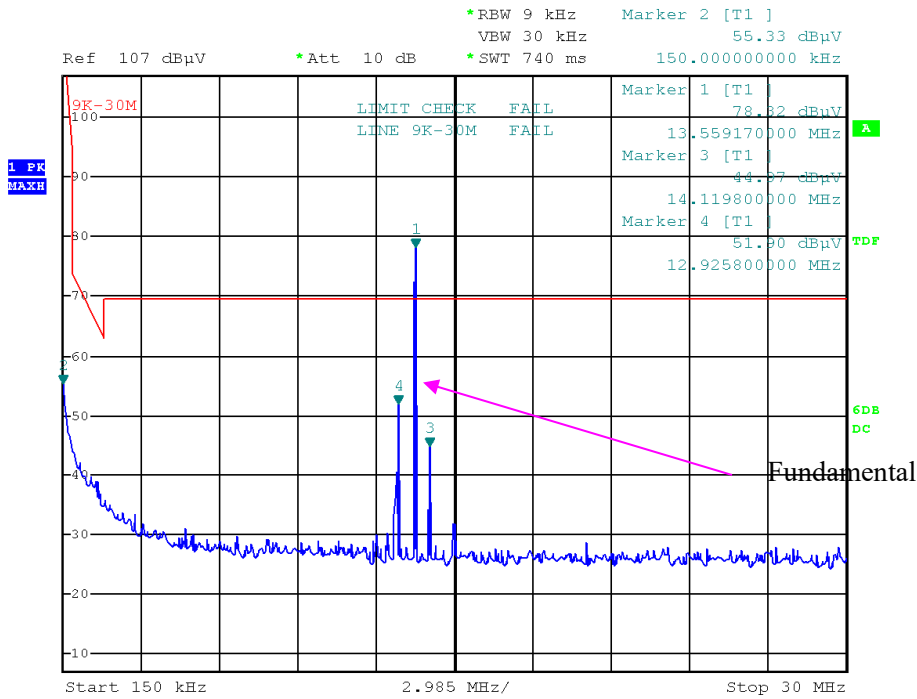


Project No. RKSA240112001

Tester: Leah Li

Date: 30.MAR.2024 15:05:21

Frequency (MHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m)@3m	Margin (dB)
0.1500	55.33	PK	31.73	104.08	48.75
12.9258	51.90	PK	3.70	69.54	17.64
14.1198	44.97	PK	3.58	69.54	24.57

3) 13.11 MHz~14.01 MHz:

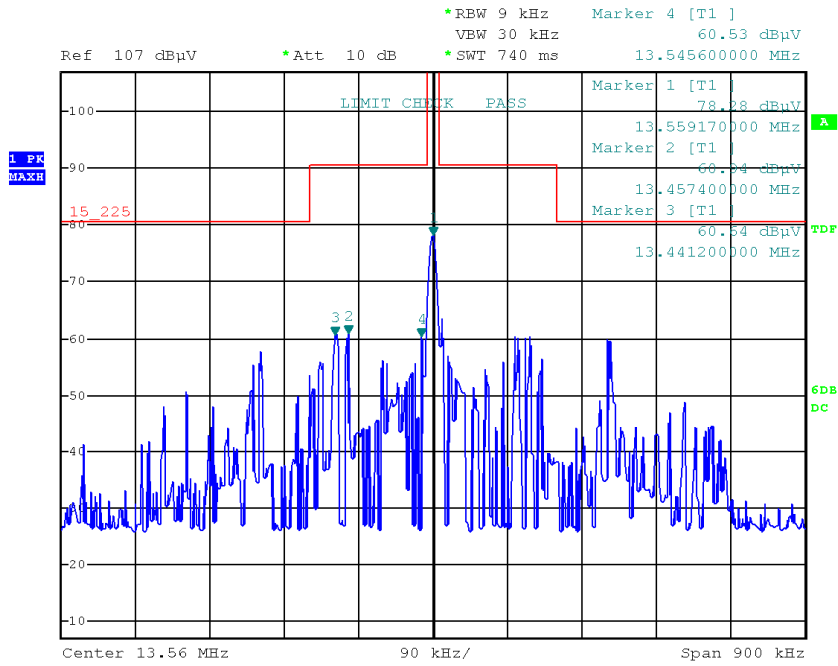

Project No. RKSA240112001

Tester: Leah Li


Date: 30.MAR.2024 15:08:19

Frequency (MHz)	Corrected Amplitude (dBµV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBµV/m)@3m	Margin (dB)
13.441	60.54	PK	3.65	90.50	29.96
13.457	60.94	PK	3.64	90.50	29.56
13.546	60.53	PK	3.64	90.50	29.97
13.560	78.28	PK	3.63	124.00	45.72



For Parallel

1) 9 kHz~150 kHz:

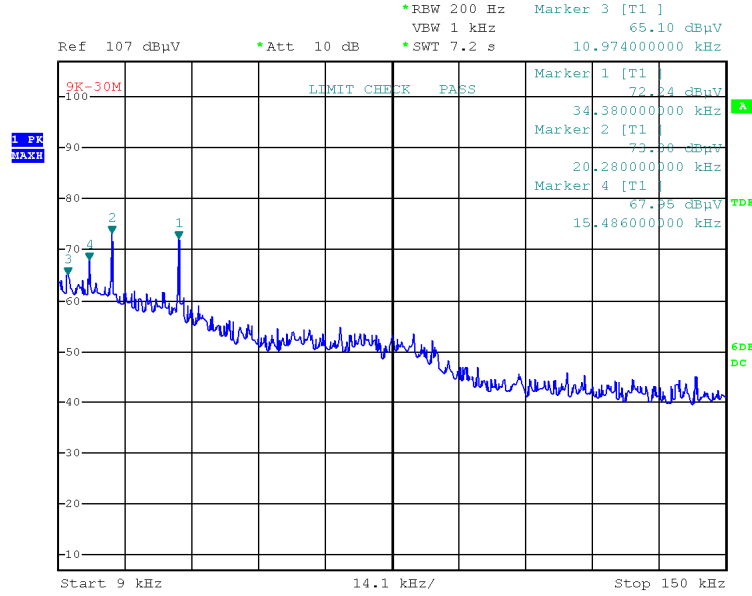


Project No.RKSA240112001  
 Date: 30.MAR.2024 15:14:46

Tester:Leah Li

Frequency (MHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m)@3m	Margin (dB)
0.010974	65.10	PK	53.34	126.80	61.70
0.015486	67.95	PK	50.72	123.81	55.86
0.020280	73.38	PK	47.99	121.46	48.08
0.034380	72.24	PK	43.47	116.88	44.64


2) 150 kHz~30 MHz:

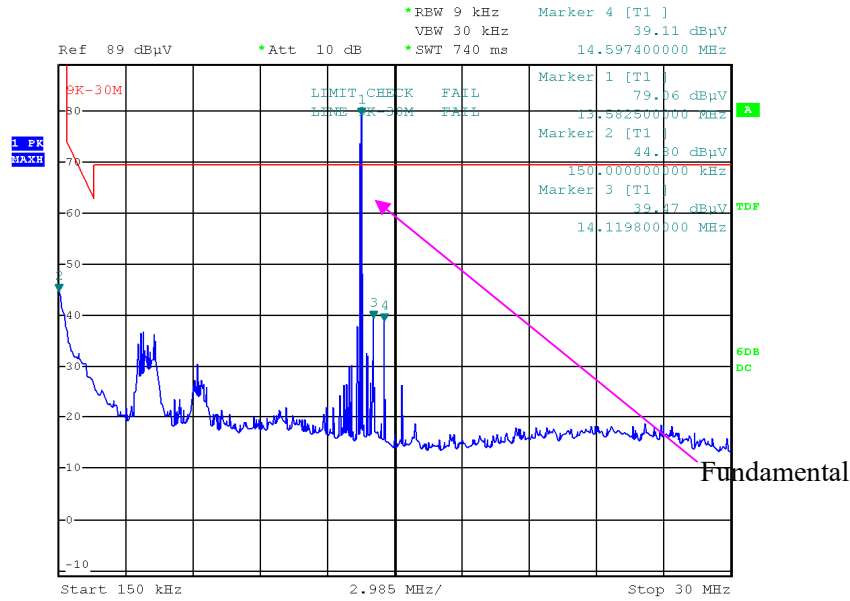

Project No. RKSA240112001      Tester: Leah Li  
 Date: 30.MAR.2024 14:35:25

Frequency (MHz)	Corrected Amplitude (dBµV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBµV/m)@3m	Margin (dB)
0.1500	44.80	PK	31.73	104.08	59.28
14.1198	39.47	PK	3.58	69.54	30.07
14.5974	39.11	PK	3.53	69.54	30.43

3) 13.11 MHz~14.01 MHz:

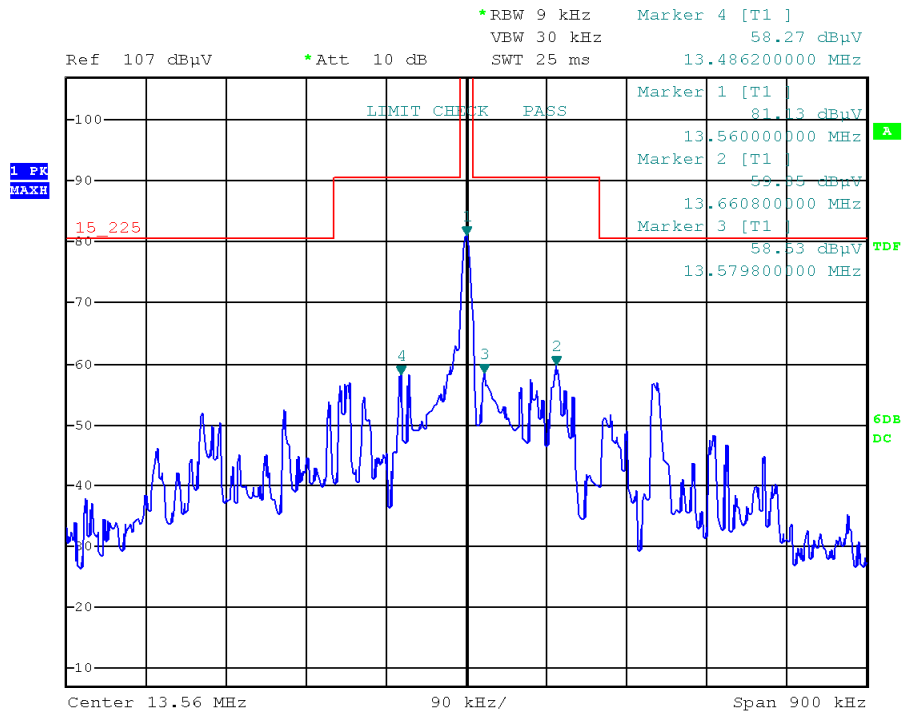

Project No. RKSA240112001

Tester: Leah Li


Date: 30.MAR.2024 14:28:03

Frequency (MHz)	Corrected Amplitude (dBμV/m)@3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m)@3m	Margin (dB)
13.486	58.27	PK	3.64	90.50	32.23
13.56	81.13	PK	3.63	124.00	42.87
13.58	58.53	PK	3.63	90.50	31.97
13.661	59.85	PK	3.62	90.50	30.65

**30 MHz ~1 GHz:**

**Common Information**

Project No: RKSA240112001  
 EUT Model: F310 P  
 Test Mode: NFC  
 Standard: FCC Part 15C & RSS-216  
 Test Equipment: ESCI, JB3, 310N  
 Temperature: 16.7°C  
 Humidity: 60%  
 Barometric Pressure: 101.1kPa  
 Test Engineer: Leah Li  
 Test Date: 2024/3/30

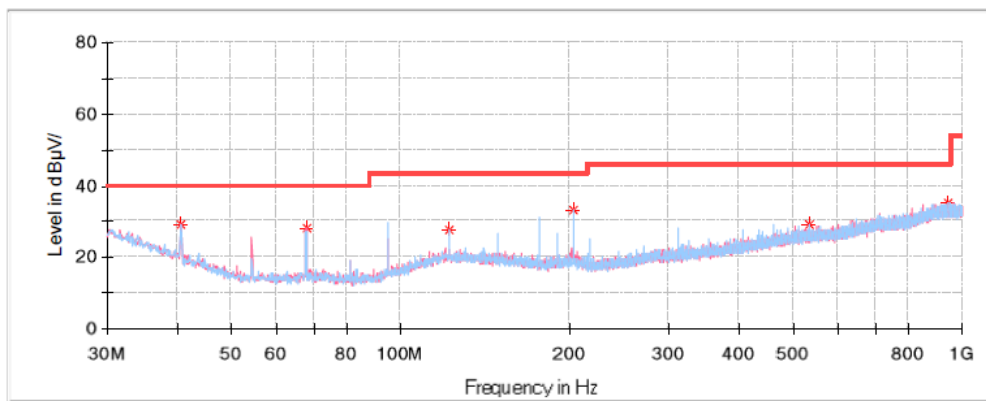

**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Pol	Corr. (dB/m)
40.670000	29.22	40.00	10.78	V	-11.6
67.830000	28.13	40.00	11.87	V	-16.9
122.028750	27.44	43.50	16.06	H	-11.3
203.387500	33.14	43.50	10.36	H	-12.7
533.308750	29.37	46.00	16.63	H	-5.5
939.860000	35.44	46.00	10.56	H	1.5

**FREQUENCY STABILITY**

*Test Mode: Transmitting.*

*Test Result: Compliant*

<b>F<sub>0</sub>=13.56MHz</b>				
<b>Power Supply(V<sub>DC</sub>)</b>	<b>Temperature (°C)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Error (%)</b>	<b>Part 15.225 Limit</b>
3.8	-20	13.5596289	-0.00274	±0.01%
	-10	13.5595479	-0.00333	±0.01%
	0	13.5597453	-0.00188	±0.01%
	10	13.5597136	-0.00211	±0.01%
	20	13.5597326	-0.00197	±0.01%
	30	13.5597644	-0.00174	±0.01%
	40	13.5598478	-0.00112	±0.01%
	50	13.5597458	-0.00187	±0.01%
3.42	20	13.5597478	-0.00186	±0.01%
4.18	20	13.5597458	-0.00187	±0.01%


**20dB EMISSION BANDWIDTH TESTING**

Test Mode: Transmitting

Test Result: Compliant

Frequency (MHz)	20 dB Bandwidth (kHz)
13.56	0.69

**20 dB Emission Bandwidth-13.56MHz**

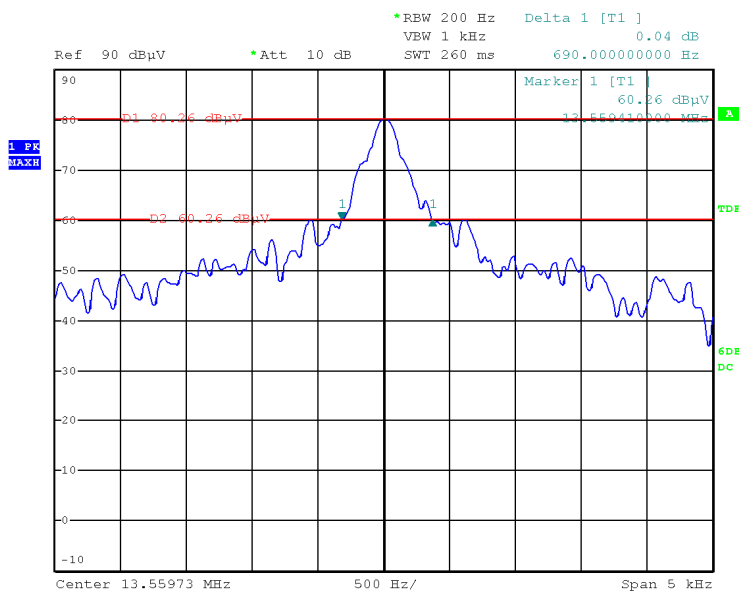

Project No. RKSA240112001  
 Date: 15.MAY.2024 10:42:48

Tester: Leah Li

### **Declarations**

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor  $k=2$  with the 95.45% confidence interval.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***