

# Ke Mei Ou Laboratory Co., Ltd.

E506, 5th Floor, No.39 Keji Middle 2nd Rd, Science & Technology  
Park, Nanshan District, Shenzhen, P. R. China  
Tel: + 86 755 83642690 Fax: + 86 755 83297077  
www.kmolab.com

## ***FCC TEST REPORT***

Under  
FCC 15 Subpart C, Paragraph 15.247

Operating in 2400 ~ 2483.5 MHz Band

Prepared For :

### **ShenZhen Foscam Intelligent Technology Co., Ltd.**

5/F, Block 1, Vision Business Park, Nanshan District, Shenzhen, China

<b>FCC ID: ZDEFI9816P</b>
<b>EUT: HD Wireless IP Camera</b>
<b>Model: FI9816P, FC2406P/EH8135 V3</b>

September 4, 2014
<b>Issue Date:</b>
Original Report
<b>Report Type:</b>
<i>Eric Guo</i>
<b>Test Engineer: Eric Guo</b>

<b>Review By: Apollo Liu / Manager</b>

The test report consists 53 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Ke Mei Ou Laboratory Corporation. The test result in the report only applied to the tested sample.

**TABLE OF CONTENTS**

- 1. General Information ..... 3**
  - 1. 1 Notes ..... 3
  - 1. 2 Testing Laboratory ..... 3
  - 1. 3 Details of Applicant ..... 3
  - 1. 4 Application Details ..... 3
  - 1. 5 Test Item ..... 3
  - 1. 6 Test Standards ..... 3
- 2. Technical Test ..... 4**
  - 2. 1 Summary of Test Results ..... 4
  - 2. 2 Antenna Requirement ..... 4
- 3. EUT Modifications ..... 4**
- 4. Conducted Power Line Test ..... 5**
  - 4. 1 Test Equipment ..... 5
  - 4. 2 Test Procedure ..... 5
  - 4. 3 Test Setup ..... 5
  - 4. 4 Configuration of the EUT ..... 6
  - 4. 5 EUT Operating Condition ..... 8
  - 4. 6 Conducted Power Line Emission Limits ..... 8
  - 4. 7 Conducted Power Line Test Result ..... 9
- 5. FCC Part 15.247 Requirements for 802.11b/g/n Systems ..... 11**
  - 5. 1 Test Equipment ..... 11
  - 5. 2 Test Procedure ..... 11
  - 5. 3 Test Setup ..... 11
  - 5. 4 Configuration of the EUT ..... 11
  - 5. 5 EUT Operating Condition ..... 11
  - 5. 6 Limit ..... 12
  - 5. 7 Test Result ..... 13
- 6. Transmitter Spurious Radiated Emission at 3 Meters ..... 34**
  - 6. 1 Test Equipment ..... 34
  - 6. 2 Test Procedure ..... 34
  - 6. 3 Test Setup ..... 34
  - 6. 4 Configuration of the EUT ..... 35
  - 6. 5 EUT Operating Condition ..... 35
  - 6. 6 Limit ..... 36
  - 6. 7 Test Result ..... 37
- 7. RF Exposure Requirements ..... 42**
  - 7. 1 Test Equipment ..... 42
  - 7. 2 Limit ..... 42
  - 7. 3 Test Result ..... 42
- 8. Photos of Testing ..... 43**
  - 8. 1 EUT Test Photographs ..... 43
  - 8. 2 EUT Detailed Photographs ..... 45
- 9. FCC ID Label ..... 52**
- 10. Test Equipment ..... 53**

# 1. General Information

## 1.1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The KMO Lab does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the KMO Lab.

## 1.2 Testing Laboratory

### Ke Mei Ou Laboratory Co., Ltd.

ANSI-ASQ National Accreditation Board/ACLASS ISO/IEC 17025 Accredited Lab for telecommunication standards. The Registration Number is AT-1532. The testing quality system meets with ISO/IEC-17025 requirements, This approval results is accepted by MRA of ILAC.

FCC Test Site Registration Number: 962205

IC Test Site Registration Number: 4986A-2

Internet: [www.kmolab.com](http://www.kmolab.com)

## 1.3 Details of Applicant

Name : ShenZhen Foscam Intelligent Technology Co., Ltd.  
 Address : 5/F, Block 1, Vision Business Park, Nanshan District, Shenzhen, China

## 1.4 Application Details

Date of Receipt of Application : July 2, 2014  
 Date of Receipt of Test Item : July 2, 2014  
 Date of Test : July 2, 2014~September 4, 2014

## 1.5 Test Item

Manufacturer : ShenZhen Foscam Intelligent Technology Co., Ltd.  
 Address : 4F, 9<sup>th</sup> building, JiaTeLiHigh-tech industrial park, Tangtou community, Shiyan town, Baoan, Shenzhen, PRC  
 Trade Name : Foscam  
 Model No.(Base) : FI9816P,  
 Model No.(Extension) : FC2406P/EH8135 V3  
 Description : HD Wireless IP Camera

## Additional Information

Product Type : WLAN (1TX, 1RX)  
 Radio Type : Intentional Transceiver  
 Power Type : DC 5V/2000mA(Adapter model: SAW-0502000)  
 Modulation : see the below tables  
 Data Modulation : IEEE 802.11b: DQPSK, DBPSK, DSSS, and CCK  
 IEEE 802.11g: BPSK, QPSK, 16QAM, 64QAM  
 IEEE 802.11n: HT20/40: OFDM (64QAM,16QAM, QPSK, BPSK)  
 Date Rate (Mbps) : see the below table  
 Frequency Range : 2412~2462MHz  
 Channel Number : 11  
 Antenna : Dipole, 2.0 dBi  
 802.11b/g/n

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode	20 MHz	40 MHz	20 MHz	40 MHz
802.11a	X	X	X	X
802.11b / 11,5.5,2 and 1 Mbps with auto-rate fall back	√	X	X	X
802.11g / 54,48,36,24,18,12,9&6 Mbps	√	X	X	X
802.11n / up to 150Mbps	√	X	X	X

## 1.6 Test Standards

FCC 15 Subpart C, Paragraph 15.247

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

## 2. Technical Test

### 2.1 Summary of Test Results

The EUT has been tested according to the following specifications:

FCC Rule	Test Type	Limit	Result	Notes
FCC 15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	PASS	Complies
FCC 15.247(b)(1)	Peak Output Power	$\leq 30\text{dBm}$	PASS	Complies
FCC 15.247(e)	Power Spectral Density	$\leq 8\text{dBm}$	PASS	Complies
FCC 15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	PASS	Complies.
FCC 15.247(d)	Radiated Band Edges and Spurious Emission	FCC 15.209(a) & 15.247(d)	PASS	Complies.
FCC 15.207	AC Conducted Emission	FCC15.207(a)	PASS	Complies.
FCC 15.203 & 15.247(b)	Antenna Requirement	N/A	PASS	Complies

\* The digital circuit porting of the EUT has been tested and verified to comply with FCC Part 15, Subpart B., Class B Digital Devices and the associated Radio Receiver has also been tested and found to comply with FCC Part 15, Subpart B – Radio Receivers.

### 2.2 Antenna Requirement

#### A. Regulation

FCC section 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### B. Result

The antenna type used in this product is Dipole Antenna with reverse SMA antenna connector. and it is considered to meet antenna requirement of FCC.



## 3. EUT Modifications

No modification by test lab.

## 4. Conducted Power Line Test

### 4.1 Test Equipment


Please refer to Section 10 this report.

### 4.2 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission., the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2003 on conducted measurement. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

### 4.3 Test Setup

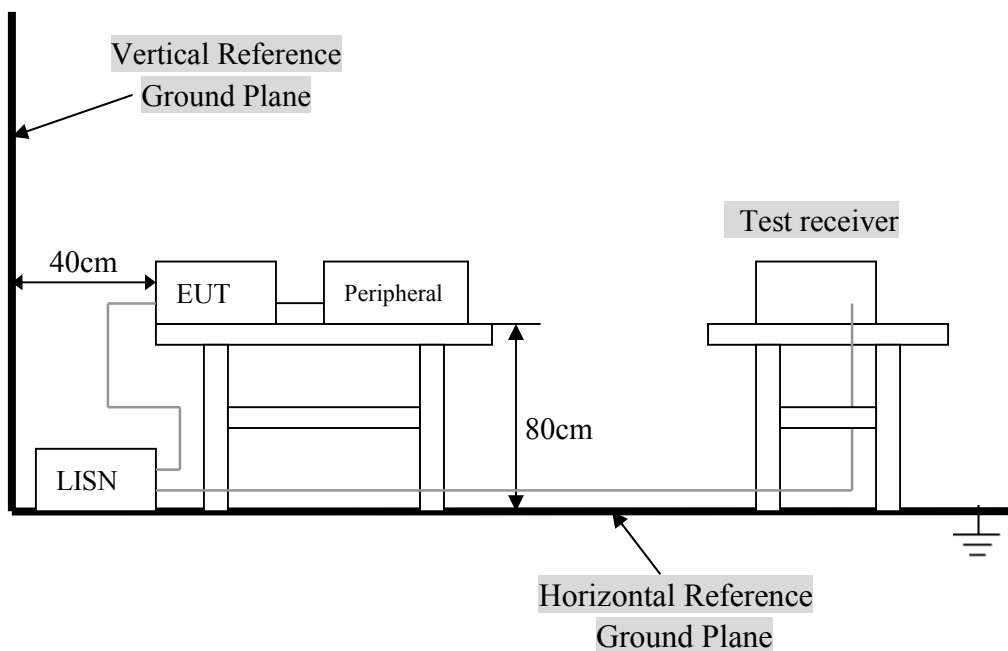

For the actual test configuration, Please refer to the related items – Photos of Testing.

### 4.4 Configuration of the EUT

The EUT was configured according to ANSI C63.4-2003. EUT was used DC5V. The operation frequency is from 2400MHz~2483.5MHz. Enable the signal transmitted from the EUT to Notebook PC. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Note:

- 1) Operating Modes: Each of lowest, middle and highest channel frequencies transmits continuously for emissions measurements. The EUT operates in normal 802.11b/g/n for occupancy duration and frequency separation.
- 2) Special Test Software & Hardware: Special firmware and hardware provided by the Applicant are installed to allow the EUT to operate in 802.11b/g/n or at each channel frequency continuously. For example, the transmitter will be operated at each of lowest, middle and highest frequencies individually continuously during testing.
- 3) Transmitter Test Antenna: The EUT is tested with the antenna fitted in a manner typical of normal intended use as an integral / non-integral antenna equipment as describe with the test results.
- 4) Frequency(ies) Tested: 2412MHz, 2437MHz and 2462MHz were pre-tested, The worst case one, was chosen for conducted emission test.
- 5) Above 1GHz, the 2412MHz, 2437MHz and 2462MHz were tested individually.
- 6) Normal Test Modulation: 802.11b/g/n
- 7) Modulating Signal Source: Internal

\* Associated Antenna Descriptions: The antenna used in this product is embedded antenna.

#### A. EUT

Device	Manufacturer	Model #	FCC ID
HD Wireless IP Camera	ShenZhen Foscam Intelligent Technology Co., Ltd.	FI9816P	ZDEFI9816P

#### Field Antenna For 2.4GHz Band

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
0,1	SHENZHEN B&T TECHNOLOGY Co.,Ltd	2.4GHz Dipole Antenna B&T-QR-PE-009-A1	Dipole	SMA	2.00	TX/RX



ANT0  
TX1/RX1

Note:

The EUT incorporates a WiFi function with 802.11b, 802.11g, 802.11n. Physically, the EUT provides one completed transmit and receiver.

#### Carrier Frequencies For 2.4GHz Band

Frequency Band	Channel No.	Frequency	Channel No.	Frquency
2400~2483.5Mhz	1	2412MHz	7	2442MHz
	2	2417MHz	8	2447MHz
	3	2422MHz	9	2452MHz
	4	2427MHz	10	2457MHz
	5	2432MHz	11	2462MHz
	6	2437MHz		

**Test Modes For 2.4GHz Band**

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Maximum Peak Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	7.2 Mbps	1/6/11	-
	MCS0/40MHz	15 Mbps	3/6/9	0
	11b/BPSK	1 Mbps	1/6/11	0
	11g/BPSK	6 Mbps	1/6/11	0
Radiated Emissions 9kHz~1GHz	Normal Link	Auto	-	0
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	MCS0/20MHz	7.2 Mbps	1/6/11	-
	MCS0/40MHz	15 Mbps	3/6/9	0
	11b/BPSK	1 Mbps	1/6/11	0
	11g/BPSK	6 Mbps	1/6/11	0
Band Edge Emissions	MCS0/20MHz	7.2 Mbps	1/11	0
	MCS0/40MHz	15 Mbps	3/9	0
	11b/BPSK	1 Mbps	1/11	0
	11g/BPSK	6 Mbps	1/11	0

Note: Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate show in the table above is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level, The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the find end product.

**B. Internal Devices**

Device	Manufacturer	Model #	FCC ID
N/A			


**C. Peripherals**

Device	Manufacturer	Model # Serial #	FCC ID/ DoC	Cable
Printer	HP	HP930C	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Modem	GVC	N/A	DoC	1.5m unshielded power cord 1.2m unshielded data cable.
Notebook	DELL	PP10L	DoC	1.5m unshielded power cord
PC	Dell	2400n	DoC	1.5m unshielded power cord

### 4.5 EUT Operating Condition

Operating condition is according to ANSI C63.4 - 2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

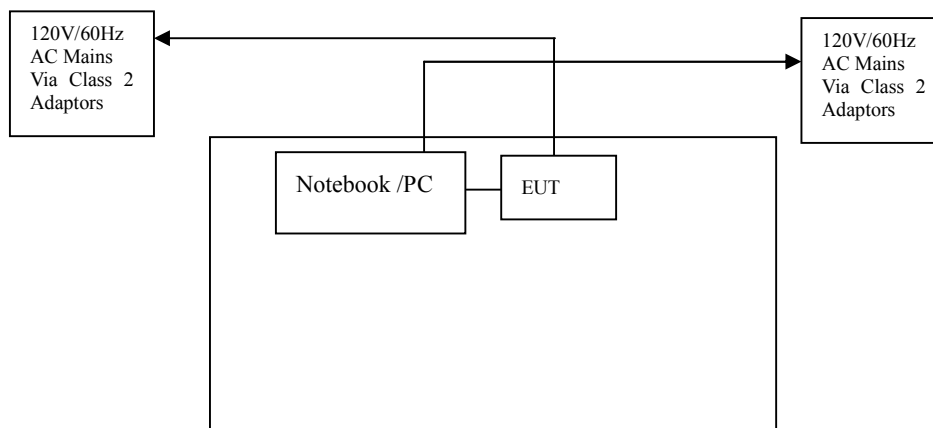

### 4.6 Conducted Power Line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHz)	Class A QP/AV	Class B QP/AV
0.15 – 0.5	79/66	66-56/56-46
0.5 – 5.0	73/60	56/46
5.0 - 30	73/60	60/50

NOTE : In the above table, the tighter limit applies at the band edges.



## 4.7 Conducted Power Line Test Result

Product	: HD Wireless IP Camera	Test Mode	: Normal Link / Auto
Test Item	: Conducted Emission Data	Temperature	: 25 °C
Test Voltage	: DC 5V (From Host)	Humidity	: 56%RH
Test Result	: <b>PASS</b>	Adapter Model	:

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 KHz.

- Temperature : 26 °C
- Humidity : 53 % RH

### Running Mode

FCC Part 15 Paragraph 15.207							
Frequency (MHz)	Emission (dBuV)		LINE/NEUTRAL	Limit (dBuV)		Margin (dB)	
	QP	AV		QP	AV	QP	AV
0.618	42.26	30.57	Line	56.00	46.00	-13.74	-15.43
0.622	42.57	30.56	Neutral	56.00	46.00	-13.43	-15.44
0.642	40.56	28.95	Line	56.00	46.00	-15.44	-17.05
0.642	40.76	29.02	Neutral	56.00	46.00	-15.24	-16.98
26.878	39.78	32.87	Line	60.00	50.00	-20.22	-17.13
26.970	38.39	33.35	Neutral	60.00	50.00	-21.61	-16.65

**Note: NF = No Significant Peak was Found.**

#### Note:

- 1.Uncertainty in conducted emission measured is <+/- 2dB.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.All Reading Levels are Quasi-Peak and Average value.
- 4.Emission = Meter Reading + Factor; Factor = Insertion Loss + Cable Loss.
- 5.Margin Value = Emission Level - Limit Value.

**Conducted Emission**

**EN55022**

EUT: HD Wireless IP Camera

M/N: FI9816P

Manufacturer: Shenzhen Foscam Intelligent Technology Co., Ltd

Operating Condition: Transmitter


Test Site: Normal

Operator: KMO Tester

Test Specification: LINE&NEUTRAL

Comment:

Running Mode

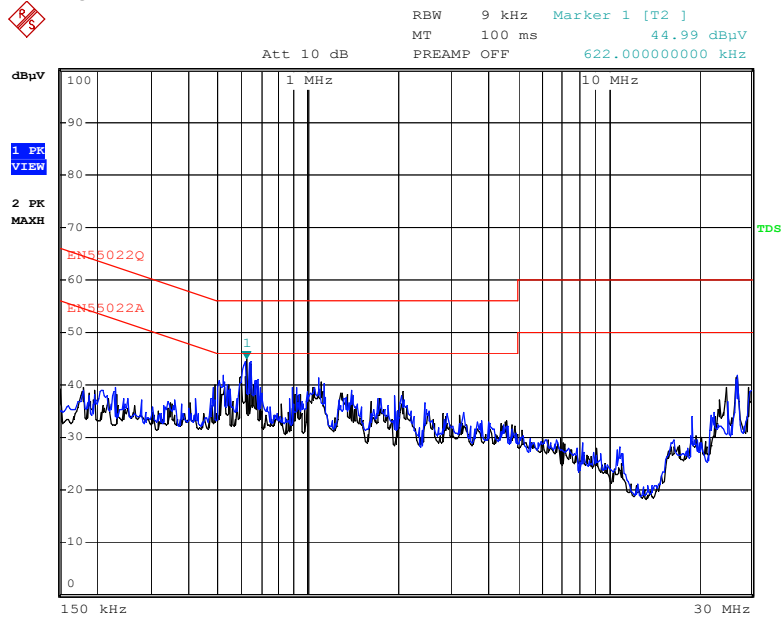

Date: 26.AUG.2014 09:48:05

## 5. FCC Part 15.247 Requirements for 802.11b/g/n Systems


### 5.1 Test Equipment

Please refer to Section 10 this report.

### 5.2 Test Procedure

<b>6 dB Bandwidth:</b>	Refer to FCC 15.247(a)(2), ANSI C63.4: 2003	
<b>Test Method:</b>	FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02. - 8.1 Option 1	
a) Set RBW = 100 kHz.	g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.	
b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.		
c) Detector = Peak.		
d) Trace mode = max hold.		
e) Sweep = auto couple.		
f) Allow the trace to stabilize.		
<b>Peak Power:</b>	Refer to FCC 15.247(b)(3), ANSI C63.4: 2003	
<b>Test Method:</b>	FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02. - 9.1.2 PKPM1 Peak power meter method	
The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.		
<b>Peak Power Spectral Density:</b>	Refer to FCC 15.247(e), ANSI C63.4: 2003	
<b>Test Method:</b>	FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02. - 10.2 Method PKPSD	
a) Set analyzer center frequency to DTS channel center frequency.	g) Trace mode = max hold. h) Allow trace to fully stabilize. i) Use the peak marker function to determine the maximum amplitude level within the RBW. j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.	
b) Set the span to 1.5 times the DTS bandwidth.		
c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .		
d) Set the VBW $\geq 3 \times$ RBW.		
e) Detector = peak.		
f) Sweep time = auto couple.		
<b>Band Edges Measurement:</b>	Refer to FCC 15.247(d), ANSI C63.4: 2003	
<b>Test Method:</b>	FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02.& 15.247	
a. The transmitter output was connected to the spectrum analyzer via a low lose cable.		
b. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.		
c. The band edges was measured and recorded.		

### 5.3 Test Setup



### 5.4 Configuration of the EUT

Same as section 4.4 of this report

### 5.5 EUT Operating Condition

Same as section 4.5 of this report.

## 5.6 Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 ~ 928 MHz, 2400 ~ 2483.5 MHz, and 5725 ~ 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

## 5.7 Test Result

### A. 6 dB Bandwidth

Product	: HD Wireless IP Camera	Test Mode	: IEEE 802.11b/g/n
Test Item	: 6 dB BW	Temperature	: 25 °C
Test Voltage	: DC 5V (Power by Adapter Supply)	Humidity	: 56%RH
Test Result	: PASS		

#### IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (MHz)	FCC Limit (kHz)	Result
Low	2412	9.12	>500 kHz	PASS
Mid	2437	9.12		PASS
High	2462	9.12		PASS

#### IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (MHz)	FCC Limit (kHz)	Result
Low	2412	16.48	>500 kHz	PASS
Mid	2437	16.52		PASS
High	2462	16.52		PASS

#### 802.11n MCS0 20MHz Ant.0


Channel	Frequency (MHz)	Bandwidth (MHz)	FCC Limit (kHz)	Result
Low	2412	17.56	>500 kHz	PASS
Mid	2437	17.56		PASS
High	2462	17.56		PASS

#### 802.11n MCS0 40MHz Ant.0

Channel	Frequency (MHz)	Bandwidth (MHz)	FCC Limit (kHz)	Result
Low	2422	35.68	>500 kHz	PASS
Mid	2437	35.80		PASS
High	2452	36.00		PASS


IEEE 802.11b

6dB Bandwidth (CH Low)

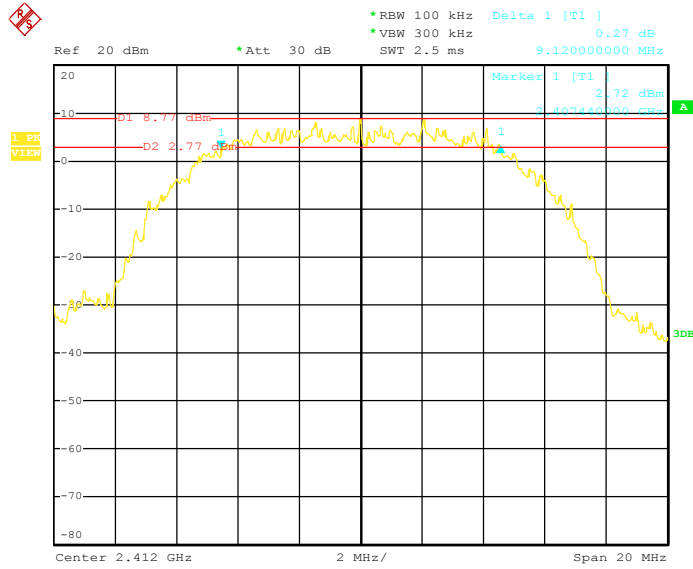


Date: 25.JUL.2014 14:27:04

6dB Bandwidth (CH Mid)

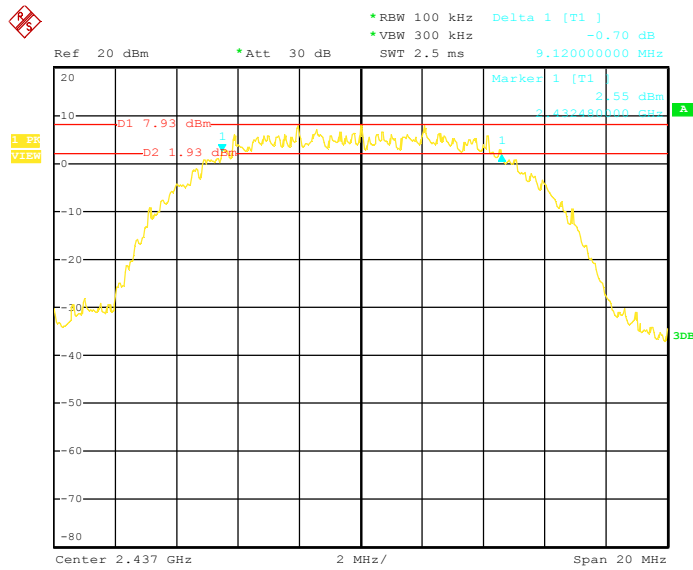

Date: 25.JUL.2014 14:28:55


### 6dB Bandwidth (CH High)

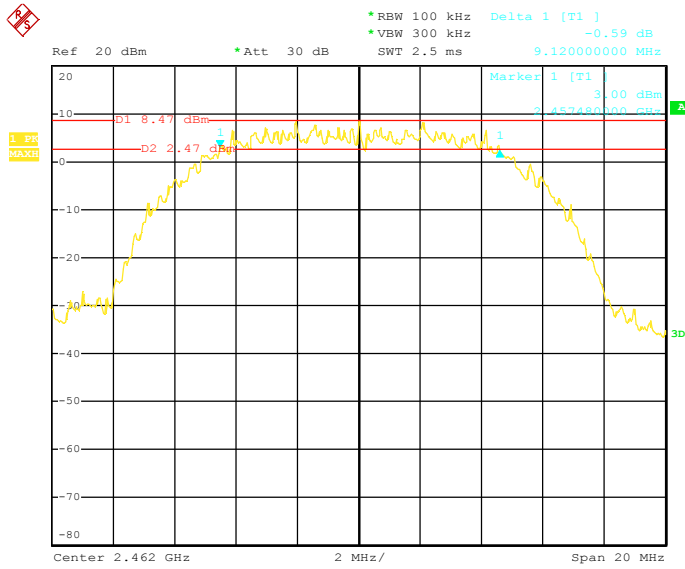

Date: 25.JUL.2014 14:30:06


### IEEE 802.11g

### 6dB Bandwidth (CH Low)

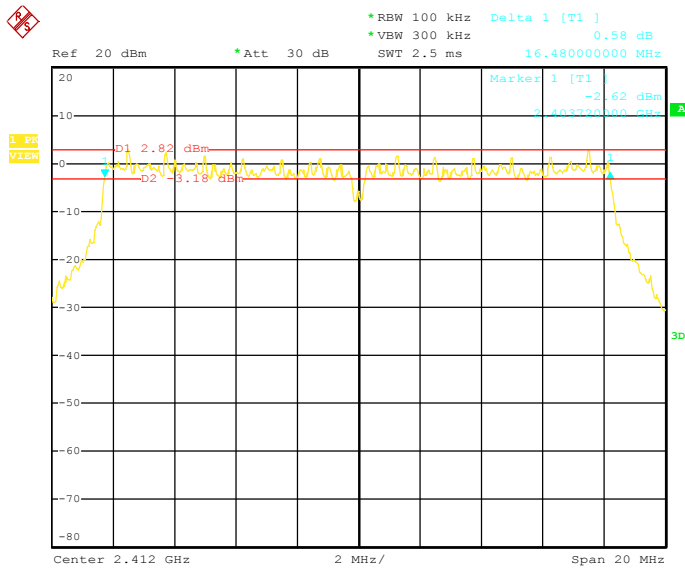


Date: 25.JUL.2014 14:32:09

### 6dB Bandwidth (CH Mid)

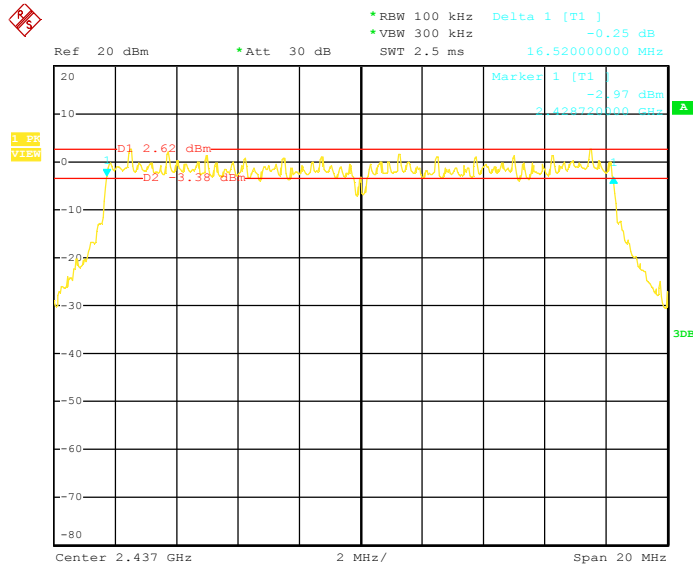

Date: 25.JUL.2014 14:34:03

### 6dB Bandwidth (CH High)

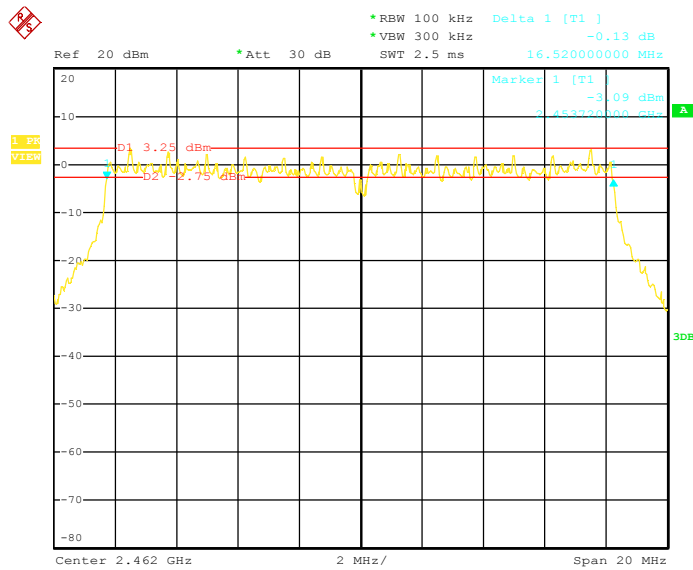


Date: 25.JUL.2014 14:35:03




802.11n MCS0 20MHz Ant.0

6dB Bandwidth (CH Low)

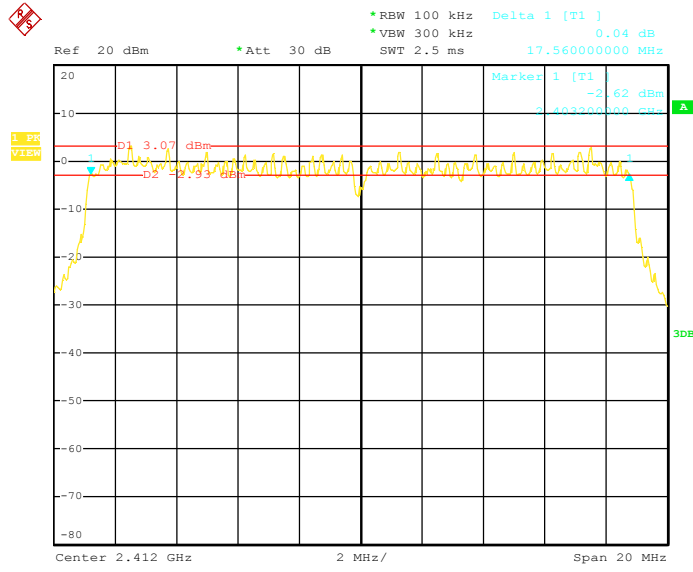


Date: 25.JUL.2014 15:05:56

6dB Bandwidth (CH Mid)

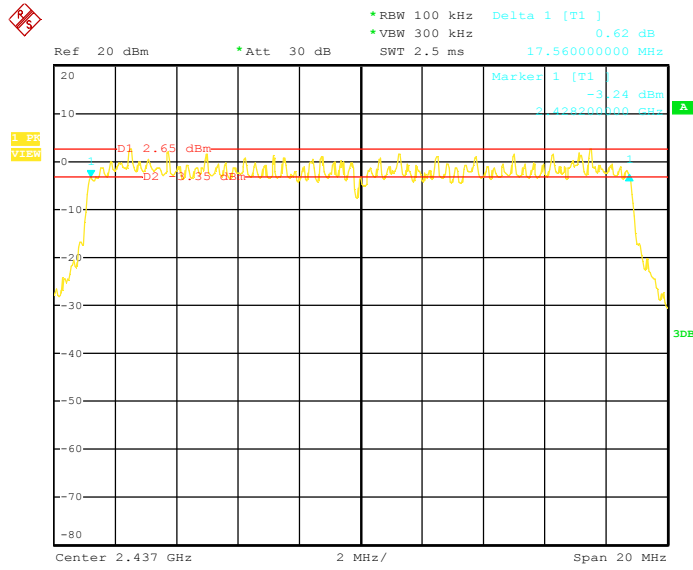

Date: 25.JUL.2014 15:07:49


### 6dB Bandwidth (CH High)

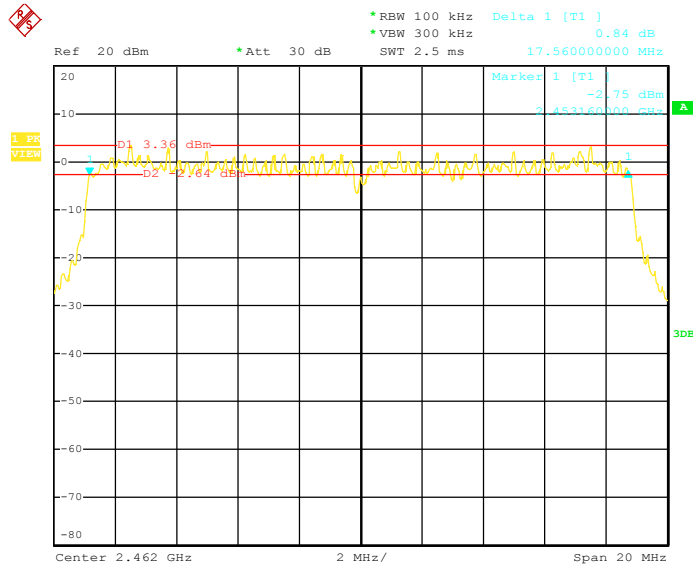

Date: 25.JUL.2014 15:09:08


### 802.11n MCS0 40MHz Ant.0

### 6dB Bandwidth (CH Low)

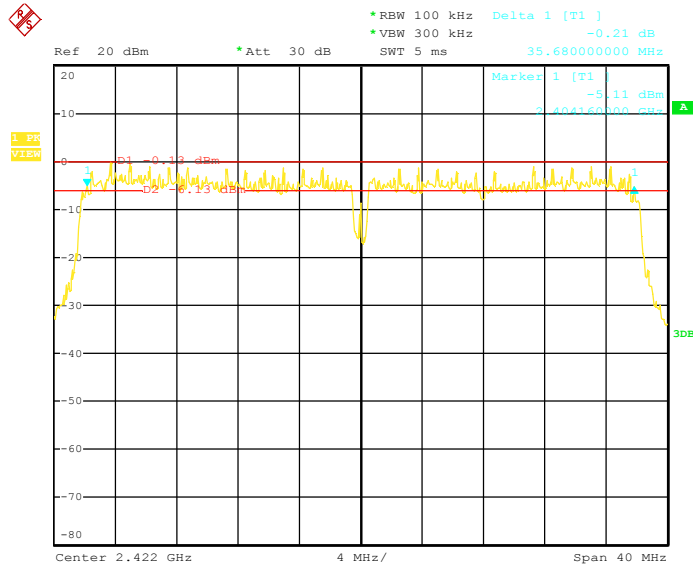


Date: 25.JUL.2014 15:10:57

### 6dB Bandwidth (CH Mid)

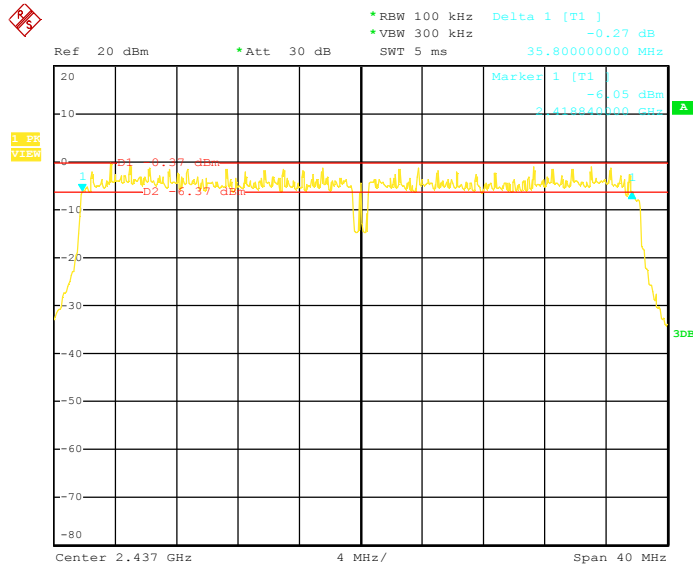

Date: 25.JUL.2014 15:13:32

### 6dB Bandwidth (CH High)

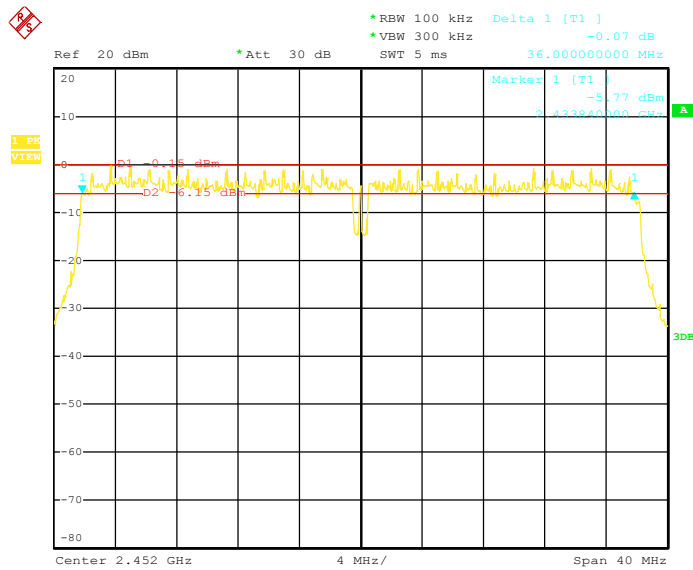

Date: 25.JUL.2014 15:15:28

**B. Peak Power**

Product	: HD Wireless IP Camera	Test Mode	: IEEE 802.11b/g/n
Test Item	: Peak Power	Temperature	: 25 °C
Test Voltage	: DC 5V (Power by Adapter Supply)	Humidity	: 56%RH
Test Result	: <b>PASS</b>		

**IEEE 802.11b**

Channel	Frequency (MHz)	Output Power (dBm)	FCC Limit (W/dBm)	Result
Low	2412	14.93	1.00/30.00	<b>PASS</b>
Mid	2437	14.70		<b>PASS</b>
High	2462	15.02		<b>PASS</b>

**IEEE 802.11g**

Channel	Frequency (MHz)	Output Power (dBm)	FCC Limit (W/dBm)	Result
Low	2412	12.03	1.00/30.00	<b>PASS</b>
Mid	2437	11.54		<b>PASS</b>
High	2462	12.21		<b>PASS</b>

**802.11n MCS8 20MHz Ant.0**

Channel	Frequency (MHz)	Output Power (dBm)	FCC Limit (W/dBm)	Result
Low	2412	11.01	1.00/30.00	<b>PASS</b>
Mid	2437	11.02		<b>PASS</b>
High	2462	11.95		<b>PASS</b>

**802.11n MCS8 40MHz Ant.0**

Channel	Frequency (MHz)	Output Power (dBm)	FCC Limit (W/dBm)	Result
Low	2422	8.80	1.00/30.00	<b>PASS</b>
Mid	2437	8.71		<b>PASS</b>
High	2452	9.10		<b>PASS</b>

### C. Band Edges Measurement

Product : HD Wireless IP Camera Test Mode : IEEE 802.11b/g/n  
 Test Item : Band Edges Measurement Temperature : 25 °C  
 Test Voltage : DC 5V (Power by Adapter Supply) Humidity : 56%RH  
 Test Result : PASS

IEEE 802.11b-low

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2350.040	57.97	47.36	HORZ	74	54	-16.03	-6.64
2384.280	57.16	47.41	VERT	74	54	-16.84	-6.59
2390.460	57.40	47.09	HORZ	74	54	-16.60	-6.91
2390.640	57.40	47.09	VERT	74	54	-16.60	-6.91

IEEE 802.11b-High

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2483.540	58.30	47.68	HORZ	74	54	-15.70	-6.32
2484.460	58.61	47.58	VERT	74	54	-15.39	-6.42
2485.520	58.39	48.41	HORZ	74	54	-15.61	-5.59
2486.640	57.83	47.58	VERT	74	54	-16.17	-6.42

IEEE 802.11g-Low

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2352.140	56.90	47.39	HORZ	74	54	-17.10	-6.61
2385.260	60.59	48.06	VERT	74	54	-13.41	-5.94
2390.780	65.37	51.49	HORZ	74	54	-8.63	-2.51
2390.840	65.37	51.49	VERT	74	54	-8.63	-2.51

IEEE 802.11g-High

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2483.640	59.54	49.00	HORZ	74	54	-14.46	-5.00
2483.720	59.26	49.00	VERT	74	54	-14.74	-5.00
2485.420	59.51	48.24	HORZ	74	54	-14.49	-5.76
2486.560	57.85	47.66	VERT	74	54	-16.15	-6.34

IEEE 802.11n MCS8 20MHz Ant.0-Low

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2351.040	57.95	46.48	HORZ	74	54	-16.05	-7.52
2385.260	61.05	47.13	VERT	74	54	-12.95	-6.87
2390.540	65.69	52.12	HORZ	74	54	-8.31	-1.88
2390.720	66.68	52.28	VERT	74	54	-7.32	-1.72

IEEE 802.11n MCS8 20MHz Ant.0-High

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2484.840	62.03	49.22	HORZ	74	54	-11.97	-4.78
2485.144	61.98	49.05	VERT	74	54	-12.02	-4.95
2485.420	60.35	48.75	HORZ	74	54	-13.65	-5.25
2487.140	58.09	47.60	VERT	74	54	-15.91	-6.40


## IEEE 802.11n MCS8 40MHz Ant.0-Low

Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2351.340	57.21	47.12	HORZ	74	54	-16.79	-6.88
2384.120	69.44	50.01	VERT	74	54	-4.56	-3.99
2390.440	70.95	52.13	HORZ	74	54	-3.05	-1.87
2390.540	70.95	52.13	VERT	74	54	-3.05	-1.87

## IEEE 802.11n MCS8 40MHz Ant.0-High


Freq. (MHz)	Emission (dBuV/m)		HORIZ / VERT	Limits (dBuV/m)		Margin (dB)	
	Peak	Average		Peak	Average		
2483.640	64.85	50.04	HORZ	74	54	-9.15	-3.96
2484.420	65.94	50.48	VERT	74	54	-8.06	-3.52
2485.260	64.58	49.80	HORZ	74	54	-9.42	-4.20
2485.640	63.91	50.02	VERT	74	54	-10.09	-3.98

### IEEE 802.11b Channel: Low

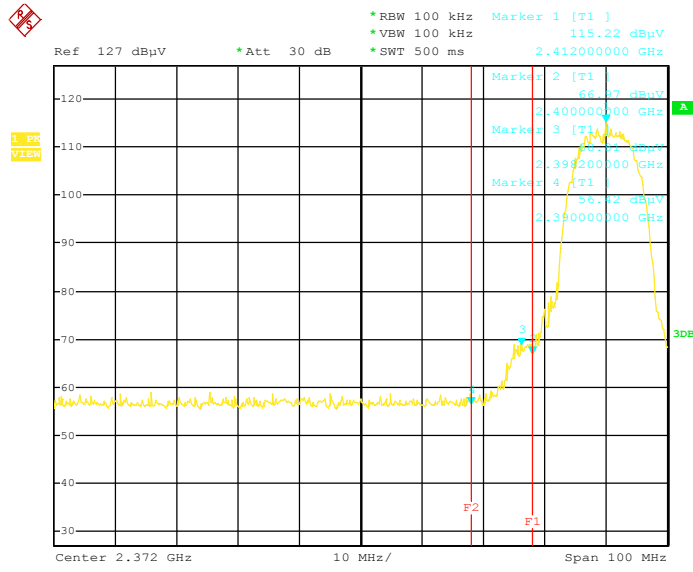


Date: 1.JAN.5202 00:43:05

### IEEE 802.11b Channel: High

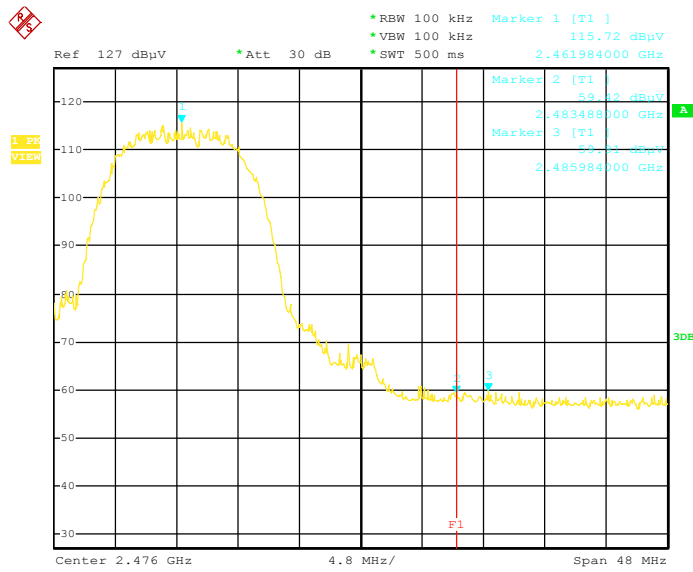


Date: 1.JAN.5202 00:56:01

### IEEE 802.11g Channel: Low

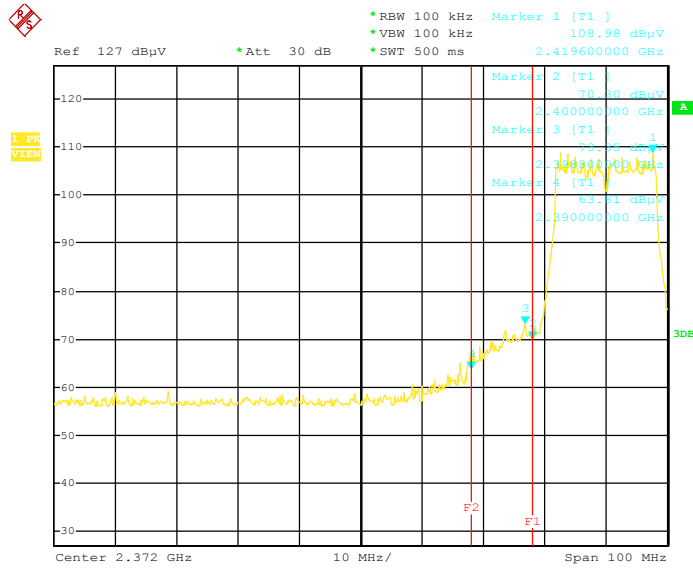

Date: 1.JAN.5202 00:51:54


### IEEE 802.11g Channel: High

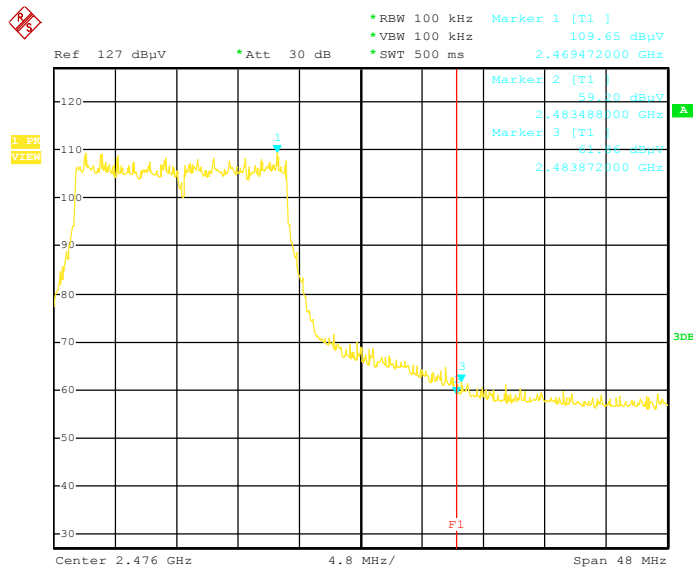

Date: 1.JAN.5202 00:58:51




### IEEE 802.11n MCS8 20MHz Ant.0 Channel: Low

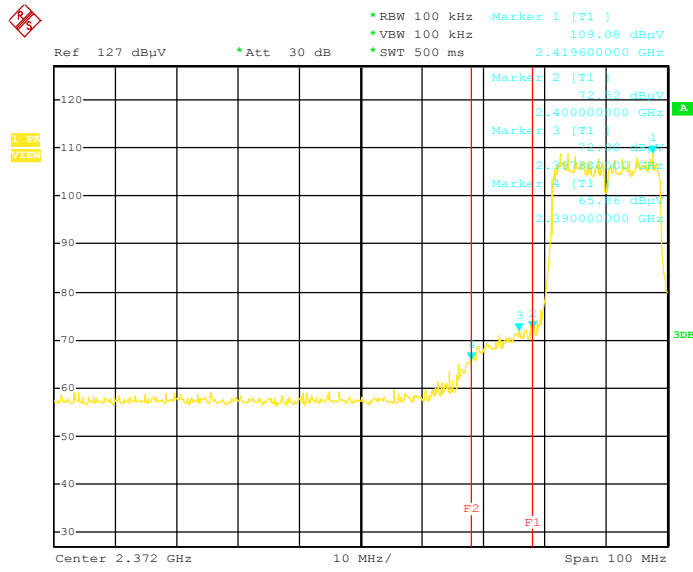


Date: 1.JAN.5202 01:02:15

### IEEE 802.11n MCS8 20MHz Ant.0 Channel: High

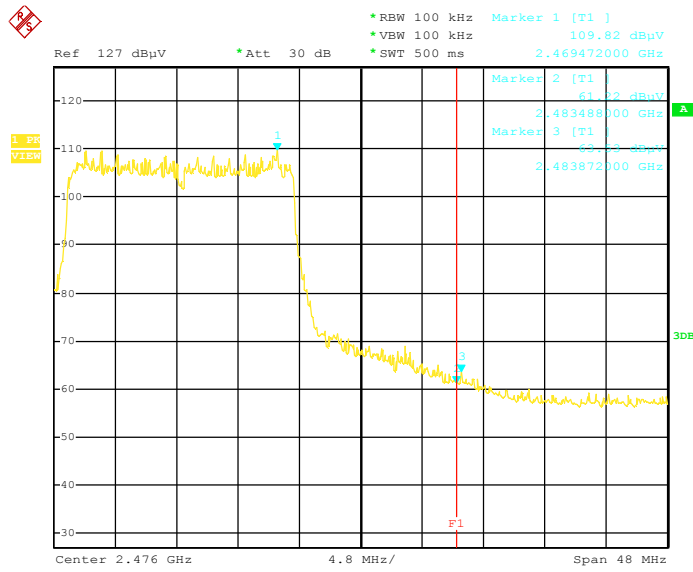


Date: 1.JAN.5202 01:05:08

**IEEE 802.11n MCS8 40MHz Ant.0**  
**Channel: Low**

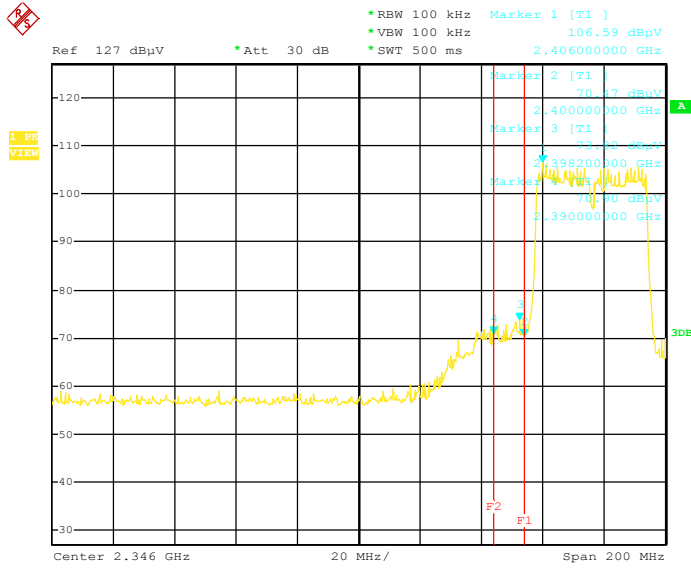

Date: 25.JUL.2014 14:16:19

**IEEE 802.11n MCS840MHz Ant.0**  
**Channel: High**

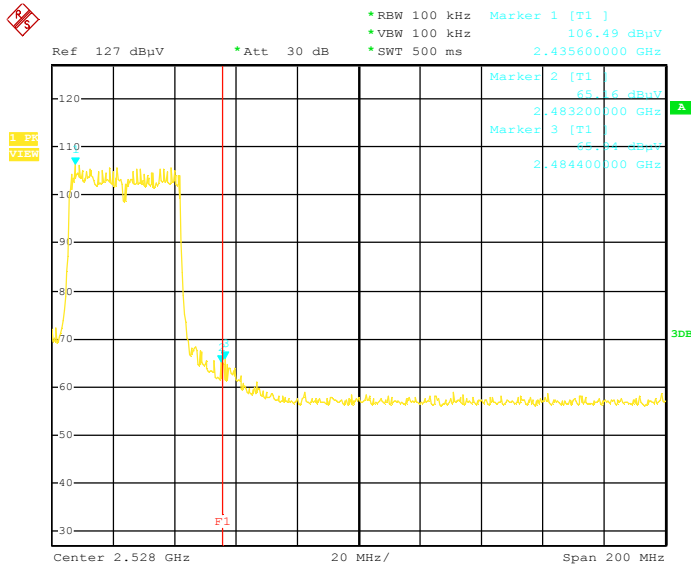

Date: 25.JUL.2014 14:20:59

**D. Peak Power Spectral Density**

Product : HD Wireless IP Camera Test Mode : IEEE 802.11b/g/n  
 Test Item : Peak Power Spectral Density Temperature : 25 °C  
 Test Voltage : DC 5V (Power by Adapter Supply) Humidity : 56%RH  
 Test Result : PASS

**IEEE 802.11b**

Channel	Frequency (MHz)	1MHz PPSD (dBm)	FCC Limit (dBm)	Result
Low	2412	-4.64	8.00	PASS
Mid	2437	-5.36		PASS
High	2462	-4.97		PASS

**IEEE 802.11g**

Channel	Frequency (MHz)	1MHz PPSD (dBm)	FCC Limit (dBm)	Result
Low	2412	-12.63	8.00	PASS
Mid	2437	-13.36		PASS
High	2462	-11.52		PASS


**Draft n MCS0 20MHz Ant.0**

Channel	Frequency (MHz)	1MHz PPSD (dBm)	FCC Limit (dBm)	Result
Low	2412	-12.30	8.00	PASS
Mid	2437	-13.60		PASS
High	2462	-12.48		PASS

**Draft n MCS0 40MHz Ant.0**


Channel	Frequency (MHz)	1MHz PPSD (dBm)	FCC Limit (dBm)	Result
Low	2422	-18.51	8.00	PASS
Mid	2437	-16.61		PASS
High	2452	-16.32		PASS

### IEEE 802.11b Channel: Low

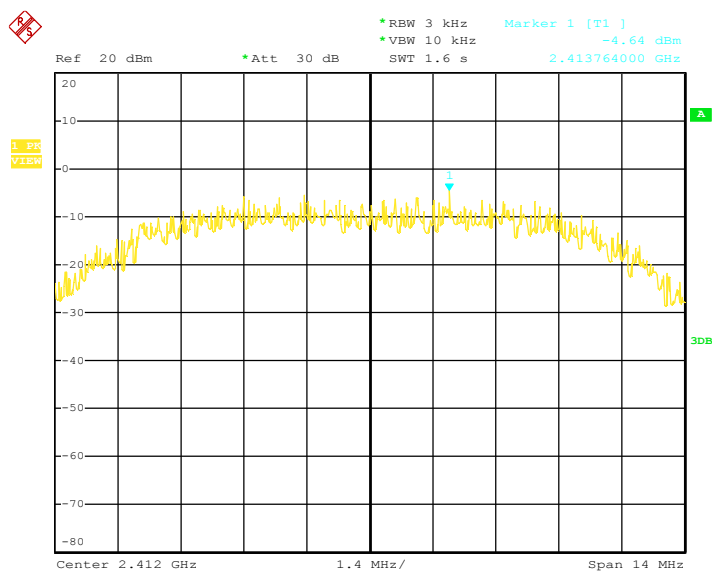


Date: 1.JAN.14502 01:25:15

### IEEE 802.11b Channel: Mid

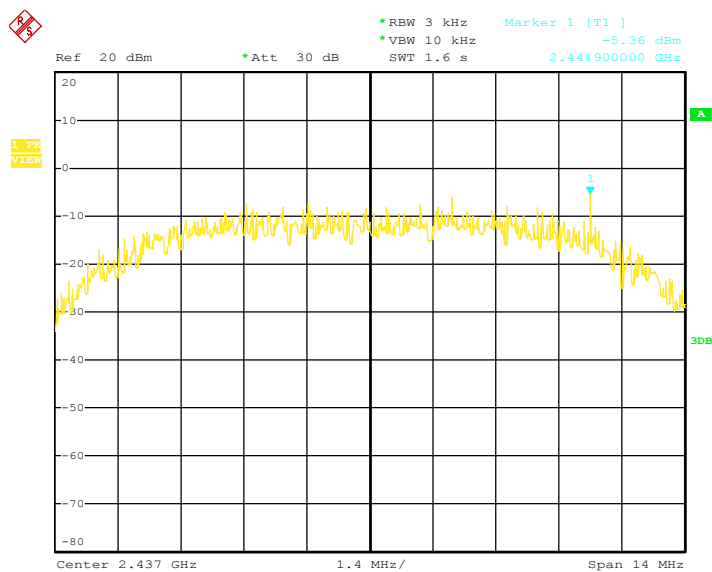


Date: 1.JAN.14502 01:27:15

### IEEE 802.11b Channel: High

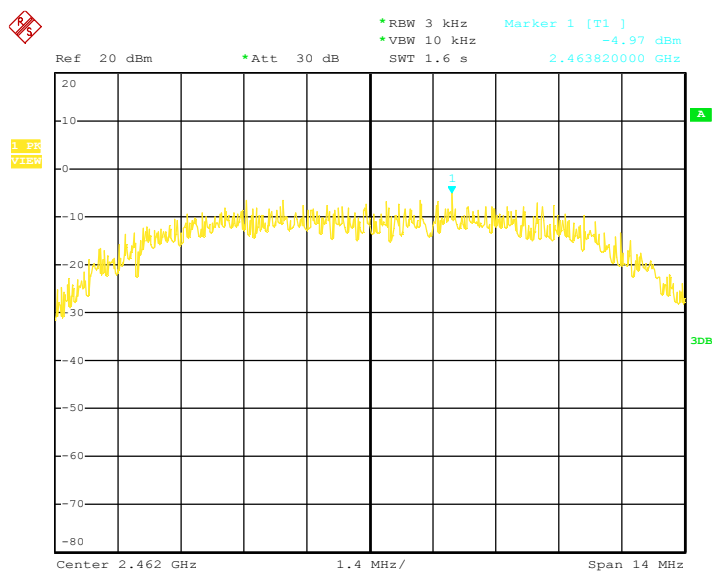


Date: 1.JAN.14502 01:28:36

### IEEE 802.11g Channel: Low

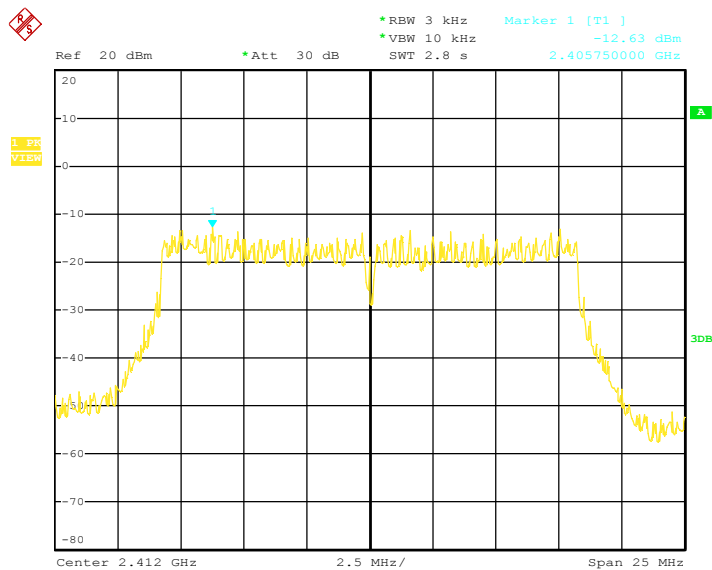


Date: 1.JAN.14502 01:29:51

### IEEE 802.11g Channel: Mid

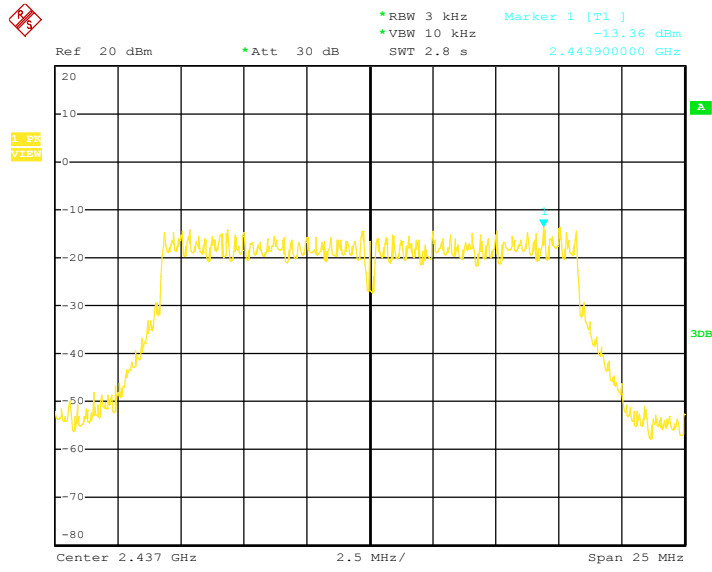


Date: 1.JAN.14502 01:30:45

### IEEE 802.11g Channel: High

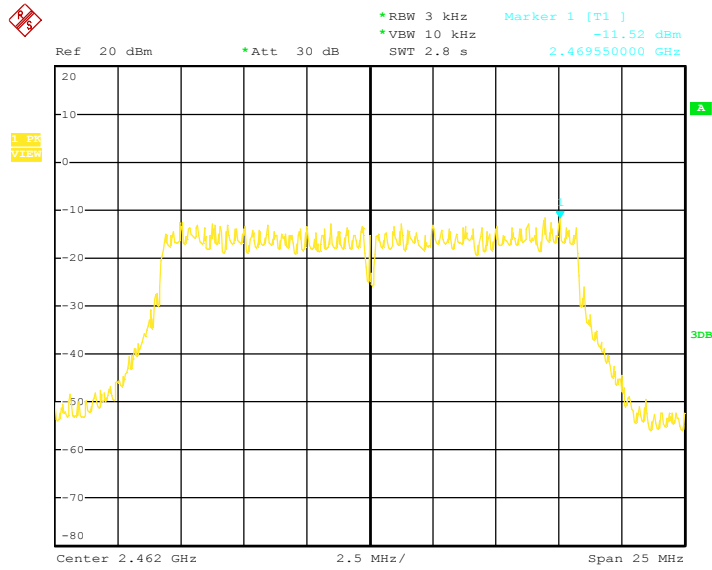


Date: 1.JAN.14502 01:32:59

**802.11n MCS0 20MHz Ant.0/2412MHZ  
(Channel: Low)**

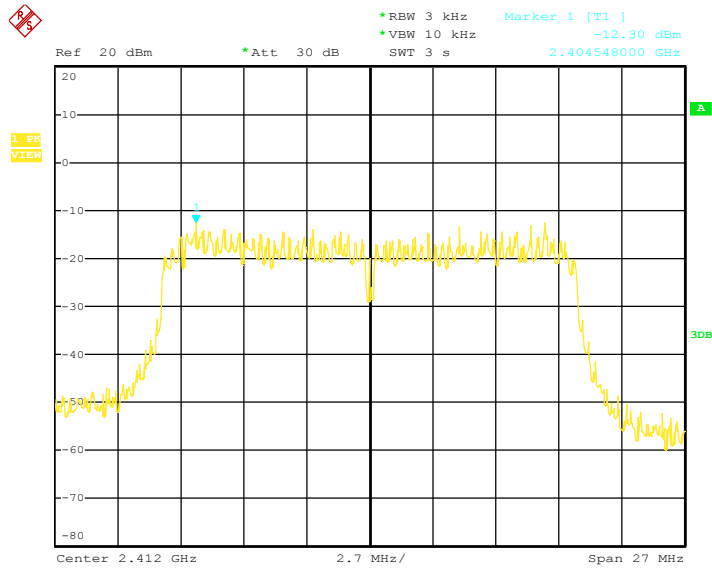


Date: 1.JAN.14502 01:34:01

**802.11n MCS0 20MHz Ant.0/2437MHZ  
(Channel: Mid)**

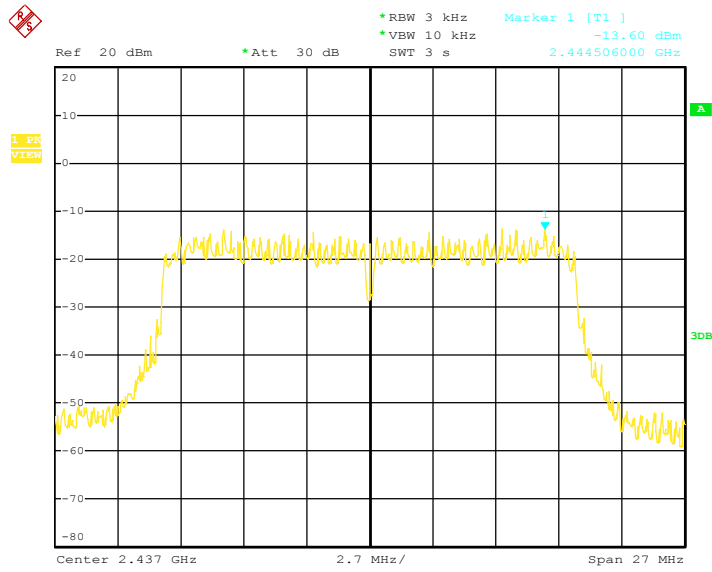


Date: 1.JAN.14502 01:35:14

### 802.11n MCS0 20MHz Ant.0/2462MHZ (Channel: High)

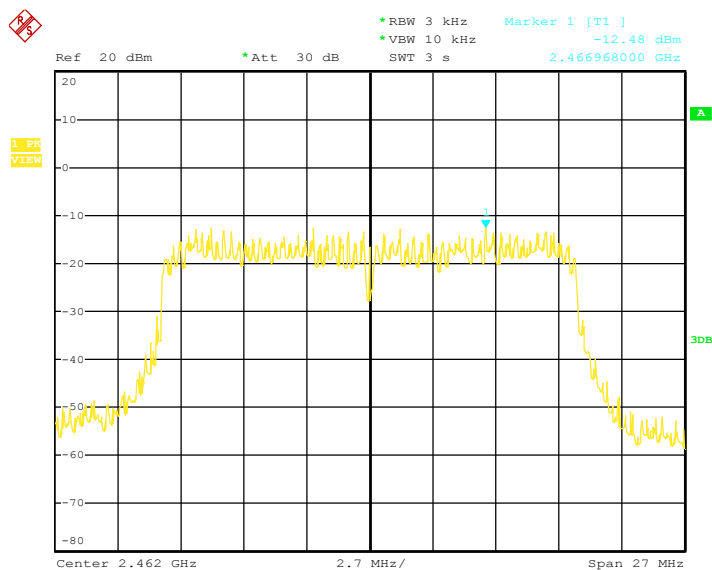

Date: 1.JAN.14502 01:36:04


### 802.11n MCS0 40MHz Ant.0/2422MHZ (Channel: Low)

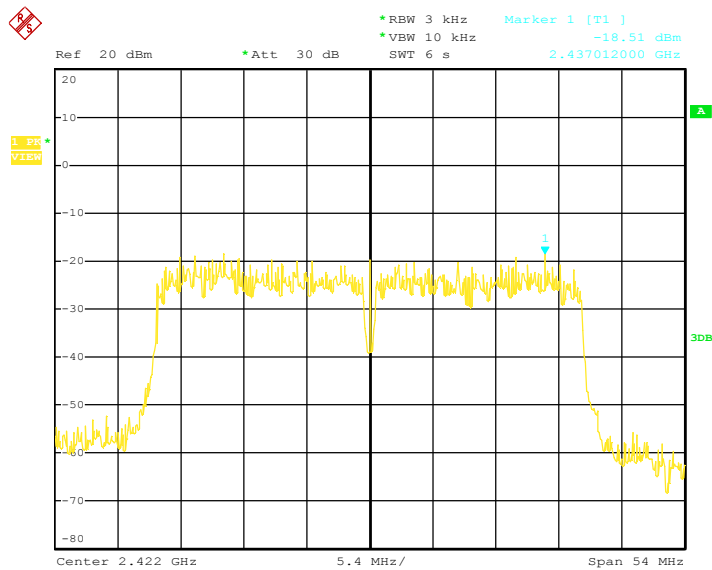

Date: 1.JAN.14502 01:37:19




### 802.11n MCS0 40MHz Ant.0/2437MHZ (Channel: Mid)

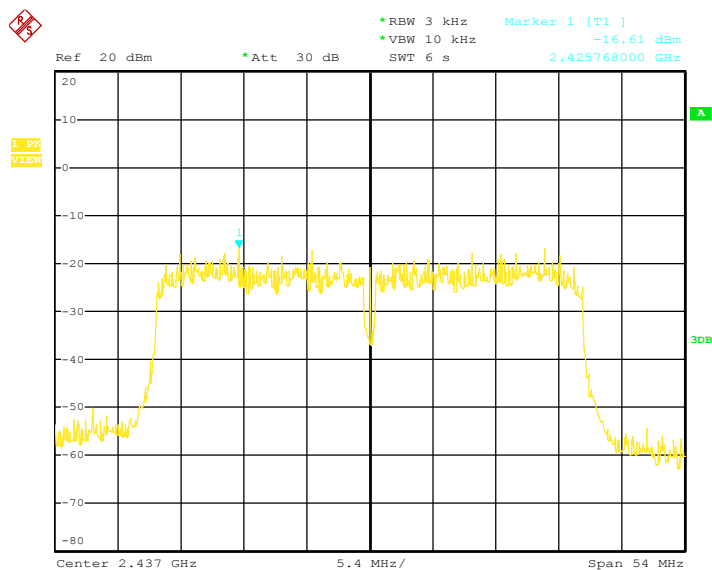

Date: 1.JAN.14502 01:39:09

### 802.11n MCS0 40MHz Ant.0/2452MHZ (Channel: High)

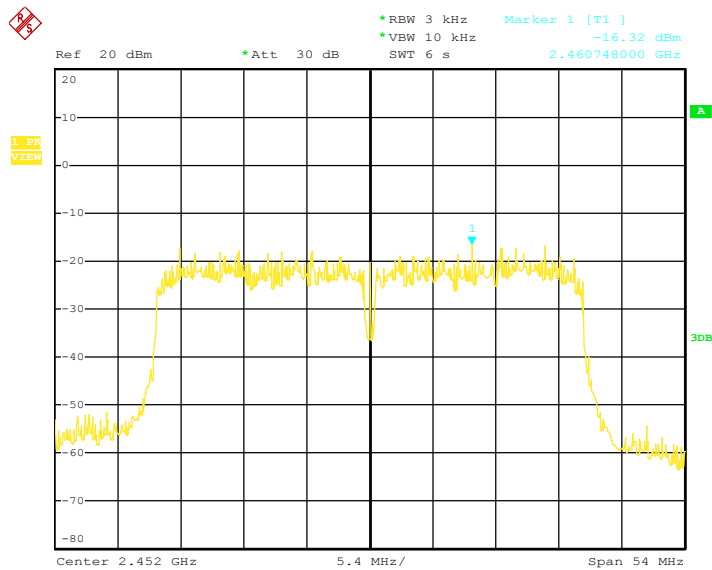

Date: 1.JAN.14502 01:40:52

## 6. Transmitter Spurious Radiated Emission at 3 Meters

### 6.1 Test Equipment


Please refer to Section 10 this report.

### 6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4 - 2003.
2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
3. The frequency spectrum from 9 kHz to 25 GHz was investigated. All readings from 9 kHz to 150 kHz are quasi-peak values with a resolution bandwidth of 200 Hz. All readings from 150 kHz to 30 MHz are quasi-peak values with a resolution bandwidth of 9 KHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz , peak values with a resolution bandwidth of 1 MHz . Measurements were made at 3 meters.
4. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. The Receiving antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency. Emissions below 30MHz were measured with a loop antenna while emission above 30MHz were measured using a broadband E-field antenna.
5. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4 - 2003.


### 6.3 Test Setup

For Frequencies below 30 MHz

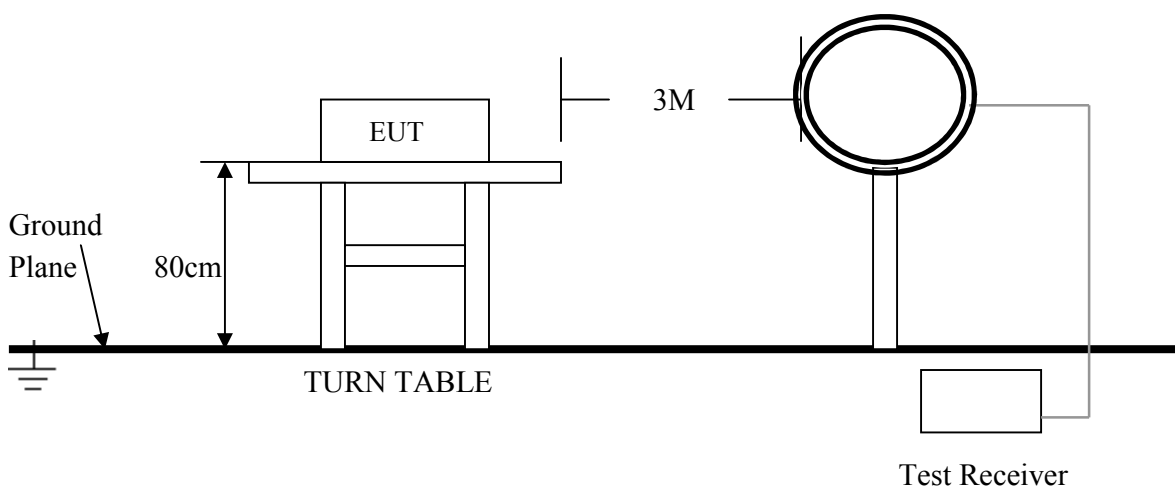

For the actual test configuration , please refer to the related items – Photos of Testing

**For Frequencies above 30 MHz**

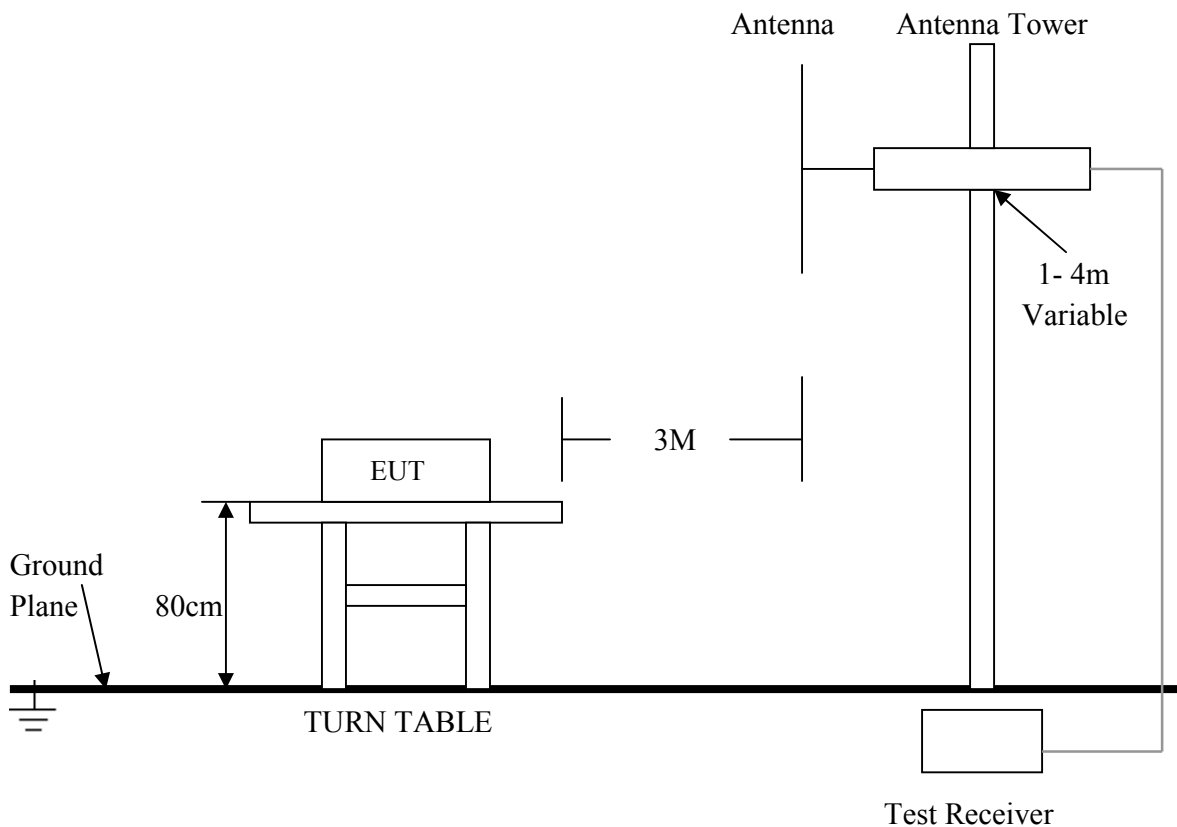

For the actual test configuration , please refer to the related items – Photos of Testing

**6. 4 Configuration of the EUT**

Same as section 4.4 of this report

**6. 5 EUT Operating Condition**

Same as section 4.5 of this report.

### 6.6 Limit

In any 100 KHz bandwidth outside the operating frequency band, the radio frequency power that is produced by modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 KHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in section 15.209(a), which lesser attenuation.

All other emissions inside restricted bands specified in section 15.205(a) shall not exceed the general radiated emission limits specified in section 15.209(a)

**Note:**

Applies to harmonics/spurious emissions that fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

47 CFR § 15.237(c): The emission limits as specified above are based on measurement instrument employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

FCC CFR 47, Part 15, Subpart C, Para, 15.205(a) – Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090–0.110 .....	16.42–16.423	399.9–410	4.5–5.15
10.495–0.505 .....	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905 .....	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128 .....	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775 .....	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775 .....	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218 .....	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825 .....	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225 .....	123–138	2200–2300	14.47–14.5
8.291–8.294 .....	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366 .....	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675 .....	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475 .....	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293 .....	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025 .....	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725 .....	322–335.4	3600–4400	(2)
13.36–13.41.			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

<sup>2</sup> Above 38.6

FCC 47 CFR, Part 15.209(a) – Field Strength Limits within Restricted Frequency Bands

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490 .....	2400/F(kHz)	300
0.490–1.705 .....	24000/F(kHz)	30
1.705–30.0 .....	30	30
30–88 .....	100**	3
88–216 .....	150**	3
216–960 .....	200**	3
Above 960 .....	500	3



Mode	Frequency (MHz)	Emission (dBuV/m)		Horiz/Vert	Limit (dBuV/m)		Margin (dB)	
		Peak	Average		Peak	Average	Peak	Average
<b>IEEE 802.11g Channel Low</b>	4824.02	49.68	-	Horz	74.0	54.0	-24.32	-
	4824.02	50.12	-	Vert	74.0	54.0	-23.88	-
	7236.00	49.52	-	Horz	74.0	54.0	-24.48	-
	7236.00	51.32	-	Vert	74.0	54.0	-22.68	-
	9648.02	49.68	-	Horz	74.0	54.0	-24.32	-
	9648.02	51.25	-	Vert	74.0	54.0	-22.75	-
	24120.05	-	-	Horz	74.0	54.0	-	-
24120.22	-	-	Vert	74.0	54.0	-	-	

Mode	Frequency (MHz)	Emission (dBuV/m)		Horiz/Vert	Limit (dBuV/m)		Margin (dB)	
		Peak	Average		Peak	Average	Peak	Average
<b>IEEE 802.11g Channel Mid</b>	4874.03	45.77	-	Horz	74.0	54.0	-28.23	-
	4874.03	48.92	-	Vert	74.0	54.0	-25.08	-
	7311.00	49.24	-	Horz	74.0	54.0	-24.76	-
	7311.00	49.97	-	Vert	74.0	54.0	-24.03	-
	9748.00	46.59	-	Horz	74.0	54.0	-27.41	-
	9748.00	47.23	-	Vert	74.0	54.0	-26.77	-
	24370.05	-	-	Horz	74.0	54.0	-	-
24370.22	-	-	Vert	74.0	54.0	-	-	

Mode	Frequency (MHz)	Emission (dBuV/m)		Horiz/Vert	Limit (dBuV/m)		Margin (dB)	
		Peak	Average		Peak	Average	Peak	Average
<b>IEEE 802.11g Channel High</b>	4924.00	49.24	-	Horz	74.0	54.0	-24.76	-
	4924.00	48.02	-	Vert	74.0	54.0	-25.98	-
	7386.06	49.51	-	Horz	74.0	54.0	-24.49	-
	7386.06	48.11	-	Vert	74.0	54.0	-25.89	-
	9848.00	48.94	-	Horz	74.0	54.0	-25.06	-
	9848.00	47.68	-	Vert	74.0	54.0	-26.32	-
	24620.05	-	-	Horz	74.0	54.0	-	-
24620.22	-	-	Vert	74.0	54.0	-	-	

- Note:**
- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
  - (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
  - (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
  - (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
  - (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
  - (6) Where an emission level is indicated by a -, levels had a margin greater than 20 dB when compared to the limit.

Mode	Frequency (MHz)	Emission (dBuV/m)		Horiz/Vert	Limit (dBuV/m)		Margin (dB)	
		Peak	Average		Peak	Average	Peak	Average
IEEE 802.11n 20MHz Ant.0 Channel Low	4824.02	46.59	-	Horz	74.0	54.0	-27.41	-
	4824.02	48.26	-	Vert	74.0	54.0	-25.74	-
	7236.00	49.28	-	Horz	74.0	54.0	-24.72	-
	7236.00	50.13	-	Vert	74.0	54.0	-23.87	-
	9648.03	48.69	-	Horz	74.0	54.0	-25.31	-
	9648.03	49.27	-	Vert	74.0	54.0	-24.73	-
	24120.05	-	-	Horz	74.0	54.0	-	-
24120.22	-	-	Vert	74.0	54.0	-	-	

Mode	Frequency (MHz)	Emission (dBuV/m)		Horiz/Vert	Limit (dBuV/m)		Margin (dB)	
		Peak	Average		Peak	Average	Peak	Average
IEEE 802.11n 20MHz Ant.0 Channel Mid	4874.00	45.26	-	Horz	74.0	54.0	-28.74	-
	4874.00	47.65	-	Vert	74.0	54.0	-26.35	-
	7311.01	48.26	-	Horz	74.0	54.0	-25.74	-
	7311.01	51.33	-	Vert	74.0	54.0	-22.67	-
	9748.00	46.85	-	Horz	74.0	54.0	-27.15	-
	9748.00	48.21	-	Vert	74.0	54.0	-25.79	-
	24370.05	-	-	Horz	74.0	54.0	-	-
24370.22	-	-	Vert	74.0	54.0	-	-	

Mode	Frequency (MHz)	Emission (dBuV/m)		Horiz/Vert	Limit (dBuV/m)		Margin (dB)	
		Peak	Average		Peak	Average	Peak	Average
IEEE 802.11n 20MHz Ant.0 Channel High	4924.00	48.55	-	Horz	74.0	54.0	-25.45	-
	4924.00	49.68	-	Vert	74.0	54.0	-24.32	-
	7386.02	48.56	-	Horz	74.0	54.0	-25.44	-
	7386.02	50.06	-	Vert	74.0	54.0	-23.94	-
	9848.05	46.29	-	Horz	74.0	54.0	-27.71	-
	9848.05	47.13	-	Vert	74.0	54.0	-26.87	-
	24620.05	-	-	Horz	74.0	54.0	-	-
24620.22	-	-	Vert	74.0	54.0	-	-	

**Note:** (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.  
 (2) Emission Level = Reading Level + Probe Factor + Cable Loss.  
 (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz  
 (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz  
 (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.  
 (6) Where an emission level is indicated by a -, levels had a margin greater than 20 dB when compared to the limit.

Mode	Frequency (MHz)	Emission (dBuV/m)		Horiz/Vert	Limit (dBuV/m)		Margin (dB)	
		Peak	Average		Peak	Average	Peak	Average
IEEE 802.11n 40MHz Ant.0 Channel Low	4844.00	45.62	-	Horz	74.0	54.0	-28.38	-
	4844.00	48.20	-	Vert	74.0	54.0	-25.80	-
	7266.06	49.62	-	Horz	74.0	54.0	-24.38	-
	7266.06	50.32	-	Vert	74.0	54.0	-23.68	-
	9688.04	45.69	-	Horz	74.0	54.0	-28.31	-
	9688.04	46.28	-	Vert	74.0	54.0	-27.72	-
	24220.00	-	-	Horz	74.0	54.0	-	-
24220.00	-	-	Vert	74.0	54.0	-	-	

Mode	Frequency (MHz)	Emission (dBuV/m)		Horiz/Vert	Limit (dBuV/m)		Margin (dB)	
		Peak	Average		Peak	Average	Peak	Average
IEEE 802.11n 40MHz Ant.0 Channel Mid	4874.00	47.56	-	Horz	74.0	54.0	-26.44	-
	4874.00	48.64	-	Vert	74.0	54.0	-25.36	-
	7311.05	48.63	-	Horz	74.0	54.0	-25.37	-
	7311.05	49.68	-	Vert	74.0	54.0	-24.32	-
	9748.02	45.26	-	Horz	74.0	54.0	-28.74	-
	9748.02	47.22	-	Vert	74.0	54.0	-26.78	-
	24120.00	-	-	Horz	74.0	54.0	-	-
24120.00	-	-	Vert	74.0	54.0	-	-	

Mode	Frequency (MHz)	Emission (dBuV/m)		Horiz/Vert	Limit (dBuV/m)		Margin (dB)	
		Peak	Average		Peak	Average	Peak	Average
IEEE 802.11n 40MHz Ant.0 Channel High	4904.02	49.17	-	Horz	74.0	54.0	-24.83	-
	4904.02	49.85	-	Vert	74.0	54.0	-24.15	-
	7356.00	47.33	-	Horz	74.0	54.0	-26.67	-
	7356.00	50.12	-	Vert	74.0	54.0	-23.88	-
	9808.03	46.89	-	Horz	74.0	54.0	-27.11	-
	9808.03	47.62	-	Vert	74.0	54.0	-26.38	-
	24520.00	-	-	Horz	74.0	54.0	-	-
24520.00	-	-	Vert	74.0	54.0	-	-	

- Note:**
- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
  - (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
  - (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
  - (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
  - (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
  - (6) Where an emission level is indicated by a -, levels had a margin greater than 20 dB when compared to the limit.



**General Radiated Emission Data**

Product	: HD Wireless IP Camera	Test Mode	: 802.11b_CH High
Test Item	: Fundamental Radiated Emission Data	Temperature	: 25 °C
Test Voltage	: DC 5V(by DC Adapter )	Humidity	: 56%RH
Test Result	: <b>PASS</b>	Model	:

**For Frequency Below 30MHz***Adapter model: SAW-0502000*

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
N/A	N/A	N/A	N/A	N/A

- Note:**
- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
  - (2) "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
  - (3) Emission Level = Reading Level + Probe Factor + Cable Loss.

**For Frequency Above 30MHz***Adapter model: SAW-0502000*

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
350.000	36.68	Horiz./	46.0	-9.32
137.960	29.80	Vert.	43.5	-13.70
450.000	40.16	Horiz./	46.0	-5.84
797.000	39.74	Vert.	46.0	-6.26
894.320	42.63	Horiz./	46.0	-3.37
853.160	40.69	Vert.	46.0	-5.31

- Note:**
- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
  - (2) "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
  - (3) Emission Level = Reading Level + Probe Factor + Cable Loss.

## 7. RF Exposure Requirements

### 7.1 Test Equipment

Please refer to Section 10 this report.

### 7.2 Limit

According to FCC 15.247(i), Systems operating under provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commissions guidelines.

FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b)(1) of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....			f/300	6
1500–100,000 .....			5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300 .....	27.5	0.073	0.2	30
300–1500 .....			f/1500	30
1500–100,000 .....			1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

### 7.3 Test Result

Product	: HD Wireless IP Camera	Test Mode	: IEEE 802.11b/g/n
Test Item	: RF Exposure	Temperature	: 25 °C
Test Voltage	: DC 5V (Power by DC Power Supply)	Humidity	: 56%RH
Test Result	: PASS		

Evaluation of RF Exposure Compliance Requirements	
MPE Prediction of MPE according to equation from page 19 of OET Bulletin 65, Edition 97-01	
RF Exposure Requirements	Compliance with FCC Rules
S=PG/4πR <sup>2</sup>  Where: S=Power density P=Power input to antenna G=Power gain of the antenna relative to an isotropic radiator R=Distance to the center of radiation of the antenna	Maximum output power at antenna input terminal: 15.02 dBm =31.77 mW (802.11b/g, 2462MHz) 11.95dBm = 15.67 mW (802.11n, 2462MHz) Prediction distance: 20 cm Antenna gain : 2.0 dBi MPE limit for uncontrolled exposure at prediction frequency: 10 W/m <sup>2</sup>  Power density at 20 cm:  802.11b/g: 0.01 mW/cm <sup>2</sup> 802.11n : 0.0049 mW/cm <sup>2</sup>


## 8. Photos of Testing

### 8.1 EUT Test Photographs

Conducted Emission (FI9816P)



Radiated Emission (FI9816P)

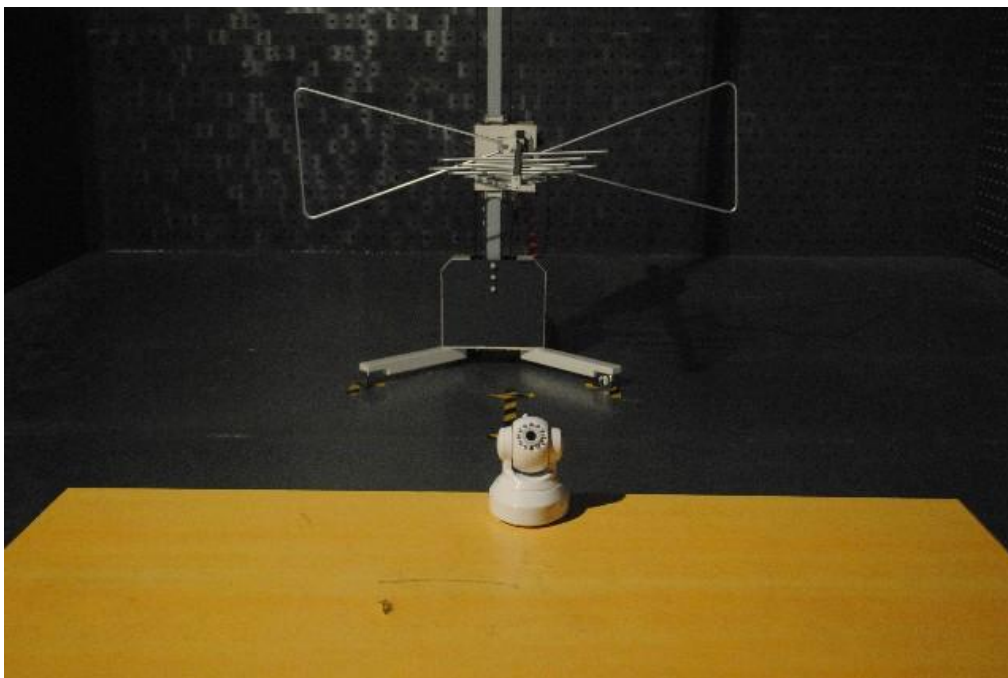

Radiated Emission Above 1GHz



### 8. 2 EUT Detailed Photographs






EUT bottom view







EUT inside whole view

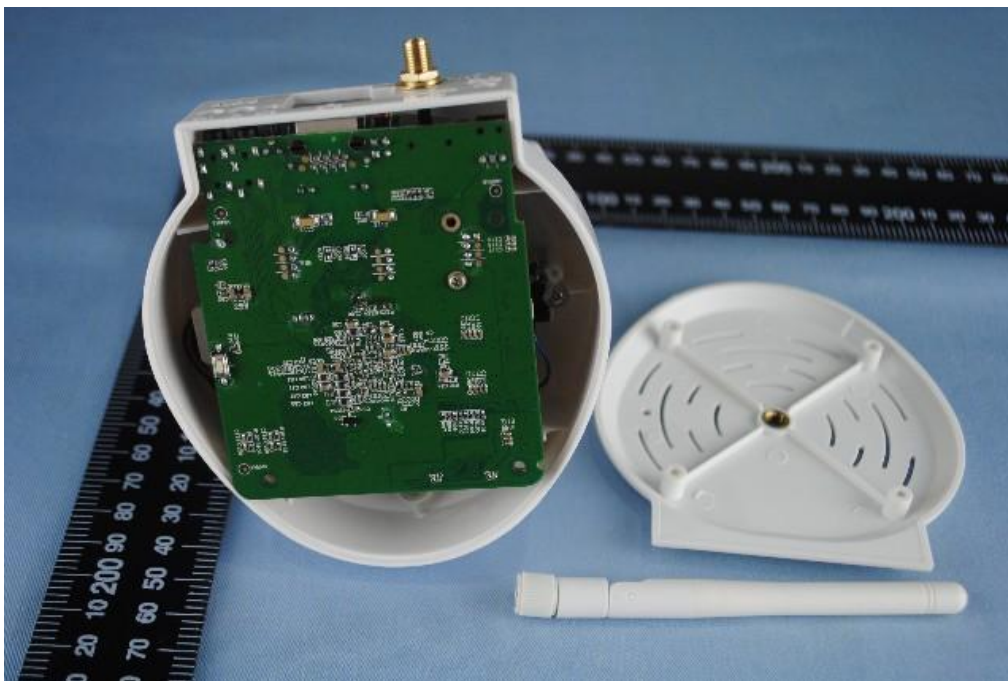


Main board component side

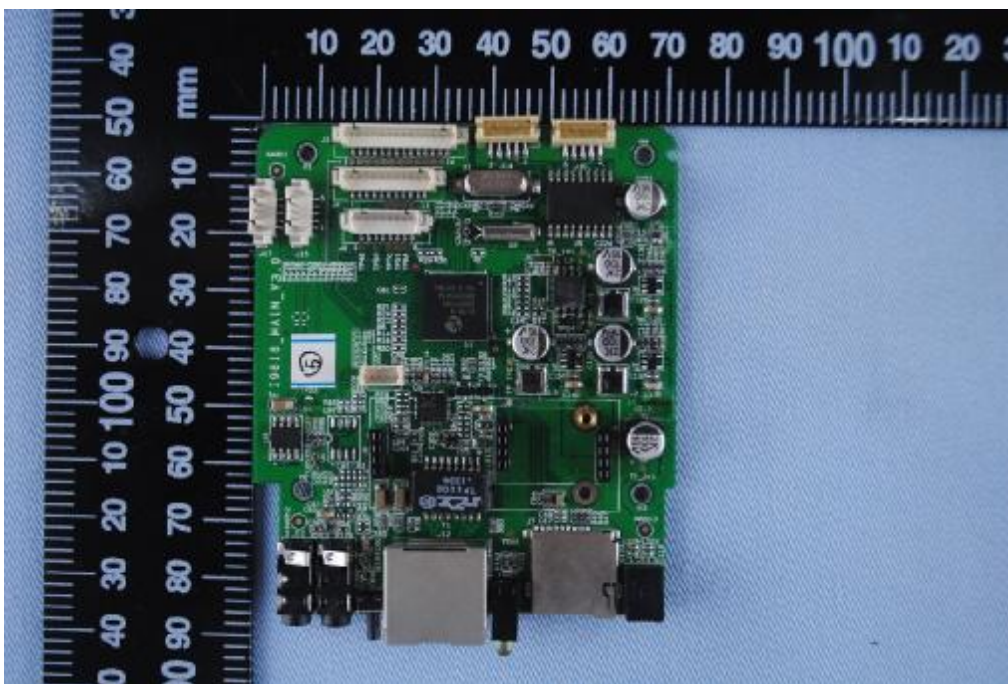




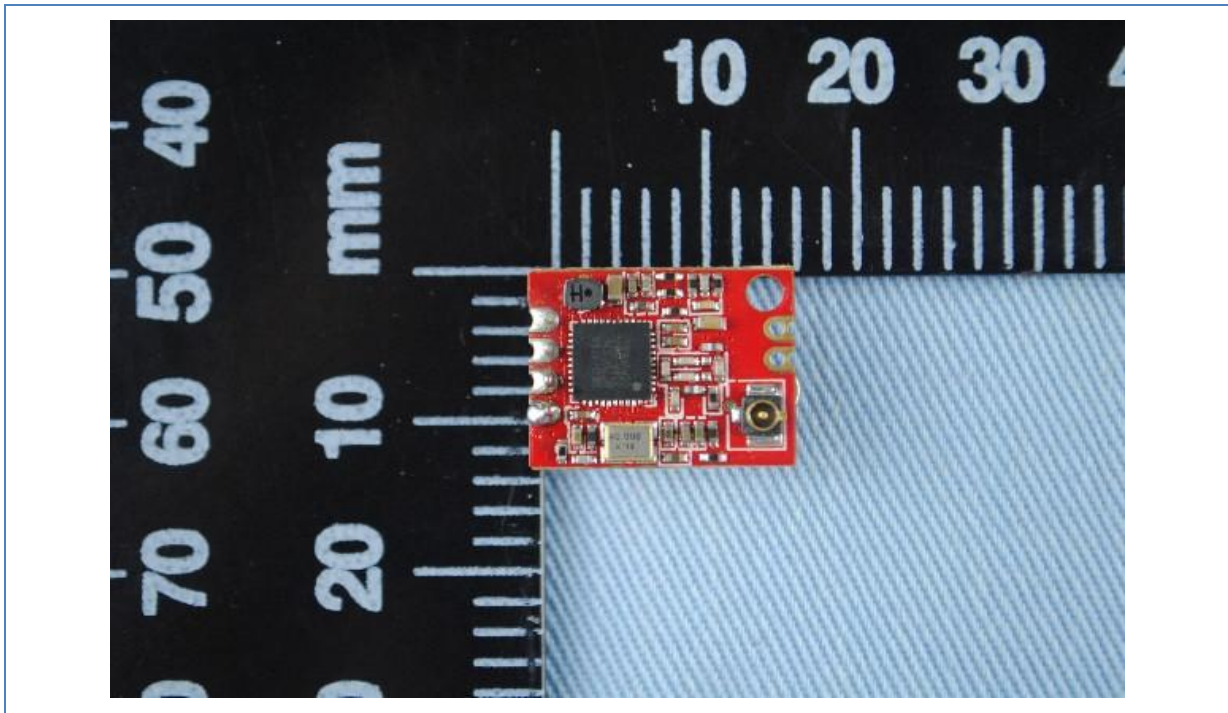

Main board solder side

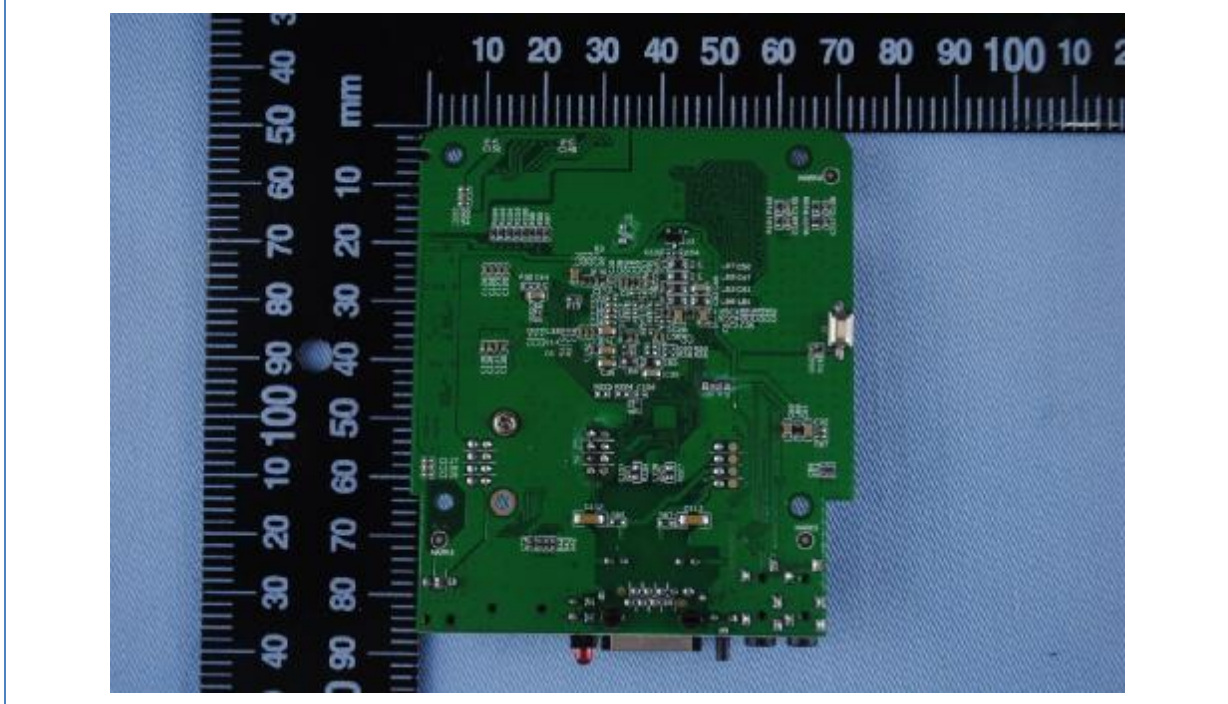

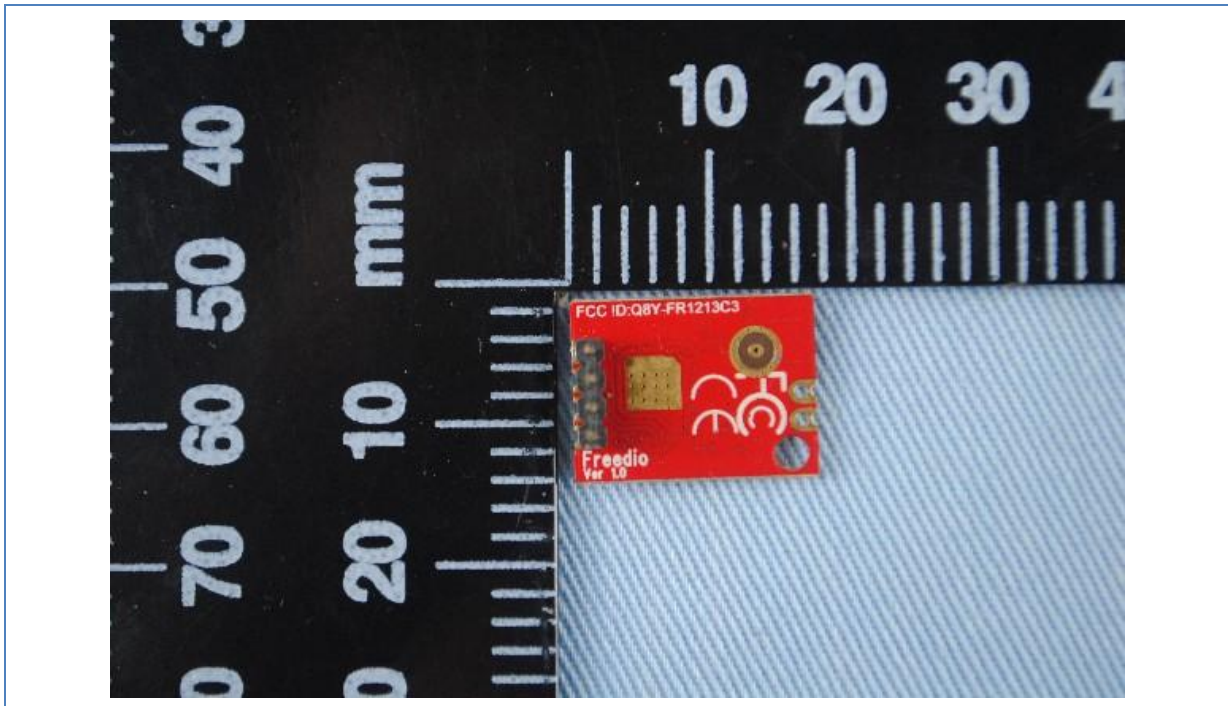

Adapter top view



Adapter side view



### 9. FCC ID Label



**This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.**

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### Proposed Label Location on EUT

EUT Bottom View/Proposed FCC ID Label Location



## 10. Test Equipment

The following test equipments were used during the radiated & conducted emission test:

Equipment/ Facilities	Manufacturer	Model #	Serial No.	Due Date
Turntable	Innco systems GmbH	CT-0801	KMO-SZ114	NCR
Antenna Tower	Innco systems GmbH	MM4000-PP	KMO-SZ115	NCR
Controller	Innco systems GmbH	CO2000	KMO-SZ116	NCR
Pre-Amplifier	Agilent	87405C	KMO-SZ155	Dec.6, 2014
Pre-Amplifier	Com-Power	PAM-840	KMO-SZ156	Dec.6, 2014
Horn Antenna	Com-Power	AH-840	KMO-SZ157	Dec.6, 2014
EMI Test Receiver	Rohde & Schwarz	ESPI7	KMO-SZ002	June 27, 2015
Spectrum Analyzer	Rohde & Schwarz	FSP40	KMO-SZ003	June 27, 2015
Signal Generator	FLUKE	PM5418+Y/C	KMO-SZ020	May 27, 2015
Loop Antenna	Rohde & Schwarz	HFH2-Z2	KMO-SZ004	Jan. 30, 2015
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	KMO-SZ005	Sep.18, 2014
Trilog-Super Broadband Antenna	SCHWARZBECK	VULB9161	KMO-SZ006	Sep.18, 2014
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	KMO-SZ007	Sep.18, 2014
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120D	KMO-SZ008	Sep.18, 2014
AMN	Rohde & Schwarz	ESH3-Z5	KMO-SZ009	June 27, 2015
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	KMO-SZ077	Nov.29, 2014
ISN	SCHWARZBECK	NTFM 8158 CAT3	KMO-SZ070	Nov.19, 2014
ISN	SCHWARZBECK	NTFM 8158 CAT5	KMO-SZ071	Nov.19, 2014
ISN	SCHWARZBECK	NTFM 8158 CAT6	KMO-SZ072	Nov.19, 2014
KMO Shielded Room	KMO	KMO-001	KMO-SZ036	NCR
Coaxial Cable with N-Connectors	SCHWARZBECK	AK9515H	KMO-SZ037	Sep.18, 2014
AC Power Source / Analyzer	Agilent	6813B	KMO-SZ166	July 22, 2015
Digital Radio Communication Tester	Rohde & Schwarz	CMD60	KMO-SZ169	April 10, 2015
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	KMO-SZ170	April 10, 2015
Program Control Telephone Exchanger	Excelltel	CDX8000-M	KMO-SZ221	NCR
3m Anechoic Chamber	KMO	KMO-3AC	KMO-3AC-1	Nov.12, 2016
Temperature Chamber	TABAI	PSL-4GTW	N/A	Feb.10, 2015