

FCC Part 15C

Measurement and Test Report

For

ShenZhen Foscam Intelligent Technology Co., Ltd.

9/F, Block F5, TCL International E City, No.1001 ZhongShanyuan Rd.,

NanShan District, Shenzhen, China

FCC ID: ZDER4S

FCC Rule(s):	<u>FCC Part 15.247</u>
Product Description:	<u>UHD 4.0MP Wi-Fi Camera</u>
Tested Model:	<u>R4S</u>
Report No.:	<u>STRD1812018I-2</u>
Sample Receipt Date:	<u>2018-12-11</u>
Tested Date:	<u>2018-12-12 to 2018-12-24</u>
Issued Date:	<u>2018-12-25</u>
Tested By:	<u>Ray Yang / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	<p>ShenZhen SEM Test Technology Co., Ltd. 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semttest.com.cn</p>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by ShenZhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	9
3. RF EXPOSURE	10
3.1 STANDARD APPLICABLE.....	10
3.2 TEST RESULT.....	10
4. ANTENNA REQUIREMENT	11
4.1 STANDARD APPLICABLE.....	11
4.2 EVALUATION INFORMATION	11
5. POWER SPECTRAL DENSITY	12
5.1 STANDARD APPLICABLE.....	12
5.2 TEST PROCEDURE.....	12
5.3 SUMMARY OF TEST RESULTS/PLOTS	12
6. DTS BANDWIDTH.....	17
6.1 STANDARD APPLICABLE.....	17
6.2 TEST PROCEDURE.....	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	17
7. RF OUTPUT POWER	22
7.1 STANDARD APPLICABLE.....	22
7.2 TEST PROCEDURE.....	22
7.3 SUMMARY OF TEST RESULTS/PLOTS	22
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	28
8.1 STANDARD APPLICABLE.....	28
8.2 TEST PROCEDURE.....	28
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	29
8.4 SUMMARY OF TEST RESULTS/PLOTS	29
9. OUT OF BAND EMISSIONS.....	37
9.1 STANDARD APPLICABLE.....	37
9.2 TEST PROCEDURE.....	37
9.3 SUMMARY OF TEST RESULTS/PLOTS	38
10. CONDUCTED EMISSIONS	59
10.1 TEST PROCEDURE.....	59
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	59
10.3 TEST RECEIVER SETUP	59
10.4 SUMMARY OF TEST RESULTS/PLOTS	59

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Foscam Intelligent Technology Co., Ltd.
Address of applicant: 9/F, Block F5, TCL International E City, No.1001
ZhongShanyuan Rd., NanShan District, Shenzhen, China

Manufacturer: Shenzhen Foscam Intelligent Technology Co., Ltd.
Address of manufacturer: 9/F, Block F5, TCL International E City, No.1001
ZhongShanyuan Rd., NanShan District, Shenzhen, China

General Description of EUT	
Product Name:	UHD 4.0MP Wi-Fi Camera
Trade Name:	FOSCAM
Model No.:	R4S
Adding Model(s):	R4M, PT4, R4M VX, PT4 VX, R4S, R2 V(X), R2C V(X), R2E V(X), R2S V(X), R2 Lite V(X), R2 Pro V(X), R4 V(X), R4S V(X), R4C V(X), R4E V(X), R4 Lite V(X), R4 Pro V(X), FI9225P V(X), FI9235P V(X), MPS4010, MPS2010, MPS401(X), MPS201(X) ("VX"represent the software version, which "X"can be from 0 which "X"can be from 0)
Rated Voltage:	DC 5V
Power Adapter:	Model:SAW12F-050-2000U INPUT:AC100/240V 50/60Hz 0.5A OUTPUT:DC5V/2000mA
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model R4S, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n-HT20 2422-2452MHz for 802.11n-HT40
RF Output Power:	16.31dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n-HT20 7 for 802.11n-HT40
Channel Separation:	5MHz
Type of Antenna:	SMA Reverse threads antenna
Antenna Gain:	2.0dBi
Lowest Internal Frequency of EUT:	32.768kHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 15.247 Meas Guidance v05: Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions		
Temperature:		22~25 °C
Relative humidity		50~56 %.
ATM Pressure:		1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	DTS Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has a SMA Reverse threads antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure


According to the KDB 558074 D01 v05 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).


5.3 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	-18.19	8
	2437	-17.58	8
	2462	-17.86	8
802.11g_54Mbps	2412	-20.29	8
	2437	-19.24	8
	2462	-19.94	8
802.11n-HT20_MCS7	2412	-20.57	8
	2437	-20.22	8
	2462	-19.77	8
802.11n-HT40_MCS7	2422	-23.31	8
	2437	-23.04	8
	2452	-23.10	8

Please refer to the following test plots:

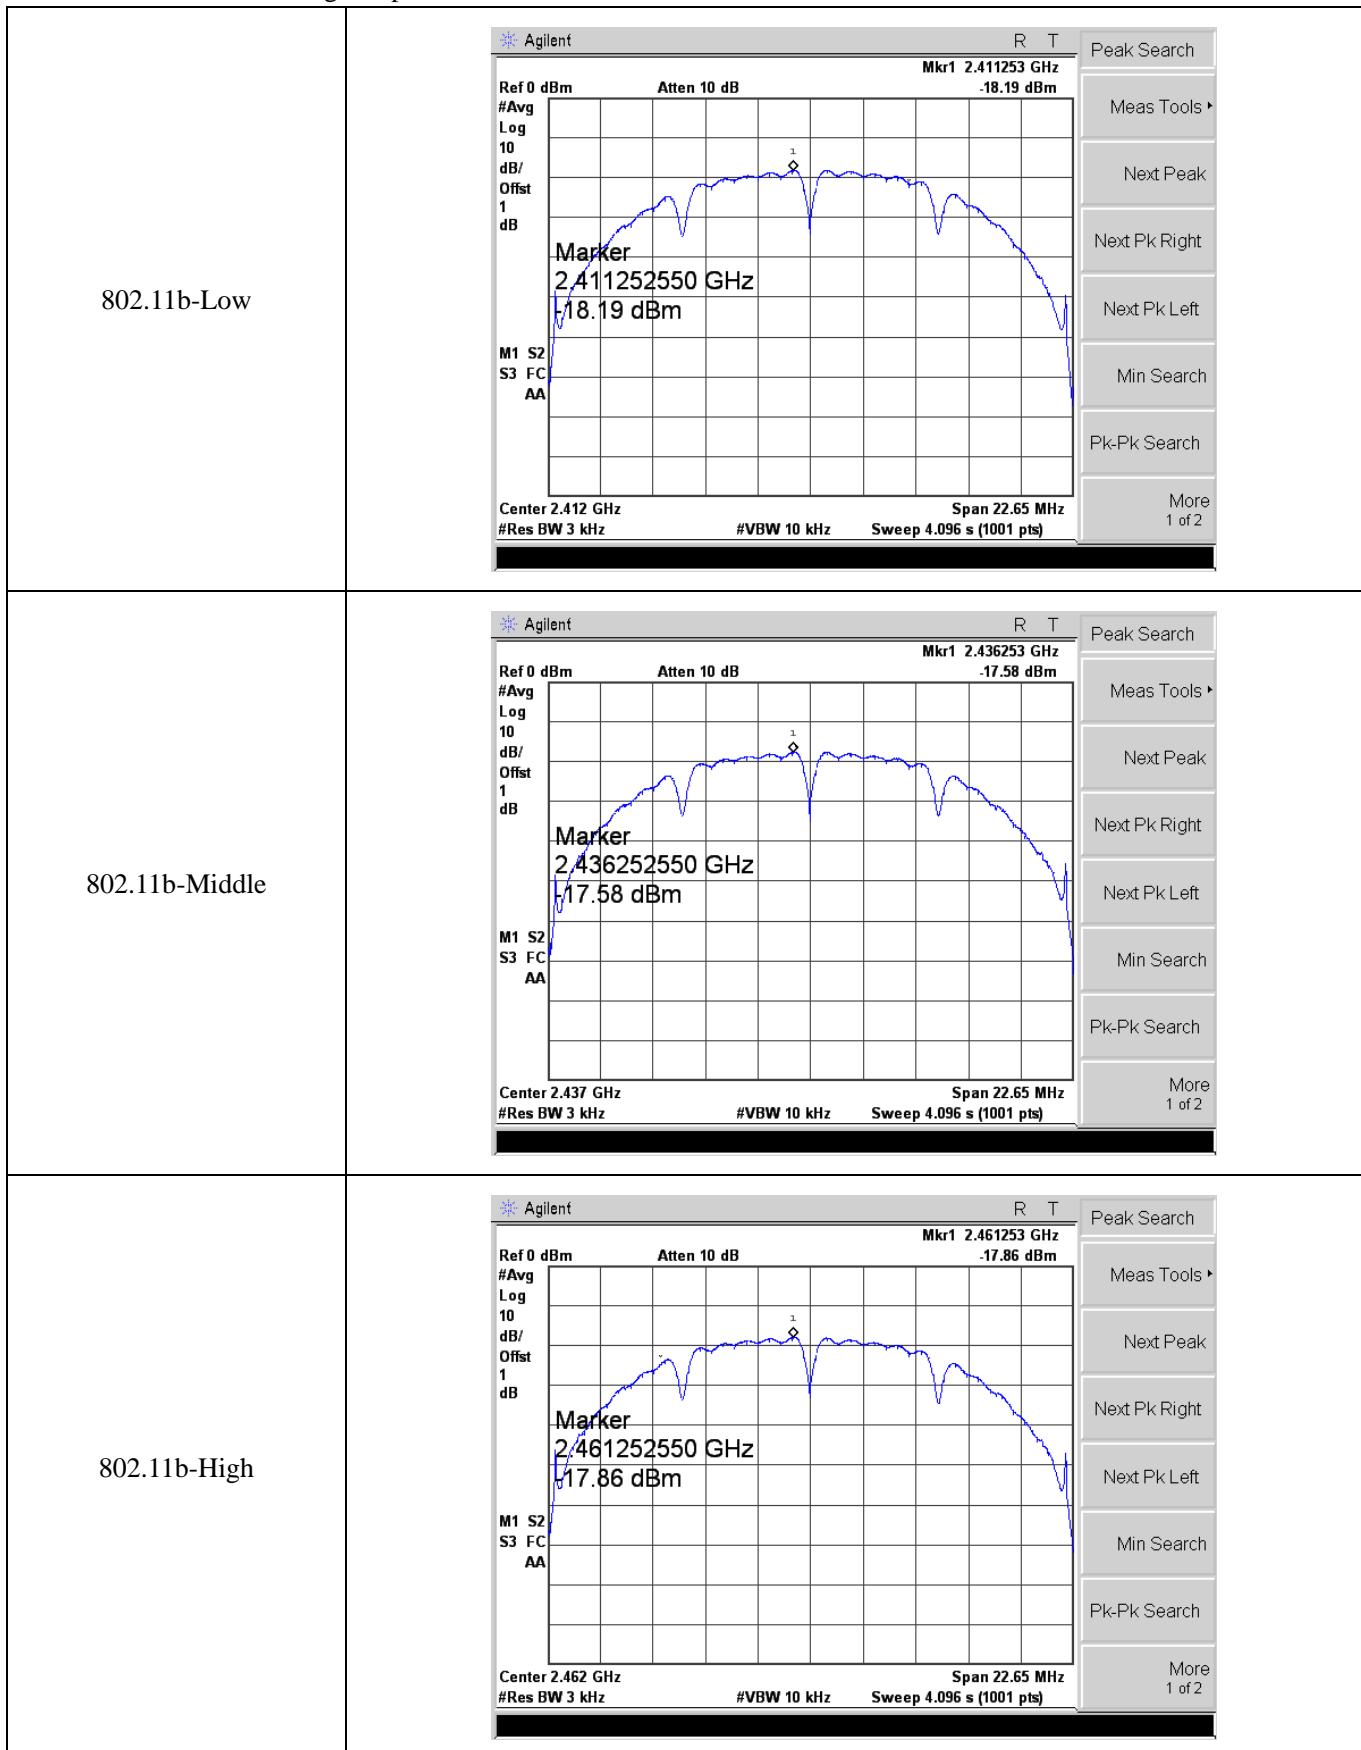

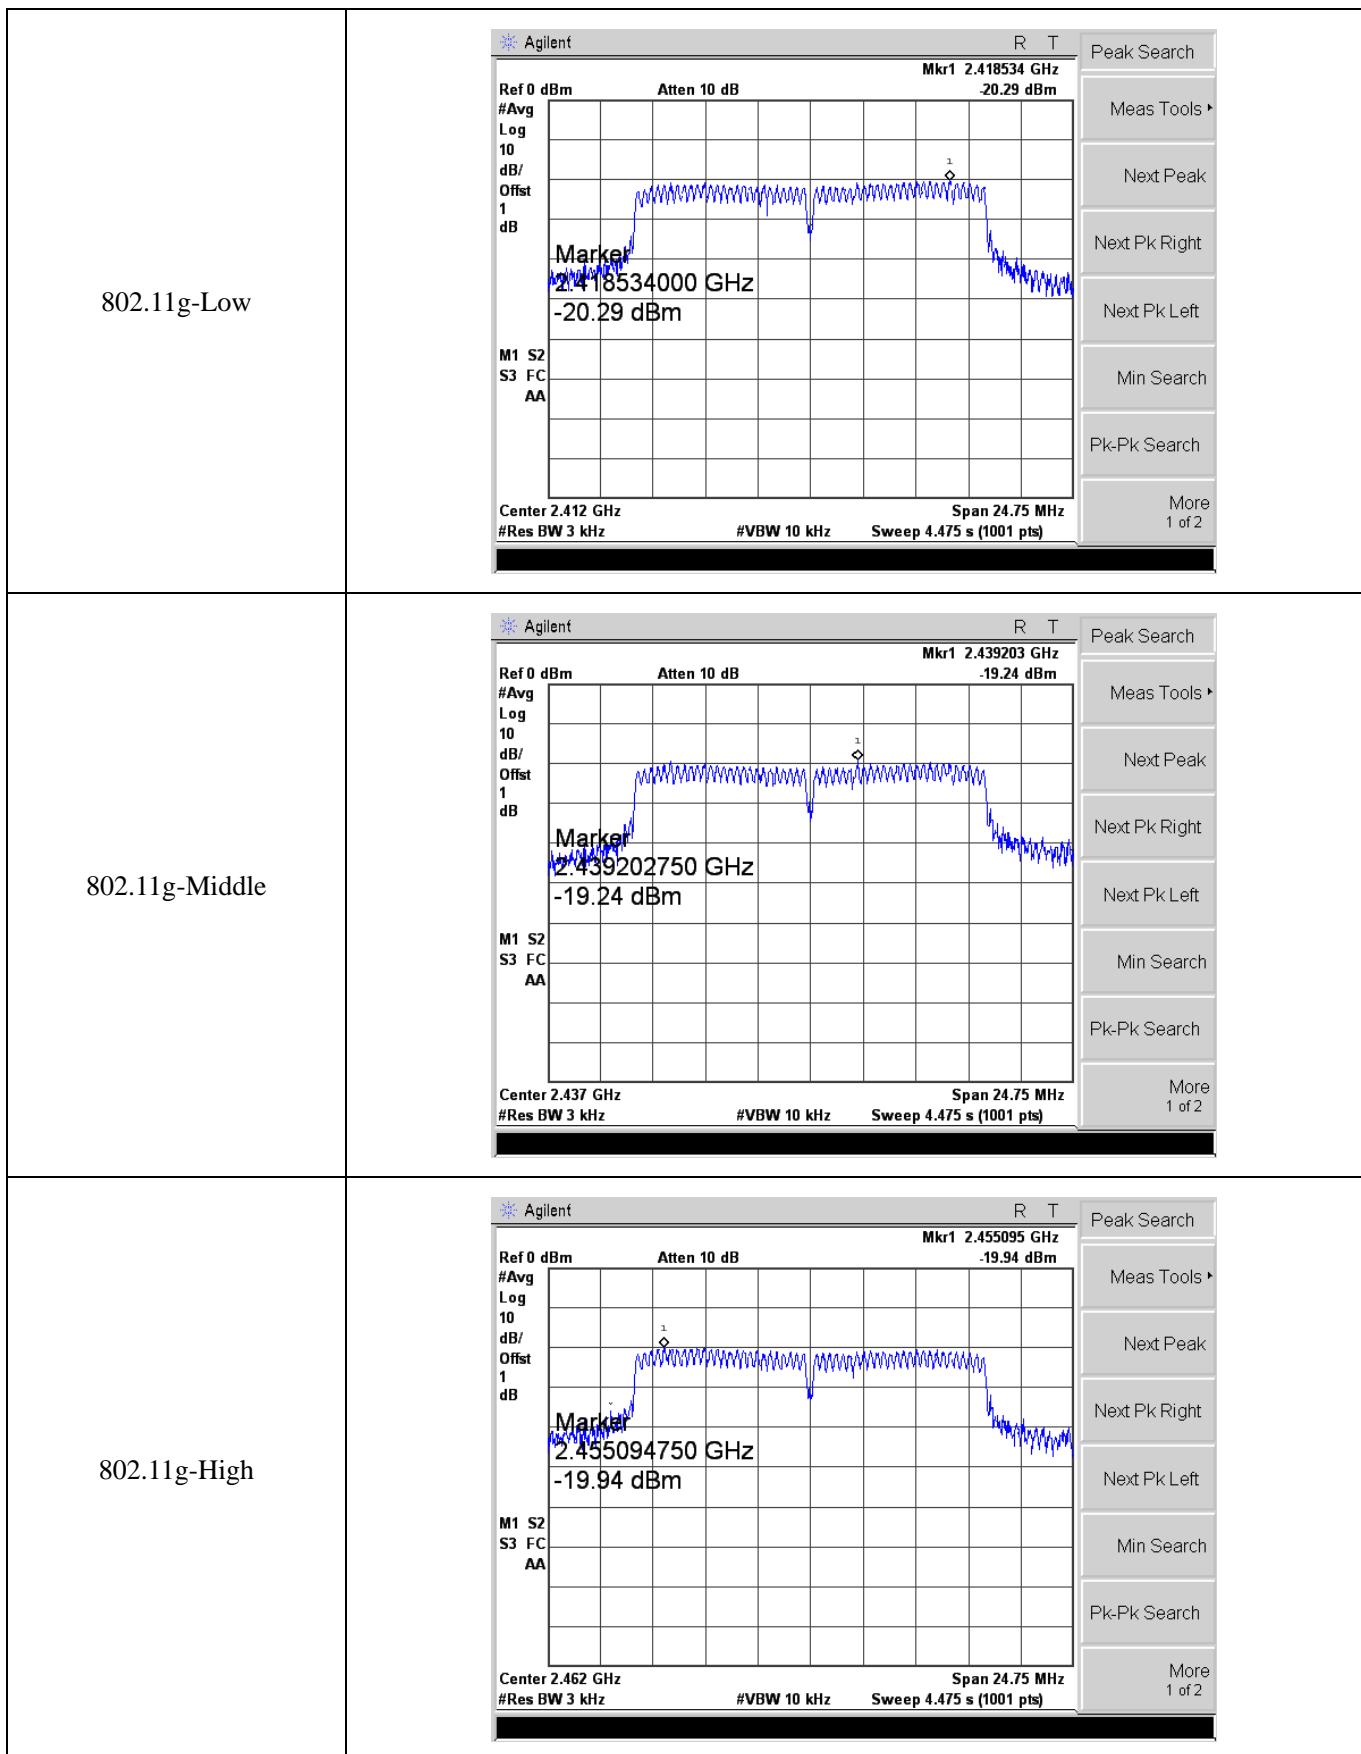

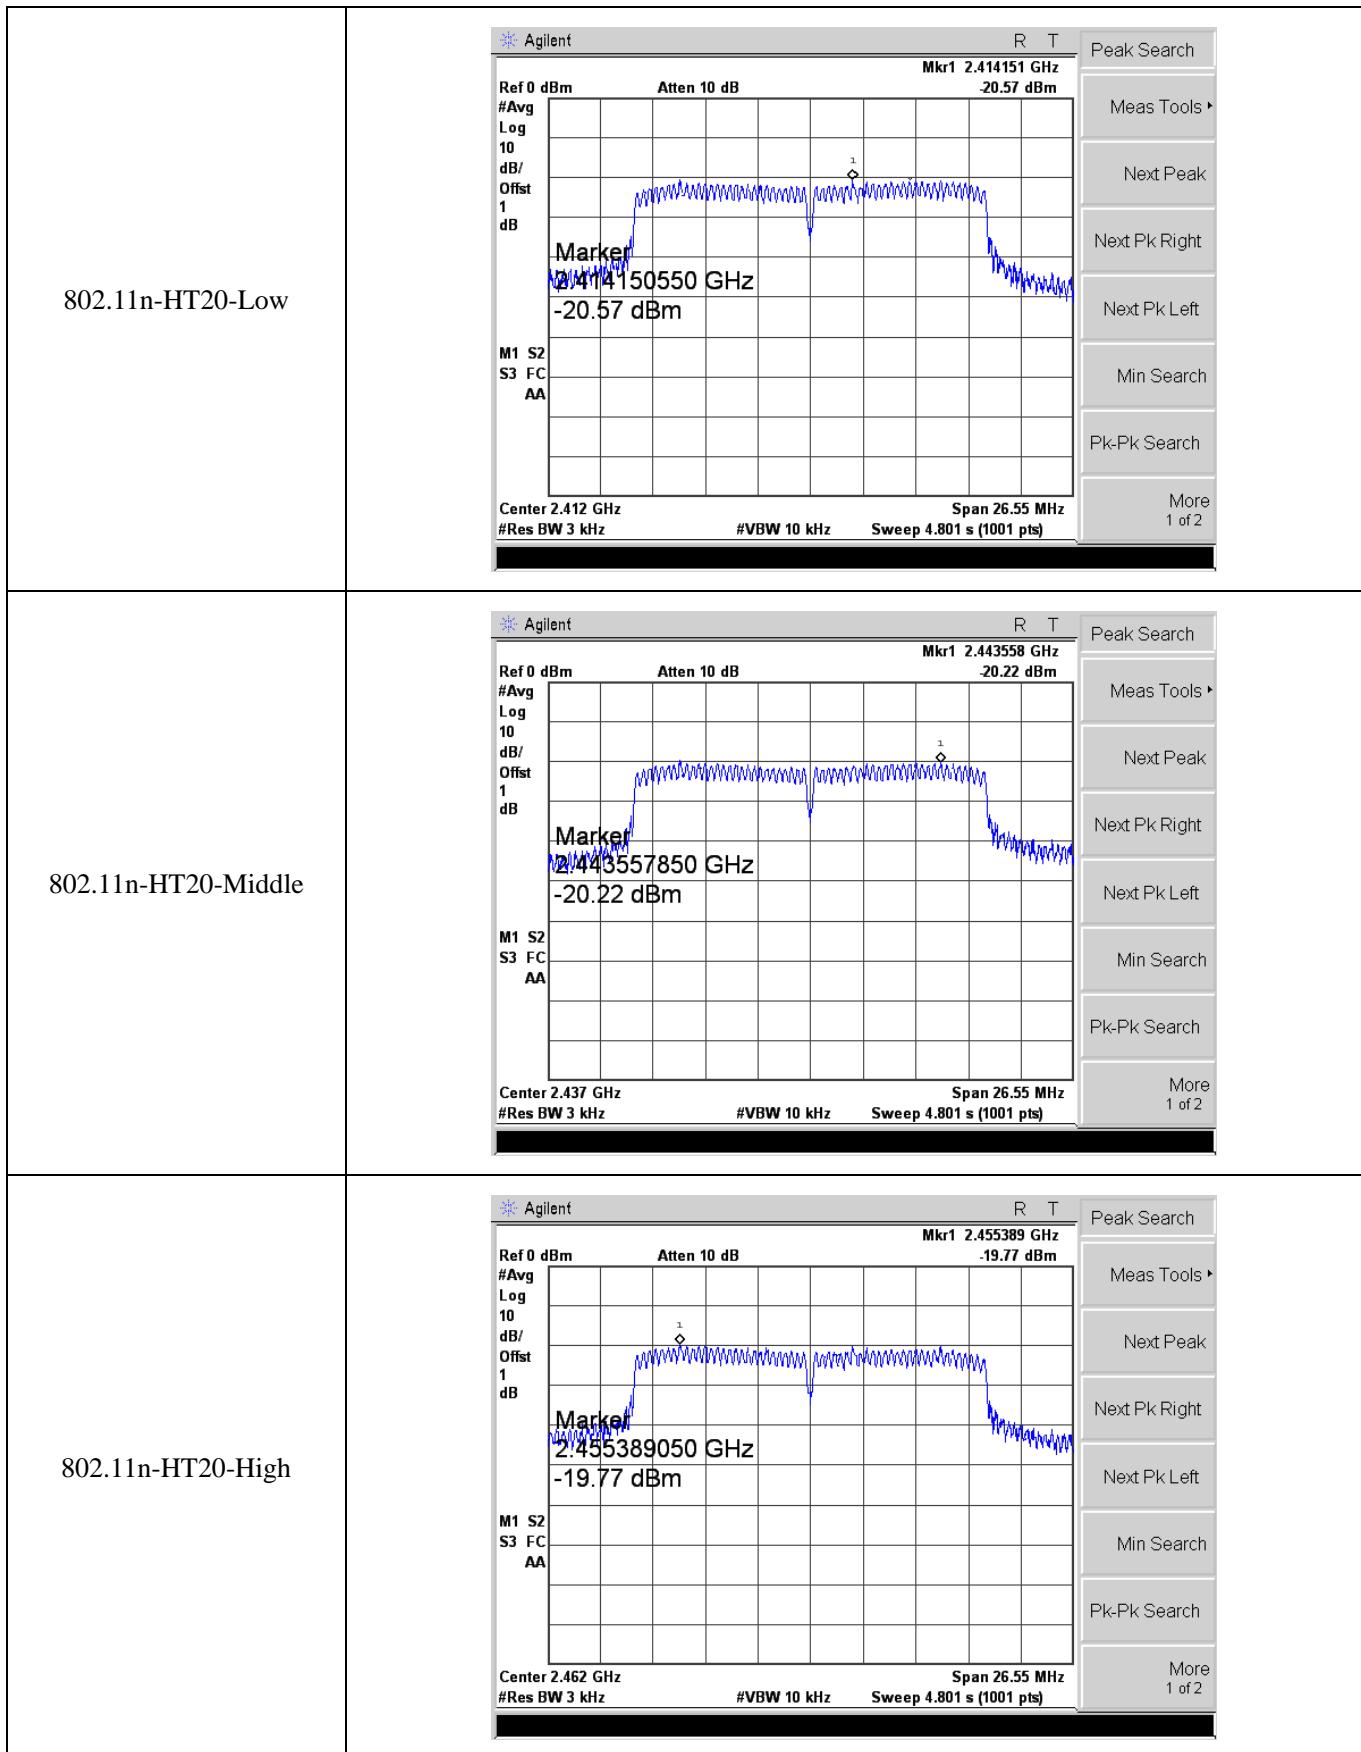

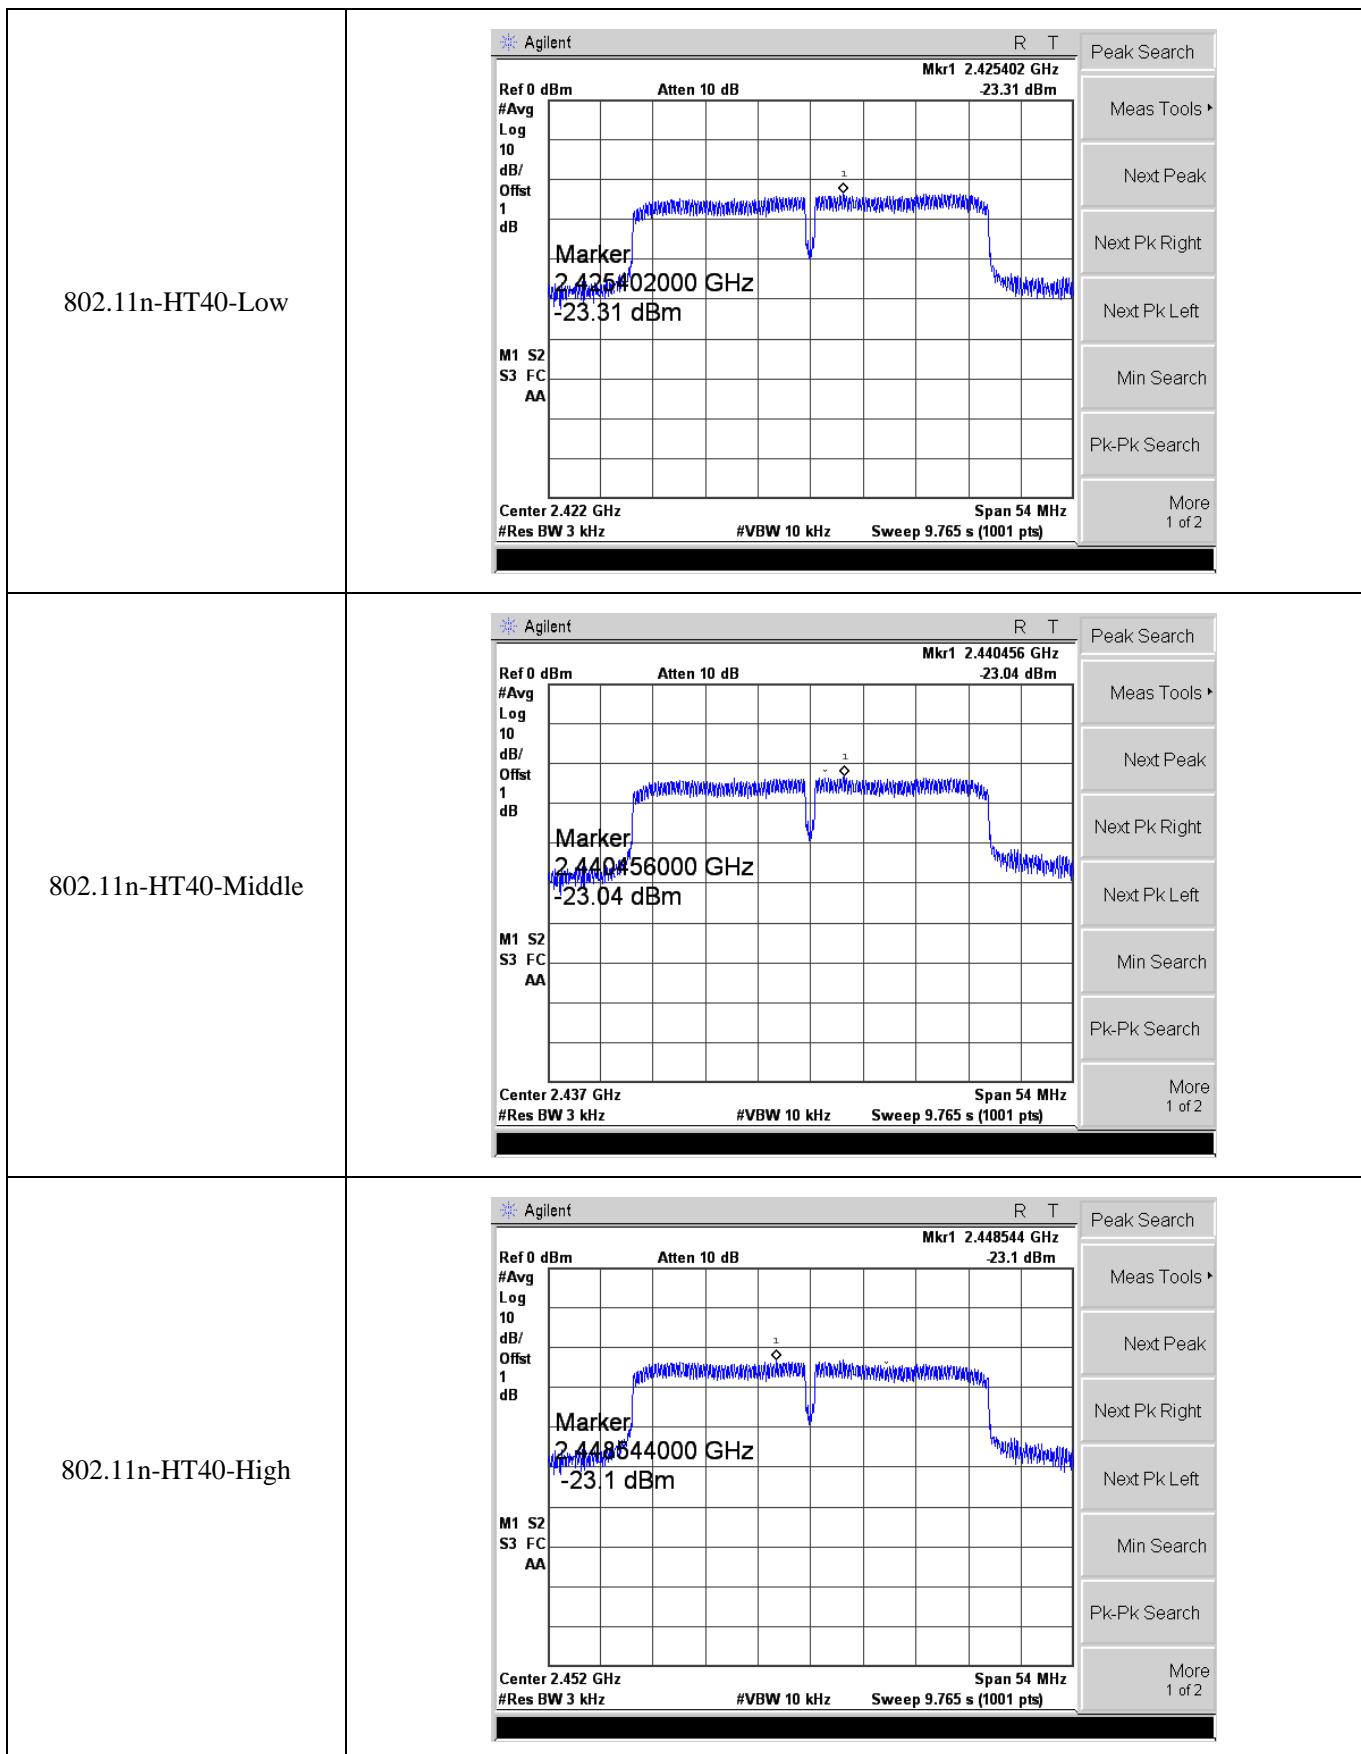

6. DTS Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure


According to the KDB 558074 D01 v05 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:


- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




6.3 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	10.123	≥ 500
	2437	10.115	≥ 500
	2462	10.072	≥ 500
802.11g_54Mbps	2412	16.449	≥ 500
	2437	16.498	≥ 500
	2462	16.459	≥ 500
802.11n-HT20_MCS7	2412	17.675	≥ 500
	2437	17.636	≥ 500
	2462	17.711	≥ 500
802.11n-HT40_MCS7	2422	36.371	≥ 500
	2437	36.372	≥ 500
	2452	36.417	≥ 500

Please refer to the following test plots:

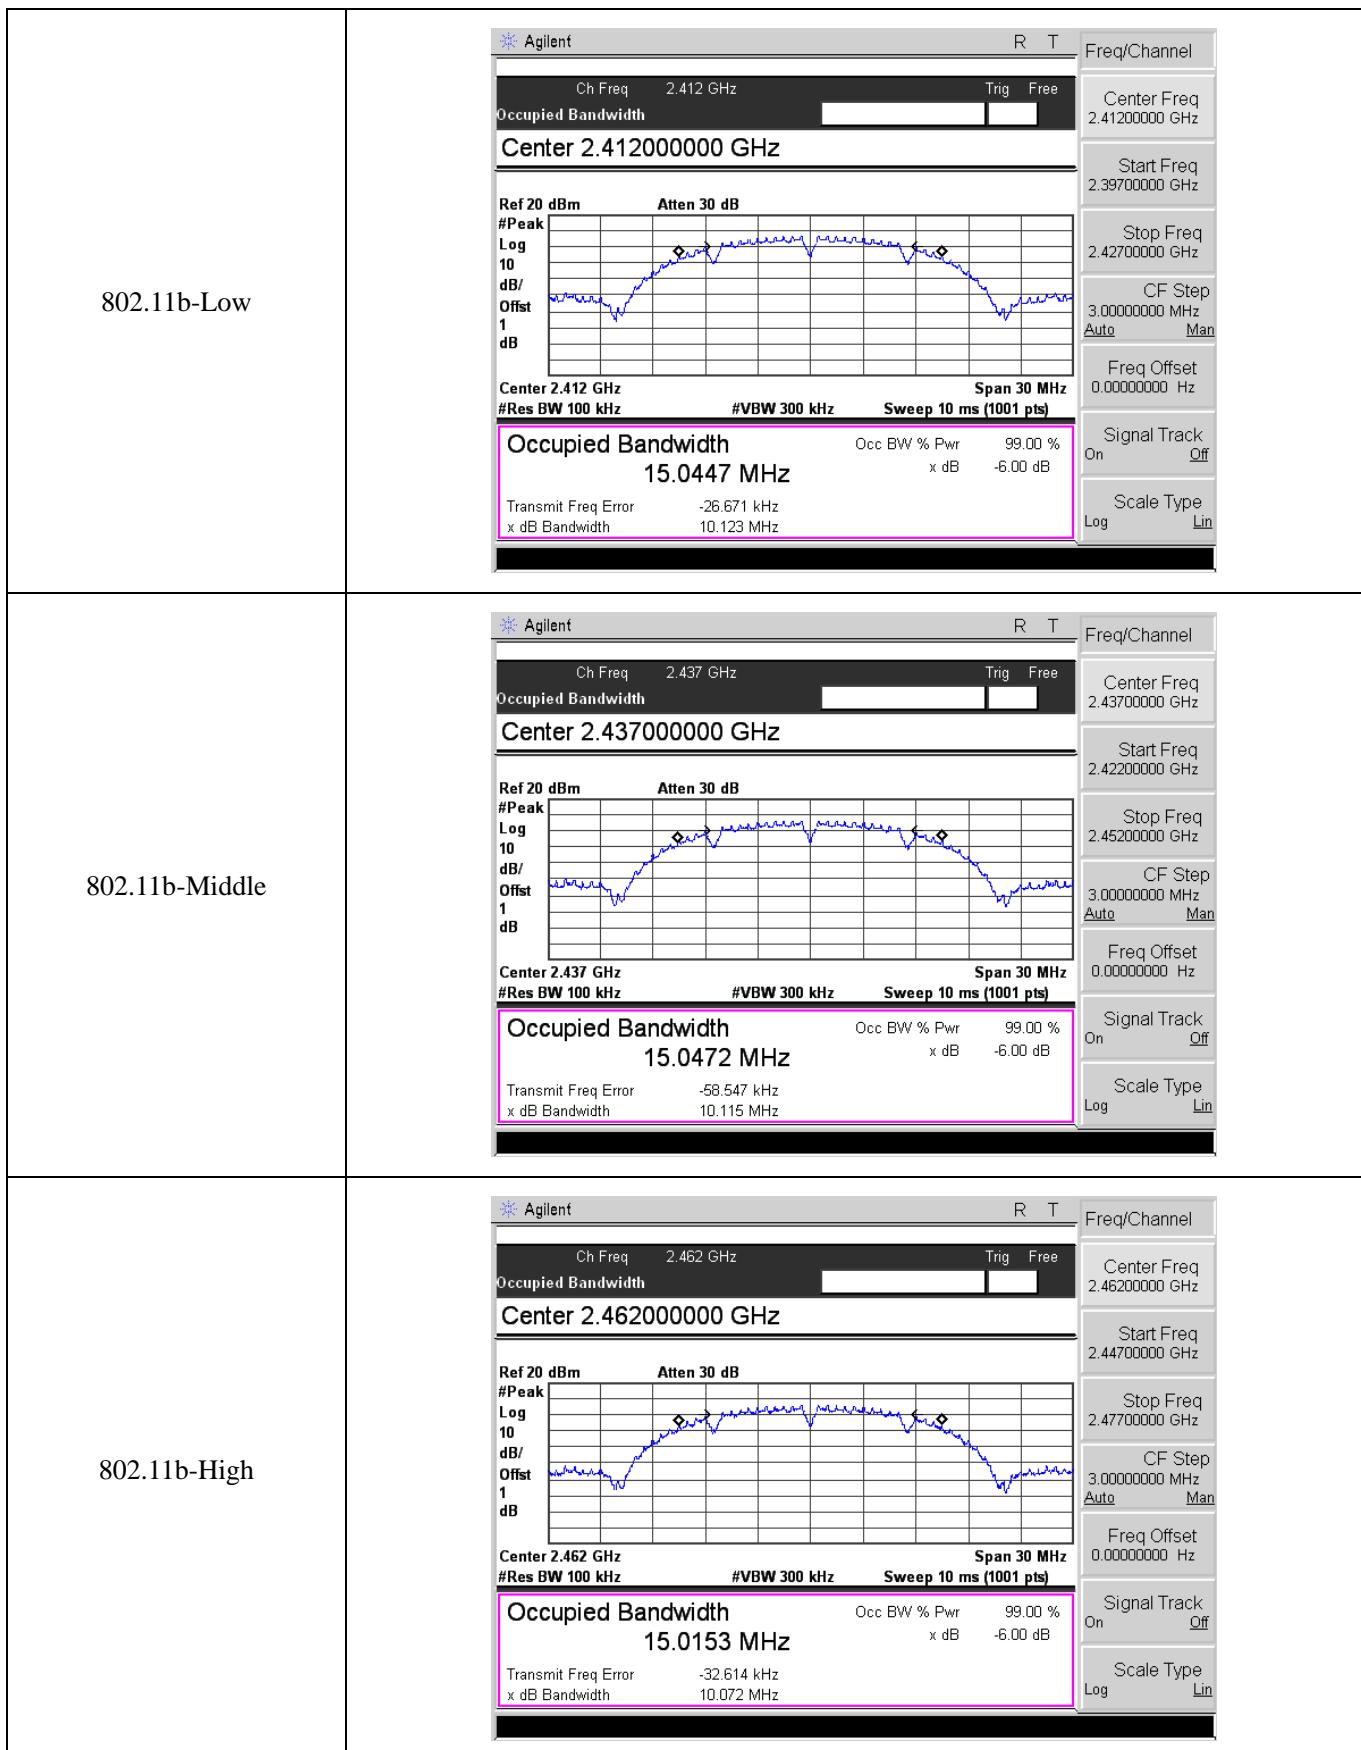

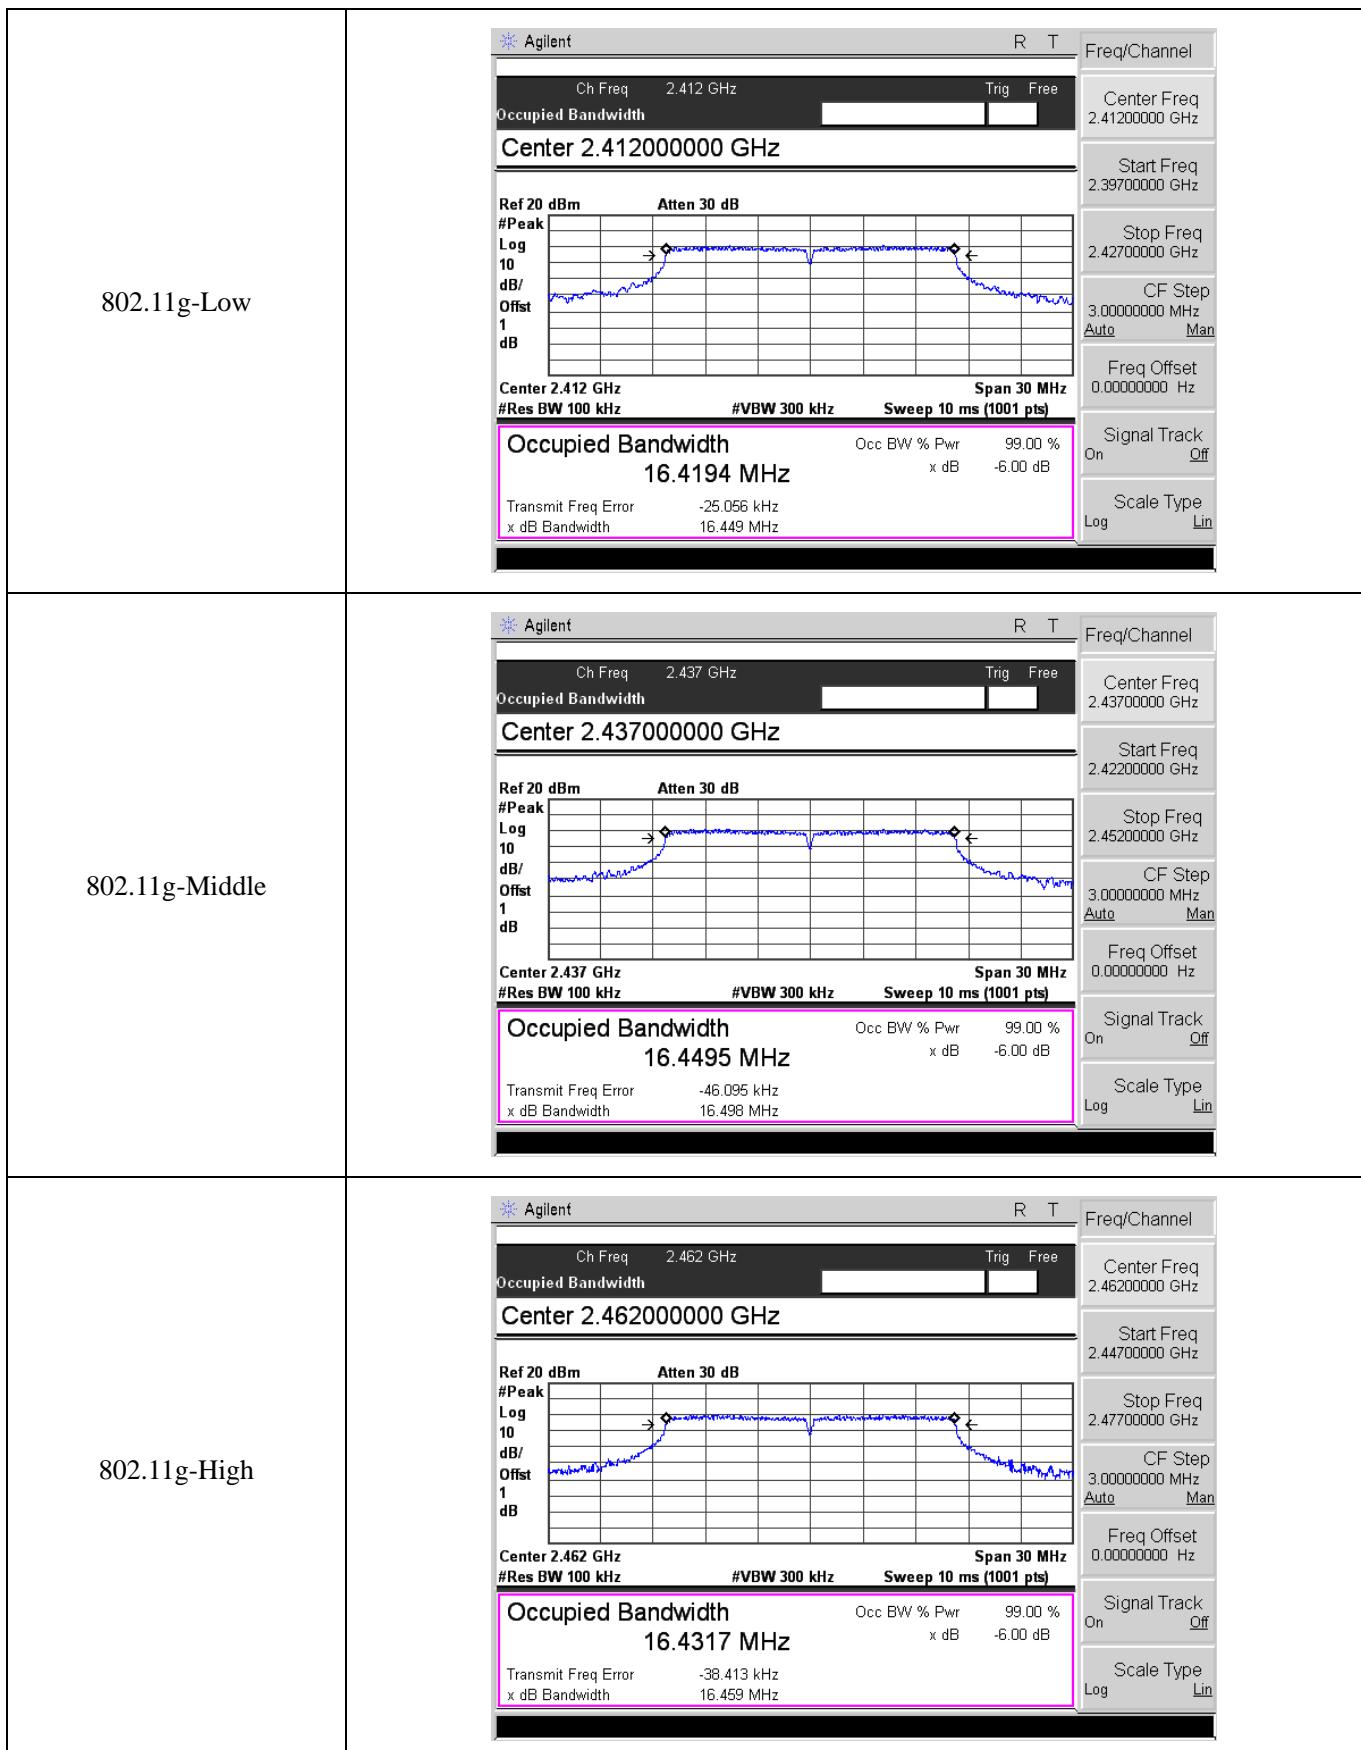

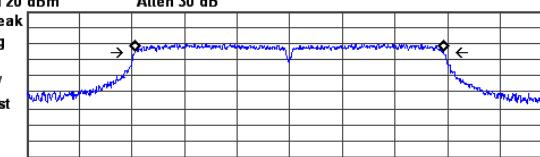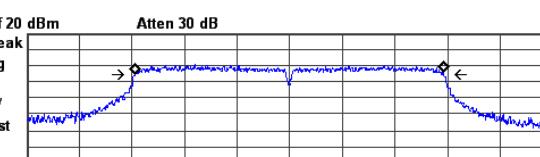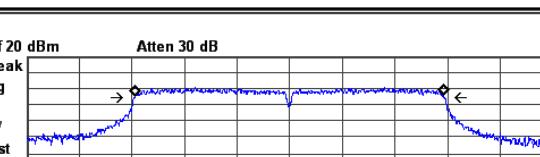802.11n-HT20-Low	<p>Agilent</p> <p>Ch Freq 2.412 GHz Trig Free Occupied Bandwidth</p> <p>Center 2.412000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offset 1 dB</p>  <p>Center 2.412 GHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th colspan="2">Occupied Bandwidth</th> <th>Occ BW % Pwr</th> <th>99.00 %</th> </tr> <tr> <th>x dB</th> <th>17.6013 MHz</th> <th>x dB</th> <th>-6.00 dB</th> </tr> </thead> <tbody> <tr> <td>Transmit Freq Error</td> <td>-25.759 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.675 MHz</td> <td></td> <td></td> </tr> </tbody> </table> <p>R T Freq/Channel</p> <ul style="list-style-type: none"> Center Freq 2.412000000 GHz Start Freq 2.397000000 GHz Stop Freq 2.427000000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin 	Occupied Bandwidth		Occ BW % Pwr	99.00 %	x dB	17.6013 MHz	x dB	-6.00 dB	Transmit Freq Error	-25.759 kHz			x dB Bandwidth	17.675 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
x dB	17.6013 MHz	x dB	-6.00 dB														
Transmit Freq Error	-25.759 kHz																
x dB Bandwidth	17.675 MHz																
802.11n-HT20-Middle	<p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free Occupied Bandwidth</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offset 1 dB</p>  <p>Center 2.437 GHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th colspan="2">Occupied Bandwidth</th> <th>Occ BW % Pwr</th> <th>99.00 %</th> </tr> <tr> <th>x dB</th> <th>17.6018 MHz</th> <th>x dB</th> <th>-6.00 dB</th> </tr> </thead> <tbody> <tr> <td>Transmit Freq Error</td> <td>-41.378 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.636 MHz</td> <td></td> <td></td> </tr> </tbody> </table> <p>R T Freq/Channel</p> <ul style="list-style-type: none"> Center Freq 2.437000000 GHz Start Freq 2.422000000 GHz Stop Freq 2.452000000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin 	Occupied Bandwidth		Occ BW % Pwr	99.00 %	x dB	17.6018 MHz	x dB	-6.00 dB	Transmit Freq Error	-41.378 kHz			x dB Bandwidth	17.636 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
x dB	17.6018 MHz	x dB	-6.00 dB														
Transmit Freq Error	-41.378 kHz																
x dB Bandwidth	17.636 MHz																
802.11n-HT20-High	<p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free Occupied Bandwidth</p> <p>Center 2.462000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offset 1 dB</p>  <p>Center 2.462 GHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th colspan="2">Occupied Bandwidth</th> <th>Occ BW % Pwr</th> <th>99.00 %</th> </tr> <tr> <th>x dB</th> <th>17.6010 MHz</th> <th>x dB</th> <th>-6.00 dB</th> </tr> </thead> <tbody> <tr> <td>Transmit Freq Error</td> <td>-25.915 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.711 MHz</td> <td></td> <td></td> </tr> </tbody> </table> <p>R T Freq/Channel</p> <ul style="list-style-type: none"> Center Freq 2.462000000 GHz Start Freq 2.447000000 GHz Stop Freq 2.477000000 GHz CF Step 3.0000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin 	Occupied Bandwidth		Occ BW % Pwr	99.00 %	x dB	17.6010 MHz	x dB	-6.00 dB	Transmit Freq Error	-25.915 kHz			x dB Bandwidth	17.711 MHz		
Occupied Bandwidth		Occ BW % Pwr	99.00 %														
x dB	17.6010 MHz	x dB	-6.00 dB														
Transmit Freq Error	-25.915 kHz																
x dB Bandwidth	17.711 MHz																

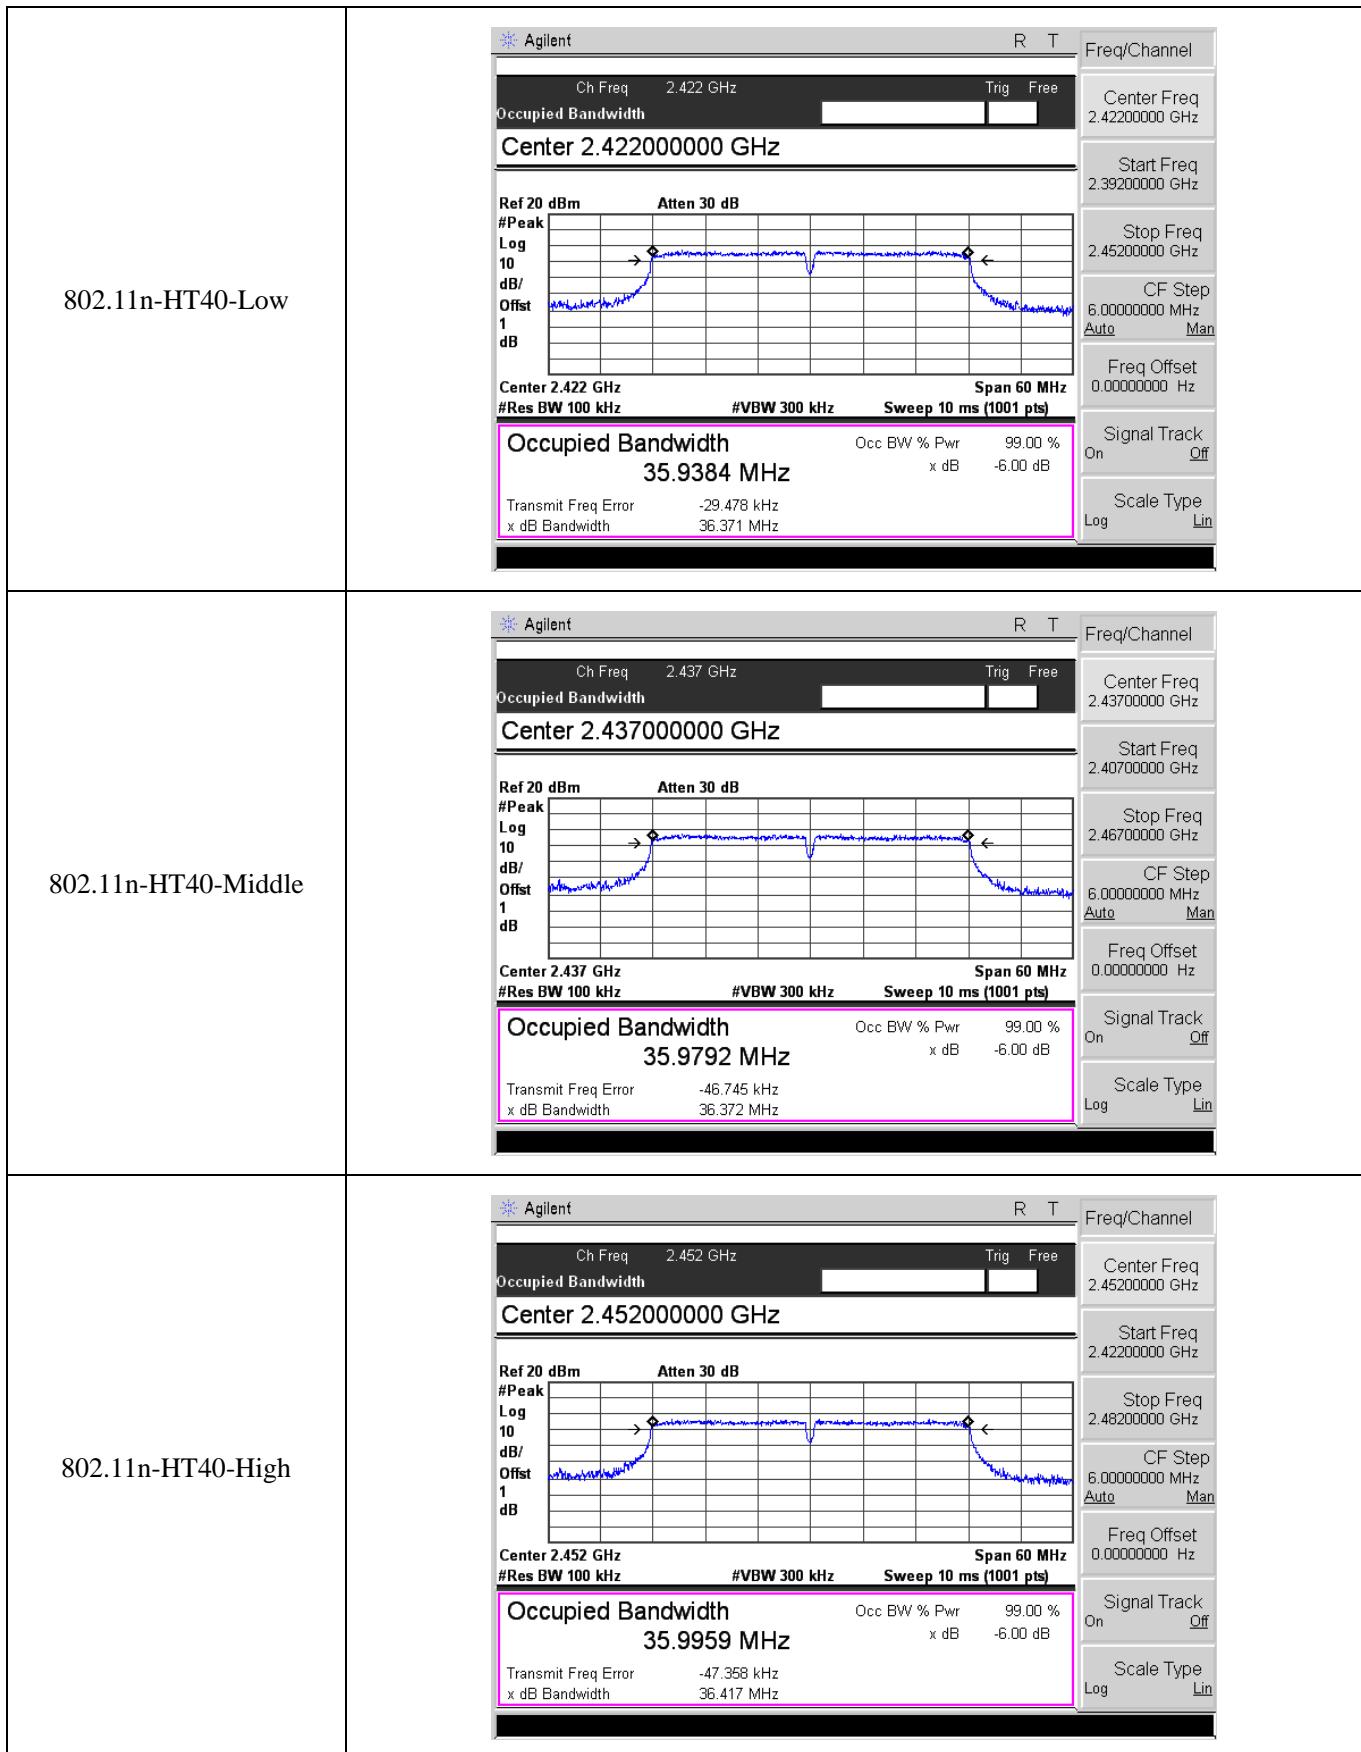

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure


According to the KDB-558074 D01 v05 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth


- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98 \%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.


7.3 Summary of Test Results/Plots

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b _ 11Mbps	2412	16.31	42.756	1000
	2437	15.86	38.548	1000
	2462	15.95	39.355	1000
802.11g_54Mbps	2412	14.26	26.669	1000
	2437	14.05	25.410	1000
	2462	14.16	26.062	1000
802.11n HT20_MCS7	2412	14.12	25.823	1000
	2437	14.13	25.882	1000
	2462	13.92	24.660	1000
802.11n HT40_MCS7	2422	13.36	21.677	1000
	2437	13.10	20.417	1000
	2452	13.19	20.845	1000

Please refer to the following test plots:

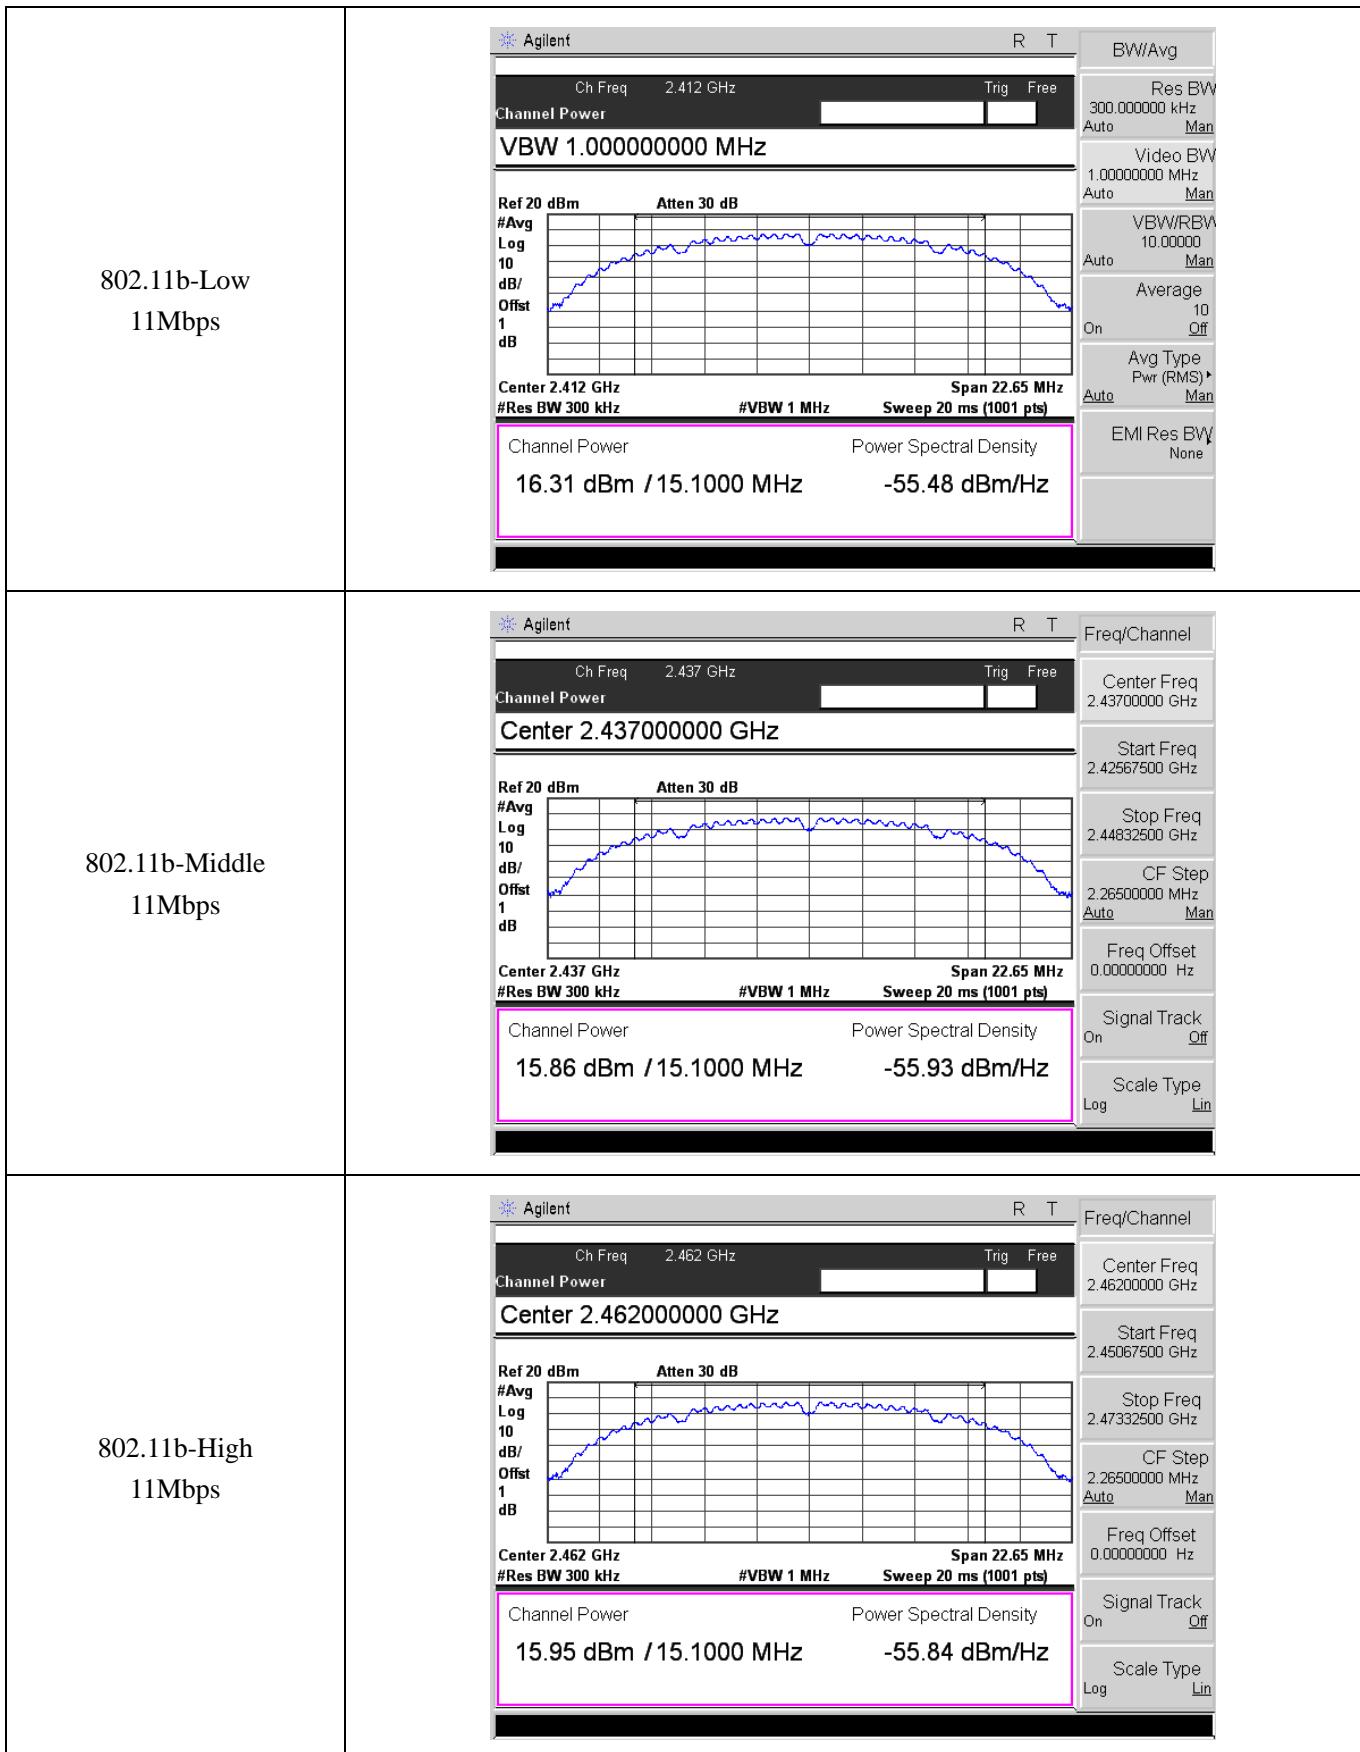

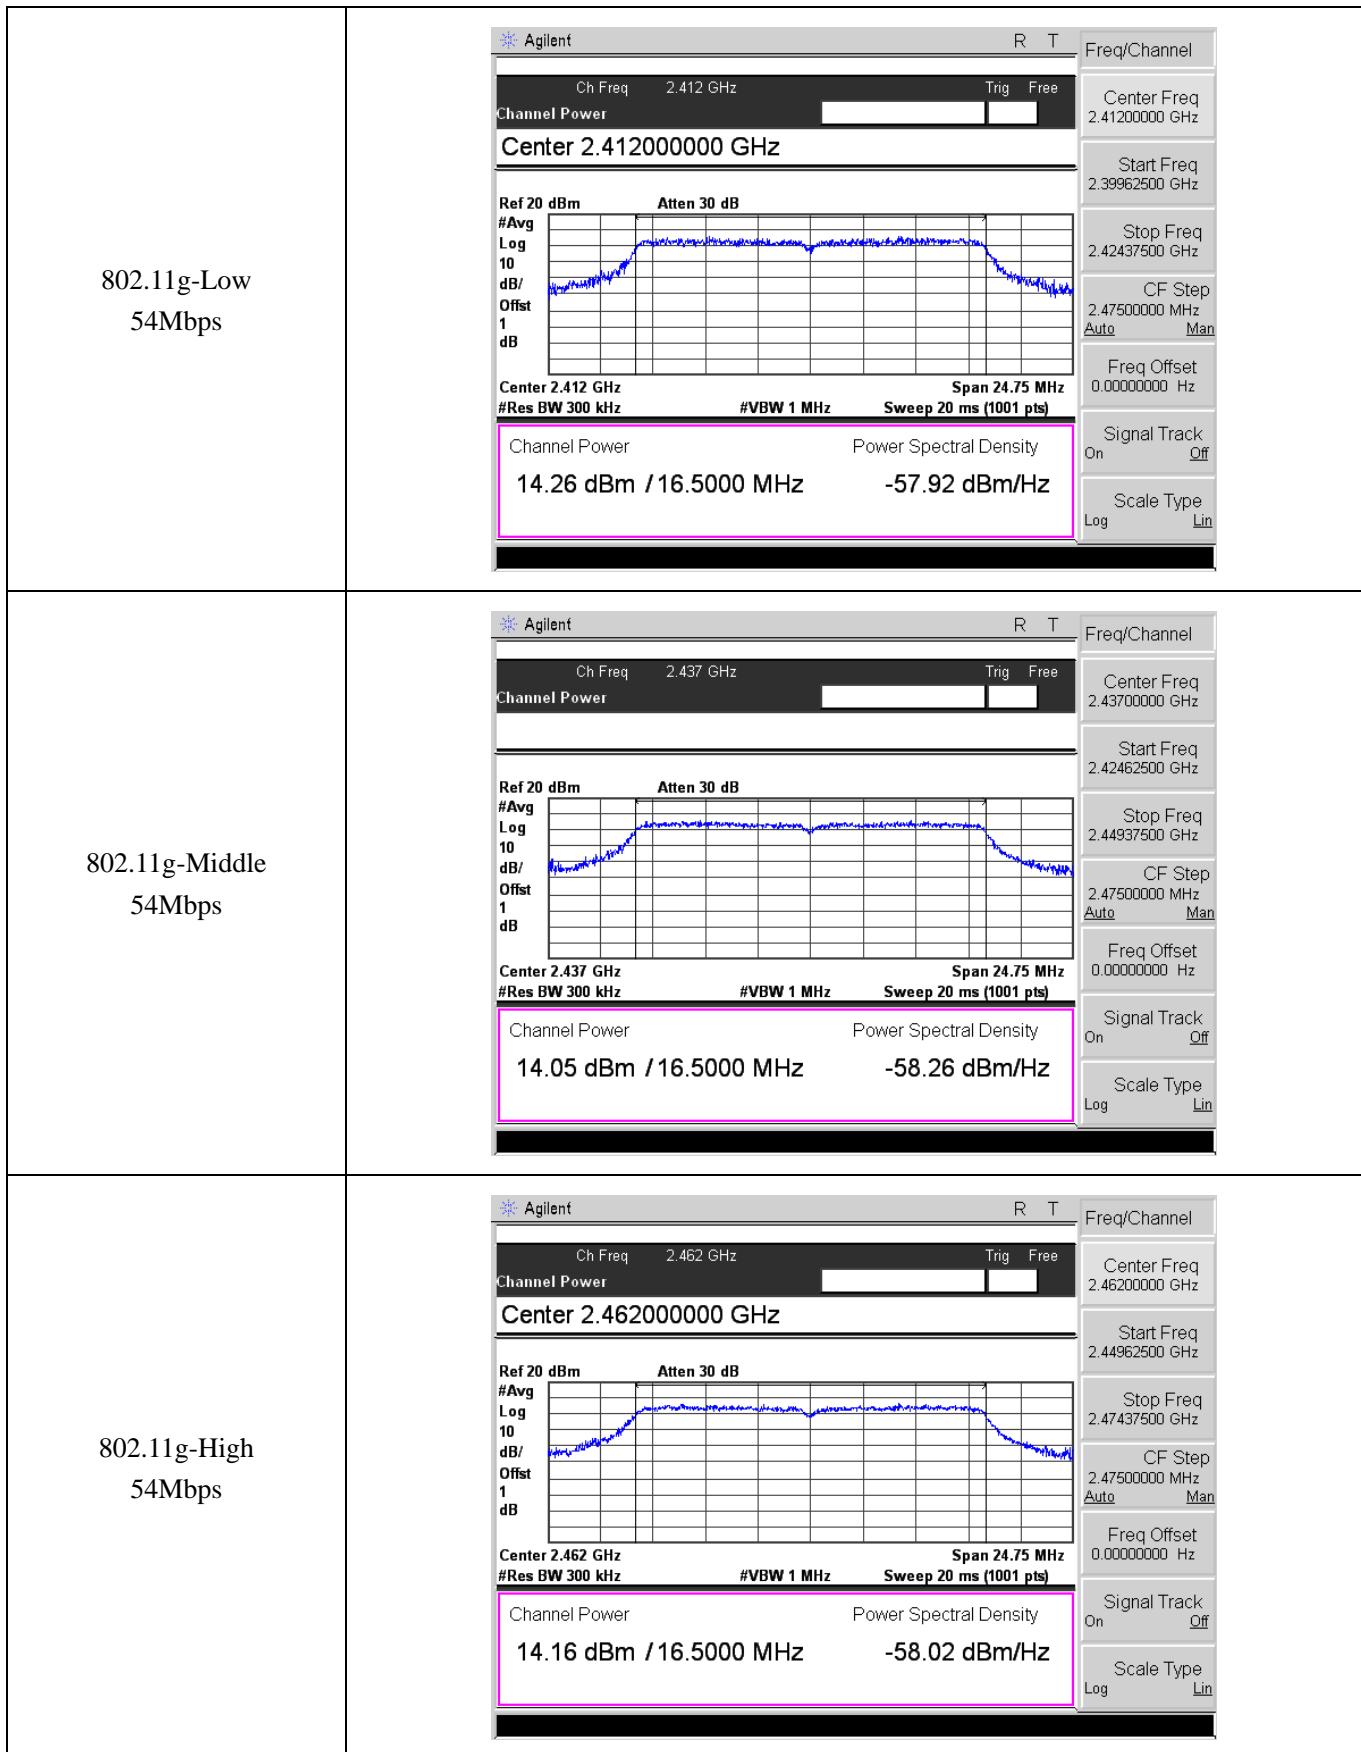

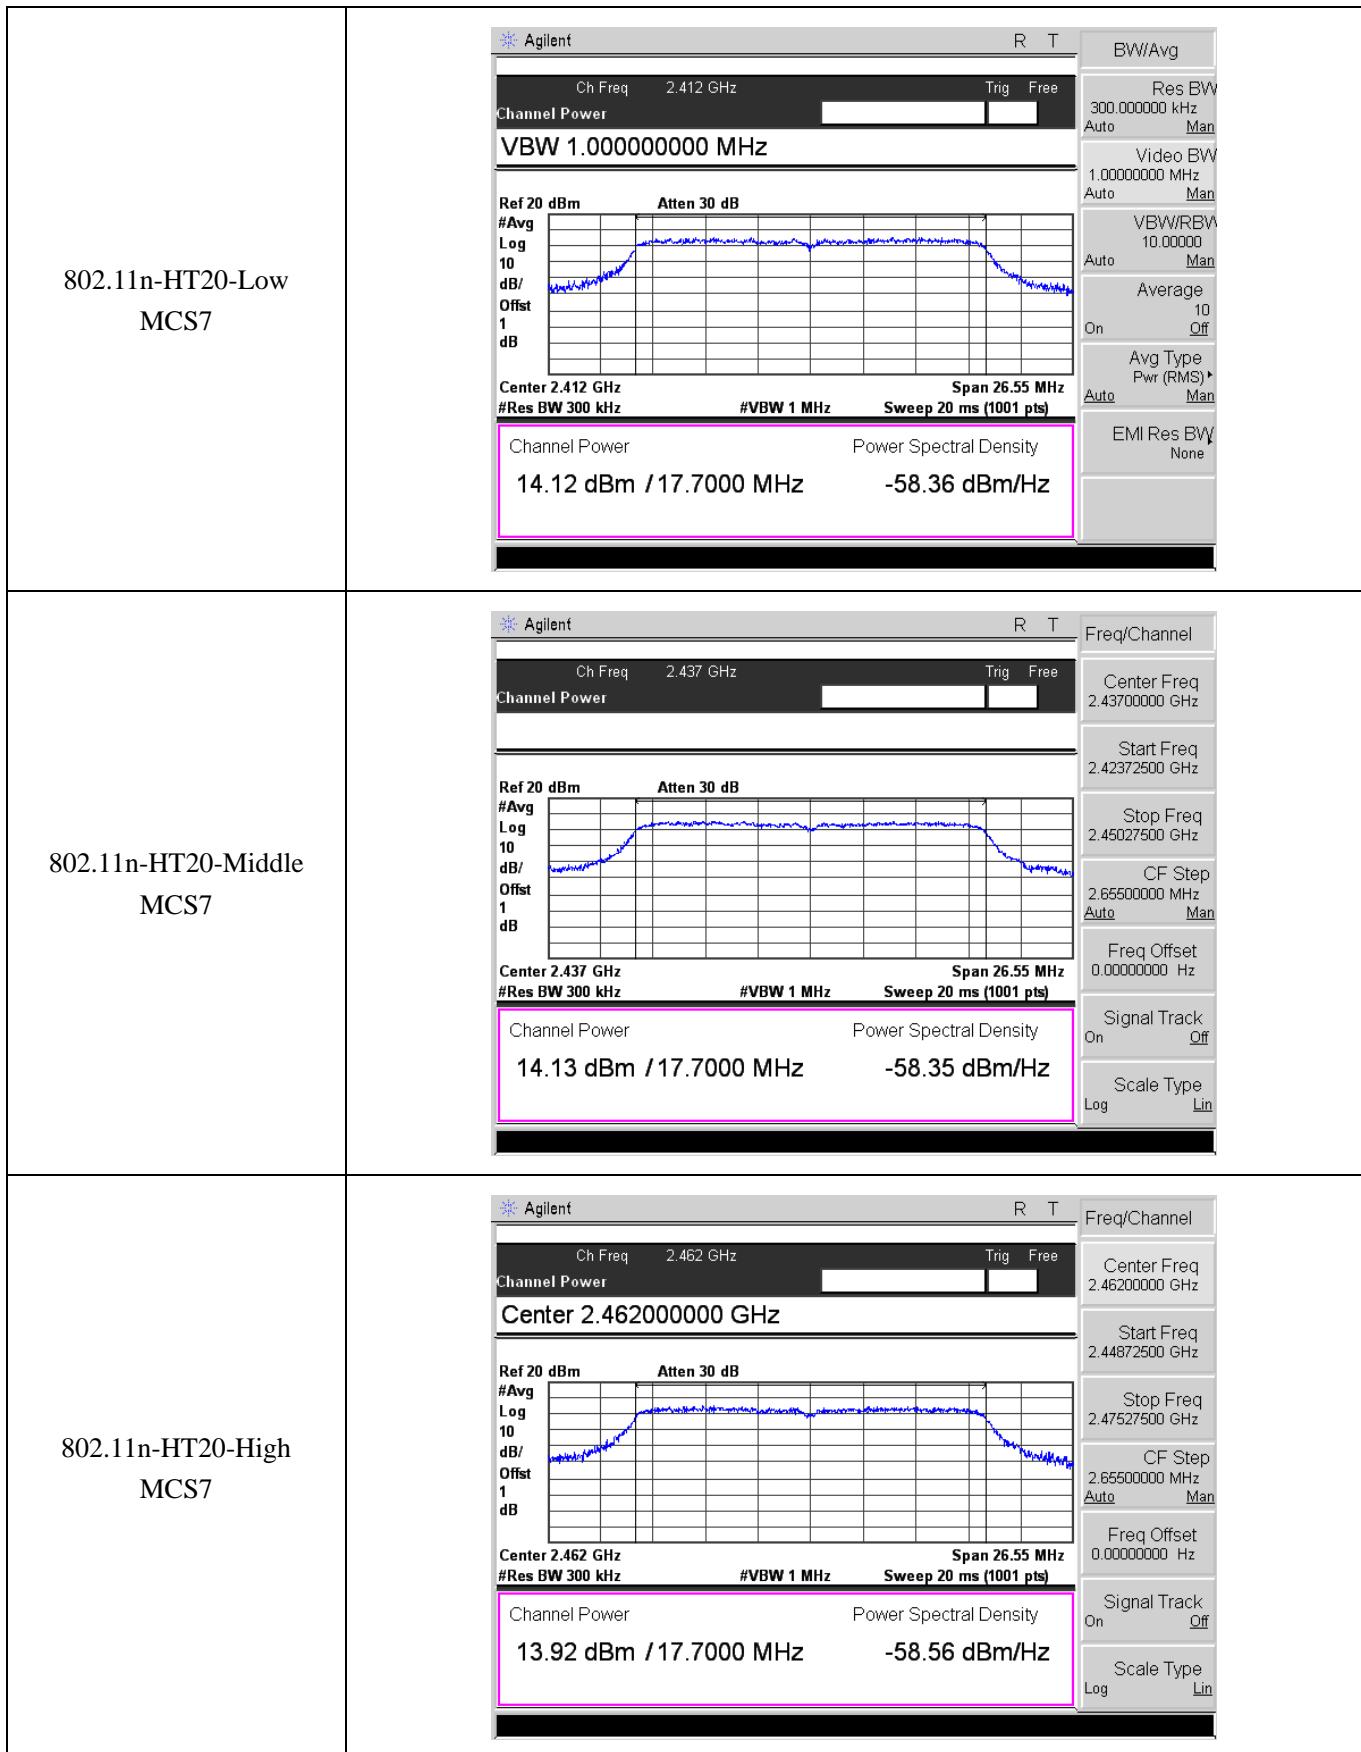

802.11n-HT40-Low MCS7	<p>Agilent</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.422 GHz Span 54 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.36 dBm / 36.0000 MHz -62.20 dBm/Hz</p> <p>R T</p> <table border="1"> <tr><td>Freq/Channel</td></tr> <tr><td>Center Freq 2.4220000 GHz</td></tr> <tr><td>Start Freq 2.3950000 GHz</td></tr> <tr><td>Stop Freq 2.4490000 GHz</td></tr> <tr><td>CF Step 5.4000000 MHz Auto Man</td></tr> <tr><td>Freq Offset 0.0000000 Hz</td></tr> <tr><td>Signal Track On Off</td></tr> <tr><td>Scale Type Log Lin</td></tr> </table>	Freq/Channel	Center Freq 2.4220000 GHz	Start Freq 2.3950000 GHz	Stop Freq 2.4490000 GHz	CF Step 5.4000000 MHz Auto Man	Freq Offset 0.0000000 Hz	Signal Track On Off	Scale Type Log Lin
Freq/Channel									
Center Freq 2.4220000 GHz									
Start Freq 2.3950000 GHz									
Stop Freq 2.4490000 GHz									
CF Step 5.4000000 MHz Auto Man									
Freq Offset 0.0000000 Hz									
Signal Track On Off									
Scale Type Log Lin									
802.11n-HT40-Middle MCS7	<p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.437000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 54 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.10 dBm / 36.0000 MHz -62.46 dBm/Hz</p> <p>R T</p> <table border="1"> <tr><td>Freq/Channel</td></tr> <tr><td>Center Freq 2.4370000 GHz</td></tr> <tr><td>Start Freq 2.4100000 GHz</td></tr> <tr><td>Stop Freq 2.4640000 GHz</td></tr> <tr><td>CF Step 5.4000000 MHz Auto Man</td></tr> <tr><td>Freq Offset 0.0000000 Hz</td></tr> <tr><td>Signal Track On Off</td></tr> <tr><td>Scale Type Log Lin</td></tr> </table>	Freq/Channel	Center Freq 2.4370000 GHz	Start Freq 2.4100000 GHz	Stop Freq 2.4640000 GHz	CF Step 5.4000000 MHz Auto Man	Freq Offset 0.0000000 Hz	Signal Track On Off	Scale Type Log Lin
Freq/Channel									
Center Freq 2.4370000 GHz									
Start Freq 2.4100000 GHz									
Stop Freq 2.4640000 GHz									
CF Step 5.4000000 MHz Auto Man									
Freq Offset 0.0000000 Hz									
Signal Track On Off									
Scale Type Log Lin									
802.11n-HT40-High MCS7	<p>Agilent</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.452000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.452 GHz Span 54 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.19 dBm / 36.0000 MHz -62.37 dBm/Hz</p> <p>R T</p> <table border="1"> <tr><td>Freq/Channel</td></tr> <tr><td>Center Freq 2.4520000 GHz</td></tr> <tr><td>Start Freq 2.4250000 GHz</td></tr> <tr><td>Stop Freq 2.4790000 GHz</td></tr> <tr><td>CF Step 5.4000000 MHz Auto Man</td></tr> <tr><td>Freq Offset 0.0000000 Hz</td></tr> <tr><td>Signal Track On Off</td></tr> <tr><td>Scale Type Log Lin</td></tr> </table>	Freq/Channel	Center Freq 2.4520000 GHz	Start Freq 2.4250000 GHz	Stop Freq 2.4790000 GHz	CF Step 5.4000000 MHz Auto Man	Freq Offset 0.0000000 Hz	Signal Track On Off	Scale Type Log Lin
Freq/Channel									
Center Freq 2.4520000 GHz									
Start Freq 2.4250000 GHz									
Stop Freq 2.4790000 GHz									
CF Step 5.4000000 MHz Auto Man									
Freq Offset 0.0000000 Hz									
Signal Track On Off									
Scale Type Log Lin									

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

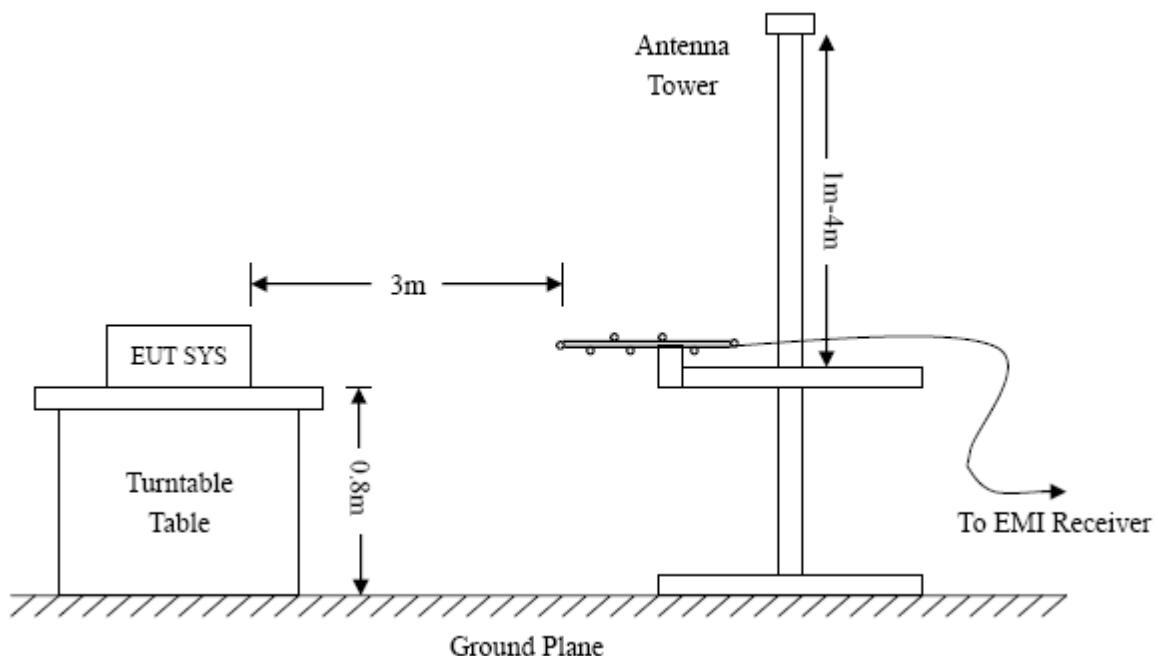

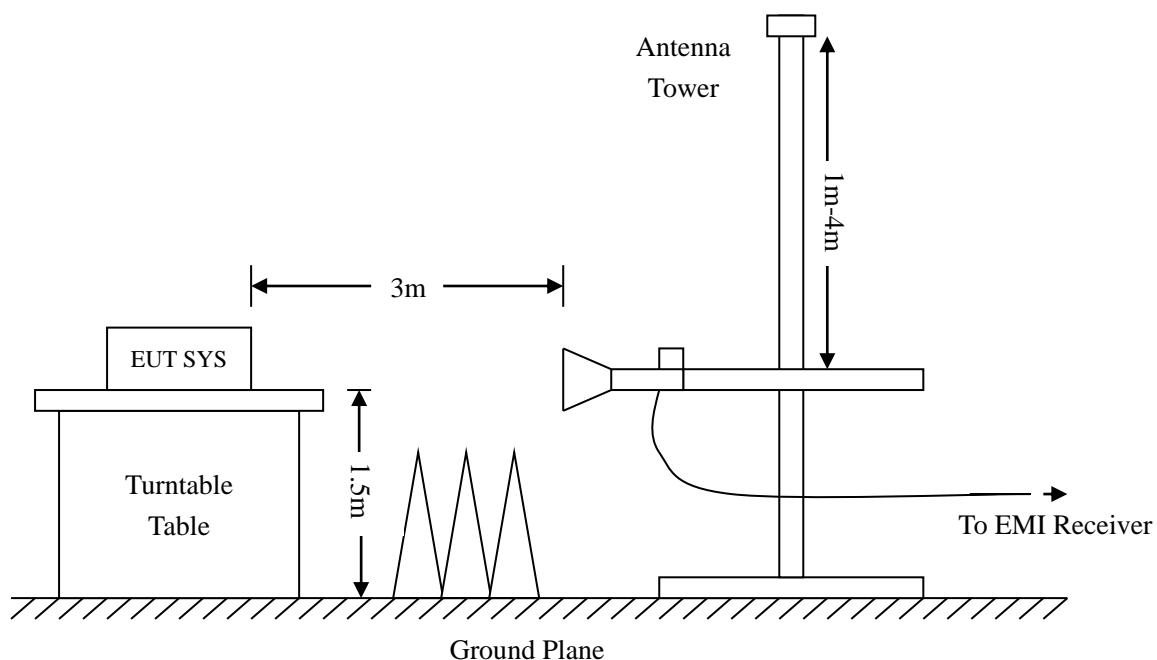

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=360KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

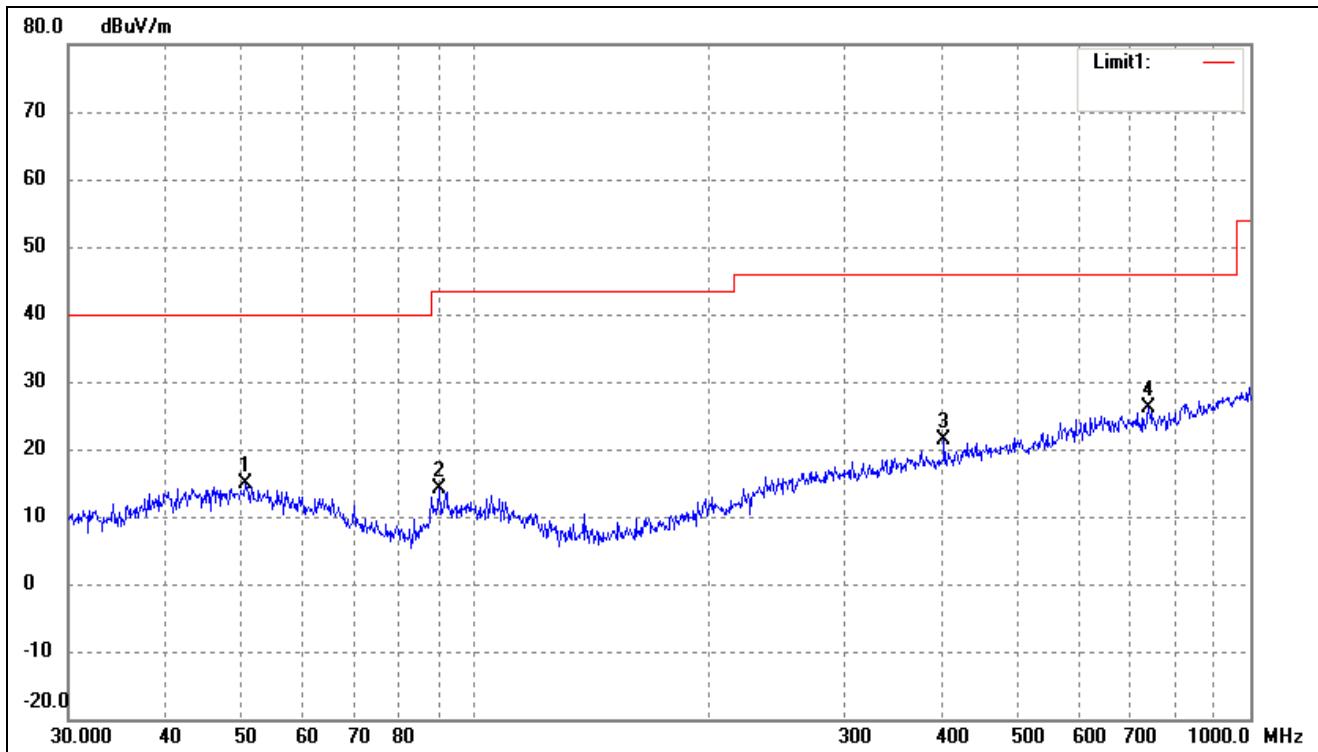

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.7637	26.40	-11.59	14.81	40.00	-25.19	321	100	peak
2	90.2205	27.45	-13.44	14.01	43.50	-29.49	147	100	peak
3	403.2500	27.99	-6.66	21.33	46.00	-24.67	57	100	peak
4	739.6605	27.93	-1.92	26.01	46.00	-19.99	122	100	peak


802.11b_11Mbps

Test Channel

Low

Polarity:

Vertical

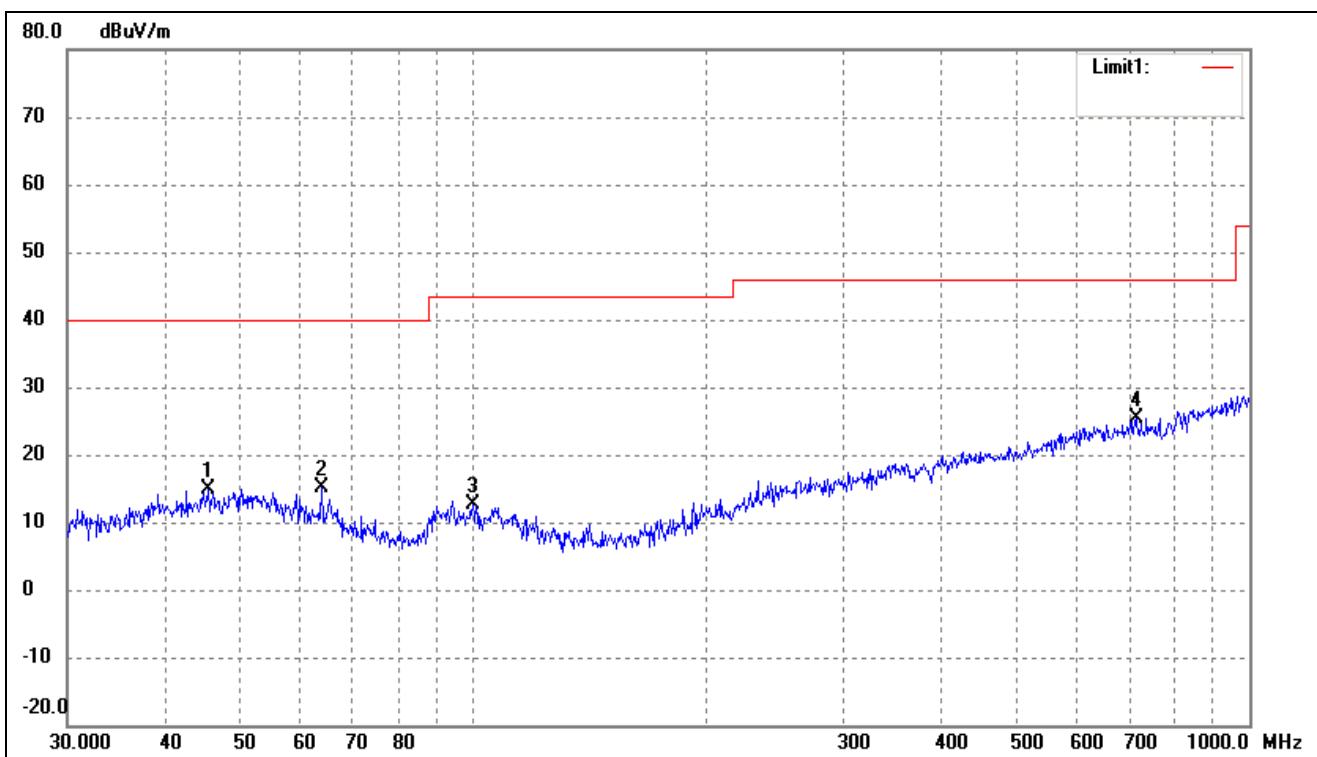

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree	Height (cm)	Remark
1	45.5348	26.79	-11.87	14.92	40.00	-25.08	99	100	peak
2	63.7588	28.88	-13.84	15.04	40.00	-24.96	173	100	peak
3	99.8777	26.39	-13.81	12.58	43.50	-30.92	113	100	peak
4	714.1734	27.24	-1.90	25.34	46.00	-20.66	259	100	peak


802.11b_11Mbps

Test Channel

Middle

Polarity:

Horizontal

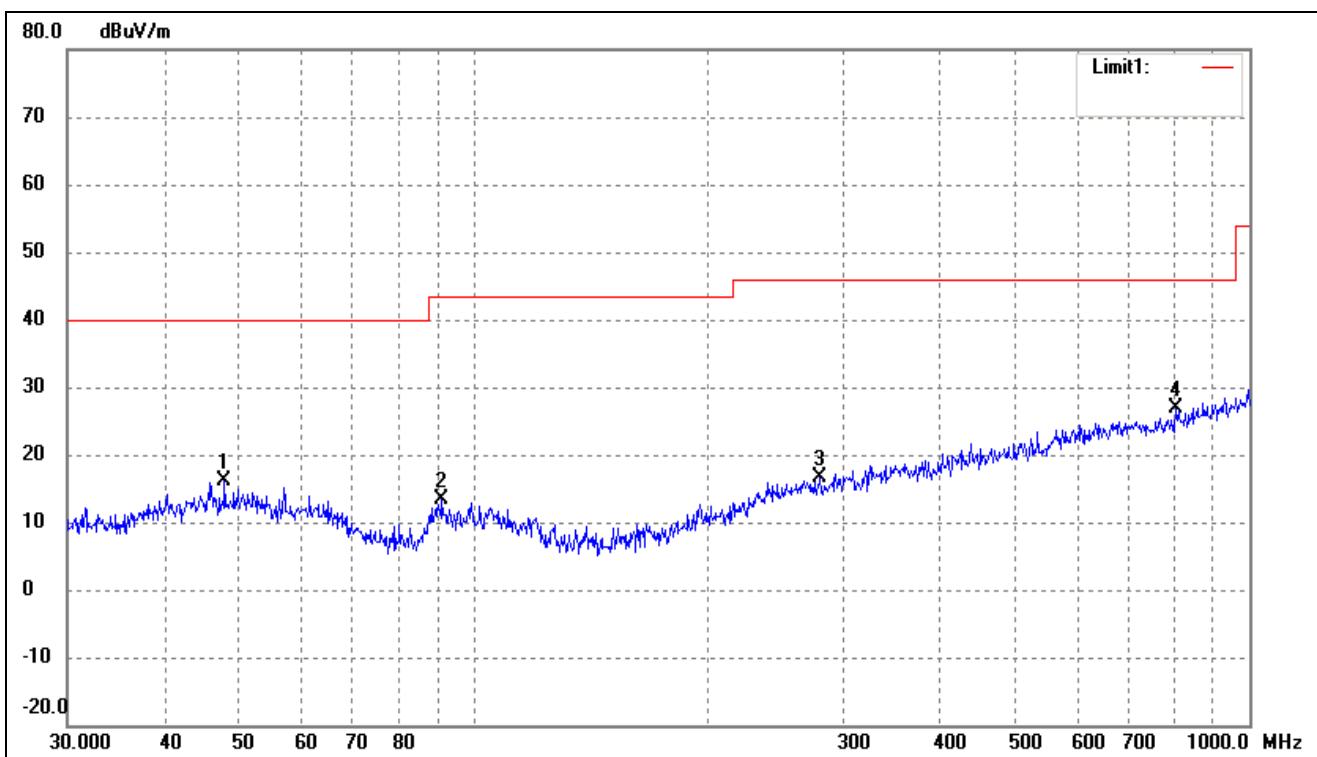

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree	Height (cm)	Remark
1	47.8260	27.70	-11.67	16.03	40.00	-23.97	162	100	peak
2	91.1746	26.99	-13.63	13.36	43.50	-30.14	294	100	peak
3	280.0238	25.42	-8.85	16.57	46.00	-29.43	59	100	peak
4	804.6028	27.42	-0.65	26.77	46.00	-19.23	343	100	peak


802.11b_11Mbps

Test Channel

Middle

Polarity:

Vertical

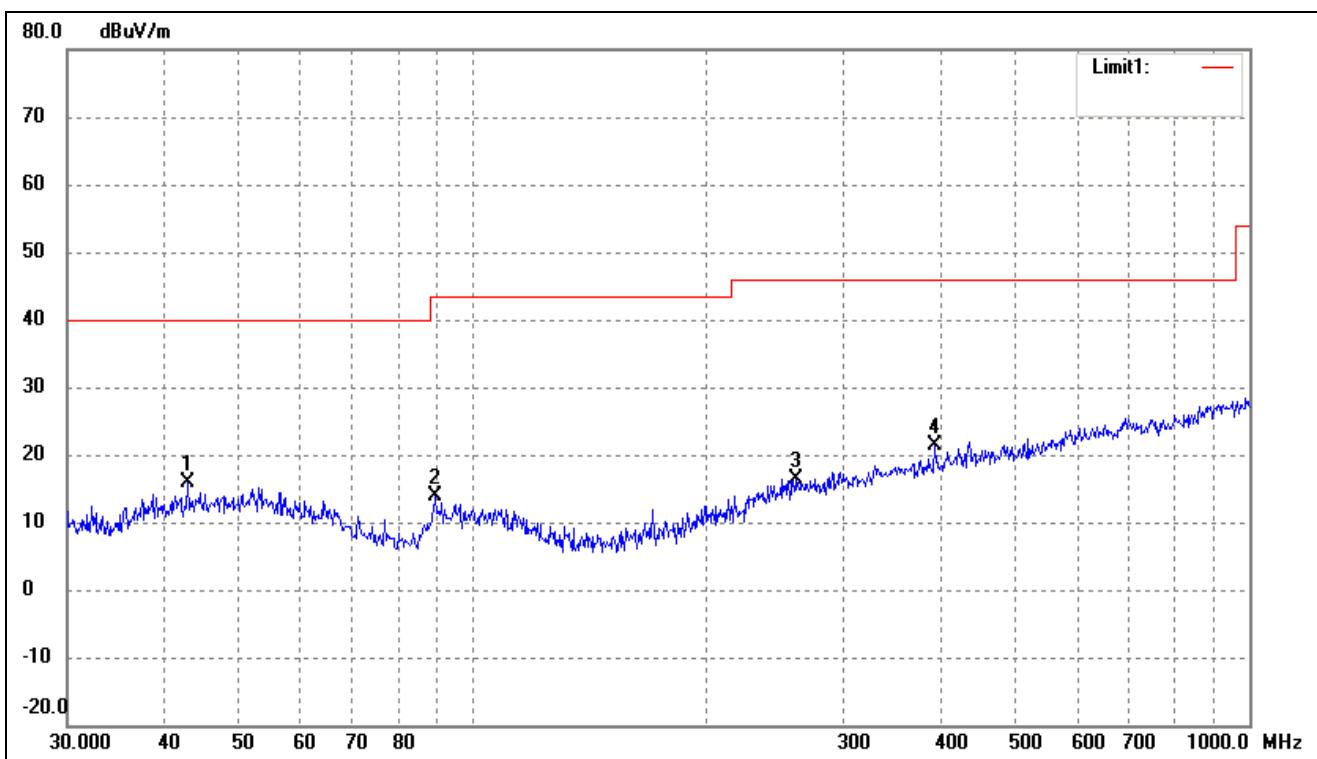

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.8998	28.06	-12.16	15.90	40.00	-24.10	293	100	peak
2	89.2764	27.81	-13.96	13.85	43.50	-29.65	102	100	peak
3	260.1444	25.83	-9.34	16.49	46.00	-29.51	148	100	peak
4	393.4724	28.41	-7.03	21.38	46.00	-24.62	110	100	peak


802.11b_11Mbps

Test Channel

High

Polarity:

Horizontal

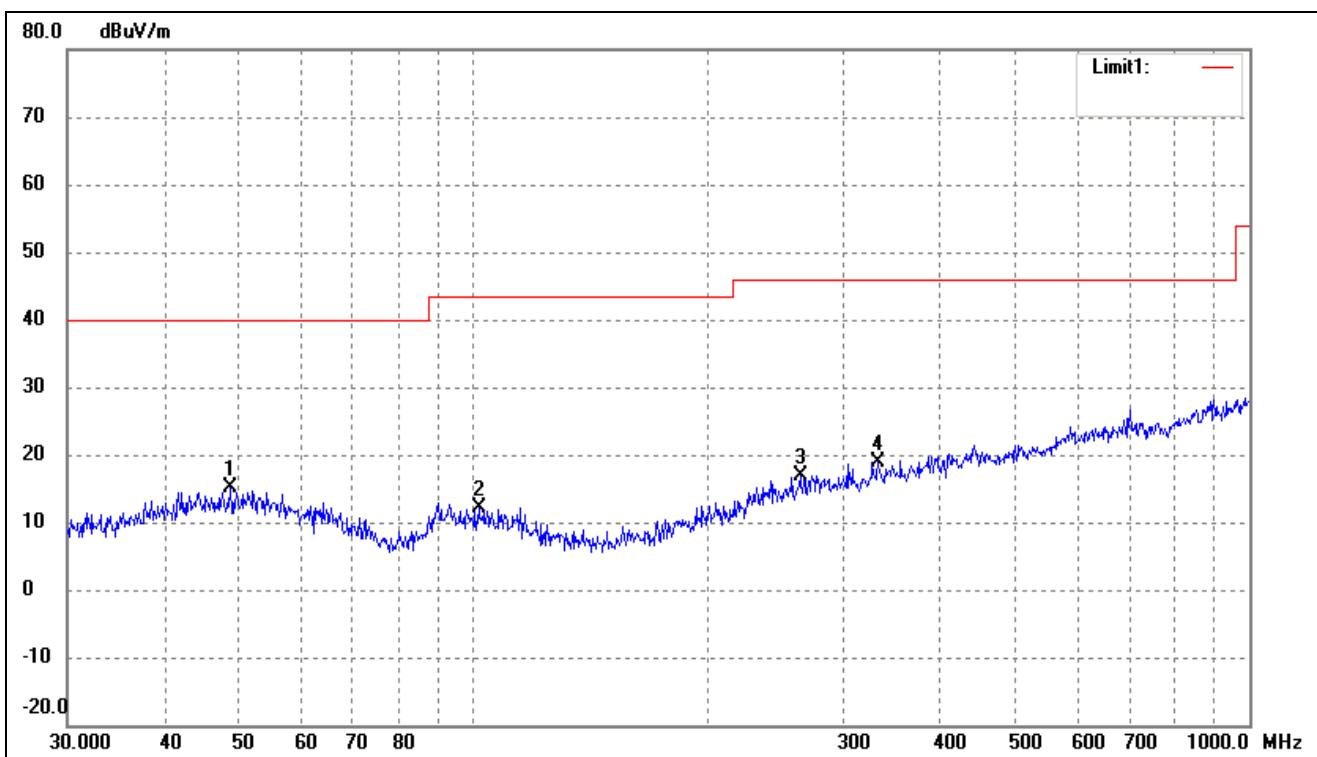

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree	Height (cm)	Remark
1	48.6719	26.68	-11.64	15.04	40.00	-24.96	87	100	peak
2	101.6443	25.83	-13.66	12.17	43.50	-31.33	93	100	peak
3	263.8190	26.00	-9.02	16.98	46.00	-29.02	108	100	peak
4	332.5187	26.51	-7.56	18.95	46.00	-27.05	131	100	peak


802.11b_11Mbps

Test Channel

High

Polarity:

Vertical

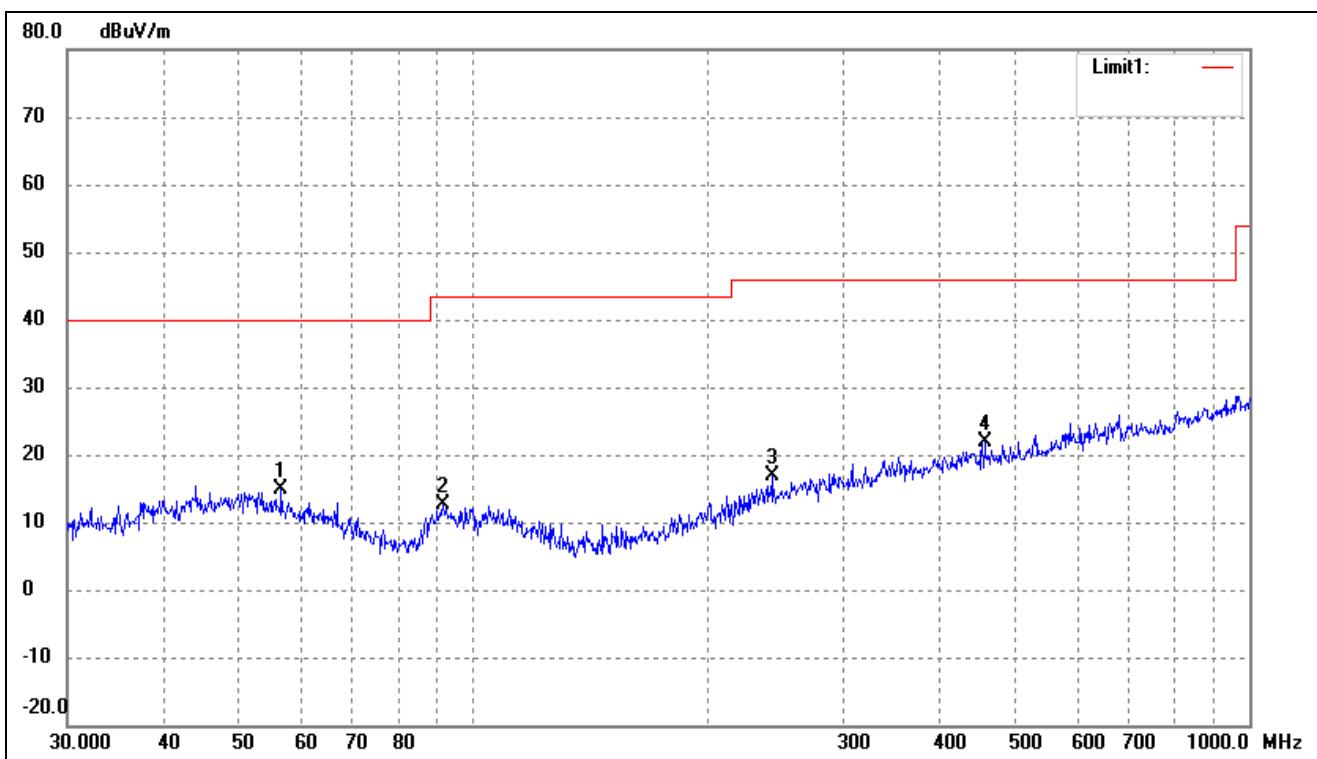

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	56.5929	27.41	-12.60	14.81	40.00	-25.19	150	100	peak
2	91.4949	26.22	-13.70	12.52	43.50	-30.98	338	100	peak
3	242.5253	27.05	-10.06	16.99	46.00	-29.01	91	100	peak
4	455.9058	27.87	-6.08	21.79	46.00	-24.21	295	100	peak

- Spurious Emissions Below 1GHz
- *Test Mode: 802.11b_11Mbps (worst case)*

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.00	61.52	-3.87	57.65	74.00	-16.35	H	PK
4824.00	46.70	-3.87	42.83	54.00	-11.17	H	AV
7236.00	56.44	1.14	57.58	74.00	-16.42	H	PK
7236.00	41.98	1.19	43.17	54.00	-10.83	H	AV
4824.00	62.44	-3.86	58.58	74.00	-15.42	V	PK
4824.00	47.33	-3.86	43.47	54.00	-10.53	V	AV
7236.00	55.84	1.10	56.94	74.00	-17.06	V	PK
7236.00	41.62	1.10	42.72	54.00	-11.28	V	AV
Middle Channel-2437MHz							
4874.00	61.33	-3.74	57.59	74.00	-16.41	H	PK
4874.00	45.37	-3.74	41.63	54.00	-12.37	H	AV
7311.00	56.69	1.47	58.16	74.00	-15.84	H	PK
7311.00	42.31	1.47	43.78	54.00	-10.22	H	AV
4874.00	60.99	-3.74	57.25	74.00	-16.75	V	PK
4874.00	45.21	-3.74	41.47	54.00	-12.53	V	AV
7311.00	55.79	1.47	57.26	74.00	-16.74	V	PK
7311.00	40.44	1.47	41.91	54.00	-12.09	V	AV
High Channel-2462MHz							
4924.00	60.58	-3.59	56.99	74.00	-17.01	H	PK
4924.00	45.25	-3.59	41.66	54.00	-12.34	H	AV
7386.00	56.38	1.79	58.17	74.00	-15.83	H	PK
7386.00	41.58	1.79	43.37	54.00	-10.63	H	AV
4924.00	61.18	-3.59	57.59	74.00	-16.41	V	PK
4924.00	45.24	-3.59	41.65	54.00	-12.35	V	AV
7386.00	54.67	1.79	56.46	74.00	-17.54	V	PK
7440.00	40.01	1.79	41.80	54.00	-12.20	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v05 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

a) RBW = as specified in Table 9/

b) VBW $\geq [3 \times \text{RBW}]$.

c) Detector = peak.

d) Sweep time = auto.

e) Trace mode = max hold.

f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots

➤ Radiated test


802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

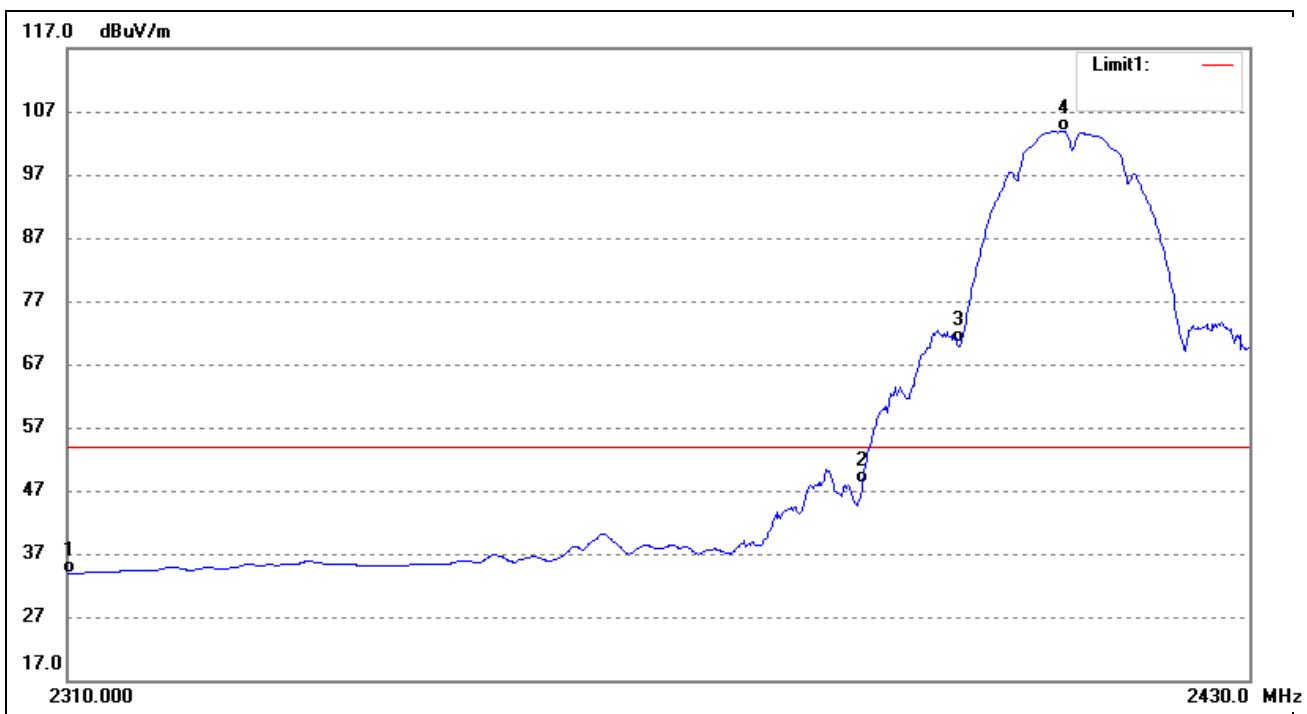

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.72	-7.78	33.94	54.00	-20.06	Average Detector
	2310.000	52.66	-7.78	44.88	74.00	-29.12	Peak Detector
2	2390.000	55.54	-7.32	48.22	54.00	-5.78	Average Detector
	2390.000	70.37	-7.32	63.05	74.00	-10.95	Peak Detector
3	2400.000	77.64	-7.26	70.38	Delta =33.52dBc	Average Detector	Average Detector
4	2410.756	111.09	-7.19	103.90			Average Detector

802.11b_11Mbps


Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

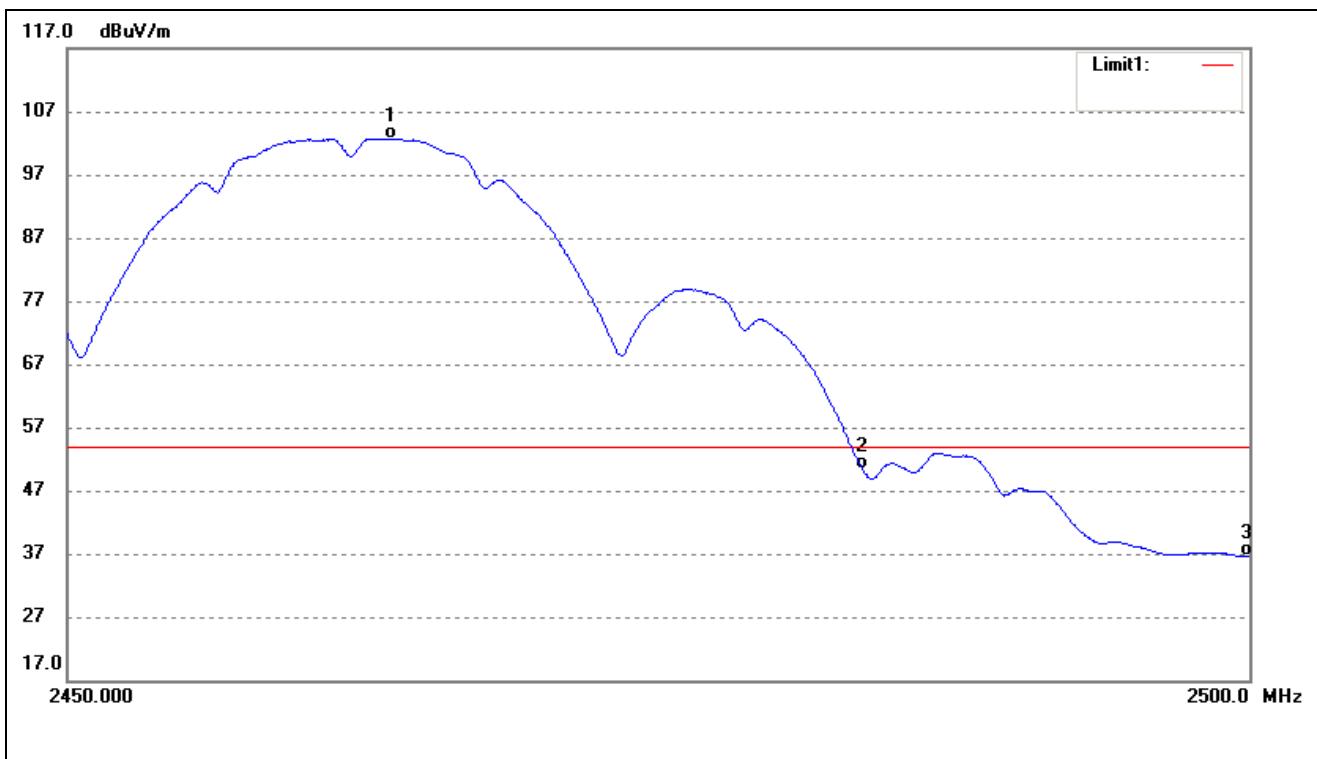

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.600	109.61	-6.89	102.72	/	/	Average Detector
	2463.003	115.36	-6.89	108.47	/	/	Peak Detector
2	2483.500	57.15	-6.77	50.38	54.00	-3.62	Average Detector
	2483.500	74.38	-6.77	67.61	74.00	-6.39	Peak Detector
3	2500.000	43.26	-6.67	36.59	54.00	-17.41	Average Detector
	2500.000	57.29	-6.67	50.62	74.00	-23.38	Peak Detector

802.11g_54Mbps


Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

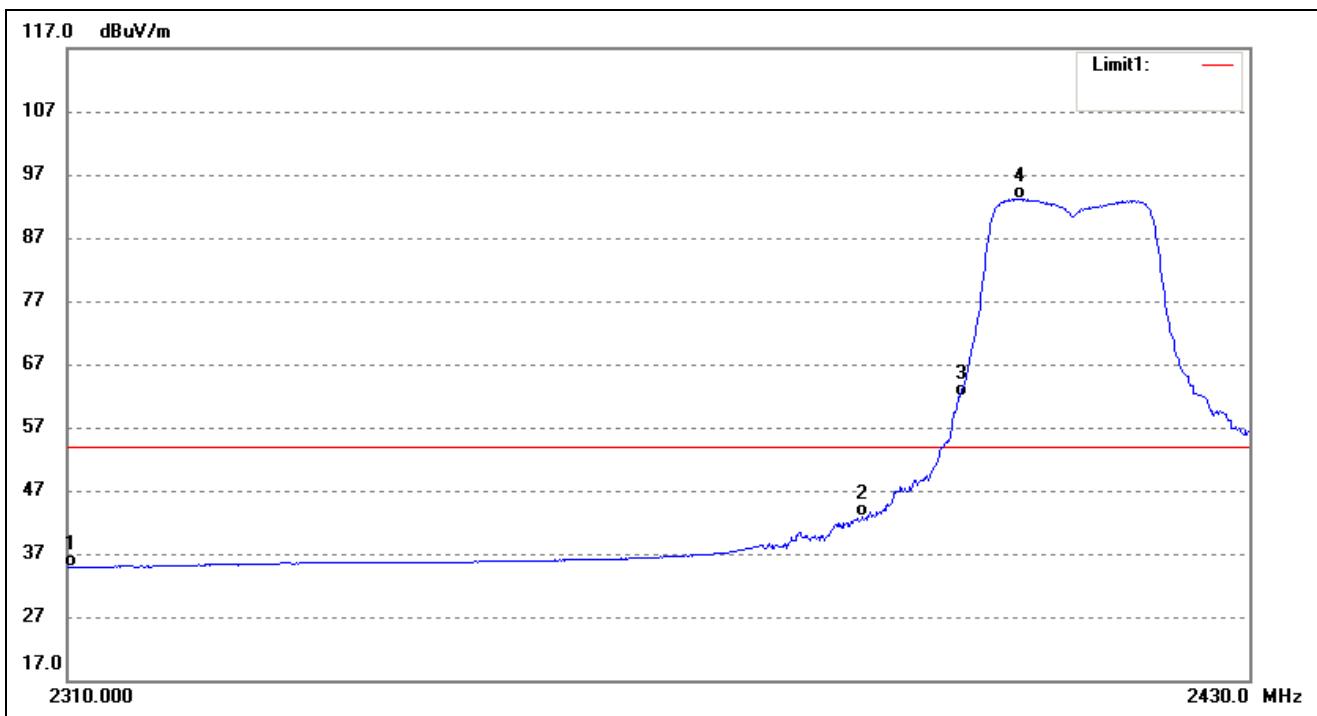

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.64	-7.78	34.86	54.00	-19.14	Average Detector
	2310.000	54.63	-7.78	46.85	74.00	-27.15	Peak Detector
2	2390.000	50.30	-7.32	42.98	54.00	-11.02	Average Detector
	2390.000	77.54	-7.32	70.22	74.00	-3.78	Peak Detector
3	2400.000	69.12	-7.26	61.86	Delta =31.3dBc	Average Detector	Average Detector
4	2406.242	100.38	-7.22	93.16			Average Detector

802.11g_54Mbps


Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

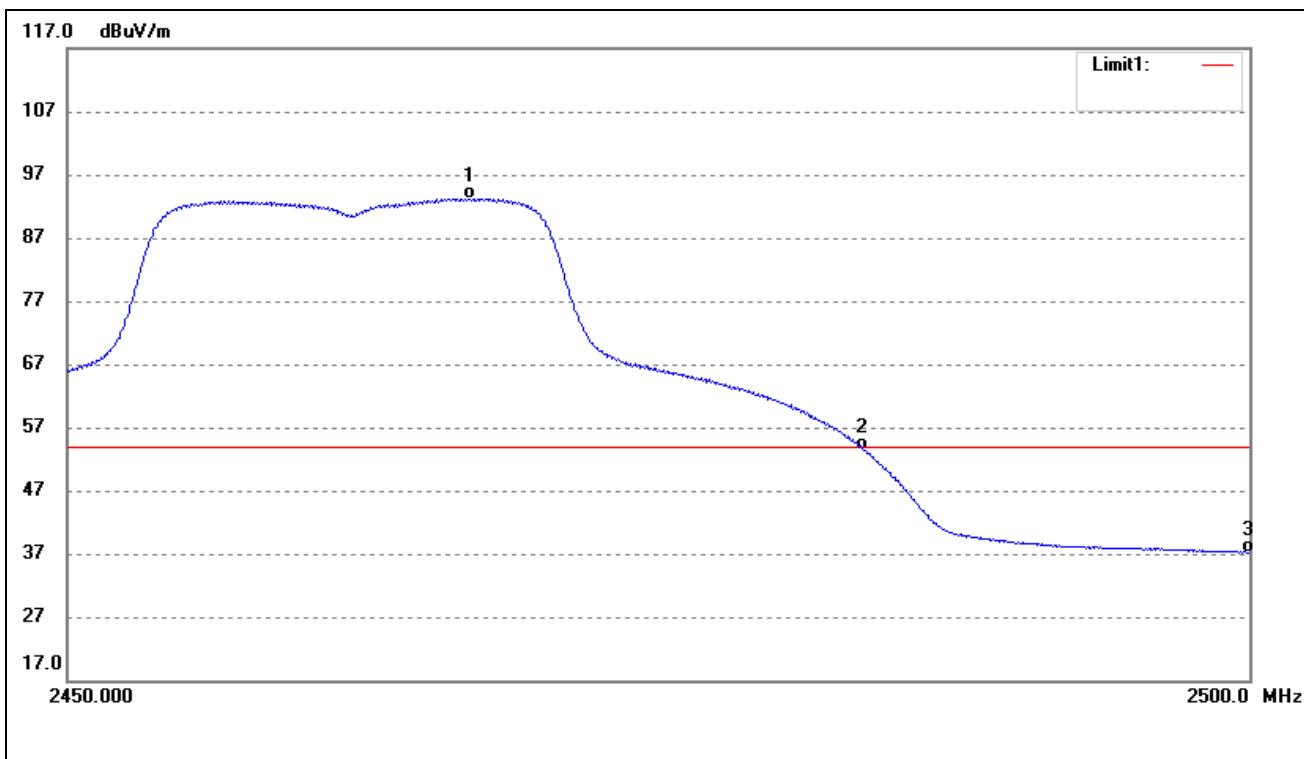

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2466.887	100.09	-6.86	93.23	/	/	Average Detector
	2465.940	114.85	-6.86	107.99	/	/	Peak Detector
2	2483.500	60.27	-6.77	53.50	54.00	-0.50	Average Detector
	2483.500	76.26	-6.77	69.49	74.00	-4.51	Peak Detector
3	2500.000	43.91	-6.67	37.24	54.00	-16.76	Average Detector
	2500.000	62.37	-6.67	55.70	74.00	-18.30	Peak Detector

802.11n-HT20_MCS7


Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

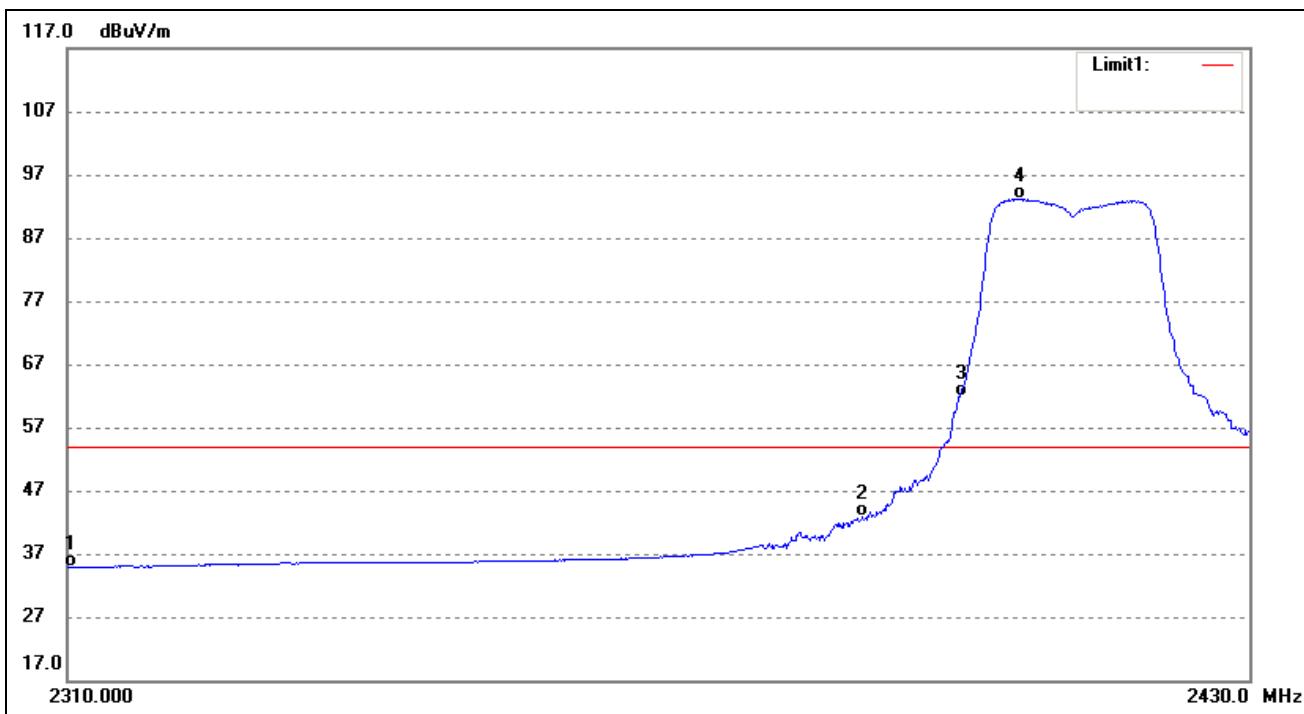

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.64	-7.78	34.86	54.00	-19.14	Average Detector
	2310.000	55.79	-7.78	48.01	74.00	-25.99	Peak Detector
2	2390.000	50.30	-7.32	42.98	54.00	-11.02	Average Detector
	2390.000	77.43	-7.32	70.11	74.00	-3.89	Peak Detector
3	2400.000	69.12	-7.26	61.86	Delta =31.3dBc	Average Detector	Average Detector
4	2406.242	100.38	-7.22	93.16			Average Detector

802.11n-HT20_MCS7

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

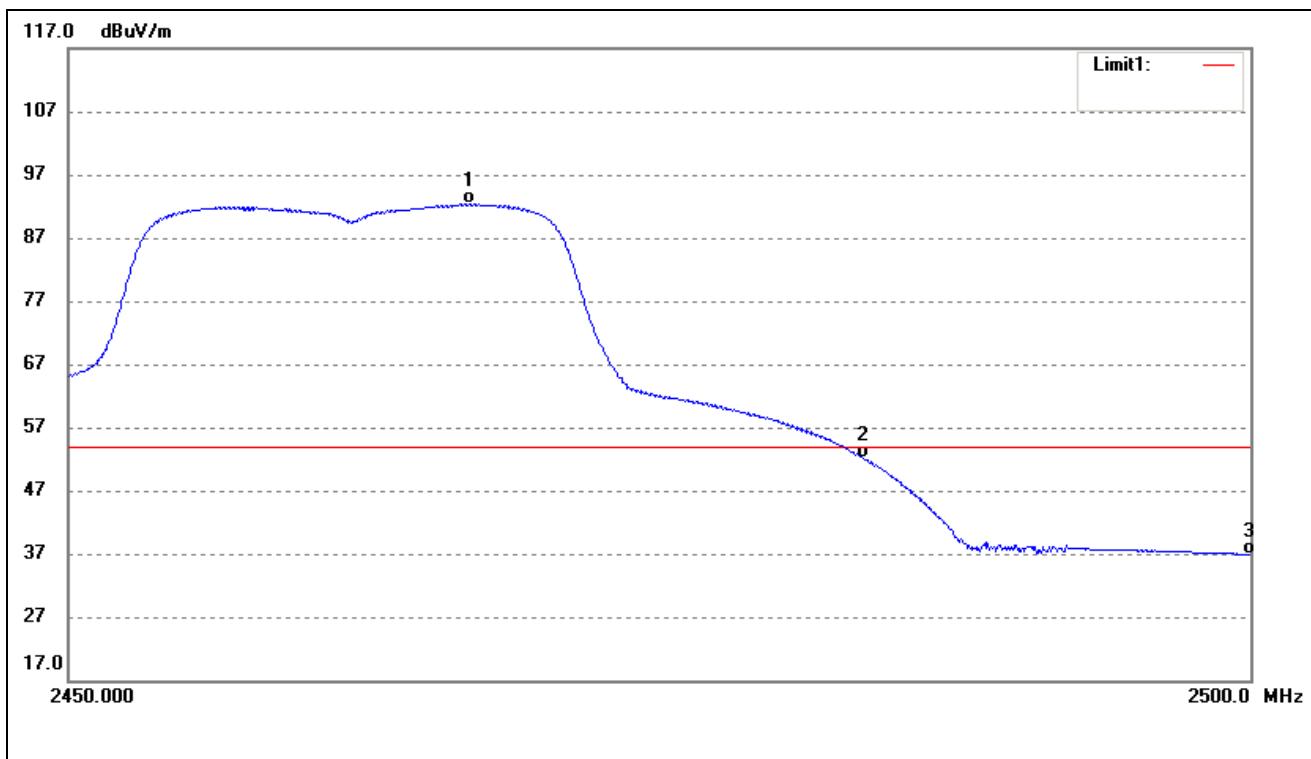

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2466.837	99.23	-6.86	92.37	/	/	Average Detector
	2465.044	114.04	-6.87	107.17	/	/	Peak Detector
2	2483.500	58.98	-6.77	52.21	54.00	-1.79	Average Detector
	2483.500	79.27	-6.77	72.50	74.00	-1.50	Peak Detector
3	2500.000	43.55	-6.67	36.88	54.00	-17.12	Average Detector
	2500.000	59.85	-6.67	53.18	74.00	-20.82	Peak Detector


802.11n-HT40_MCS7

Test Channel

Low

Polarity:


Vertical(worst case)

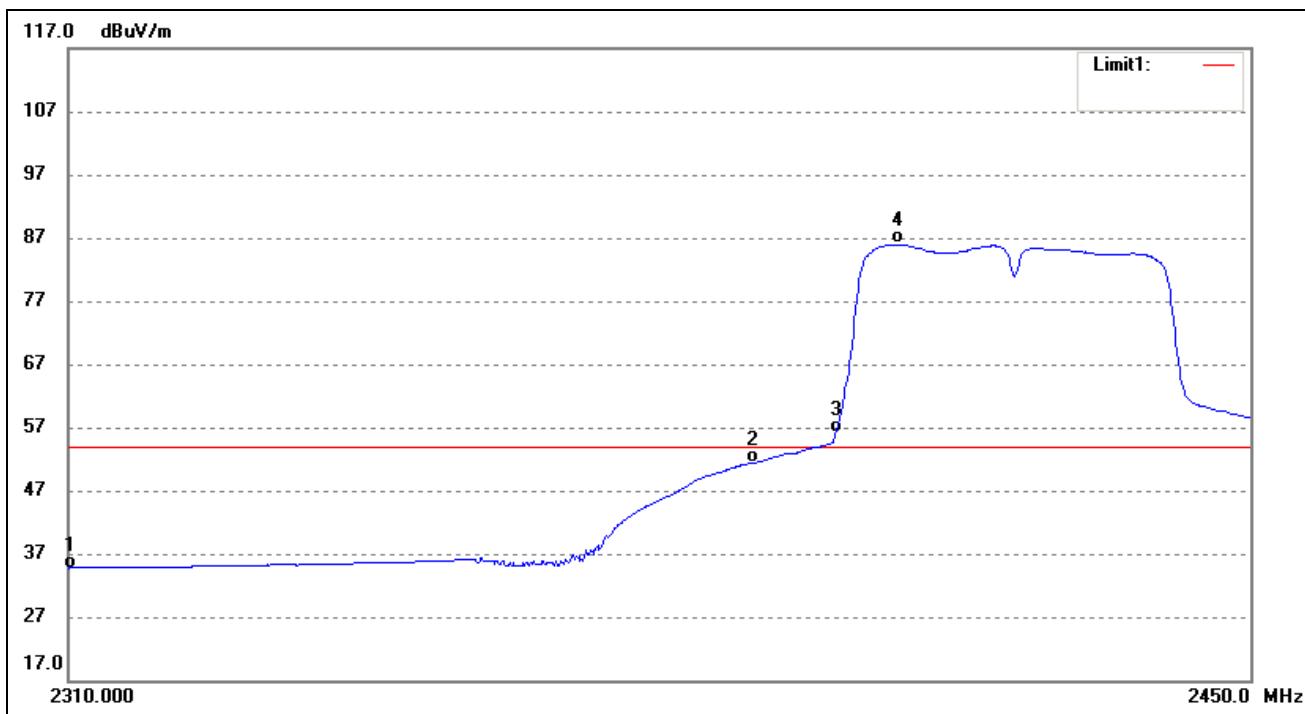

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	42.53	-7.78	34.75	54.00	-19.25	Average Detector
	2310.000	54.86	-7.78	47.08	74.00	-26.92	Peak Detector
2	2390.000	58.72	-7.32	51.40	54.00	-2.60	Average Detector
	2390.000	71.34	-7.32	64.02	74.00	-9.98	Peak Detector
3	2400.000	63.28	-7.26	56.02	Delta =30.03dBc		Average Detector
4	2407.415	93.26	-7.21	86.05			Average Detector


802.11n-HT40_MCS7

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

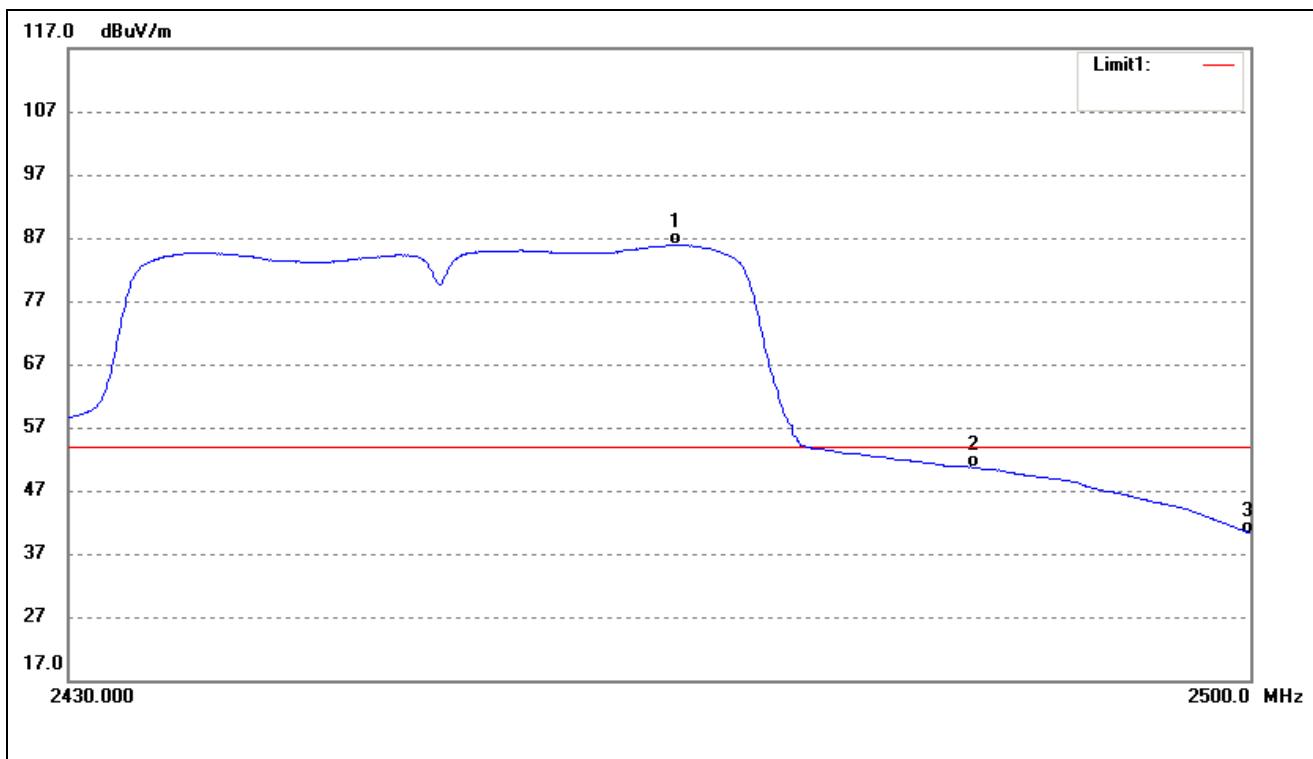


No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2465.732	92.74	-6.86	85.88	/	/	Average Detector
	2463.842	110.81	-6.89	103.92	/	/	Peak Detector
2	2483.500	57.36	-6.77	50.59	54.00	-3.41	Average Detector
	2483.500	75.22	-6.77	68.45	74.00	-5.55	Peak Detector
3	2500.000	46.89	-6.67	40.22	54.00	-13.78	Average Detector
	2500.000	74.63	-6.67	67.96	74.00	-6.04	Peak Detector


➤ Conducted test

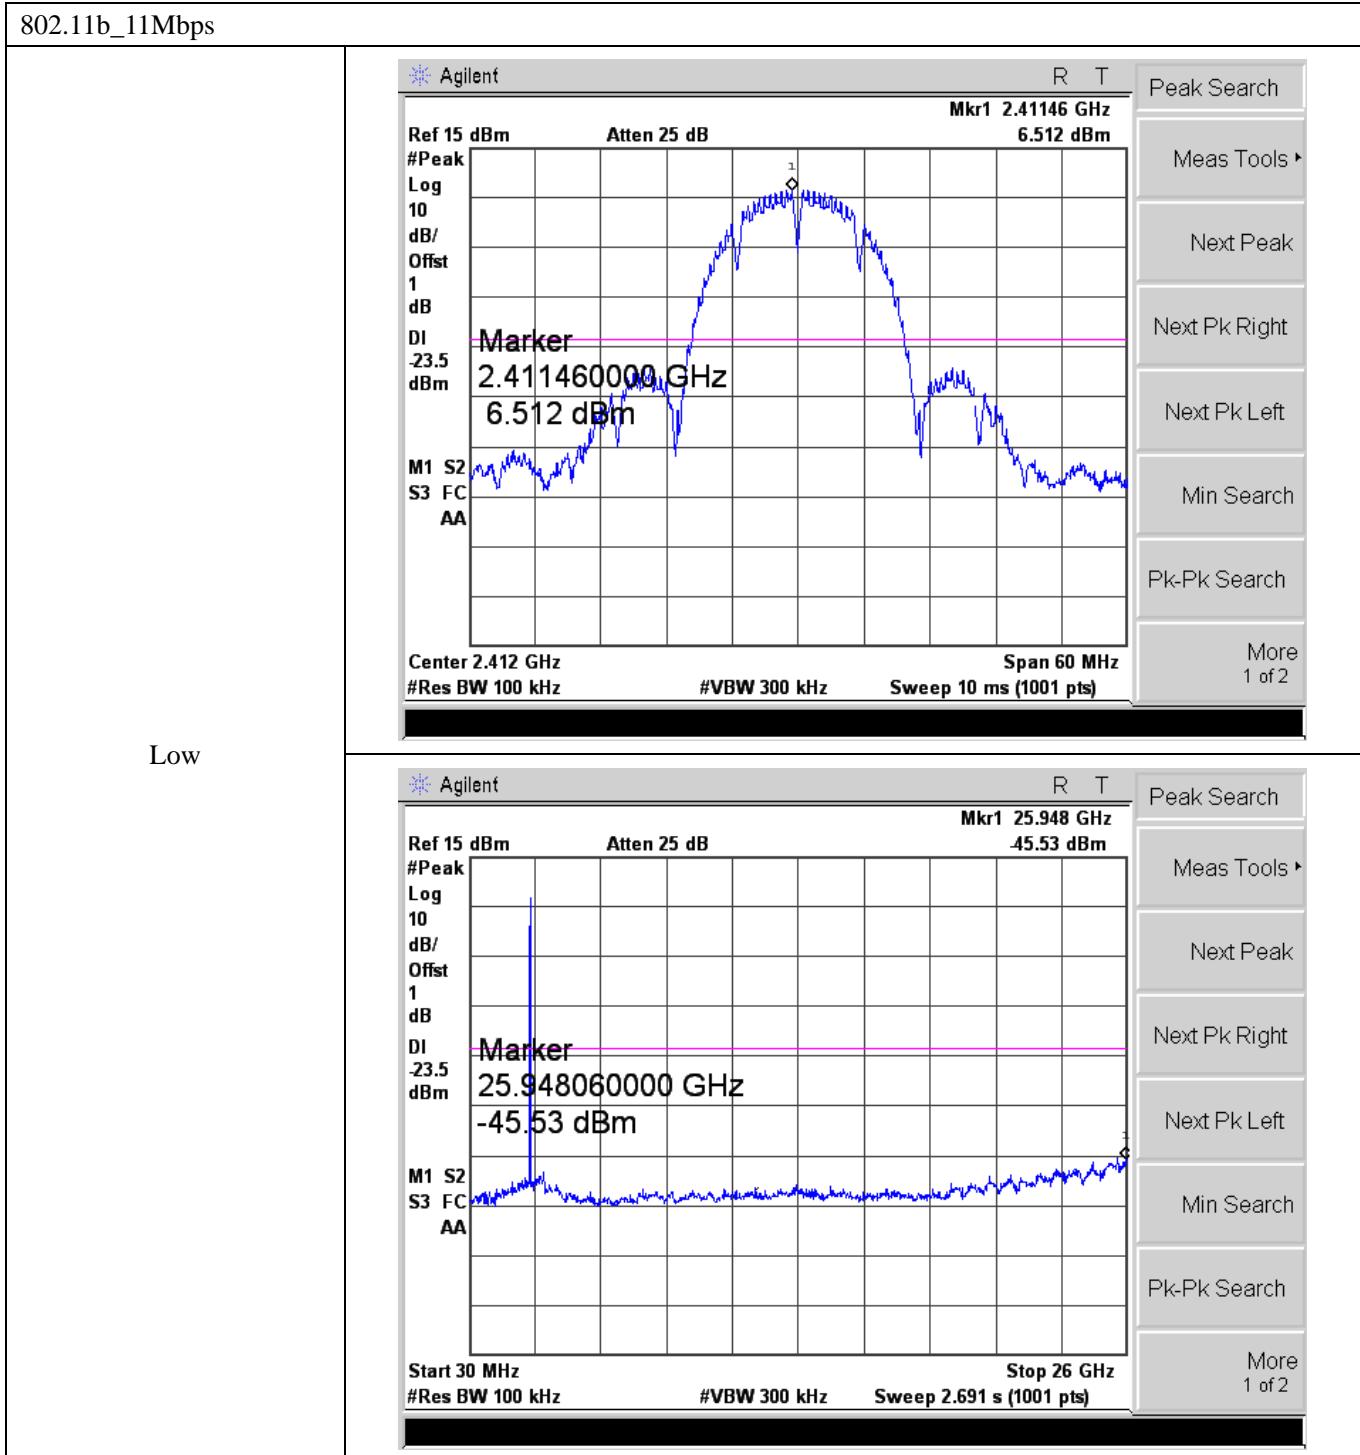


802.11b_11Mbps

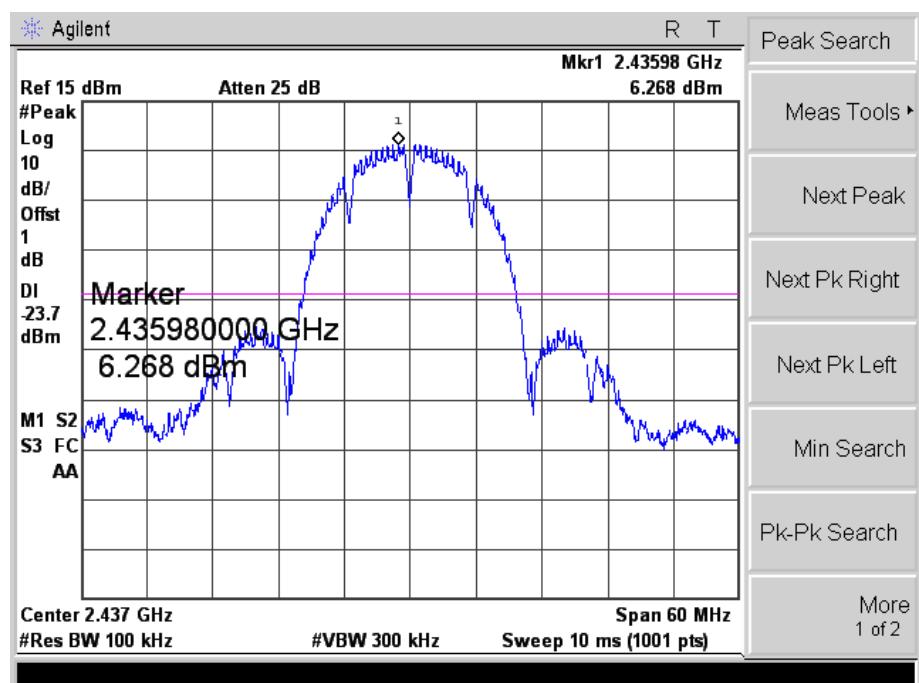


Middle

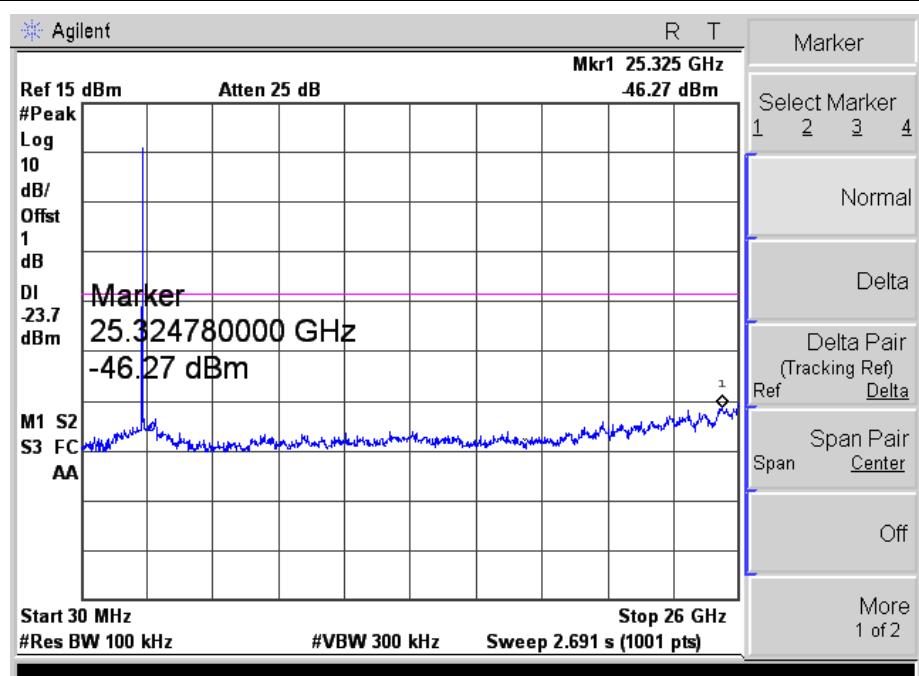


802.11b_11Mbps

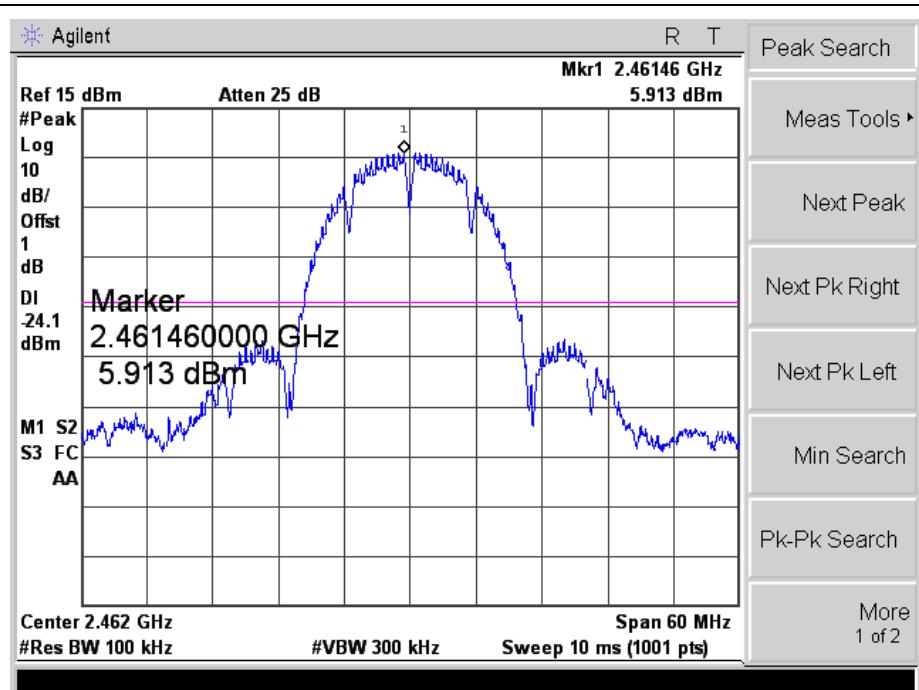


High

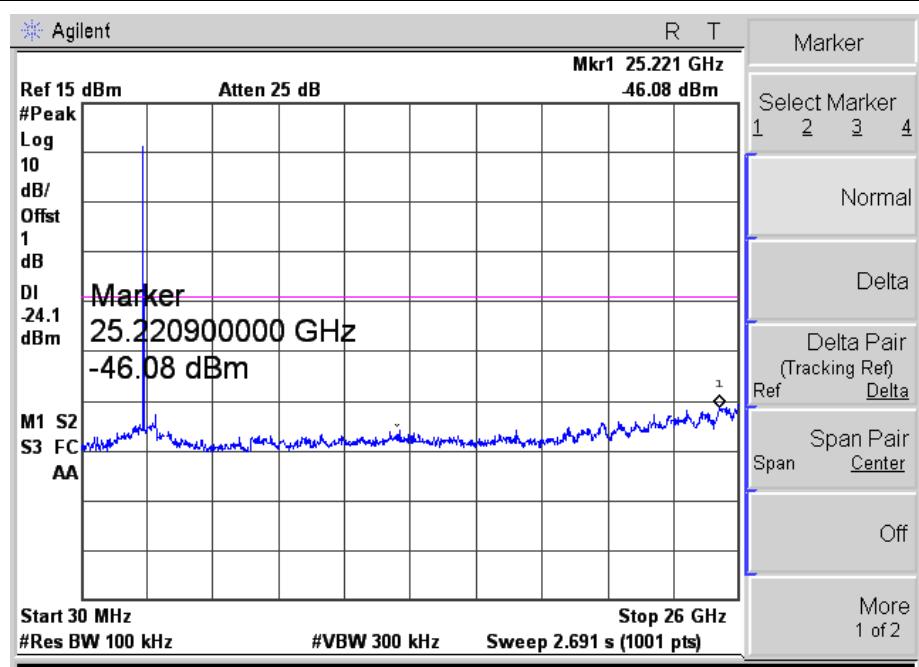


802.11g_54Mbps

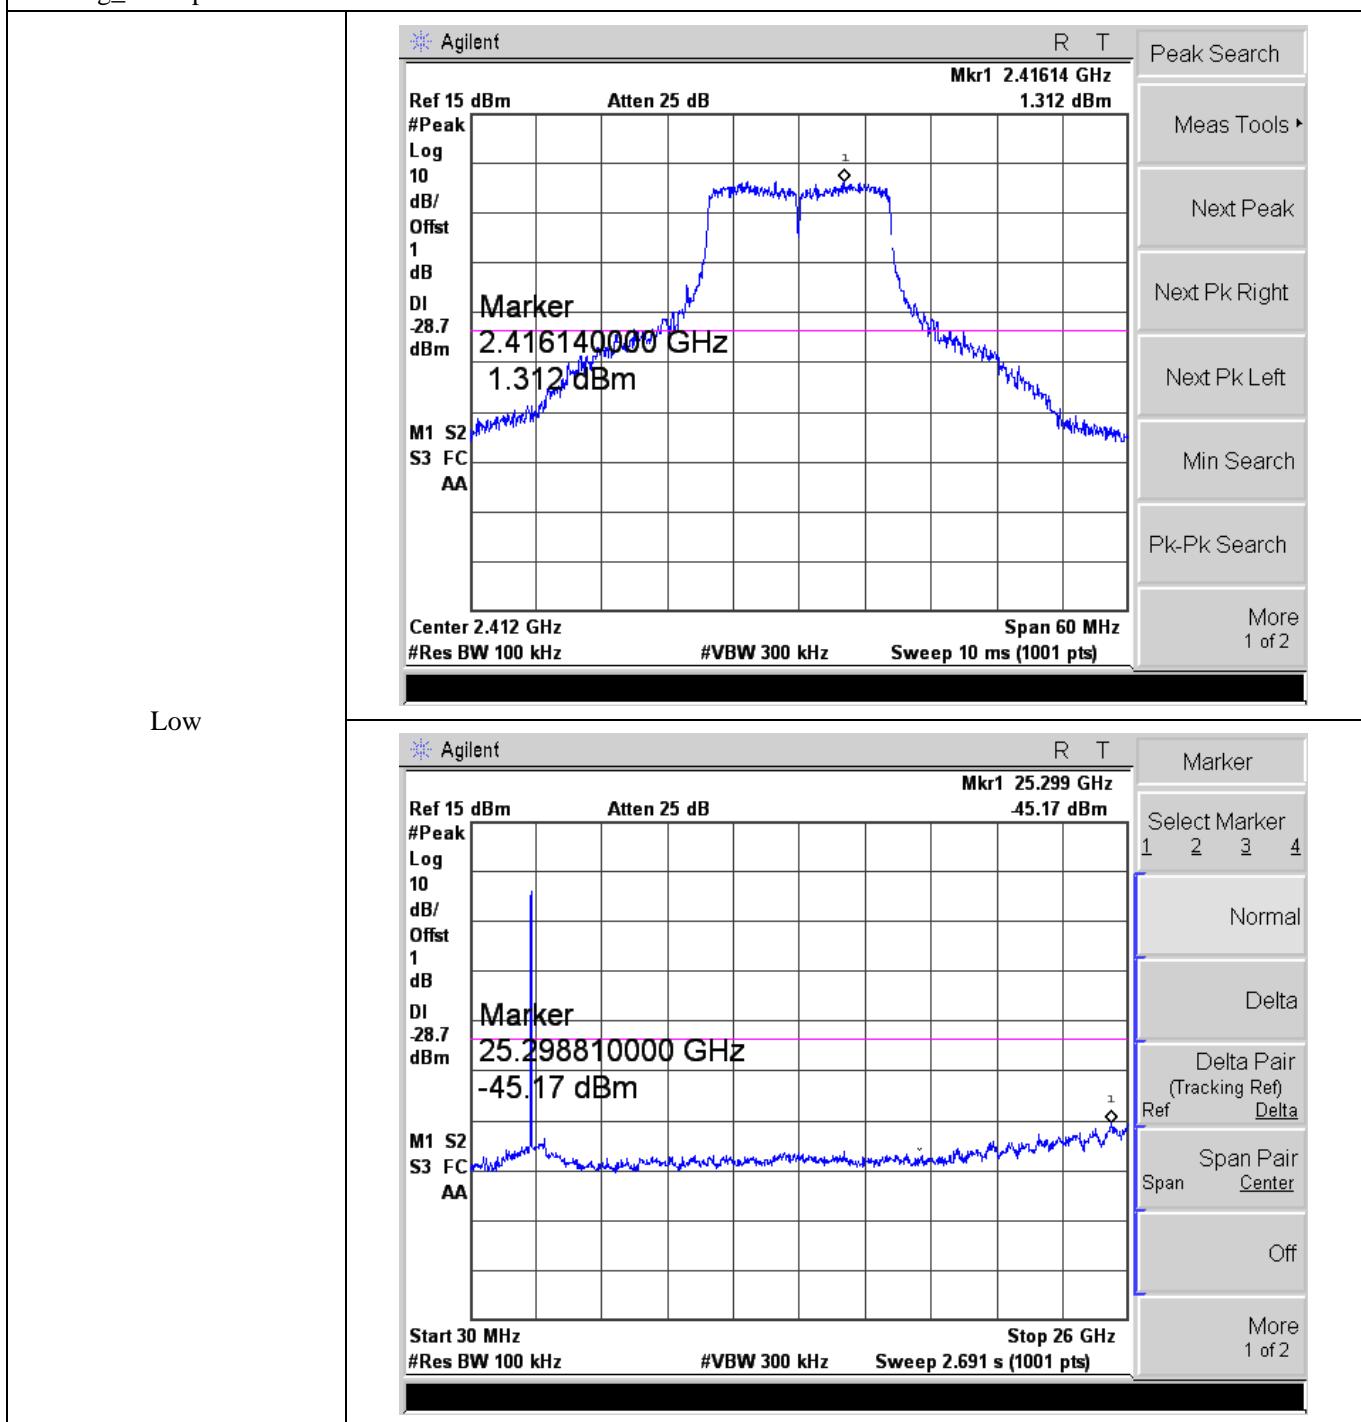


802.11g_54Mbps

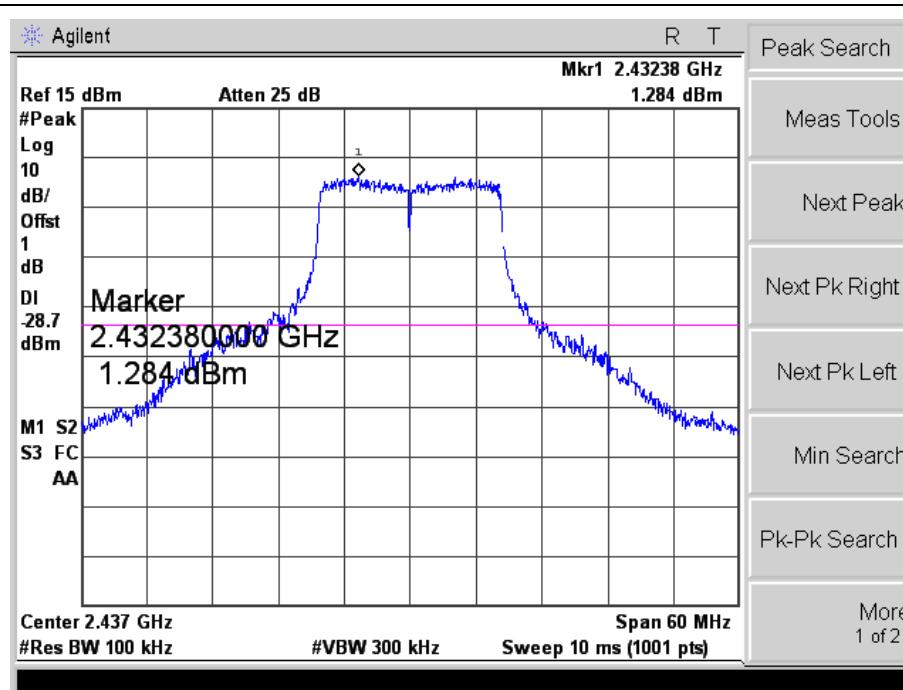


Middle

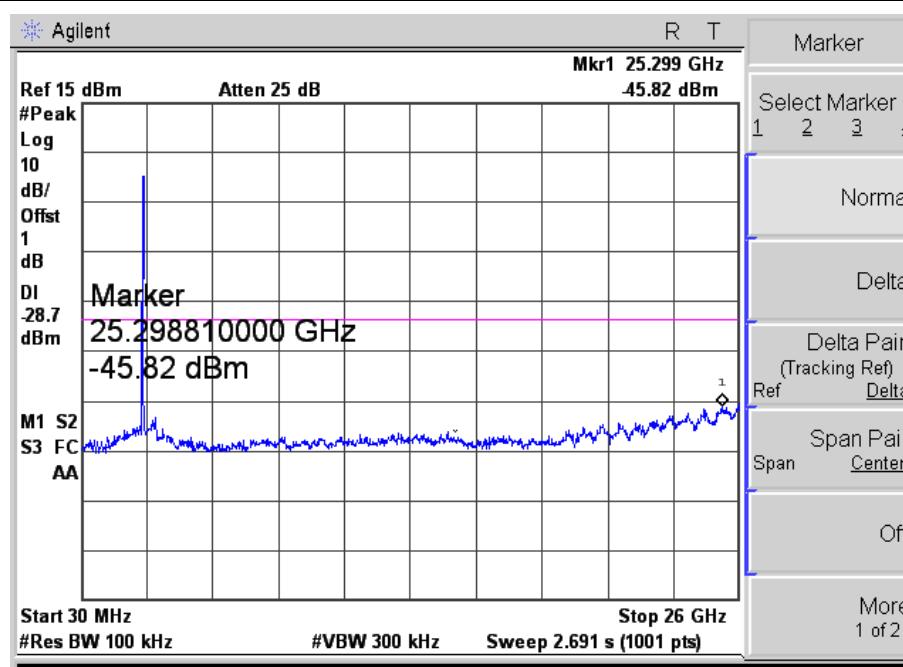


802.11g_54Mbps

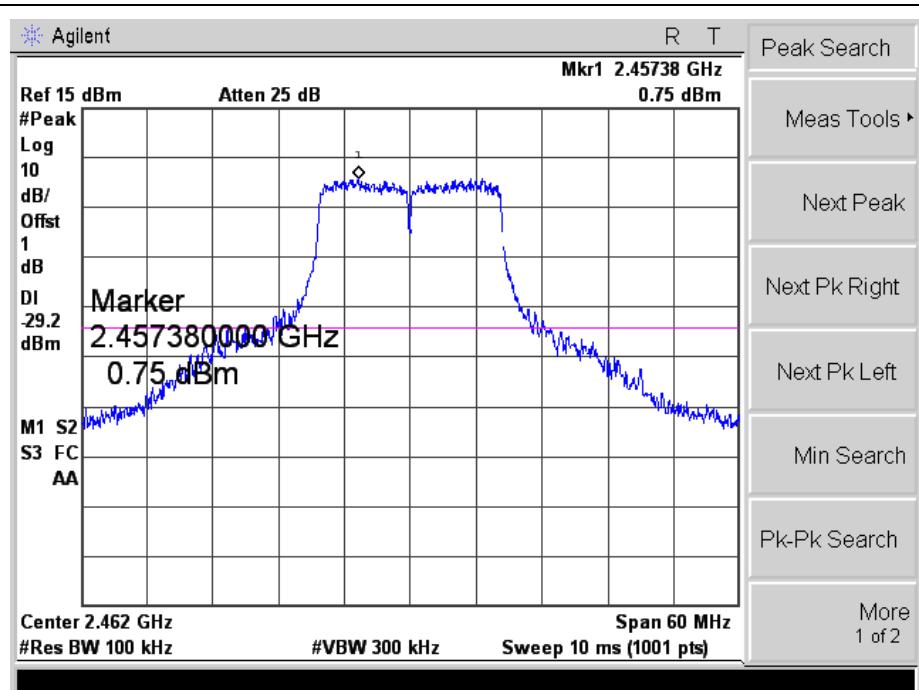


High

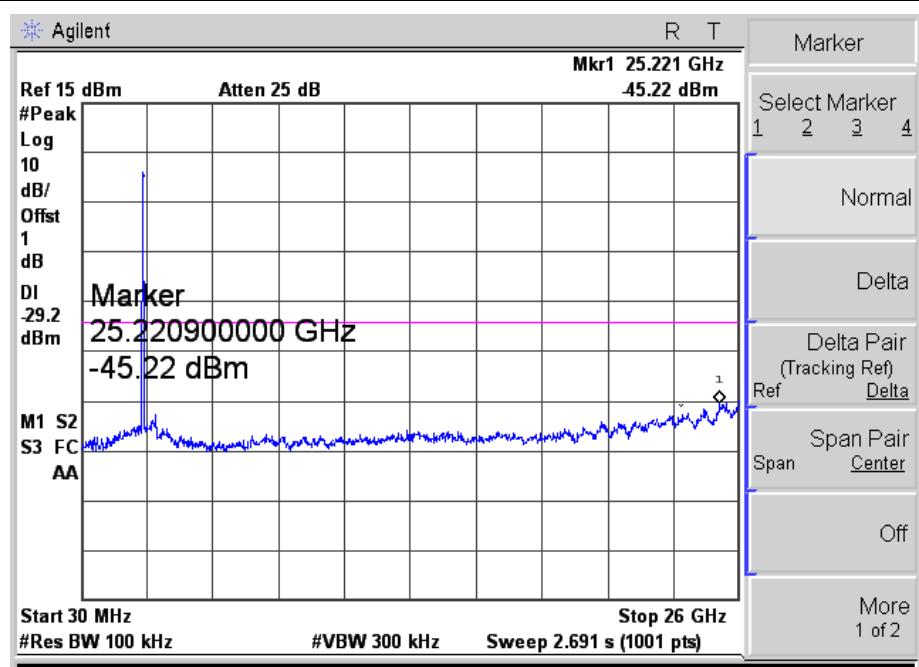


802.11n-HT20_MCS7

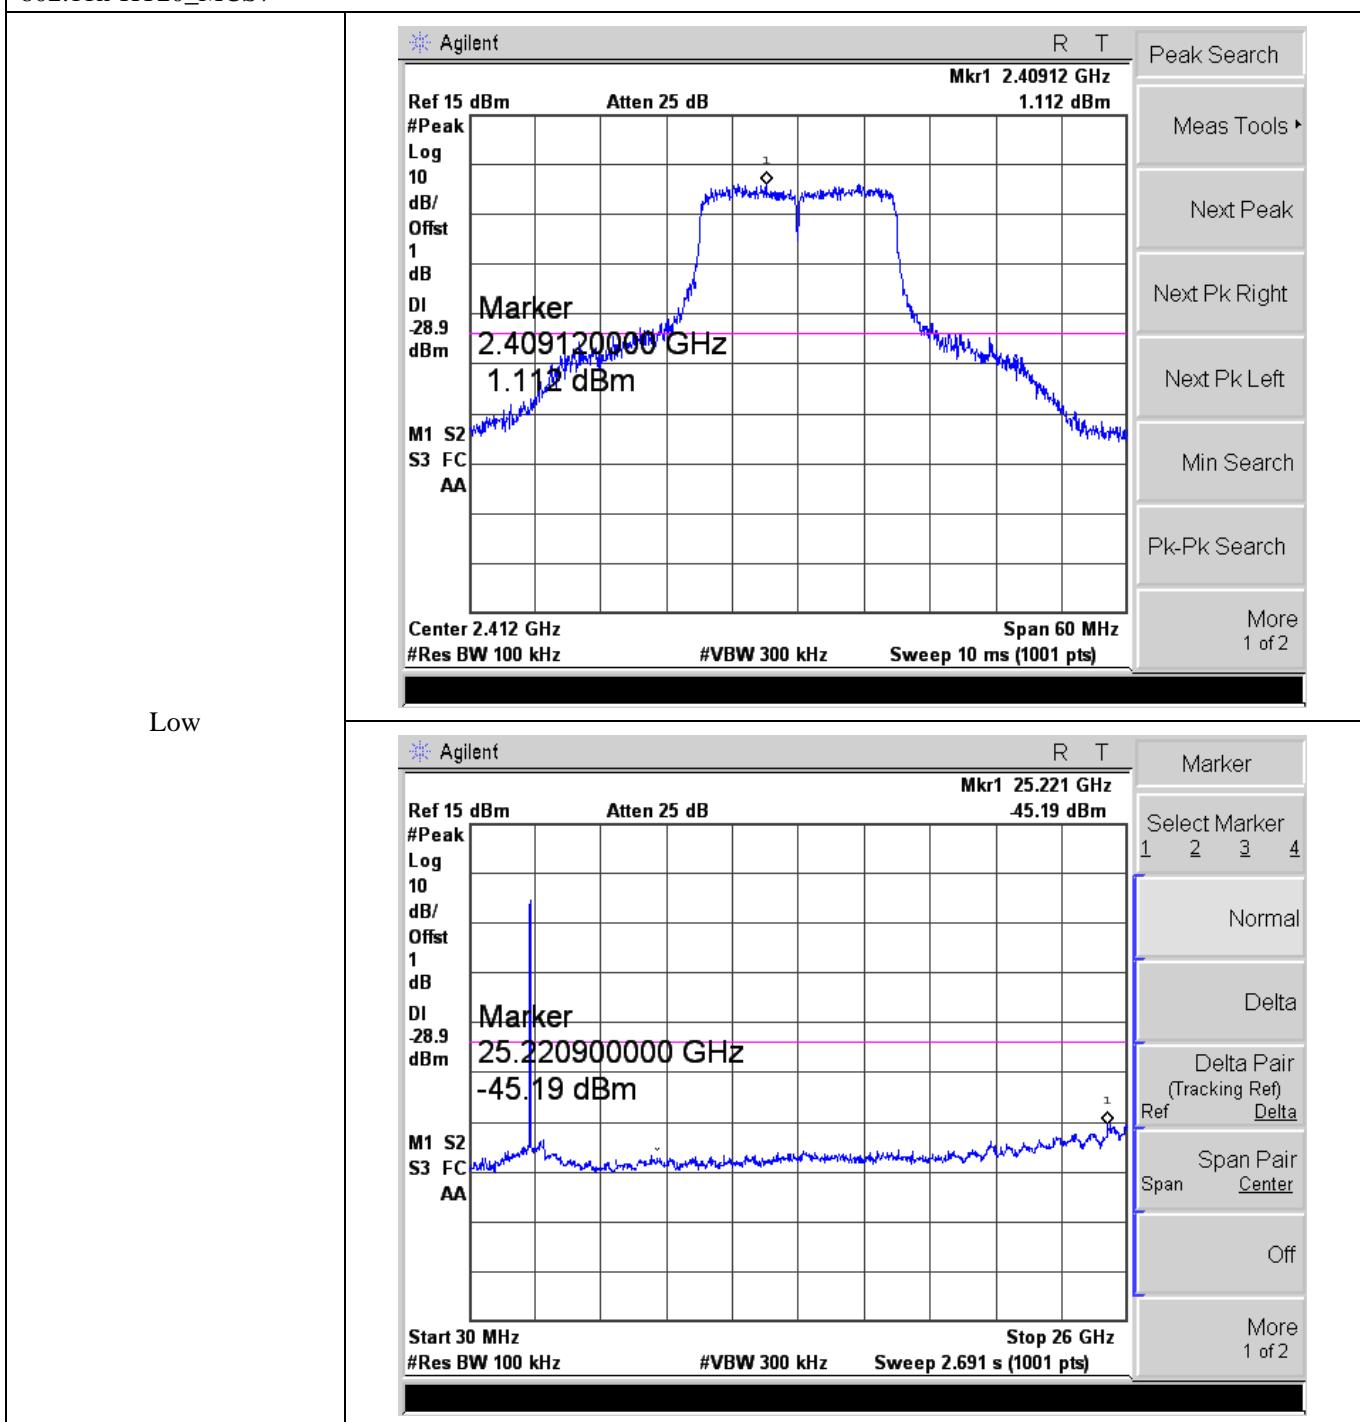


802.11n-HT20_MCS7

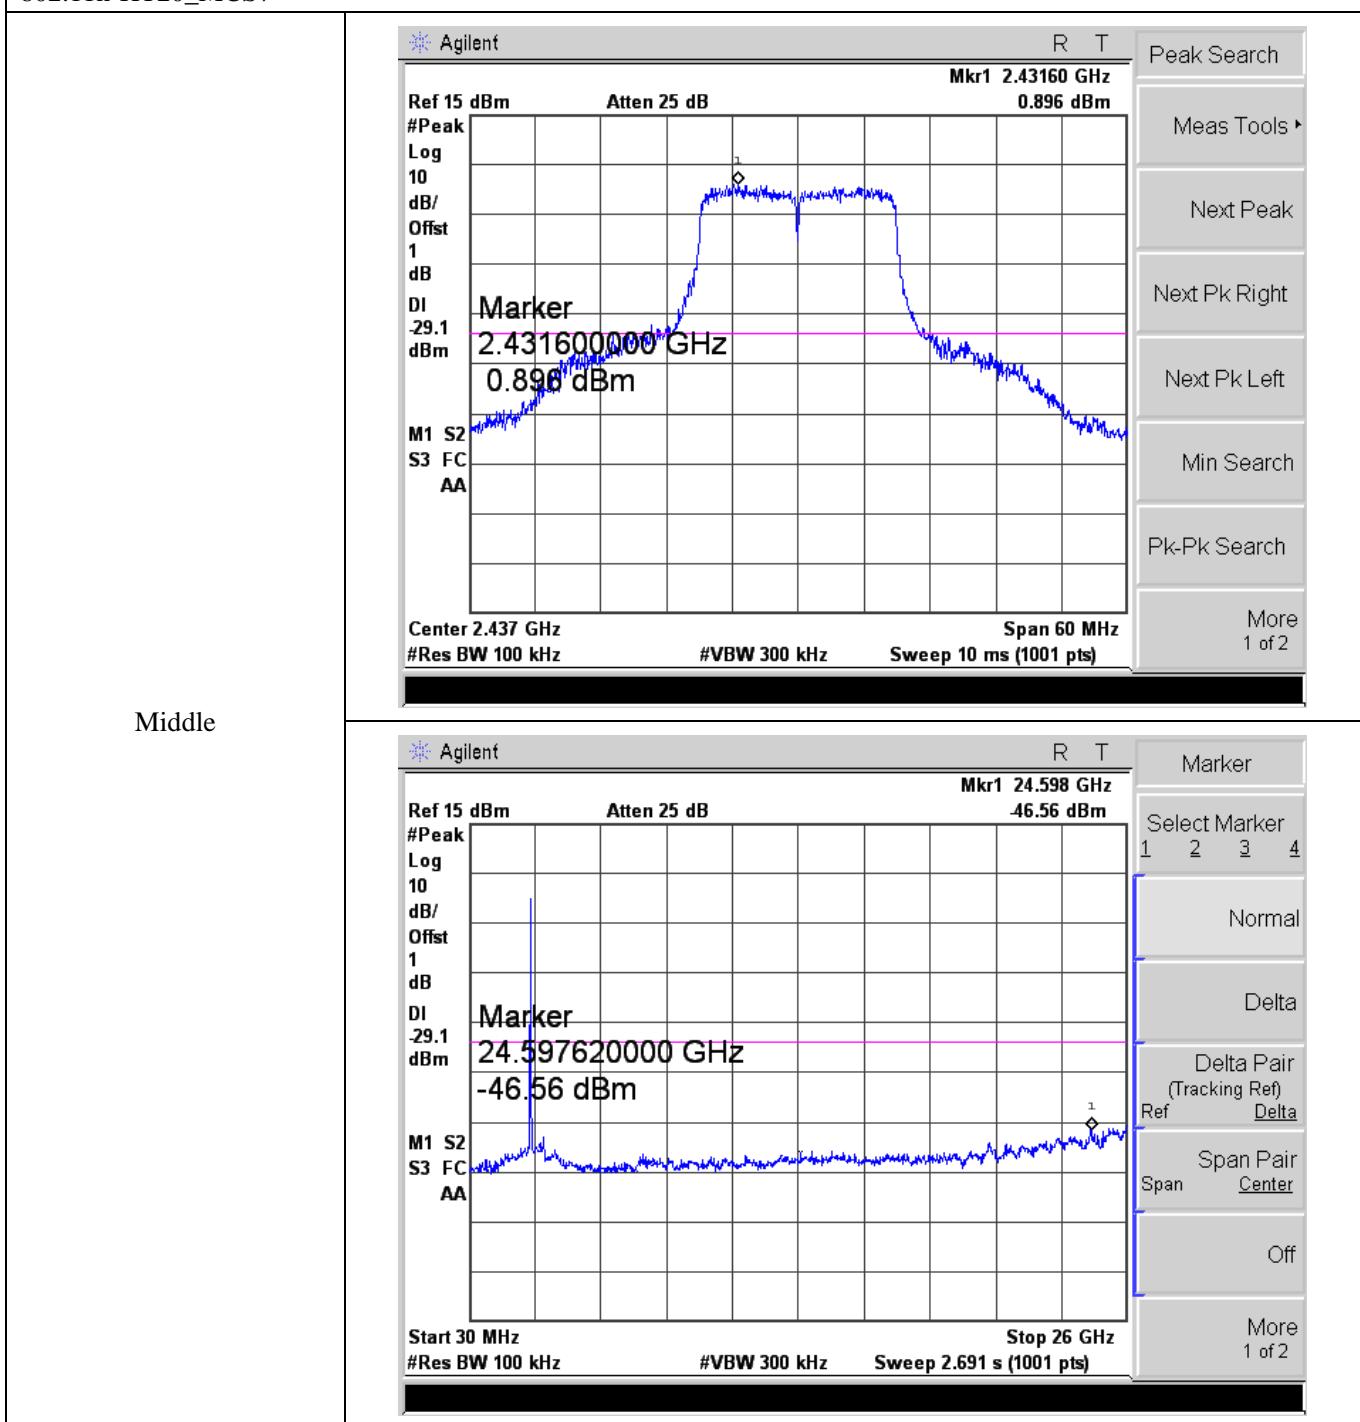


802.11n-HT20_MCS7

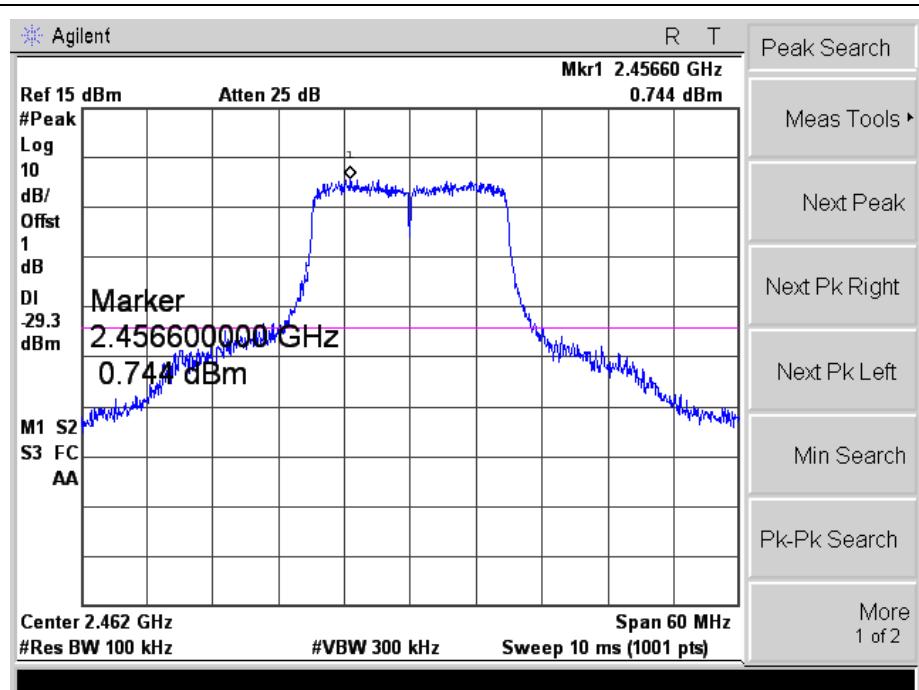


High

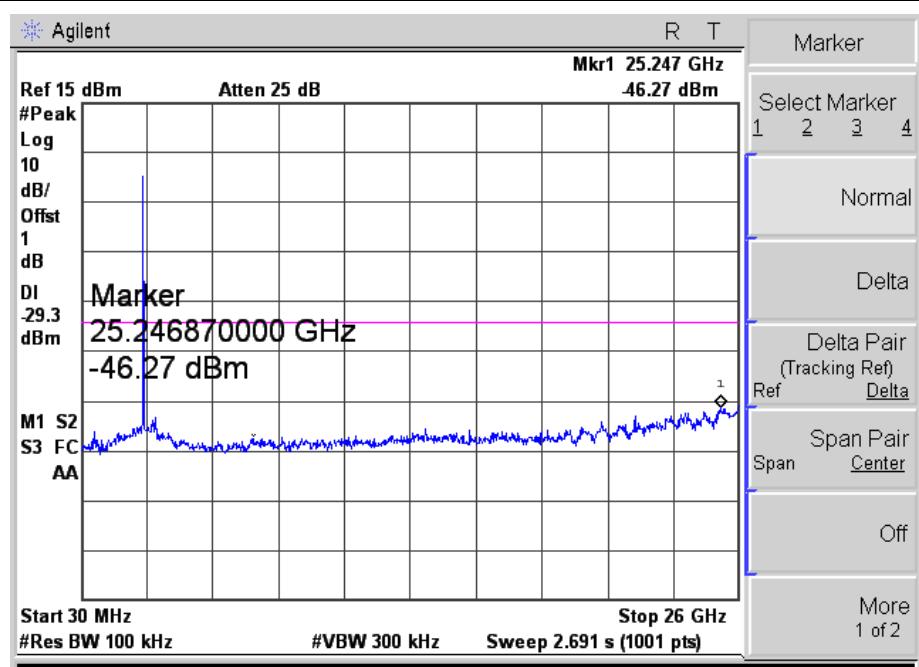


802.11n-HT40_MCS7

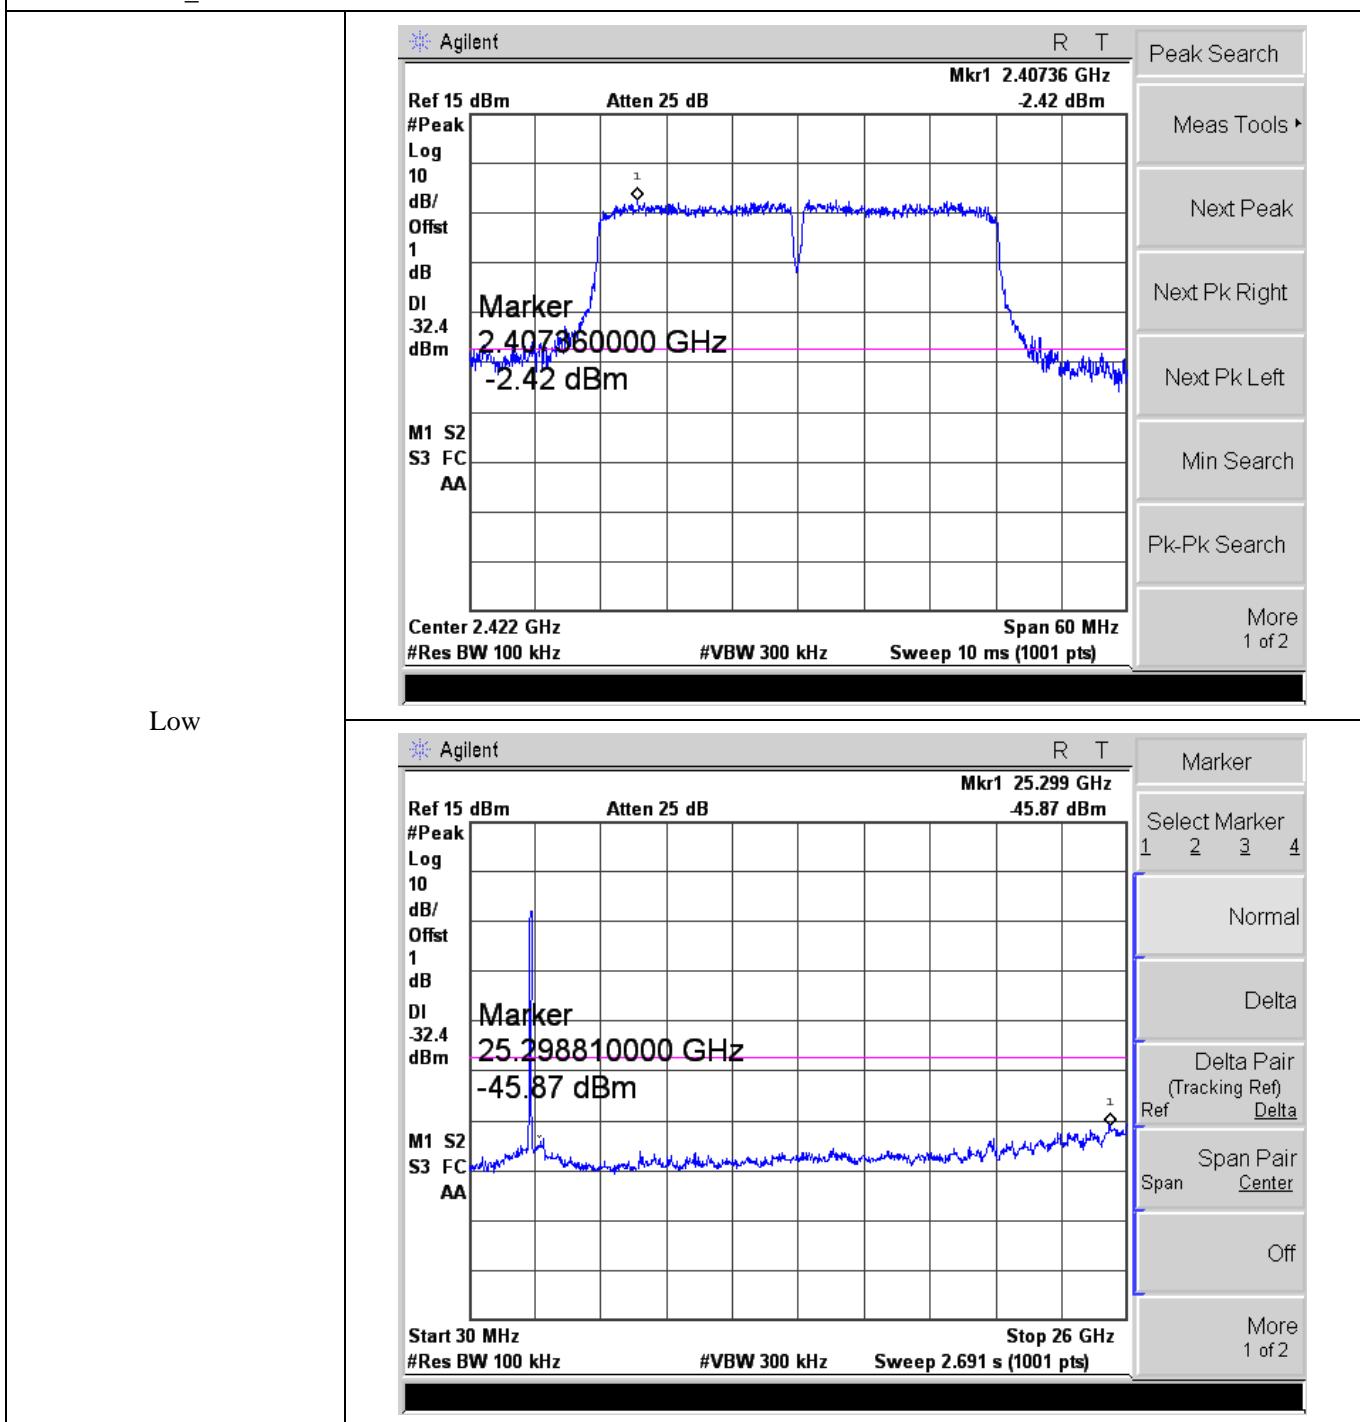


802.11n-HT40_MCS7

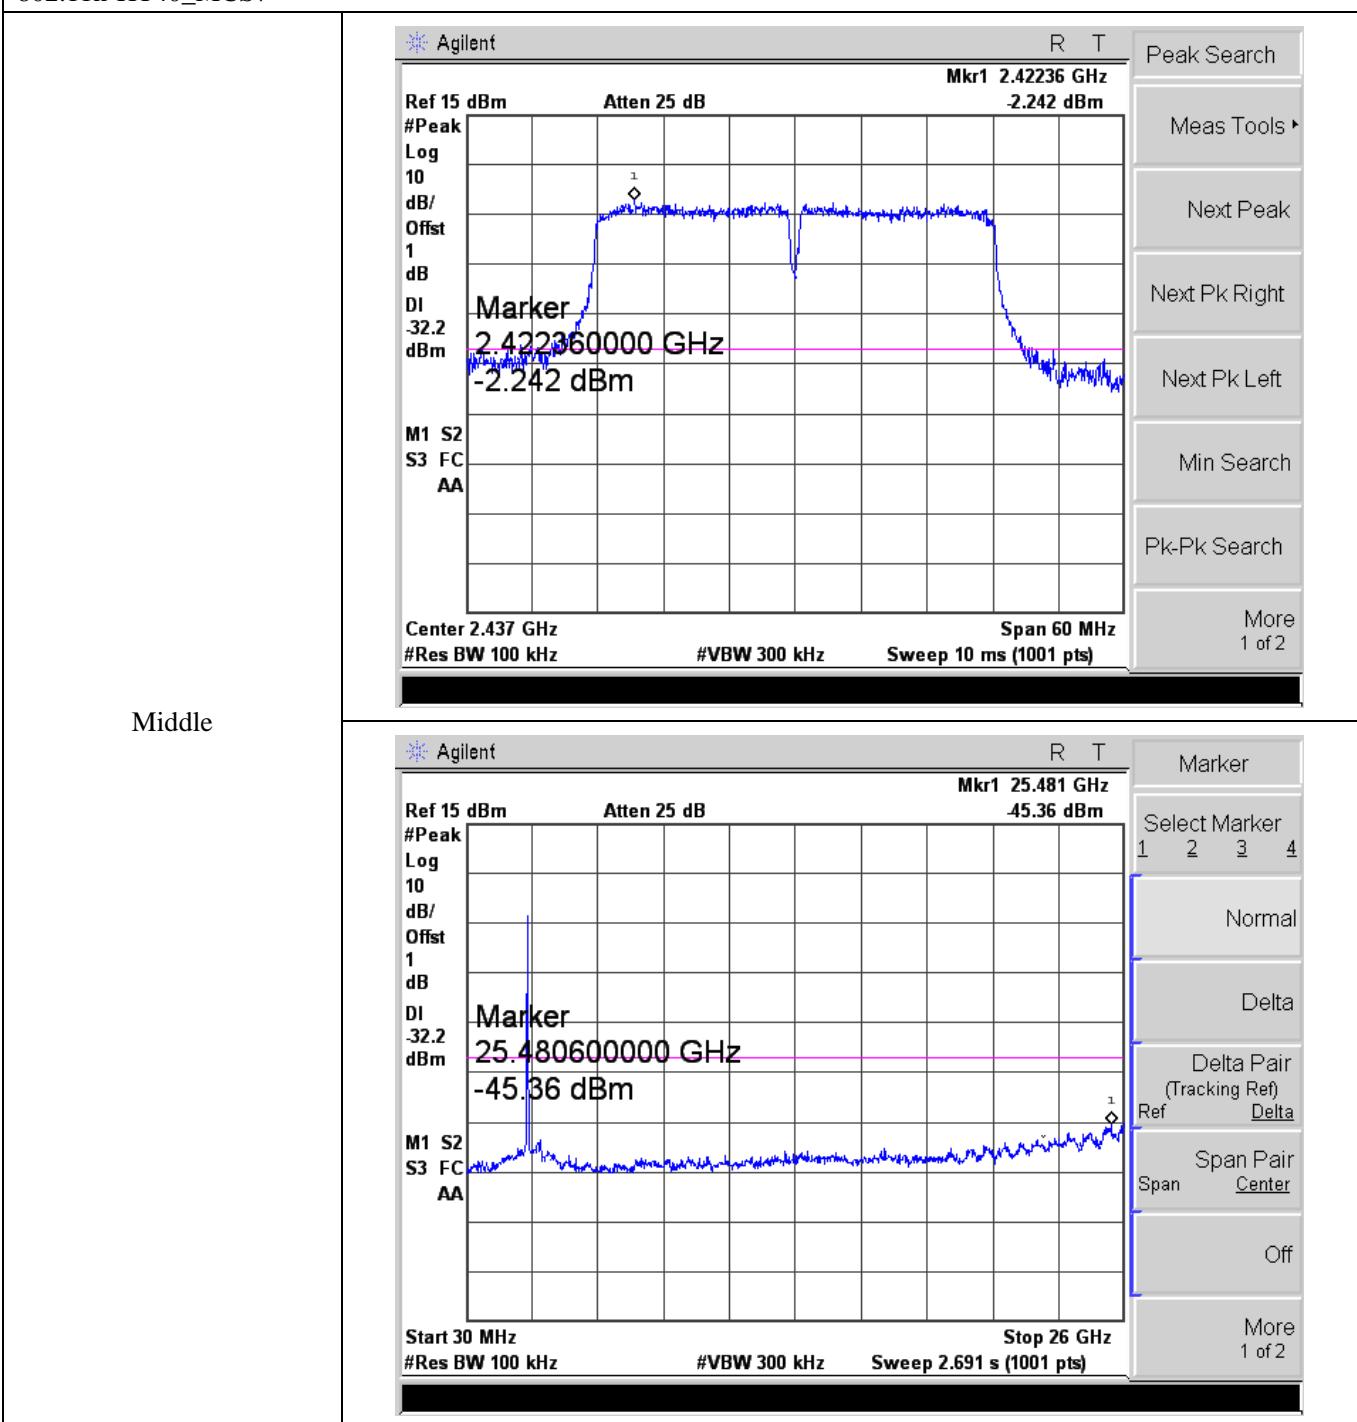

802.11n-HT40_MCS7

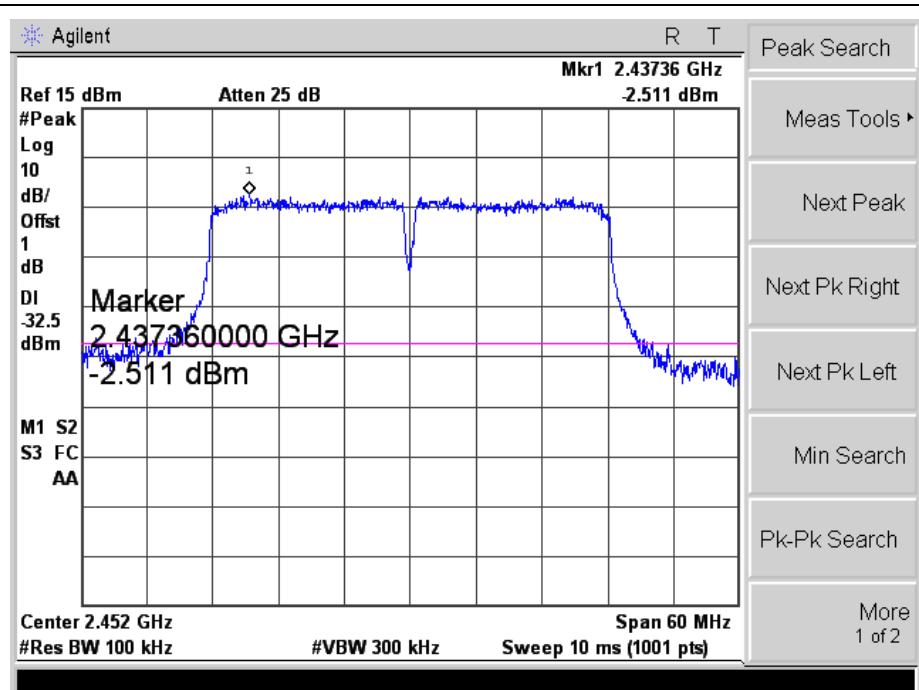

High

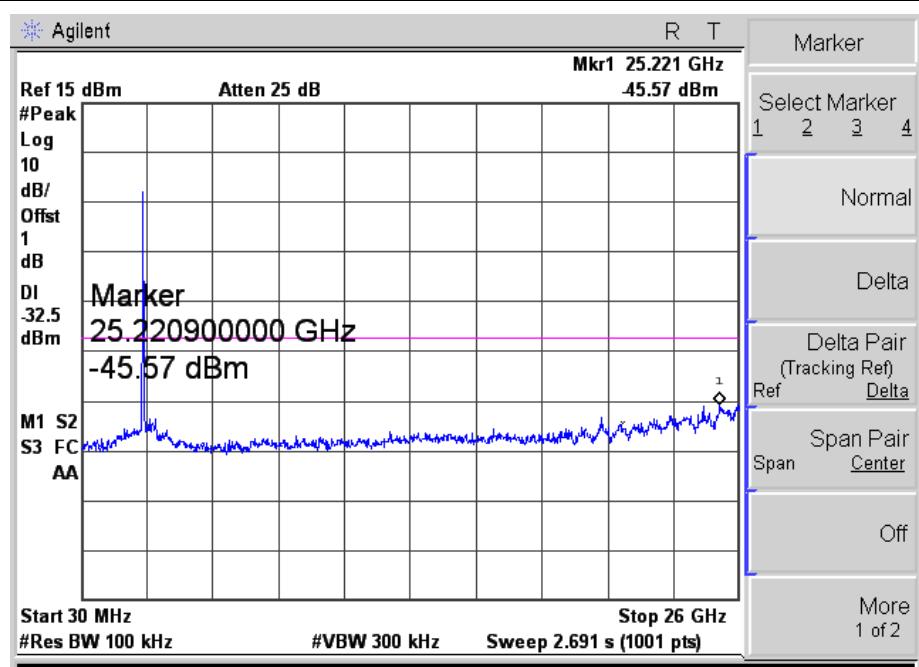


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

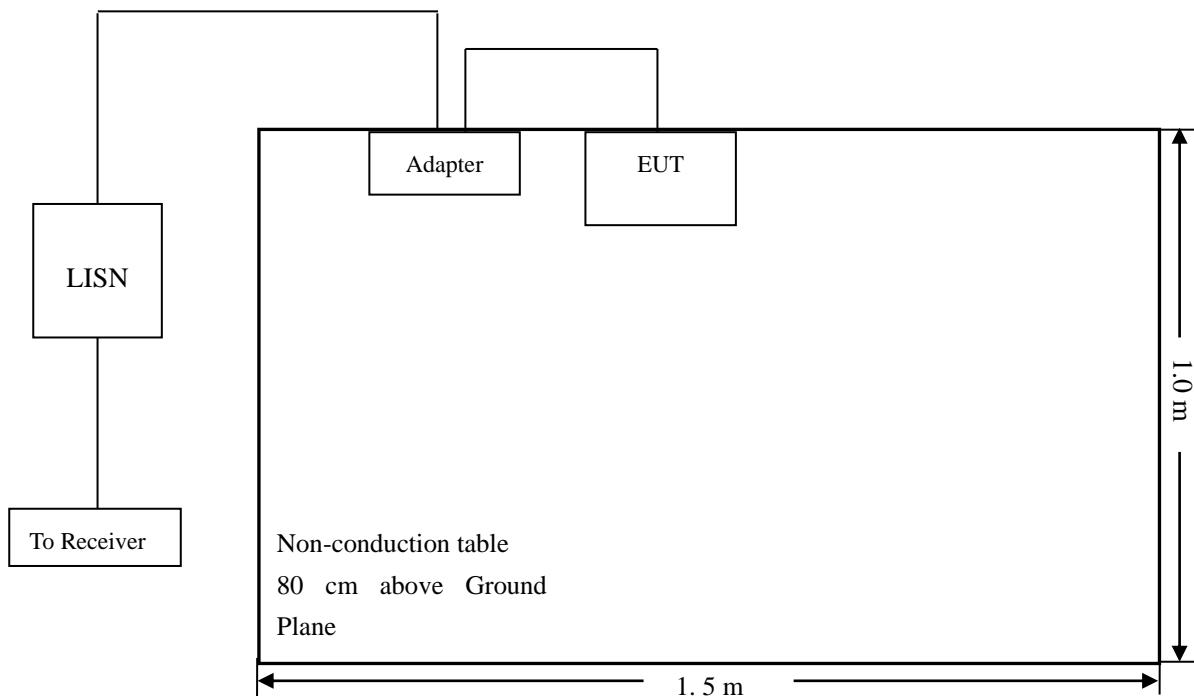


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

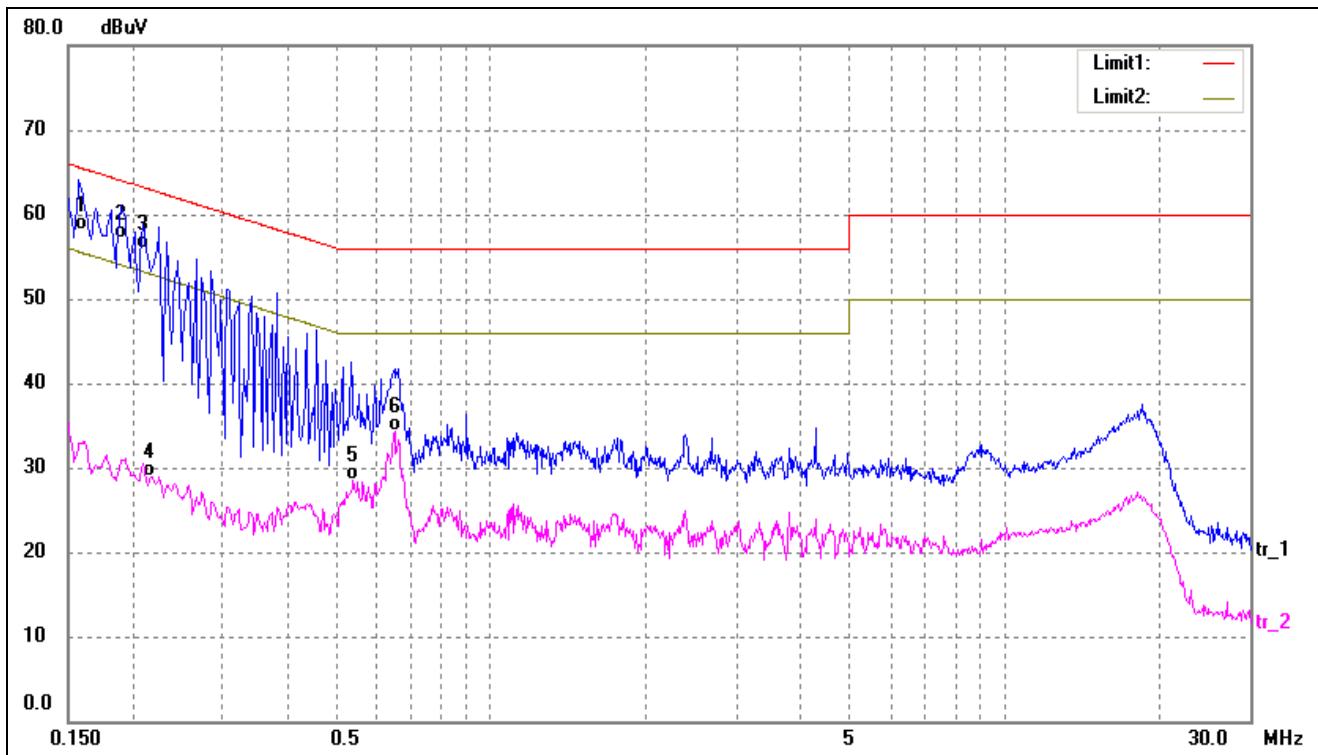

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	48.05	10.10	58.15	65.56	-7.41	QP
2*	0.1900	47.00	10.12	57.12	64.03	-6.91	QP
3	0.2100	45.83	10.13	55.96	63.20	-7.24	QP
4	0.2180	18.83	10.13	28.96	52.89	-23.93	AVG
5	0.5380	18.23	10.31	28.54	46.00	-17.46	AVG
6	0.6500	23.90	10.36	34.26	46.00	-11.74	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

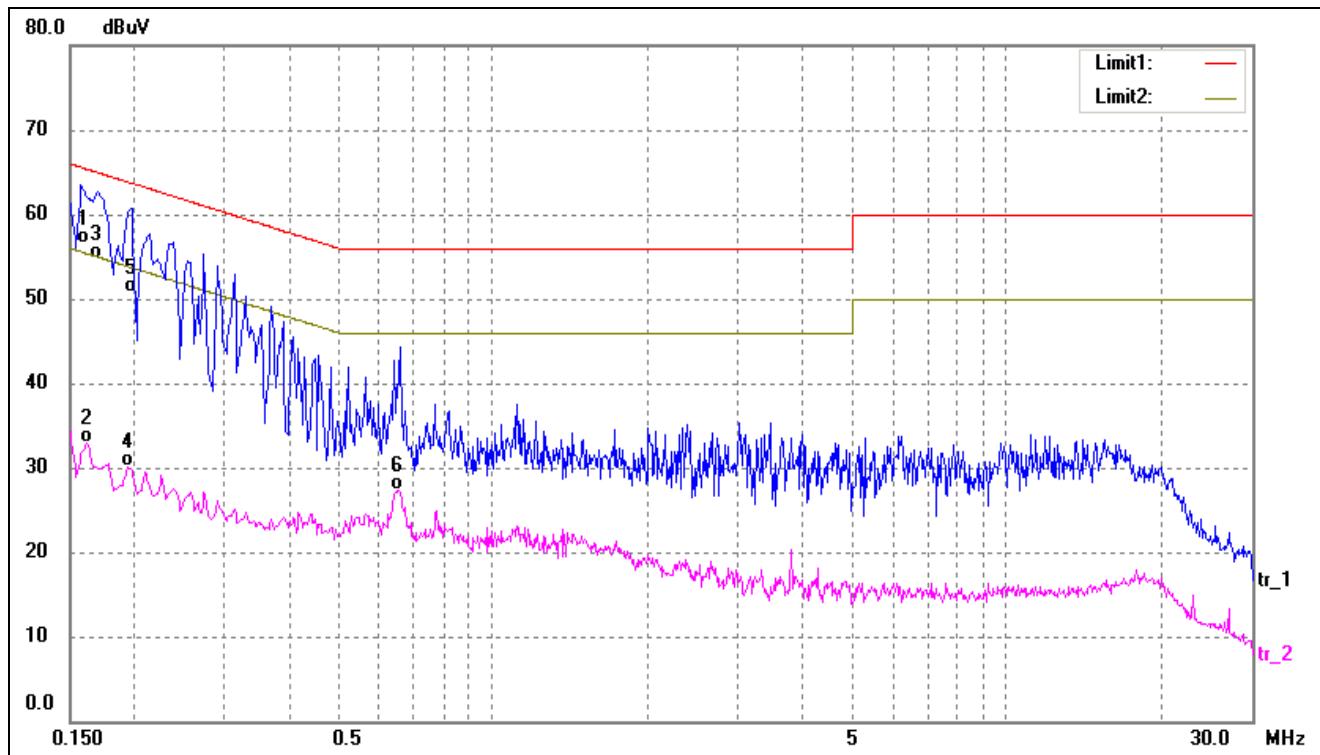

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1580	46.47	10.10	56.57	65.57	-9.00	QP
2	0.1620	22.85	10.10	32.95	55.36	-22.41	AVG
3	0.1700	44.53	10.11	54.64	64.96	-10.32	QP
4	0.1940	19.97	10.12	30.09	53.86	-23.77	AVG
5	0.1980	40.62	10.12	50.74	63.69	-12.95	QP
6	0.6540	16.89	10.36	27.25	46.00	-18.75	AVG

***** END OF REPORT *****