

An Engineering Document

FOR

Buddi Limited

ON

Buddi Click System - Wristband

DOCUMENT NO. TRA-015303-05-47-01A

HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.
T +44 (0)1482 801801 F +44 (0)1482 801806 E test@tracglobal.com
www.tracglobal.com

TRaC Wireless Test Report : TRA-015303-05-47-01A

Applicant : Buddi Limited

Apparatus : Buddi Click System - Wristband

Specification(s) : FCC CFR47 Part 15 (c) & RSS-210 Issue 8

Purpose of Test : Certification

FCC ID : ZDL349A

Authorised by :



: Radio Product Manager

Issue Date : 30th May 2014

Authorised Copy Number : PDF

Contents

| | | |
|-------------|---|----|
| Section 1: | Introduction | 4 |
| 1.1 | General | 4 |
| 1.2 | Tests Requested By | 5 |
| 1.3 | Manufacturer | 5 |
| 1.4 | Apparatus Assessed | 5 |
| 1.5 | Test Result Summary | 6 |
| 1.6 | Notes relating to the assessment | 7 |
| 1.7 | Deviations from Test Standards | 7 |
| Section 2: | Measurement Uncertainty | 8 |
| 2.1 | Measurement Uncertainty Values | 8 |
| Section 3: | Modifications | 10 |
| 3.1 | Modifications Performed During Assessment | 10 |
| Appendix A: | Formal Emission Test Results | 11 |
| A1 | Transmitter Intentional Emission Radiated | 12 |
| A2 | Transmitter Bandwidth | 13 |
| A3 | Radiated Electric Field Emissions | 14 |
| A4 | Unintentional Radiated Emissions | 17 |
| Appendix B: | Supporting Graphical Data | 19 |
| Appendix C: | Additional Test and Sample Details | 28 |
| C1 | Test samples | 29 |
| C2 | EUT operating mode during testing | 30 |
| C3 | EUT Configuration Information | 31 |
| C4 | List of EUT Ports | 32 |
| C5 | Details of Equipment Used | 33 |
| Appendix D: | Additional Information | 34 |
| Appendix E: | Photographs and Figures | 35 |
| Appendix F: | MPE Calculation | 37 |

Section 1:**Introduction****1.1 General**

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Global []
Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Global [X]
Unit 1
Pendle Place
Skelmersdale
West Lancashire, WN8 9PN
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Tests performed by: A Tosif

Report author: A Tosif

This report must not be reproduced except in full without prior written permission from TRaC Global Ltd.

1.2 Tests Requested By

This testing in this report was requested by:

Buddi Limited

Talbot House
17 Church Street
Rickmansworth
Herts
WD3 1DE

1.3 Manufacturer

As above

1.4 Apparatus Assessed

The following apparatus was assessed between: 7th – 29th May 2014

Buddi Click System - Wristband.

The Wristband is a SRD device operating in 902 – 928 band.

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

| Test Type | FCC Regulation | IC Regulation | Measurement standard | Result |
|---|--|---|----------------------|--------|
| Spurious Emissions Radiated | Title 47 of the CFR: Part 15 Subpart (c) 15.249(a)(d) | RSS-210 Issue 8 December 2010 Annex 2 A2.9 | ANSI C63.10 | Pass |
| Unintentional Radiated Spurious Emissions | Title 47 of the CFR: Part 15 Subpart (b) 15.109 | RSS-Gen Issue 3 December 2010 Section 4.10 | ANSI C63.10 | Pass |
| AC Power conducted emissions | Title 47 of the CFR: Part 15 Subpart (c) 15.207 | RSS-Gen Issue 3 December 2010 Section 7.2.4 | ANSI C63.10 | N/A |
| Intentional Emission Frequency | Title 47 of the CFR: Part 15 Subpart (c) 15.249 (a) | RSS-210 Issue 8 December 2010 Annex 2 A2.9 | ANSI C63.10 | Pass |
| Intentional Emission Field Strength | Title 47 of the CFR: Part 15 Subpart (c) 15.249 (a) | RSS-210 Issue 8 December 2010 Annex 2 A2.9 | ANSI C63.10 | Pass |
| Intentional Emission Band Occupancy | Title 47 of the CFR: Part 15 Subpart (c) 15.215 (c) | RSS-Gen Issue 3 December 2010 Section 4.6.1 | ANSI C63.10 | Pass |

Abbreviations used in the above table:

| | | | |
|------|-------------------------------------|------|---|
| CFR | : Code of Federal Regulations | ANSI | : American National Standards Institution |
| REFE | : Radiated Electric Field Emissions | PLCE | : Power Line Conducted Emissions |

1.6 Notes relating to the assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

| | |
|-------------|---------------|
| Temperature | : 20 to 22 °C |
| Humidity | : 45 to 75 % |

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:**Measurement Uncertainty****2.1 Measurement Uncertainty Values**

For the test data recorded in accordance with note (iii) of Section 2.1 the following measurement uncertainty was calculated:

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Power Meter) = **1.08dB**
Uncertainty in test result (Spectrum Analyser) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Power Meter) = **0.113ppm**
Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,
Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,
Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result – Up to 8.1GHz = **3.31dB**
Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**
Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**
Uncertainty in test result – Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**,
Uncertainty in time measurement = **0.59%**,
Uncertainty in Amplitude measurement = **0.82%**

[12] Power Line Conduction

Uncertainty in test result = **3.4dB**

[13] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[14] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[15] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[16] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[17] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[18] Receiver Threshold

Uncertainty in test result = **3.23dB**

[19] Transmission Time Measurement

Uncertainty in test result = **7.98%**

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

| | | | |
|------|---------------------------------|------|--------------------------------|
| Spec | : Specification | ALSR | : Absorber Lined Screened Room |
| Mod | : Modification | OATS | : Open Area Test Site |
| EUT | : Equipment Under Test | ATS | : Alternative Test Site |
| SE | : Support Equipment | Ref | : Reference |
| L | : Live Power Line | Freq | : Frequency |
| N | : Neutral Power Line | MD | : Measurement Distance |
| E | : Earth Power Line | SD | : Spec Distance |
| Pk | : Peak Detector | Pol | : Polarisation |
| QP | : Quasi-Peak Detector | H | : Horizontal Polarisation |
| Av | : Average Detector | V | : Vertical Polarisation |
| CDN | : Coupling & decoupling network | | |

A1 Transmitter Intentional Emission Radiated

| Test Details | |
|------------------------|--|
| Regulation | Part15 Subpart (c) 15.249 (a) / RSS-210 Issue 8 Annex 2 A2.9 |
| Measurement standard | ANSI C63.10:2003 |
| EUT sample number | S24 |
| Modification state | 0 |
| SE in test environment | None |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |
| Temperature | 25.9 |
| Photographs | Refer to Appendix F |

| FREQ. (MHz) | MEASUREMENT Rx. READING (dB μ V) | CABLE LOSS (dB) | ANT FACTOR (dB/m) | PRE AMP (dB) | FIELD STRENGTH (dB μ V/m) | FIELD STRENGTH (mV/m) |
|-------------|--------------------------------------|-----------------|-------------------|--------------|-------------------------------|-----------------------|
| 915.8 | 66.4 | 3.6 | 20.9 | N/A | 90.9 | 35.075 |
| 918.3 | 66.1 | 3.6 | 20.9 | N/A | 90.6 | 33.884 |
| 920.8 | 65.8 | 3.6 | 20.9 | N/A | 90.3 | 32.734 |
| Limit | | | 50mV/m @ 3m | | | |

- Notes:**
- 1 Results quoted are extrapolated as indicated
 - 2 Receiver detector @ fc = Quasi Peak / 120kHz bandwidth
 - 3 When battery powered the EUT was powered with new batteries

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.10
 - 2 Measuring distances 3m
 - 3 EUT 0.8 metre above ground plane
 - 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded

A2 Transmitter Bandwidth

| Test Details: | |
|------------------------|---|
| Regulation | Part 15.215 (c) / RSS-Gen Issue 3 Section 4.6.1 |
| Measurement standard | ANSI C63.10:2009 |
| EUT sample number | S26 |
| Modification state | 0 |
| SE in test environment | None |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |
| Temperature | 24°C |

| Band occupancy @ -20 dBc | | | |
|---------------------------------|----------------------|-----------------------|---------------------|
| FREQ. (MHz) | f lower (MHz) | f higher (MHz) | Occ BW (kHz) |
| 915.8 | 915.758 | 915.844 | 85.897 |
| 918.3 | 918.261 | 918.347 | 85.577 |
| 920.8 | 920.758 | 920.844 | 85.577 |

The 20dB Bandwidth of the carrier must be contained within the frequency band 902-928 MHz

| 99% Band occupancy | | | |
|---------------------------|----------------------|-----------------------|---------------------|
| FREQ. (MHz) | f lower (MHz) | f higher (MHz) | Occ BW (kHz) |
| 915.8 | 915.760 | 915.842 | 82.051 |
| 918.3 | 918.260 | 918.342 | 81.731 |
| 920.8 | 920.760 | 920.841 | 81.731 |

A3 Radiated Electric Field Emissions

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test applies to all spurious emissions and harmonics emissions. The maximum permitted field strength is listed in Part 15 Subpart (c) Clause 15.209 (a) / RSS-Gen Issue 3 Section 7.2.5. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : 3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

| Test Details | |
|------------------------|---|
| Regulation | Part 15 Subpart (c) Clause 15.249 (a)(d) / RSS-210 Issue 8 Annex 2 A2.9 |
| Measurement standard | ANSI C63.10:2003 |
| Frequency range | 30MHz-10GHz |
| EUT sample number | S24 |
| Modification state | 0 |
| SE in test environment | None |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |
| Temperature | 25.9 |

The worst case emissions are listed below:

Bottom Channel

| Ref No. | FREQ. (MHz) | MEAS Rx (dB μ V) | CABLE LOSS (dB) | ANT FACT. (dB/m) | PRE AMP (dB) | HPF Loss (dB) | Duty Cycle correction (dB) | Field ST'GH (dB μ V/m) | FIELD ST'GH (μ V/m) | LIMIT (μ V/m) |
|---------|-------------|----------------------|-----------------|------------------|--------------|---------------|----------------------------|----------------------------|--------------------------|--------------------|
| 1. | 1831.59 | 64.0 | 2.9 | 27.2 | 36.3 | - | - | 57.8 | 773.571pk | 5011pk |
| 2. | 1831.59 | 57.2 | 2.9 | 27.2 | 36.3 | - | - | 51.0 | 355.222av | 500av |
| 3. | 2747.37 | 41.8 | 3.1 | 29.1 | 36.0 | - | - | 38.0 | 79.3414av | 500av |
| 4. | 3663.25 | 48.6 | 3.1 | 31.6 | 35.7 | - | - | 47.6 | 239.607av | 500av |
| 5. | 4579.01 | 46.9 | 3.5 | 32.3 | 35.6 | - | - | 47.1 | 227.51av | 500av |
| 6. | 5494.89 | 54.1 | 3.9 | 33.9 | 35.7 | - | - | 56.2 | 648.634pk | 5011pk |
| 7. | 5494.89 | 50.4 | 3.9 | 33.9 | 35.7 | - | - | 52.5 | 420.243av | 500av |
| 8. | 7326.46 | 52.7 | 4.4 | 36.6 | 36.1 | - | - | 57.6 | 761.202pk | 5011pk |
| 9. | 7326.46 | 47.1 | 4.4 | 36.6 | 36.1 | - | - | 52.0 | 397.649av | 500av |
| 10. | 8242.22 | 50.1 | 4.6 | 36.8 | 36.4 | - | - | 55.1 | 570.821pk | 5011pk |
| | 8242.22 | 50.1 | 4.6 | 36.8 | 36.4 | - | - | 55.1 | 570.821pk | 5011pk |

Middle Channel

| Ref No. | FREQ. (MHz) | MEAS Rx (dB μ V) | CABLE LOSS (dB) | ANT FACT. (dB/m) | PRE AMP (dB) | HPF Loss (dB) | Duty Cycle correction (dB) | Field ST'GH (dB μ V/m) | FIELD ST'GH (μ V/m) | LIMIT (μ V/m) |
|---------|-------------|----------------------|-----------------|------------------|--------------|---------------|----------------------------|----------------------------|--------------------------|--------------------|
| 11. | 1836.60 | 54.1 | 3.0 | 27.2 | 36.3 | - | - | 48.0 | 250.9av | 500av |
| 12. | 2754.90 | 41.9 | 3.1 | 29.1 | 36.0 | - | - | 38.1 | 80.2602av | 500av |
| 13. | 3673.14 | 48.3 | 3.1 | 31.6 | 35.7 | - | - | 47.3 | 231.206av | 500av |
| 14. | 4591.52 | 45.8 | 3.5 | 32.3 | 35.6 | - | - | 46.0 | 199.986av | 500av |
| 15. | 5509.82 | 54.8 | 3.9 | 33.9 | 35.7 | - | - | 56.9 | 696.627pk | 5011pk |
| 16. | 5509.82 | 51.0 | 3.9 | 33.9 | 35.7 | - | - | 53.1 | 449.78av | 500av |
| 17. | 7346.56 | 53.0 | 4.4 | 36.6 | 36.1 | - | - | 57.9 | 785.236pk | 5011pk |
| 18. | 7346.56 | 47.7 | 4.4 | 36.6 | 36.1 | - | - | 52.6 | 426.089av | 500av |
| 19. | 8264.55 | 49.7 | 4.6 | 36.9 | 36.4 | - | - | 54.8 | 550.808pk | 5011pk |
| 20. | 1836.60 | 54.1 | 3.0 | 27.2 | 36.3 | - | - | 48.0 | 250.9av | 500av |

Top Channel

| Ref No. | FREQ. (MHz) | MEAS Rx (dB μ V) | CABLE LOSS (dB) | ANT FACT. (dB/m) | PRE AMP (dB) | HPF Loss (dB) | Duty Cycle correction (dB) | Field ST'GH (dB μ V/m) | FIELD ST'GH (μ V/m) | LIMIT (μ V/m) |
|---------|-------------|----------------------|-----------------|------------------|--------------|---------------|----------------------------|----------------------------|--------------------------|--------------------|
| 21. | 1841.66 | 54.5 | 2.9 | 27.2 | 36.3 | - | - | 48.3 | 261.216av | 500av |
| 22. | 2762.43 | 41.7 | 3.2 | 29.1 | 36.0 | - | - | 38.0 | 79.3414av | 500av |
| 23. | 3683.23 | 48.2 | 3.1 | 31.7 | 35.7 | - | - | 47.3 | 230.94av | 500av |
| 24. | 4603.95 | 46.0 | 3.6 | 32.3 | 35.6 | - | - | 46.3 | 205.353av | 500av |
| 25. | 5524.82 | 54.6 | 3.9 | 33.9 | 35.7 | - | - | 56.7 | 687.068pk | 5011pk |
| 26. | 5524.82 | 51.2 | 3.9 | 33.9 | 35.7 | - | - | 53.3 | 463.447av | 500av |
| 27. | 7366.36 | 52.4 | 4.4 | 36.7 | 36.2 | - | - | 57.3 | 728.618pk | 5011pk |
| 28. | 7366.36 | 47.2 | 4.4 | 36.7 | 36.2 | - | - | 52.1 | 402.717av | 500av |
| 29. | 8287.26 | 49.2 | 4.6 | 36.9 | 36.4 | - | - | 54.3 | 518.8pk | 5011pk |
| 30. | 8287.26 | 40.3 | 4.6 | 36.9 | 36.4 | - | - | 45.4 | 186.209av | 500av |

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak RBW=VBW= 1MHz
Average RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15:2010 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR part 15- Clause 15.209 / RSS-Gen Issue 3 Section 7.2.5 for all emissions except harmonics:

| Frequency of emission (MHz) | Field strength (□V/m) | Measurement Distance (m) | Field strength (dB □) |
|-----------------------------|-----------------------|--------------------------|-----------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 | 67.6/F (kHz) |
| 0.490-1.705 | 24000/F(kHz) | 30 | 87.6/F (kHz) |
| 1.705-30 | 30 | 30 | 29.5 |
| 30-88 | 100 | 3 | 40.0 |
| 88-216 | 150 | 3 | 43.5 |
| 216-960 | 200 | 3 | 46.0 |
| Above 960 | 500 | 3 | 54.0 |

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels:

| | See (i) | See (ii) | See (iii) | See (iv) |
|--|---------|----------|-----------|----------|
| Effect of EUT operating mode on emission levels | ✓ | | | |
| Effect of EUT internal configuration on emission levels | ✓ | | | |
| Effect of Position of EUT cables & samples on emission levels | ✓ | | | |
| (i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D | | | | |

A4 Unintentional Radiated Emissions

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test applies to all spurious emissions on directly related to the transmitter. The maximum permitted field strength is listed in Part 15 Subpart (c) Clause 15.109 / RSS-Gen Issue 3 Section 6.1. The EUT was set to operate in transmit standby / receive mode.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : 3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

| Test Details | |
|------------------------|--|
| Regulation | Part 15 Subpart (c) Clause 15.109 / RSS-Gen Issue 3 Section 4.10 |
| Measurement standard | ANSI C63.10:2003 |
| Frequency range | 30MHz – 10GHz |
| EUT sample number | S24 |
| Modification state | 0 |
| SE in test environment | None |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |
| Temperature | 22°C |

No emissions were detected within 20dB of the limit.

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW = 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak (pk) RBW=VBW= 1MHz
Average (Av) RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR Part 15: Clause 15.109 / RSS-Gen Issue 3 section 6.1 for all emissions:

| Frequency of emission (MHz) | Field strength (□V/m) | Measurement Distance (m) | Field strength (dB □) |
|-----------------------------|-----------------------|--------------------------|-----------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 | 67.6/F (kHz) |
| 0.490-1.705 | 24000/F(kHz) | 30 | 87.6/F (kHz) |
| 1.705-30 | 30 | 30 | 29.5 |
| 30-88 | 100 | 3 | 40.0 |
| 88-216 | 150 | 3 | 43.5 |
| 216-960 | 200 | 3 | 46.0 |
| Above 960 | 500 | 3 | 54.0 |

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

| | See (i) | See (ii) | See (iii) | See (iv) |
|--|---------|----------|-----------|----------|
| Effect of EUT operating mode on emission levels | ✓ | | | |
| Effect of EUT internal configuration on emission levels | ✓ | | | |
| Effect of Position of EUT cables & samples on emission levels | ✓ | | | |
| (i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D | | | | |


Appendix B:**Supporting Graphical Data**

This appendix contains graphical data obtained during testing.

Notes:


- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.

20dB Bandwidth

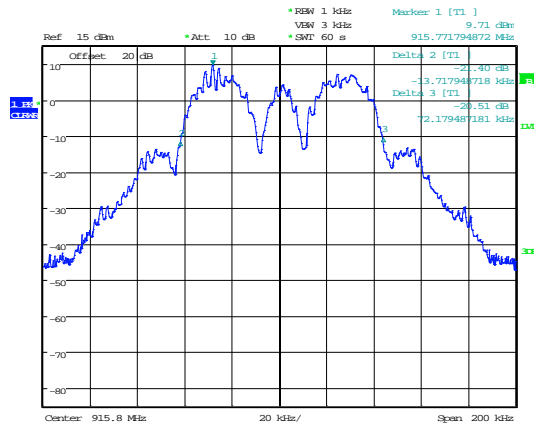


Date: 16.MAY.2014 15:11:52

20dB Bandwidth 915.8MHz

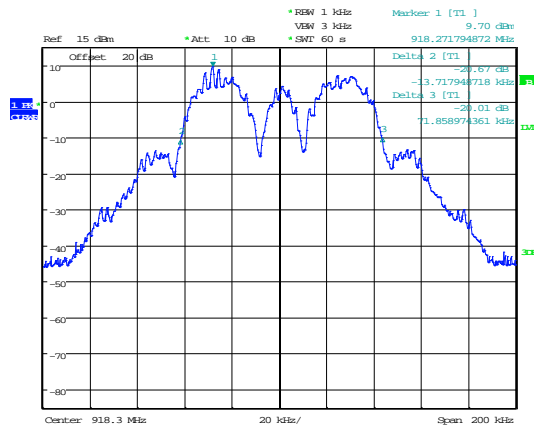

Date: 16.MAY.2014 15:14:05


20dB Bandwidth 918.3MHz

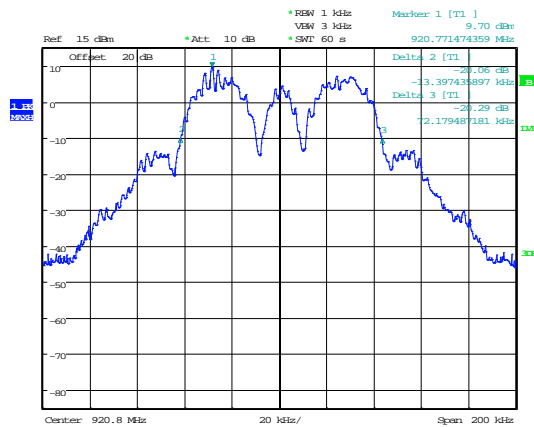

Date: 16.MAY.2014 15:16:29


20dB Bandwidth 920.8MHz

99% Bandwidth

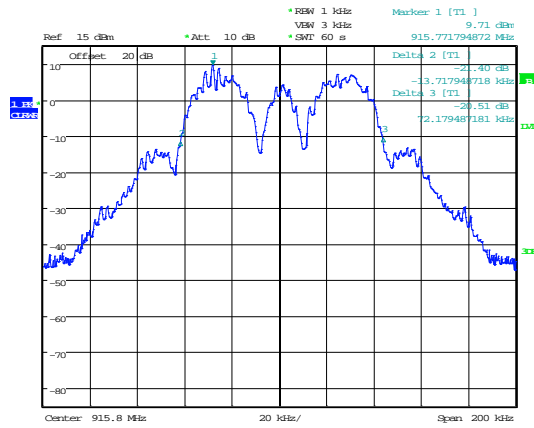


Date: 16.MAY.2014 15:11:52

99% Bandwidth 915.8MHz

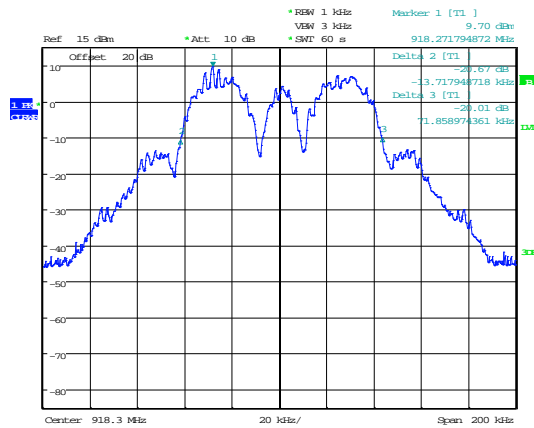

Date: 16.MAY.2014 15:14:05


99% Bandwidth 918.3MHz

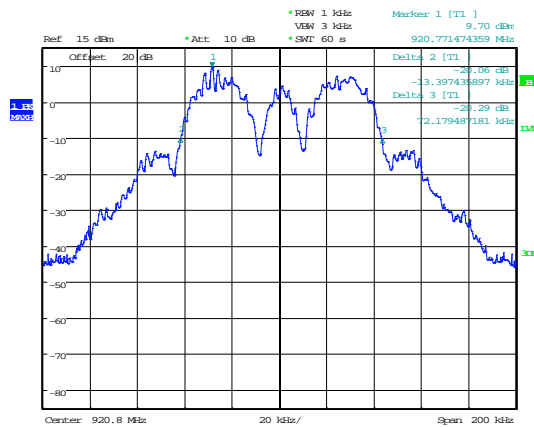


Date: 16.MAY.2014 15:16:29

99% Bandwidth 920.8MHz

Radiated Transmitter Emissions – 915.8MHz

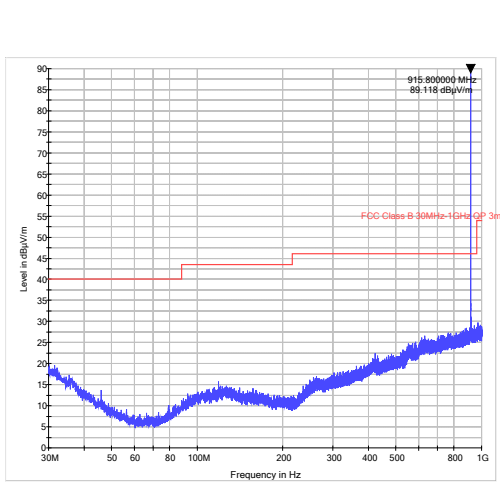


30MHz – 1GHz

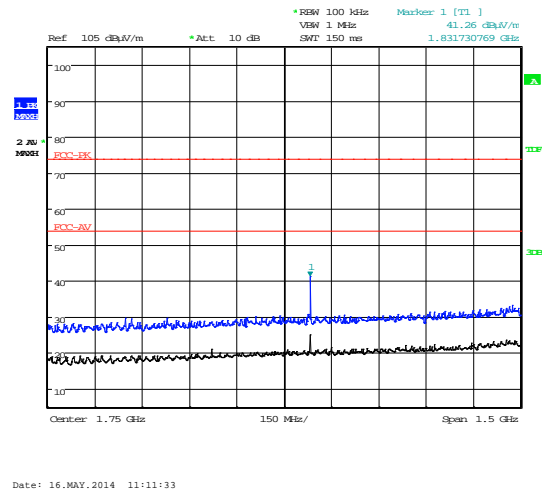


Date: 16.MAY.2014 11:11:33

1GHz – 2.5GHz

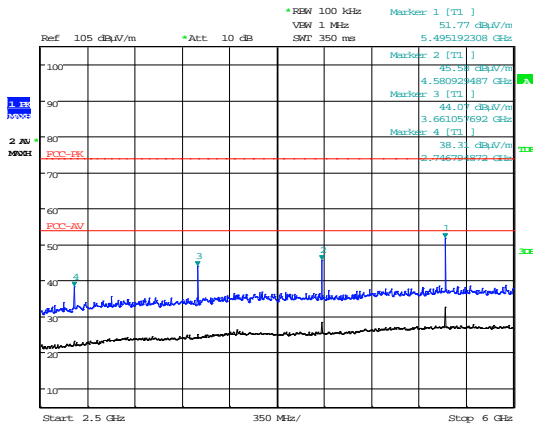

Date: 16.MAY.2014 10:40:05


2.5GHz – 6GHz

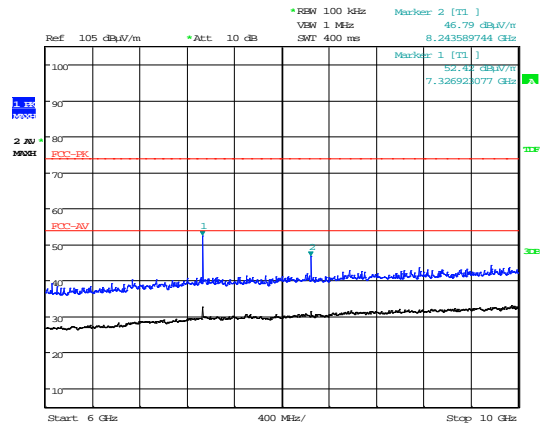


Date: 16.MAY.2014 10:45:24

6GHz – 10GHz

Radiated Transmitter Emissions – 918.3MHz

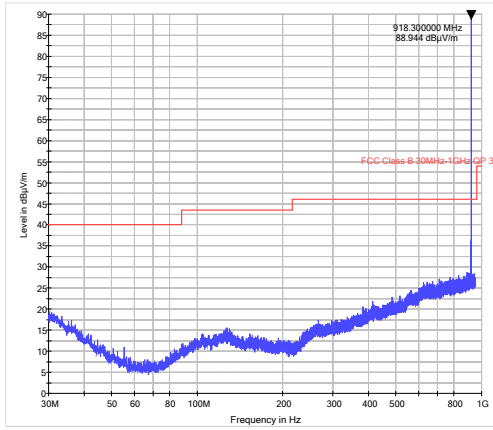


30MHz – 1GHz

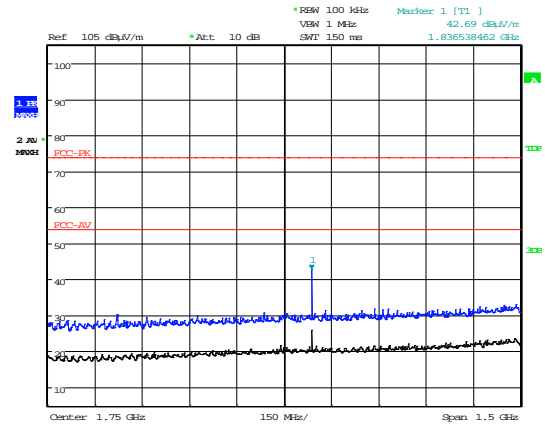


Date: 16.MAY.2014 11:14:11

1GHz – 2.5GHz

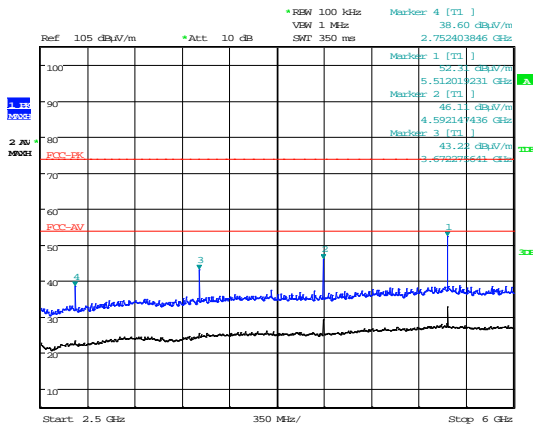

Date: 16.MAY.2014 10:52:56


2.5GHz – 6GHz

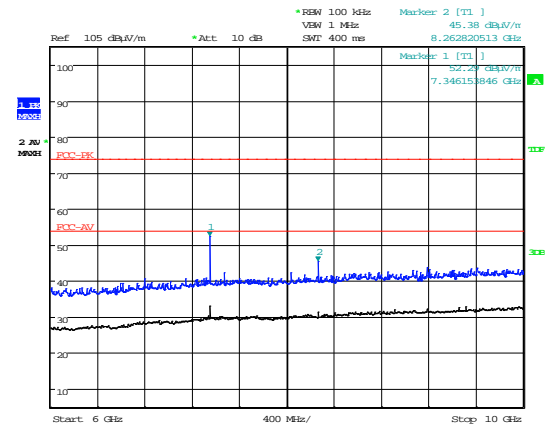


Date: 16.MAY.2014 10:55:42

6GHz – 10GHz

Radiated Transmitter Emissions – 920.8MHz

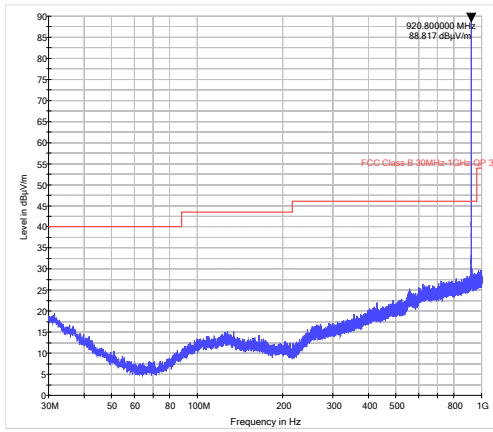


30MHz – 1GHz

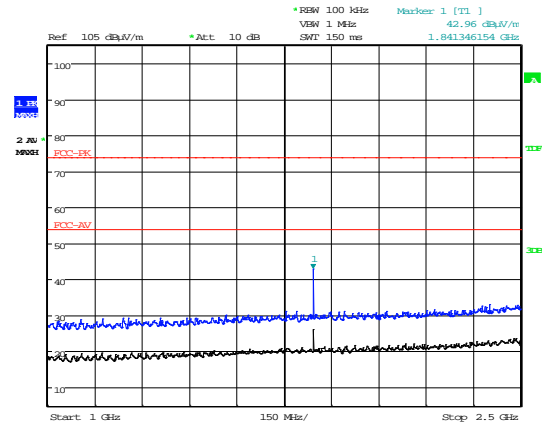


Date: 16.MAY.2014 11:10:25

1GHz – 2.5GHz

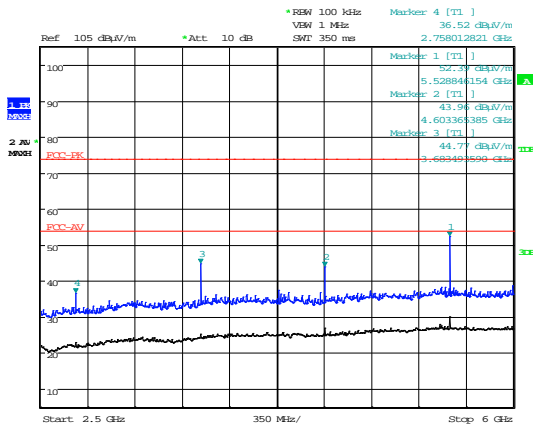

Date: 16.MAY.2014 10:59:21


2.5GHz – 6GHz

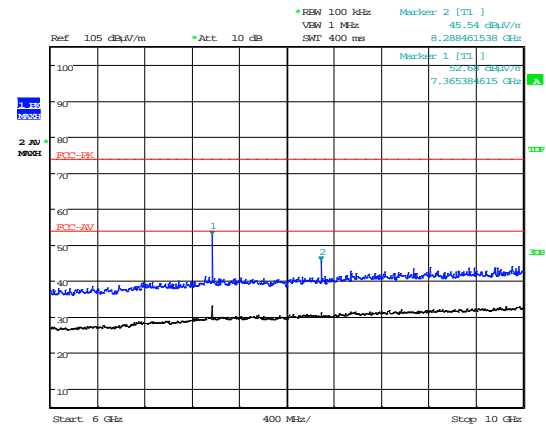


Date: 16.MAY.2014 10:56:57

6GHz – 10GHz

Unintentional Radiated Emissions – 915.8MHz

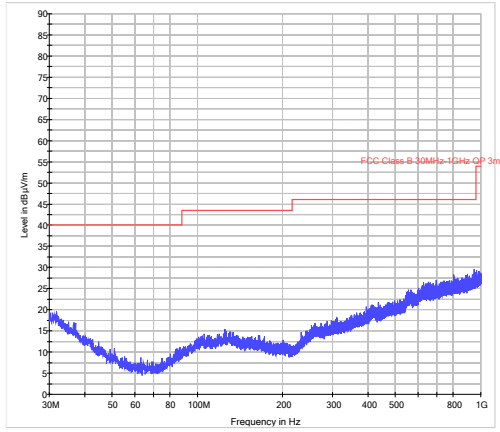


30MHz – 1GHz

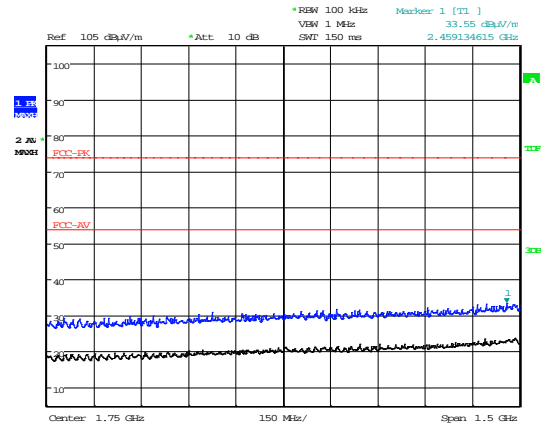


Date: 16.MAY.2014 11:16:25

1GHz – 2.5GHz

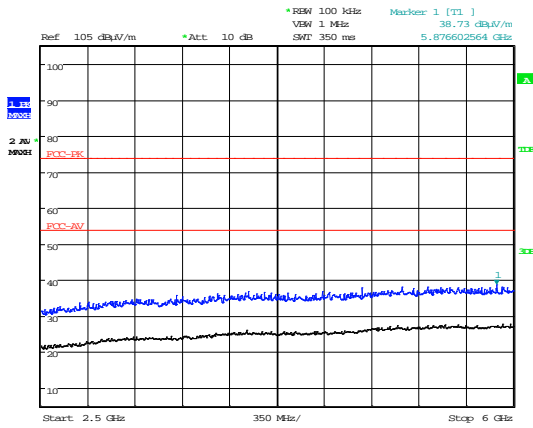

Date: 16.MAY.2014 11:17:17


2.5GHz – 6GHz

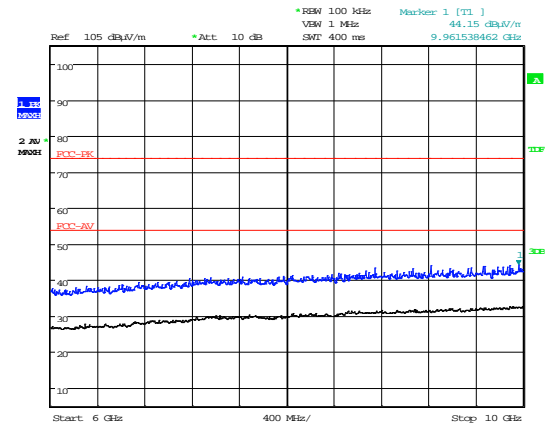


Date: 16.MAY.2014 11:17:53

6GHz – 10GHz

Unintentional Radiated Emissions – 918.3MHz

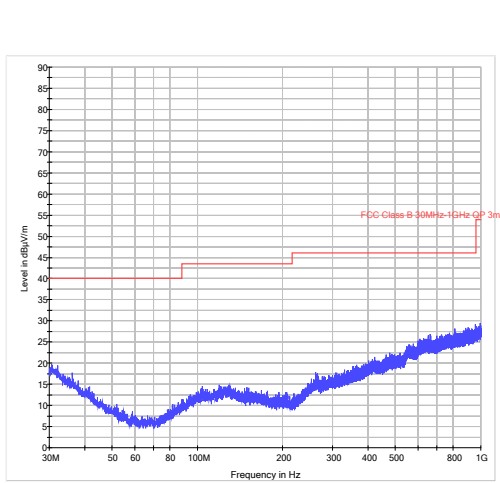


30MHz – 1GHz

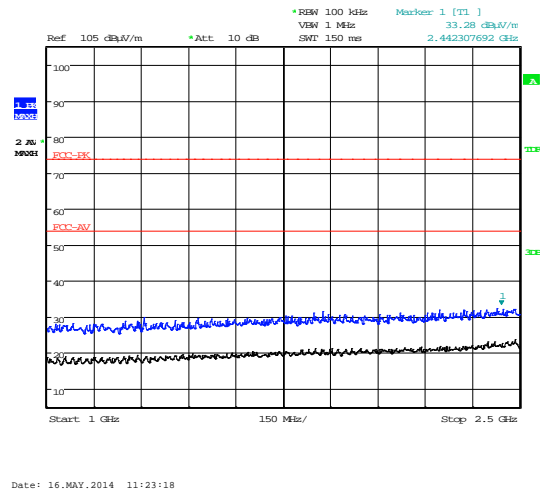


1GHz – 2.5GHz

Date: 16.MAY.2014 11:23:18

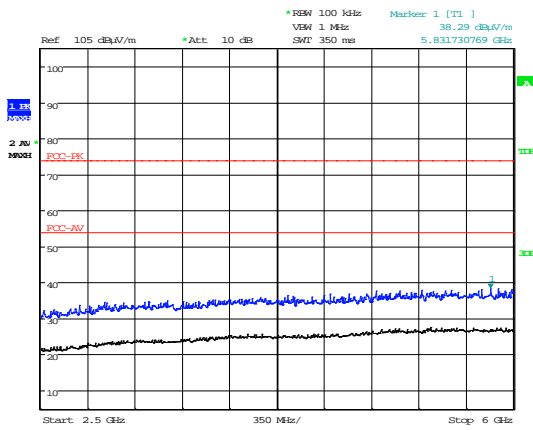

2.5GHz – 6GHz


Date: 16.MAY.2014 11:22:56

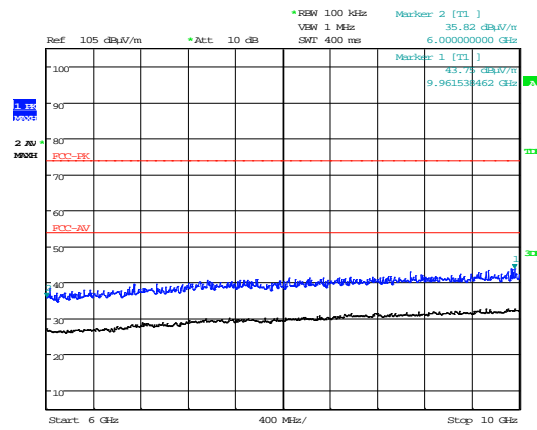


6GHz – 10GHz

Date: 16.MAY.2014 11:22:30


Unintentional Radiated Emissions – 920.8MHz

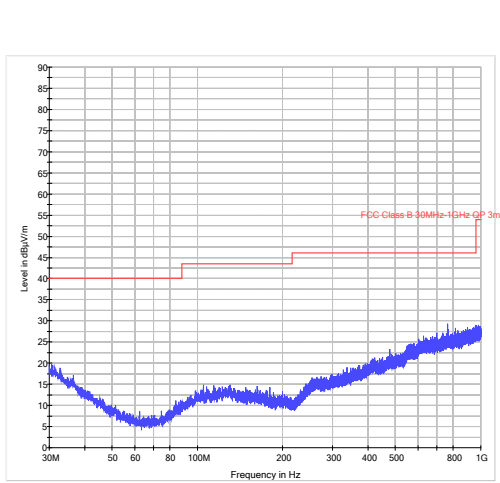


30MHz – 1GHz

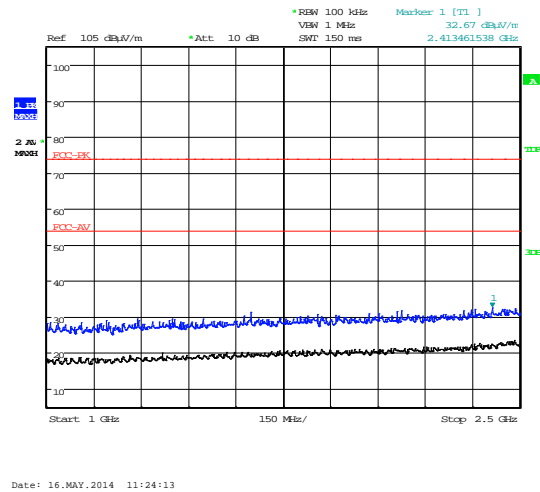

1GHz – 2.5GHz

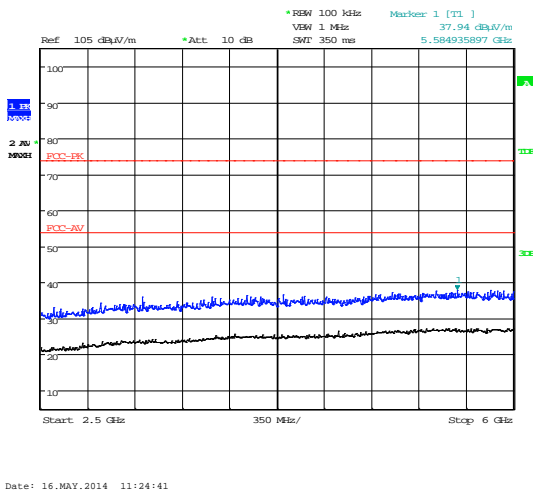

2.5GHz – 6GHz

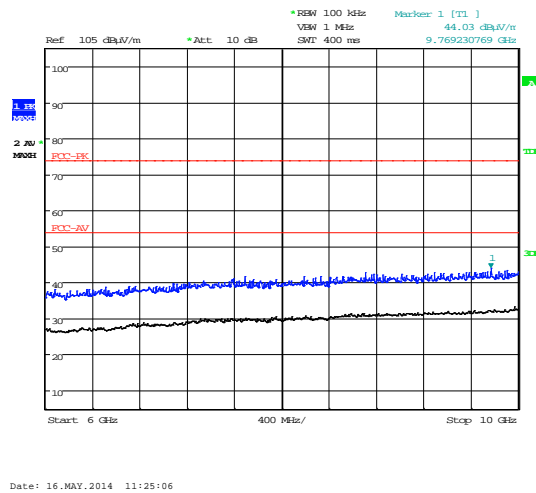

6GHz – 10GHz

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and its modification state:

Sample No: Sxx Mod w

where:

| | | |
|----|-----------------------|-----------|
| xx | = sample number | eg. S01 |
| w | = modification number | eg. Mod 2 |

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as “single possible configuration”.

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document “EMC Test Methods – An Overview”, which can be supplied by TraC Global upon request.

C1 Test samples

The following samples of the apparatus were submitted by the client for testing:

| Sample No. | Description | Identification |
|------------|--------------------------------|----------------|
| S24 | Buddi Click System - Wristband | BWB-00000093 |
| S26 | Buddi Click System - Wristband | BWB-00000134 |

C2 EUT operating mode during testing

During testing, the EUT was exercised as described in the following tables:

| Test | Description of Operating Mode: Transmit |
|---|---|
| All tests detailed in this report except receiver radiated spurious emissions | EUT actively transmitting |

| Test | Description of Operating Mode: Recieve |
|--------------------------------------|--|
| Receiver radiated spurious emissions | EUT in receive mode |

C3 EUT Configuration Information

The EUT was submitted for testing in one single possible configuration.

C4 List of EUT Ports

The tables below describe the termination of EUT ports:

Sample : S24
Tests : Radiated Emissions

| Port | Description of Cable Attached | Cable length | Equipment Connected |
|--|-------------------------------|--------------|---------------------|
| EUT is a battery powered device with no external ports | | | |

C5 Details of Equipment Used

| RFG No | Type | Description | Manufacturer | Date Calibrated. |
|--------|----------|-------------------|--------------|------------------|
| UH191 | CBL611/A | Bilog | Chase | 13/12/2012 |
| UH387 | ATS | Chamber 1 | Rainford EMC | 04/07/2013 |
| UH403 | ESCI 7 | Recevier | R&S | 12/08/2013 |
| REF909 | FSU26 | Spectrum Analyser | R&S | 12/02/2014 |
| UH281 | FSU46 | Spectrum Analyser | R&S | 26/02/2014 |

Appendix D:

Additional Information

Appendix E:

Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement (Front view)
2. Radiated electric field emissions arrangement (Close up)

Photograph 1



Photograph 2



Appendix F:**MPE Calculation**

OET Bulletin No. 65, Supplement C 01-01

47 CFR §§1.1307, 2.1091 and RSS-102

Radio frequency radiation exposure evaluation: mobile devices.

For purposes of these requirements mobile devices are defined by the FCC and Industry Canada as transmitters designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between radiating structures and the body of the user or nearby persons. These devices are normally evaluated for exposure potential with relation to the MPE limits. As the 20cm separation specified under FCC and Industry Canada rules may not be achievable under normal operation of the EUT, an RF exposure calculation is needed to show the minimum distance required to be less than $0.6\text{mW}/\text{cm}^2$ ($60\text{W}/\text{m}^2$ for Industry Canada) power density limit, as required under FCC and IC rules

Prediction of MPE limit at a given distance

Equation from page 20 of OET Bulletin 65, Edition 97-01

$$S = \frac{1.64ERP}{4\pi R^2} \text{ re - arranged } R = \sqrt{\frac{1.64ERP}{S4\pi}}$$

where:

S = power density

R = distance to the centre of radiation of the antenna

ERP = EUT Maximum power

Result

| Prediction Frequency (MHz) | Maximum ERP (mW) | Power density limit (S) (mW/cm^2) | Distance (R) cm required to be less than $0.6\text{mW}/\text{cm}^2$ |
|----------------------------|------------------|---|---|
| 915.8 | 0.22 | 0.61 | 0.22 |

