

# Radio Test Report

Report No.: STS2403302W08

Issued for

Buddi Limited

Talbot House 17 Church Street Rickmansworth, WD3 1DE  
United Kingdom

Product Name: Smart Tag 5

Brand Name: buddi

Model Name: S1-BUD-1-TENX-B-TEEU-CX

Series Model(s): 3430017

FCC ID: ZDLST11

Test Standards: 47 CFR Part 2, 22, 24, 27

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.



TEST REPORT

**Applicant's Name** .....: Buddi Limited  
 Address .....: Talbot House 17 Church Street Rickmansworth, WD3 1DE  
 United Kingdom  
**Manufacturer's Name** .....: Buddi Limited  
 Address .....: Talbot House 17 Church Street Rickmansworth, WD3 1DE  
 United Kingdom

**Product Description**

Product Name .....: Smart Tag 5  
 Brand Name .....: buddi  
 Model Name .....: S1-BUD-1-TENX-B-TEEU-CX  
 Series Model(s) .....: 3430017

**Test Standards**.....: 47 CFR Part 2, 22, 24, 27  
 Test Procedure .....: KDB 971168 D01 v03r01,ANSI C63.26( 2015)

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.  
 The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**Date of Test**.....:  
 Date of receipt of test item.....: 05 Mar. 2024  
 Date (s) of performance of tests.: 05 Mar. 2024 ~ 14 Mar. 2024  
 Date of Issue .....: 14 Mar. 2024  
 Test Result .....: Pass

Testing Engineer : Lenon Hou  
 (Lenon Hou)

Technical Manager : Chris Chen  
 (Chris Chen)

Authorized Signatory : Bovey Yang  
 (Bovey Yang)





<b>Table of Contents</b>	<b>Page</b>
<b>1 INTRODUCTION</b>	<b>7</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2 PRODUCT INFORMATION</b>	<b>8</b>
<b>3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b>	<b>11</b>
<b>4 MEASUREMENT INSTRUMENTS</b>	<b>13</b>
<b>5 TEST ITEMS</b>	<b>14</b>
5.1 CONDUCTED OUTPUT POWER&TRANSMITTER RADIATED POWER	14
5.2 PEAK TO AVERAGE RATIO	33
5.3 OCCUPIED BANDWIDTH	34
5.4 FREQUENCY STABILITY	35
5.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	42
5.6 BAND EDGE	43
5.7 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	45
<b>APPENDIX-PHOTOS OF TEST SETUP</b>	<b>71</b>



**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	14 Mar. 2024	STS2403302W08	ALL	Initial Issue



SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of KDB 971168 D01 v03r01 and ANSI C63.26( 2015)

Test Description	FCC Rules	Band	Test Limit	Test Result
Conducted Output Power	2.1046	/	Reporting Only	PASS
Transmitter Radiated Power	22.913	B5	ERP < 7 Watt	PASS
	24.232(c)	B2, B25	EIRP < 2Watt	
	27.50(c)	B12	ERP < 3 Watt	
Peak-to-Average Ratio	22.913(d)	B5	< 13 dB	PASS
	24.232(d)	B2		
	27.50	B12		
Occupied Bandwidth	2.1049	/	Reporting Only	PASS
Frequency Stability	2.1055	/	< 2.5 ppm	PASS
	22.355	B5		
	24.235	B2		
	27.54	B12		
Spurious Emission at Antenna Terminals	2.1051	/	< 43+10log10(P[Watts])	PASS
	22.917	B5		
	24.238(a)	B2		
	27.53(g)	B12		
Band Edge	2.1051	/	Please refer to standard	PASS
	22.917	B5		
	24.238(a)	B2		
	27.53(g)	B12		
Field Strength of	2.1053	/	< 43+10log10(P[Watts])	PASS



Spurious Radiation	22.917	B5		
	24.238(a)	B2		
	27.53(g)	B12		



## 1 INTRODUCTION

### 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

### 1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
6	All emissions, radiated >6G	$\pm 5.24\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.5\%$
10	Power Spectral Density, conducted	$\pm 1.245\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



## 2 PRODUCT INFORMATION

Product Name	Smart Tag 5
Brand Name	buddi
Model Name	S1-BUD-1-TENX-B-TEEU-CX
Series Model(s)	3430017
Model Difference	The difference only in the model name.
Tx Frequency:	GSM850: 824-849 MHz GSM1900: 1850-1910 MHz WCDMA B2: 1850-1910 MHz WCDMA B5: 824-849 MHz LTE Band 2:1850~1910MHz LTE Band 5:824~849MHz LTE Band 12:699~716MHz
Rx Frequency:	GSM850: 824-849 MHz GSM1900: 1850-1910 MHz WCDMA B2: 1930-1990 MHz WCDMA B5: 869-894 MHz LTE Band 2:1930 ~1990MHz LTE Band 5:869~894MHz LTE Band 12:729~746MHz
Max RF Output Power:	GSM850:30.88dBm GSM1900: 29.92dBm WCDMA B2:22.83 dBm WCDMA B5: 22.07dBm LTE Band 2: 23.89dBm LTE Band 5: 22.49dBm LTE Band 12: 20.14dBm
Modulation Characteristics:	GMSK for GPRS; GMSK and 8PSK for EDGE WCDMA: QPSK; HSDPA:QPSK/16QAM; HSUPA:BPSK LTE: QPSK /16QAM
SIM Card:	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested
Antenna:	SMD
Antenna gain:	GSM850: -1.3dBi; GSM1900:0.3dBi WCDMA B2: 0.3dBi, WCDMA B5:-1.3dBi LTE BAND 2:0.3dBi; LTE BAND 5:-1.3dBi; LTE BAND 12: -1.3dBi;
Adapter	Model: On Body Charger Dock Input: AC 100-240V 47-63Hz 0.4A Output: DC 5.99V 2000mA Model: On Body Charger V4 Input: DC 5.99V, 2000mA Output: DC 5V, 800mA
Battery	Model: HCP623536TNFC-1S2P Rated Voltage: 3.7V Charge Limit Voltage: 4.2V Capacity:1800mAh





Rating	Input: DC 5V, 800mA
GPRS/EDGE Class:	Multi-Class12
Extreme Vol. Limits:	DC 3.33V~ DC 4.07V(Normal: DC 3.7V)
Extreme Temp. Tolerance:	-30°C to +50°C
Hardware version number:	V15.10
Software version number:	1.41.6
<p><i>** Note: The High Voltage 4.07V and Low Voltage 3.33V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage, the antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.</i></p>	



2.1 EMISSION DESIGNATOR

Mode	Emission Designator (99%OBW)	
GPRS850	250KGXW	
EGPRS850	250KG7W	
GPRS1900	249KGXW	
EGPRS1900	249KG7W	
Mode	Emission Designator (99%OBW)	
WCDMA Band2	4M14F9W	
HSDPA Band2	4M14F9W	
HSUPA Band2	4M14F9W	
WCDMA Band5	4M13F9W	
HSDPA Band5	4M15F9W	
HSUPA Band5	4M16F9W	
LTE Band 2	Emission Designator	Emission Designator
BW(MHz)	(99%OBW)QPSK	(99%OBW)16QAM
1.4	1M10G7D	1M10W7D
3	2M71G7D	2M72W7D
5	4M54G7D	4M52W7D
10	8M99G7D	\
15	13M5G7D	\
20	18M0G7D	\
LTE Band 5	Emission Designator	Emission Designator
BW(MHz)	(99%OBW)QPSK	(99%OBW)16QAM
1.4	1M10G7D	1M10W7D
3	2M71G7D	2M71W7D
5	4M51G7D	4M52W7D
10	8M99G7D	\
LTE Band 12	Emission Designator	Emission Designator
BW(MHz)	(99%OBW)QPSK	(99%OBW)16QAM
1.4	1M10G7D	1M10W7D
3	2M72G7D	2M71W7D
5	4M52G7D	4M53W7D
10	8M98G7D	\



### 3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 and ANSI C63.26 2015 Power Meas. License Digital Systems with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV.
3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

BAND	TEST MODES	
	RADIATED TCS	CONDUCTED TCS
GSM 850	GSM LINK 12 LINK	GSM LINK 12 LINK
GSM 1900	GSM LINK 12 LINK	GSM LINK 12 LINK
WCDMA BAND V	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
WCDMA BAND II	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK



LTE:

ITEMS	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v			v	v	v	v	v	v	v	v
	12	v	v	v	v			v	v	v	v	v	v	v	v
Peak&Avera Ratio	2	v	v	v	v	v	v	v	v	v			v	v	v
	5	v	v	v	v			v	v	v			v	v	v
	12	v	v	v	v			v	v	v			v	v	v
26dB&99% Bandwidth	2	v	v	v	v	v	v	v	v			v	v	v	v
	5	v	v	v	v			v	v			v	v	v	v
	12	v	v	v	v			v	v			v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v			v	v		v
	5	v	v	v	v			v	v			v	v		v
	12	v	v	v	v			v	v			v	v		v
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v		v	v	v	v
	5	v	v	v	v			v	v	v		v	v	v	v
	12	v	v	v	v			v	v	v		v	v	v	v
Frequency Stability	2				v			v				v		v	
	5				v			v				v		v	
	12				v			v				v		v	
E.R.P.& E.I.R.P.	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v			v	v	v	v	v	v	v	v
	12	v	v	v	v			v	v	v	v	v	v	v	v
Radiated Spurious Emission	2	v	v	v	v	v	v	v		v			v	v	v
	5	v	v	v	v			v		v			v	v	v
	12	v	v	v	v			v		v			v	v	v



## 4 MEASUREMENT INSTRUMENTS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2024.02.23	2025.02.22
Wireless Communications Test Set	R&S	CMW 500	117239	2023.09.26	2024.09.25
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2024.02.23	2025.02.22
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2023.09.28	2024.09.27
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2023.09.26	2024.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Video Controller	SKET	FCS C-3	N/A	N/A	N/A
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	N/A	N/A	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC Power Supply	Zhaoxin	RXN 605D	20R605D11010081	N/A	N/A
Test SW	EMC Test Software	15.2.0.339			
	EZ-EMC	Ver.STSLAB-03A1 RE			
RF Connected Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2024.02.23	2025.02.22
Wireless Communications Test Set	R&S	CMW 500	131428	2024.02.23	2025.02.22
Signal Analyzer	Agilent	N9020A	MY52440124	2024.02.23	2025.02.22
RF Automatic Test System	Maiwei	MW200-SFCB	N/A	N/A	N/A
Temperature & Humidity Test Chamber	Safety test	AG80L	171200018	2024.02.23	2025.02.22
Programmable Power Supply	Agilent	E3642A	MY40002025	2023.09.26	2024.09.25
Test SW	MTS 8200	2.0.0.0			

## 5 TEST ITEMS

### 5.1 CONDUCTED OUTPUT POWER&TRANSMITTER RADIATED POWER

#### TEST OVERVIEW

##### CONDUCTED OUTPUT POWER:

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

##### TRANSMITTER RADIATED POWER (EIRP/ERP)

Determining ERP and/or EIRP from conducted RF output power measurements according to ANSI C63.26 2015 Section 5.2.5.5.

In many cases, RF output power limits are specified in terms of the ERP or the EIRP. Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are defined as the product of the power supplied to the antenna and its gain (relative to a dipole antenna in the case of ERP, and relative to an isotropic antenna in the case of EIRP); however, when working in decibels (i.e., logarithmic scale), the ERP and EIRP represent the sum of the transmit antenna gain (in dBd or dBi, respectively) and the conducted RF output power (expressed in dB relative to watts or milliwatts).

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$(1) \text{ ERP or EIRP} = \text{PMeas} + \text{GT}$$
$$\text{ERP} = \text{EIRP} - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as PMeas, e.g., dBm or dBW)

PMeas measured transmitter output power or PSD, in dBm or dBW

GT gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

For devices utilizing multiple antennas, see 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.


The following equations demonstrate the mathematical relationship between ERP and EIRP:

- ERP = EIRP - 2.15, where ERP and EIRP are expressed in consistent units.
- EIRP = ERP + 2.15, where ERP and EIRP are expressed in consistent units.

#### TEST PROCEDURES

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

#### TEST SETUP



TEST RESULT

GSM 850							
Mode	Frequency (MHz)	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit (W)	ERP Limit (dBm)	Conclusion
GPRS (GMSK,1-Slot)	824.2	30.88	-1.30	27.43	7.00	38.45	PASS
	836.6	30.56	-1.30	27.11	7.00	38.45	PASS
	848.8	30.86	-1.30	27.41	7.00	38.45	PASS
GPRS (GMSK,2-Slot)	824.2	30.77	-1.30	27.32	7.00	38.45	PASS
	836.6	30.32	-1.30	26.87	7.00	38.45	PASS
	848.8	30.66	-1.30	27.21	7.00	38.45	PASS
GPRS (GMSK,3-Slot)	824.2	29.28	-1.30	25.83	7.00	38.45	PASS
	836.6	29.68	-1.30	26.23	7.00	38.45	PASS
	848.8	30.17	-1.30	26.72	7.00	38.45	PASS
GPRS (GMSK,4-Slot)	824.2	27.67	-1.30	24.22	7.00	38.45	PASS
	836.6	27.65	-1.30	24.20	7.00	38.45	PASS
	848.8	28.37	-1.30	24.92	7.00	38.45	PASS
EGPRS (8PSK,1-Slot)	824.2	24.58	-1.30	21.13	7.00	38.45	PASS
	836.6	25.04	-1.30	21.59	7.00	38.45	PASS
	848.8	26.06	-1.30	22.61	7.00	38.45	PASS
EGPRS (8PSK,2-Slot)	824.2	24.35	-1.30	20.90	7.00	38.45	PASS
	836.6	25.08	-1.30	21.63	7.00	38.45	PASS
	848.8	25.59	-1.30	22.14	7.00	38.45	PASS
EGPRS (8PSK,3-Slot)	824.2	23.24	-1.30	19.79	7.00	38.45	PASS
	836.6	23.97	-1.30	20.52	7.00	38.45	PASS
	848.8	24.79	-1.30	21.34	7.00	38.45	PASS
EGPRS (8PSK,4-Slot)	824.2	21.63	-1.30	18.18	7.00	38.45	PASS
	836.6	22.11	-1.30	18.66	7.00	38.45	PASS
	848.8	22.84	-1.30	19.39	7.00	38.45	PASS



PCS 1900							
Mode	Frequency (MHz)	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit (W)	EIRP Limit (dBm)	Conclusion
GPRS (GMSK,1-Slot)	1850.2	29.87	0.30	30.17	2.00	33.01	PASS
	1880.0	29.92	0.30	30.22	2.00	33.01	PASS
	1909.8	29.88	0.30	30.18	2.00	33.01	PASS
GPRS (GMSK,2-Slot)	1850.2	29.70	0.30	30.00	2.00	33.01	PASS
	1880.0	29.77	0.30	30.07	2.00	33.01	PASS
	1909.8	29.76	0.30	30.06	2.00	33.01	PASS
GPRS (GMSK,3-Slot)	1850.2	29.48	0.30	29.78	2.00	33.01	PASS
	1880.0	29.52	0.30	29.82	2.00	33.01	PASS
	1909.8	29.32	0.30	29.62	2.00	33.01	PASS
GPRS (GMSK,4-Slot)	1850.2	28.33	0.30	28.63	2.00	33.01	PASS
	1880.0	28.50	0.30	28.80	2.00	33.01	PASS
	1909.8	28.40	0.30	28.70	2.00	33.01	PASS
EGPRS (8PSK,1-Slot)	1850.2	26.56	0.30	26.86	2.00	33.01	PASS
	1880.0	26.15	0.30	26.45	2.00	33.01	PASS
	1909.8	27.12	0.30	27.42	2.00	33.01	PASS
EGPRS (8PSK,2-Slot)	1850.2	26.25	0.30	26.55	2.00	33.01	PASS
	1880.0	26.66	0.30	26.96	2.00	33.01	PASS
	1909.8	26.74	0.30	27.04	2.00	33.01	PASS
EGPRS (8PSK,3-Slot)	1850.2	25.16	0.30	25.46	2.00	33.01	PASS
	1880.0	24.46	0.30	24.76	2.00	33.01	PASS
	1909.8	23.71	0.30	24.01	2.00	33.01	PASS
EGPRS (8PSK,4-Slot)	1850.2	22.48	0.30	22.78	2.00	33.01	PASS
	1880.0	22.42	0.30	22.72	2.00	33.01	PASS
	1909.8	22.45	0.30	22.75	2.00	33.01	PASS





Radiated Power (EIRP) for WCDMA Band 2							
Mode	Frequency (MHz)	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit (dBm)	Conclusion
WCDMA	1852.40	22.66	0.30	22.96	2.00	33.01	PASS
	1880.00	22.63	0.30	22.93	2.00	33.01	PASS
	1907.60	22.83	0.30	23.13	2.00	33.01	PASS
HSDPA Subtest 1	1852.40	21.50	0.30	21.80	2.00	33.01	PASS
	1880.00	21.16	0.30	21.46	2.00	33.01	PASS
	1907.60	20.31	0.30	20.61	2.00	33.01	PASS
HSDPA Subtest 2	1852.40	20.26	0.30	20.56	2.00	33.01	PASS
	1880.00	21.25	0.30	21.55	2.00	33.01	PASS
	1907.60	21.09	0.30	21.39	2.00	33.01	PASS
HSDPA Subtest 3	1852.40	19.90	0.30	20.20	2.00	33.01	PASS
	1880.00	19.83	0.30	20.13	2.00	33.01	PASS
	1907.60	21.49	0.30	21.79	2.00	33.01	PASS
HSDPA Subtest 4	1852.40	21.08	0.30	21.38	2.00	33.01	PASS
	1880.00	20.42	0.30	20.72	2.00	33.01	PASS
	1907.60	20.54	0.30	20.84	2.00	33.01	PASS
HSUPA Subtest 1	1852.40	20.59	0.30	20.89	2.00	33.01	PASS
	1880.00	21.53	0.30	21.83	2.00	33.01	PASS
	1907.60	20.75	0.30	21.05	2.00	33.01	PASS
HSUPA Subtest 2	1852.40	21.63	0.30	21.93	2.00	33.01	PASS
	1880.00	20.80	0.30	21.10	2.00	33.01	PASS
	1907.60	20.60	0.30	20.90	2.00	33.01	PASS
HSUPA Subtest 3	1852.40	21.33	0.30	21.63	2.00	33.01	PASS
	1880.00	20.97	0.30	21.27	2.00	33.01	PASS
	1907.60	21.34	0.30	21.64	2.00	33.01	PASS
HSUPA Subtest 4	1852.40	20.69	0.30	20.99	2.00	33.01	PASS
	1880.00	20.61	0.30	20.91	2.00	33.01	PASS
	1907.60	21.31	0.30	21.61	2.00	33.01	PASS
HSUPA Subtest 5	1852.40	20.78	0.30	21.08	2.00	33.01	PASS
	1880.00	21.48	0.30	21.78	2.00	33.01	PASS
	1907.60	20.74	0.30	21.04	2.00	33.01	PASS



Radiated Power (ERP) for WCDMA Band 5							
Mode	Frequency (MHz)	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit(W)	ERP Limit (dBm)	Conclusion
WCDMA	826.40	21.75	-1.30	18.30	7.00	38.45	PASS
	836.40	21.94	-1.30	18.49	7.00	38.45	PASS
	846.60	22.07	-1.30	18.62	7.00	38.45	PASS
HSDPA Subtest 1	826.40	20.61	-1.30	17.16	7.00	38.45	PASS
	836.40	20.29	-1.30	16.84	7.00	38.45	PASS
	846.60	19.04	-1.30	15.59	7.00	38.45	PASS
HSDPA Subtest 2	826.40	19.41	-1.30	15.96	7.00	38.45	PASS
	836.40	20.70	-1.30	17.25	7.00	38.45	PASS
	846.60	20.55	-1.30	17.10	7.00	38.45	PASS
HSDPA Subtest 3	826.40	19.39	-1.30	15.94	7.00	38.45	PASS
	836.40	19.50	-1.30	16.05	7.00	38.45	PASS
	846.60	21.04	-1.30	17.59	7.00	38.45	PASS
HSDPA Subtest 4	826.40	20.74	-1.30	17.29	7.00	38.45	PASS
	836.40	19.76	-1.30	16.31	7.00	38.45	PASS
	846.60	19.74	-1.30	16.29	7.00	38.45	PASS
HSUPA Subtest 1	826.40	19.70	-1.30	16.25	7.00	38.45	PASS
	836.40	20.40	-1.30	16.95	7.00	38.45	PASS
	846.60	19.99	-1.30	16.54	7.00	38.45	PASS
HSUPA Subtest 2	826.40	20.65	-1.30	17.20	7.00	38.45	PASS
	836.40	19.93	-1.30	16.48	7.00	38.45	PASS
	846.60	19.88	-1.30	16.43	7.00	38.45	PASS
HSUPA Subtest 3	826.40	20.57	-1.30	17.12	7.00	38.45	PASS
	836.40	20.13	-1.30	16.68	7.00	38.45	PASS
	846.60	20.74	-1.30	17.29	7.00	38.45	PASS
HSUPA Subtest 4	826.40	19.97	-1.30	16.52	7.00	38.45	PASS
	836.40	20.09	-1.30	16.64	7.00	38.45	PASS
	846.60	20.87	-1.30	17.42	7.00	38.45	PASS
HSUPA Subtest 5	826.40	20.27	-1.30	16.82	7.00	38.45	PASS
	836.40	21.01	-1.30	17.56	7.00	38.45	PASS
	846.60	20.15	-1.30	16.70	7.00	38.45	PASS



Radiated Power (EIRP) for LTE Band 2 /1.4M										
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Verdict
1.4	Lowest	1	0	QPSK	22.75	0.3	23.05	2.00	33.01	PASS
		1	2		22.83	0.3	23.13	2.00	33.01	PASS
		1	5		22.69	0.3	22.99	2.00	33.01	PASS
		3	0		22.96	0.3	23.26	2.00	33.01	PASS
		3	1		22.9	0.3	23.20	2.00	33.01	PASS
		3	2		22.71	0.3	23.01	2.00	33.01	PASS
		6	0	21.85	0.3	22.15	2.00	33.01	PASS	
		1	0	16QAM	21.52	0.3	21.82	2.00	33.01	PASS
		1	2		21.44	0.3	21.74	2.00	33.01	PASS
		1	5		21.47	0.3	21.77	2.00	33.01	PASS
		3	0		21.82	0.3	22.12	2.00	33.01	PASS
		3	1		21.94	0.3	22.24	2.00	33.01	PASS
	3	2	21.27		0.3	21.57	2.00	33.01	PASS	
	6	0	20.65	0.3	20.95	2.00	33.01	PASS		
	Middle	QPSK	1	0	22.62	0.3	22.92	2.00	33.01	PASS
			1	2	22.71	0.3	23.01	2.00	33.01	PASS
			1	5	22.6	0.3	22.90	2.00	33.01	PASS
			3	0	22.73	0.3	23.03	2.00	33.01	PASS
			3	1	22.74	0.3	23.04	2.00	33.01	PASS
			3	2	22.63	0.3	22.93	2.00	33.01	PASS
		6	0	21.81	0.3	22.11	2.00	33.01	PASS	
		16QAM	1	0	21.54	0.3	21.84	2.00	33.01	PASS
			1	2	21.7	0.3	22.00	2.00	33.01	PASS
			1	5	21.61	0.3	21.91	2.00	33.01	PASS
			3	0	21.54	0.3	21.84	2.00	33.01	PASS
			3	1	21.59	0.3	21.89	2.00	33.01	PASS
	3		2	21.86	0.3	22.16	2.00	33.01	PASS	
	6	0	21.05	0.3	21.35	2.00	33.01	PASS		
	Highest	QPSK	1	0	22.9	0.3	23.20	2.00	33.01	PASS
			1	2	22.91	0.3	23.21	2.00	33.01	PASS
			1	5	22.95	0.3	23.25	2.00	33.01	PASS
			3	0	22.95	0.3	23.25	2.00	33.01	PASS
			3	1	23.05	0.3	23.35	2.00	33.01	PASS
			3	2	23.08	0.3	23.38	2.00	33.01	PASS
		6	0	21.9	0.3	22.20	2.00	33.01	PASS	
		16QAM	1	0	21.68	0.3	21.98	2.00	33.01	PASS
1			2	21.67	0.3	21.97	2.00	33.01	PASS	
1			5	21.57	0.3	21.87	2.00	33.01	PASS	
3			0	21.64	0.3	21.94	2.00	33.01	PASS	
3			1	21.62	0.3	21.92	2.00	33.01	PASS	
3	2		21.76	0.3	22.06	2.00	33.01	PASS		
6	0	20.81	0.3	21.11	2.00	33.01	PASS			



Radiated Power (EIRP) for LTE Band 2 /3M											
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Verdict	
3	Lowest	1	0	QPSK	23.06	0.3	23.36	2.00	33.01	PASS	
		1	7		22.82	0.3	23.12	2.00	33.01	PASS	
		1	14		22.66	0.3	22.96	2.00	33.01	PASS	
		8	0		21.97	0.3	22.27	2.00	33.01	PASS	
		8	4		21.86	0.3	22.16	2.00	33.01	PASS	
		8	7		21.79	0.3	22.09	2.00	33.01	PASS	
		15	0	21.93	0.3	22.23	2.00	33.01	PASS		
		1	0	21.71	0.3	22.01	2.00	33.01	PASS		
		1	7	21.46	0.3	21.76	2.00	33.01	PASS		
		1	14	21.15	0.3	21.45	2.00	33.01	PASS		
		8	0	20.92	0.3	21.22	2.00	33.01	PASS		
		8	4	20.92	0.3	21.22	2.00	33.01	PASS		
		8	7	20.94	0.3	21.24	2.00	33.01	PASS		
		15	0	20.79	0.3	21.09	2.00	33.01	PASS		
		1	0	22.49	0.3	22.79	2.00	33.01	PASS		
	Middle	1	7	QPSK	22.81	0.3	23.11	2.00	33.01	PASS	
		1	14		22.67	0.3	22.97	2.00	33.01	PASS	
		8	0		21.88	0.3	22.18	2.00	33.01	PASS	
		8	4		21.9	0.3	22.20	2.00	33.01	PASS	
		8	7		21.92	0.3	22.22	2.00	33.01	PASS	
		15	0		21.94	0.3	22.24	2.00	33.01	PASS	
		1	0	21.34	0.3	21.64	2.00	33.01	PASS		
		1	7	21.42	0.3	21.72	2.00	33.01	PASS		
		1	14	21.72	0.3	22.02	2.00	33.01	PASS		
		8	0	20.79	0.3	21.09	2.00	33.01	PASS		
		8	4	20.71	0.3	21.01	2.00	33.01	PASS		
		8	7	20.66	0.3	20.96	2.00	33.01	PASS		
		15	0	20.83	0.3	21.13	2.00	33.01	PASS		
		Highest	1	0	QPSK	23.12	0.3	23.42	2.00	33.01	PASS
			1	7		23.23	0.3	23.53	2.00	33.01	PASS
	1		14	22.97		0.3	23.27	2.00	33.01	PASS	
	8		0	21.77		0.3	22.07	2.00	33.01	PASS	
	8		4	21.7		0.3	22.00	2.00	33.01	PASS	
	8		7	21.74		0.3	22.04	2.00	33.01	PASS	
	15		0	21.78	0.3	22.08	2.00	33.01	PASS		
	1		0	22.14	0.3	22.44	2.00	33.01	PASS		
1	7		22.05	0.3	22.35	2.00	33.01	PASS			
1	14		21.62	0.3	21.92	2.00	33.01	PASS			
8	0		20.67	0.3	20.97	2.00	33.01	PASS			
8	4		20.52	0.3	20.82	2.00	33.01	PASS			
8	7		20.52	0.3	20.82	2.00	33.01	PASS			
15	0		20.84	0.3	21.14	2.00	33.01	PASS			



Radiated Power (EIRP) for LTE Band 2 /5M										
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Verdict
5	Lowest	1	0	QPSK	22.6	0.3	22.90	2.00	33.01	PASS
		1	12		22.63	0.3	22.93	2.00	33.01	PASS
		1	24		22.59	0.3	22.89	2.00	33.01	PASS
		12	0		21.89	0.3	22.19	2.00	33.01	PASS
		12	6		21.81	0.3	22.11	2.00	33.01	PASS
		12	11		21.71	0.3	22.01	2.00	33.01	PASS
		25	0	21.86	0.3	22.16	2.00	33.01	PASS	
		1	0	16QAM	21.76	0.3	22.06	2.00	33.01	PASS
		1	12		21.5	0.3	21.80	2.00	33.01	PASS
		1	24		21.2	0.3	21.50	2.00	33.01	PASS
		12	0		20.76	0.3	21.06	2.00	33.01	PASS
		12	6		20.6	0.3	20.90	2.00	33.01	PASS
		12	11		20.6	0.3	20.90	2.00	33.01	PASS
		25	0	20.78	0.3	21.08	2.00	33.01	PASS	
		1	0	QPSK	22.25	0.3	22.55	2.00	33.01	PASS
	1	12	22.46		0.3	22.76	2.00	33.01	PASS	
	1	24	22.33		0.3	22.63	2.00	33.01	PASS	
	12	0	21.74		0.3	22.04	2.00	33.01	PASS	
	12	6	21.76		0.3	22.06	2.00	33.01	PASS	
	12	11	21.86		0.3	22.16	2.00	33.01	PASS	
	25	0	21.8	0.3	22.10	2.00	33.01	PASS		
	1	0	16QAM	21.37	0.3	21.67	2.00	33.01	PASS	
	1	12		21.48	0.3	21.78	2.00	33.01	PASS	
	1	24		21.29	0.3	21.59	2.00	33.01	PASS	
	12	0		20.52	0.3	20.82	2.00	33.01	PASS	
	12	6		20.53	0.3	20.83	2.00	33.01	PASS	
	12	11		20.56	0.3	20.86	2.00	33.01	PASS	
	25	0	20.69	0.3	20.99	2.00	33.01	PASS		
	1	0	QPSK	22.73	0.3	23.03	2.00	33.01	PASS	
	1	12		22.79	0.3	23.09	2.00	33.01	PASS	
	1	24		22.81	0.3	23.11	2.00	33.01	PASS	
	12	0		21.9	0.3	22.20	2.00	33.01	PASS	
	12	6		21.84	0.3	22.14	2.00	33.01	PASS	
	12	11		21.88	0.3	22.18	2.00	33.01	PASS	
	25	0	21.76	0.3	22.06	2.00	33.01	PASS		
	1	0	16QAM	21.35	0.3	21.65	2.00	33.01	PASS	
	1	12		21.79	0.3	22.09	2.00	33.01	PASS	
	1	24		21.42	0.3	21.72	2.00	33.01	PASS	
	12	0		20.97	0.3	21.27	2.00	33.01	PASS	
	12	6		20.9	0.3	21.20	2.00	33.01	PASS	
	12	11		20.72	0.3	21.02	2.00	33.01	PASS	
	25	0	20.62	0.3	20.92	2.00	33.01	PASS		



Radiated Power (EIRP) for LTE Band 2 /10M										
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Verdict
10	Lowest	1	0	QPSK	22.82	0.3	23.12	2.00	33.01	PASS
		1	24		22.95	0.3	23.25	2.00	33.01	PASS
		1	49		22.71	0.3	23.01	2.00	33.01	PASS
		25	0		21.87	0.3	22.17	2.00	33.01	PASS
		25	12		21.83	0.3	22.13	2.00	33.01	PASS
		25	24		21.84	0.3	22.14	2.00	33.01	PASS
		50	0		21.95	0.3	22.25	2.00	33.01	PASS
	Middle	1	0	QPSK	22.49	0.3	22.79	2.00	33.01	PASS
		1	24		22.7	0.3	23.00	2.00	33.01	PASS
		1	49		22.6	0.3	22.90	2.00	33.01	PASS
		25	0		21.81	0.3	22.11	2.00	33.01	PASS
		25	12		21.93	0.3	22.23	2.00	33.01	PASS
		25	24		21.88	0.3	22.18	2.00	33.01	PASS
		50	0		21.95	0.3	22.25	2.00	33.01	PASS
	Highest	1	0	QPSK	22.96	0.3	23.26	2.00	33.01	PASS
		1	24		23.39	0.3	23.69	2.00	33.01	PASS
		1	49		23.05	0.3	23.35	2.00	33.01	PASS
		25	0		21.83	0.3	22.13	2.00	33.01	PASS
		25	12		21.92	0.3	22.22	2.00	33.01	PASS
		25	24		21.91	0.3	22.21	2.00	33.01	PASS
		50	0		21.96	0.3	22.26	2.00	33.01	PASS



Radiated Power (EIRP) for LTE Band 2 /15M										
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Verdict
15	Lowest	1	0	QPSK	22.84	0.3	23.14	2.00	33.01	PASS
		1	37		23.04	0.3	23.34	2.00	33.01	PASS
		1	74		22.85	0.3	23.15	2.00	33.01	PASS
		36	0		21.84	0.3	22.14	2.00	33.01	PASS
		36	18		21.88	0.3	22.18	2.00	33.01	PASS
		36	39		21.87	0.3	22.17	2.00	33.01	PASS
		75	0		21.83	0.3	22.13	2.00	33.01	PASS
	Middle	1	0	QPSK	22.62	0.3	22.92	2.00	33.01	PASS
		1	37		23.12	0.3	23.42	2.00	33.01	PASS
		1	74		22.41	0.3	22.71	2.00	33.01	PASS
		36	0		21.89	0.3	22.19	2.00	33.01	PASS
		36	18		21.9	0.3	22.20	2.00	33.01	PASS
		36	39		21.83	0.3	22.13	2.00	33.01	PASS
		75	0		21.87	0.3	22.17	2.00	33.01	PASS
	Highest	1	0	QPSK	22.74	0.3	23.04	2.00	33.01	PASS
		1	37		23.81	0.3	24.11	2.00	33.01	PASS
		1	74		22.98	0.3	23.28	2.00	33.01	PASS
		36	0		21.77	0.3	22.07	2.00	33.01	PASS
		36	18		21.87	0.3	22.17	2.00	33.01	PASS
		36	39		21.89	0.3	22.19	2.00	33.01	PASS
		75	0		21.8	0.3	22.10	2.00	33.01	PASS



Radiated Power (EIRP) for LTE Band 2 /20M										
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	EIRP (dBm)	EIRP Limit(W)	EIRP Limit(dBm)	Verdict
20	Lowest	1	0	QPSK	22.39	0.3	22.69	2.00	33.01	PASS
		1	49		22.76	0.3	23.06	2.00	33.01	PASS
		1	99		22.73	0.3	23.03	2.00	33.01	PASS
		50	0		21.8	0.3	22.10	2.00	33.01	PASS
		50	24		23.89	0.3	24.19	2.00	33.01	PASS
		50	49		21.81	0.3	22.11	2.00	33.01	PASS
		100	0		21.79	0.3	22.09	2.00	33.01	PASS
	Middle	1	0	QPSK	22.74	0.3	23.04	2.00	33.01	PASS
		1	49		23.26	0.3	23.56	2.00	33.01	PASS
		1	99		22.81	0.3	23.11	2.00	33.01	PASS
		50	0		21.82	0.3	22.12	2.00	33.01	PASS
		50	24		21.86	0.3	22.16	2.00	33.01	PASS
		50	49		21.81	0.3	22.11	2.00	33.01	PASS
		100	0		21.91	0.3	22.21	2.00	33.01	PASS
	Highest	1	0	QPSK	22.55	0.3	22.85	2.00	33.01	PASS
		1	49		23.11	0.3	23.41	2.00	33.01	PASS
		1	99		22.79	0.3	23.09	2.00	33.01	PASS
		50	0		21.78	0.3	22.08	2.00	33.01	PASS
		50	24		21.96	0.3	22.26	2.00	33.01	PASS
		50	49		21.97	0.3	22.27	2.00	33.01	PASS
		100	0		21.84	0.3	22.14	2.00	33.01	PASS





Radiated Power (ERP) for LTE Band 5 /1.4M											
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit(W)	ERP Limit(dBm)	Verdict	
1.4	Lowest	1	0	QPSK	22.01	-1.3	18.56	7.00	38.45	PASS	
		1	2		21.97	-1.3	18.52	7.00	38.45	PASS	
		1	5		21.88	-1.3	18.43	7.00	38.45	PASS	
		3	0		21.88	-1.3	18.43	7.00	38.45	PASS	
		3	1		21.77	-1.3	18.32	7.00	38.45	PASS	
		3	2		21.8	-1.3	18.35	7.00	38.45	PASS	
		6	0	20.8	-1.3	17.35	7.00	38.45	PASS		
		1	0	16QAM	20.51	-1.3	17.06	7.00	38.45	PASS	
		1	2		20.61	-1.3	17.16	7.00	38.45	PASS	
		1	5		20.46	-1.3	17.01	7.00	38.45	PASS	
		3	0		20.73	-1.3	17.28	7.00	38.45	PASS	
		3	1		20.73	-1.3	17.28	7.00	38.45	PASS	
		3	2		20.68	-1.3	17.23	7.00	38.45	PASS	
		6	0	19.63	-1.3	16.18	7.00	38.45	PASS		
		Middle	QPSK	1	0	21.78	-1.3	18.33	7.00	38.45	PASS
				1	2	21.77	-1.3	18.32	7.00	38.45	PASS
				1	5	21.81	-1.3	18.36	7.00	38.45	PASS
				3	0	21.89	-1.3	18.44	7.00	38.45	PASS
	3			1	21.88	-1.3	18.43	7.00	38.45	PASS	
	3			2	21.69	-1.3	18.24	7.00	38.45	PASS	
	6		0	20.98	-1.3	17.53	7.00	38.45	PASS		
	16QAM		1	0	20.48	-1.3	17.03	7.00	38.45	PASS	
			1	2	20.35	-1.3	16.90	7.00	38.45	PASS	
			1	5	20.34	-1.3	16.89	7.00	38.45	PASS	
			3	0	20.83	-1.3	17.38	7.00	38.45	PASS	
			3	1	20.82	-1.3	17.37	7.00	38.45	PASS	
			3	2	20.63	-1.3	17.18	7.00	38.45	PASS	
	6		0	19.72	-1.3	16.27	7.00	38.45	PASS		
	Highest		QPSK	1	0	22.07	-1.3	18.62	7.00	38.45	PASS
				1	2	21.96	-1.3	18.51	7.00	38.45	PASS
				1	5	21.96	-1.3	18.51	7.00	38.45	PASS
				3	0	22.22	-1.3	18.77	7.00	38.45	PASS
		3		1	22.2	-1.3	18.75	7.00	38.45	PASS	
		3		2	22	-1.3	18.55	7.00	38.45	PASS	
		6	0	21.28	-1.3	17.83	7.00	38.45	PASS		
		16QAM	1	0	20.95	-1.3	17.50	7.00	38.45	PASS	
1			2	21.06	-1.3	17.61	7.00	38.45	PASS		
1			5	21.2	-1.3	17.75	7.00	38.45	PASS		
3			0	21.44	-1.3	17.99	7.00	38.45	PASS		
3			1	21.36	-1.3	17.91	7.00	38.45	PASS		
3			2	21.03	-1.3	17.58	7.00	38.45	PASS		
6		0	20.36	-1.3	16.91	7.00	38.45	PASS			



Radiated Power (ERP) for LTE Band 5 /3M											
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit(W)	ERP Limit(dBm)	Verdict	
3	Lowest	1	0	QPSK	21.83	-1.3	18.38	7.00	38.45	PASS	
		1	7		21.82	-1.3	18.37	7.00	38.45	PASS	
		1	14		21.73	-1.3	18.28	7.00	38.45	PASS	
		8	0		20.85	-1.3	17.40	7.00	38.45	PASS	
		8	4		20.76	-1.3	17.31	7.00	38.45	PASS	
		8	7		20.8	-1.3	17.35	7.00	38.45	PASS	
		15	0	20.71	-1.3	17.26	7.00	38.45	PASS		
		1	0	16QAM	20.58	-1.3	17.13	7.00	38.45	PASS	
		1	7		20.47	-1.3	17.02	7.00	38.45	PASS	
		1	14		20.4	-1.3	16.95	7.00	38.45	PASS	
		8	0		19.6	-1.3	16.15	7.00	38.45	PASS	
		8	4		19.6	-1.3	16.15	7.00	38.45	PASS	
		8	7		19.52	-1.3	16.07	7.00	38.45	PASS	
		15	0	19.63	-1.3	16.18	7.00	38.45	PASS		
		Middle	QPSK	1	0	21.63	-1.3	18.18	7.00	38.45	PASS
	1			7	21.82	-1.3	18.37	7.00	38.45	PASS	
	1			14	21.56	-1.3	18.11	7.00	38.45	PASS	
	8			0	21.01	-1.3	17.56	7.00	38.45	PASS	
	8			4	20.81	-1.3	17.36	7.00	38.45	PASS	
	8			7	20.79	-1.3	17.34	7.00	38.45	PASS	
	15		0	20.83	-1.3	17.38	7.00	38.45	PASS		
	16QAM		1	0	20.46	-1.3	17.01	7.00	38.45	PASS	
			1	7	20.8	-1.3	17.35	7.00	38.45	PASS	
			1	14	20.62	-1.3	17.17	7.00	38.45	PASS	
			8	0	19.9	-1.3	16.45	7.00	38.45	PASS	
			8	4	19.79	-1.3	16.34	7.00	38.45	PASS	
			8	7	19.69	-1.3	16.24	7.00	38.45	PASS	
			15	0	19.86	-1.3	16.41	7.00	38.45	PASS	
			Highest	QPSK	1	0	22.18	-1.3	18.73	7.00	38.45
		1			7	22.49	-1.3	19.04	7.00	38.45	PASS
	1	14			22.09	-1.3	18.64	7.00	38.45	PASS	
	8	0			21.29	-1.3	17.84	7.00	38.45	PASS	
	8	4			21.23	-1.3	17.78	7.00	38.45	PASS	
	8	7			21.07	-1.3	17.62	7.00	38.45	PASS	
	15	0		21.25	-1.3	17.80	7.00	38.45	PASS		
	16QAM	1		0	21.09	-1.3	17.64	7.00	38.45	PASS	
1		7		21.42	-1.3	17.97	7.00	38.45	PASS		
1		14		20.96	-1.3	17.51	7.00	38.45	PASS		
8		0		20.28	-1.3	16.83	7.00	38.45	PASS		
8		4		20.26	-1.3	16.81	7.00	38.45	PASS		
8		7		19.87	-1.3	16.42	7.00	38.45	PASS		
15		0		20.26	-1.3	16.81	7.00	38.45	PASS		



Radiated Power (ERP) for LTE Band 5 /5M										
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit(W)	ERP Limit(dBm)	Verdict
5	Lowest	1	0	QPSK	21.65	-1.3	18.20	7.00	38.45	PASS
		1	12		21.61	-1.3	18.16	7.00	38.45	PASS
		1	24		21.58	-1.3	18.13	7.00	38.45	PASS
		12	0		20.64	-1.3	17.19	7.00	38.45	PASS
		12	6		20.58	-1.3	17.13	7.00	38.45	PASS
		12	11		20.58	-1.3	17.13	7.00	38.45	PASS
		25	0	20.63	-1.3	17.18	7.00	38.45	PASS	
		1	0	16QAM	20.56	-1.3	17.11	7.00	38.45	PASS
		1	12		20.83	-1.3	17.38	7.00	38.45	PASS
		1	24		20.19	-1.3	16.74	7.00	38.45	PASS
		12	0		19.24	-1.3	15.79	7.00	38.45	PASS
		12	6		19.47	-1.3	16.02	7.00	38.45	PASS
		12	11		19.57	-1.3	16.12	7.00	38.45	PASS
		25	0	19.53	-1.3	16.08	7.00	38.45	PASS	
		1	0	QPSK	21.33	-1.3	17.88	7.00	38.45	PASS
		1	12		21.6	-1.3	18.15	7.00	38.45	PASS
		1	24		21.31	-1.3	17.86	7.00	38.45	PASS
		12	0		20.75	-1.3	17.30	7.00	38.45	PASS
	12	6	20.74		-1.3	17.29	7.00	38.45	PASS	
	12	11	20.6		-1.3	17.15	7.00	38.45	PASS	
	25	0	20.88	-1.3	17.43	7.00	38.45	PASS		
	1	0	16QAM	20.31	-1.3	16.86	7.00	38.45	PASS	
	1	12		20.6	-1.3	17.15	7.00	38.45	PASS	
	1	24		20.17	-1.3	16.72	7.00	38.45	PASS	
	12	0		19.66	-1.3	16.21	7.00	38.45	PASS	
	12	6		19.46	-1.3	16.01	7.00	38.45	PASS	
	12	11		19.45	-1.3	16.00	7.00	38.45	PASS	
	25	0	19.81	-1.3	16.36	7.00	38.45	PASS		
	1	0	QPSK	21.98	-1.3	18.53	7.00	38.45	PASS	
	1	12		22.39	-1.3	18.94	7.00	38.45	PASS	
	1	24		22.06	-1.3	18.61	7.00	38.45	PASS	
	12	0		21	-1.3	17.55	7.00	38.45	PASS	
	12	6		21.33	-1.3	17.88	7.00	38.45	PASS	
	12	11		21.24	-1.3	17.79	7.00	38.45	PASS	
	25	0	21.16	-1.3	17.71	7.00	38.45	PASS		
	1	0	16QAM	20.59	-1.3	17.14	7.00	38.45	PASS	
	1	12		21.18	-1.3	17.73	7.00	38.45	PASS	
	1	24		20.64	-1.3	17.19	7.00	38.45	PASS	
	12	0		19.88	-1.3	16.43	7.00	38.45	PASS	
	12	6		20.44	-1.3	16.99	7.00	38.45	PASS	
	12	11		20.37	-1.3	16.92	7.00	38.45	PASS	
	25	0	19.95	-1.3	16.50	7.00	38.45	PASS		



Radiated Power (ERP) for LTE Band 5 /10M										
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit(W)	ERP Limit(dBm)	Verdict
10	Lowest	1	0	QPSK	21.71	-1.3	18.26	7.00	38.45	PASS
		1	24		21.85	-1.3	18.40	7.00	38.45	PASS
		1	49		22.03	-1.3	18.58	7.00	38.45	PASS
		25	0		20.63	-1.3	17.18	7.00	38.45	PASS
		25	12		20.59	-1.3	17.14	7.00	38.45	PASS
		25	24		20.65	-1.3	17.20	7.00	38.45	PASS
		50	0		20.56	-1.3	17.11	7.00	38.45	PASS
	Middle	1	0	QPSK	21.49	-1.3	18.04	7.00	38.45	PASS
		1	24		21.72	-1.3	18.27	7.00	38.45	PASS
		1	49		21.6	-1.3	18.15	7.00	38.45	PASS
		25	0		20.79	-1.3	17.34	7.00	38.45	PASS
		25	12		20.71	-1.3	17.26	7.00	38.45	PASS
		25	24		20.72	-1.3	17.27	7.00	38.45	PASS
		50	0		20.73	-1.3	17.28	7.00	38.45	PASS
	Highest	1	0	QPSK	21.83	-1.3	18.38	7.00	38.45	PASS
		1	24		22.28	-1.3	18.83	7.00	38.45	PASS
		1	49		22.33	-1.3	18.88	7.00	38.45	PASS
		25	0		20.83	-1.3	17.38	7.00	38.45	PASS
		25	12		21.17	-1.3	17.72	7.00	38.45	PASS
		25	24		21.34	-1.3	17.89	7.00	38.45	PASS
		50	0		21.03	-1.3	17.58	7.00	38.45	PASS



Radiated Power (ERP) for LTE Band 12 /1.4M										
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit(W)	ERP Limit(dBm)	Verdict
1.4	Lowest	1	0	QPSK	18.69	-1.3	15.24	3.00	34.77	PASS
		1	2		18.87	-1.3	15.42	3.00	34.77	PASS
		1	5		18.85	-1.3	15.40	3.00	34.77	PASS
		3	0		18.81	-1.3	15.36	3.00	34.77	PASS
		3	1		18.8	-1.3	15.35	3.00	34.77	PASS
		3	2		18.69	-1.3	15.24	3.00	34.77	PASS
		6	0	17.68	-1.3	14.23	3.00	34.77	PASS	
		1	0	16QAM	17.37	-1.3	13.92	3.00	34.77	PASS
		1	2		17.41	-1.3	13.96	3.00	34.77	PASS
		1	5		17.43	-1.3	13.98	3.00	34.77	PASS
		3	0		17.59	-1.3	14.14	3.00	34.77	PASS
		3	1		17.79	-1.3	14.34	3.00	34.77	PASS
	3	2	17.95		-1.3	14.50	3.00	34.77	PASS	
	6	0	17.01	-1.3	13.56	3.00	34.77	PASS		
	Middle	QPSK	1	0	18.91	-1.3	15.46	3.00	34.77	PASS
			1	2	19.1	-1.3	15.65	3.00	34.77	PASS
			1	5	18.98	-1.3	15.53	3.00	34.77	PASS
			3	0	19.3	-1.3	15.85	3.00	34.77	PASS
			3	1	19.16	-1.3	15.71	3.00	34.77	PASS
			3	2	19.07	-1.3	15.62	3.00	34.77	PASS
		6	0	18.2	-1.3	14.75	3.00	34.77	PASS	
		16QAM	1	0	18.16	-1.3	14.71	3.00	34.77	PASS
			1	2	18.23	-1.3	14.78	3.00	34.77	PASS
			1	5	18.09	-1.3	14.64	3.00	34.77	PASS
			3	0	18.43	-1.3	14.98	3.00	34.77	PASS
			3	1	18.39	-1.3	14.94	3.00	34.77	PASS
	3		2	18.03	-1.3	14.58	3.00	34.77	PASS	
	6	0	17.37	-1.3	13.92	3.00	34.77	PASS		
	Highest	QPSK	1	0	19.73	-1.3	16.28	3.00	34.77	PASS
			1	2	19.71	-1.3	16.26	3.00	34.77	PASS
			1	5	19.65	-1.3	16.20	3.00	34.77	PASS
			3	0	19.99	-1.3	16.54	3.00	34.77	PASS
			3	1	19.91	-1.3	16.46	3.00	34.77	PASS
			3	2	19.77	-1.3	16.32	3.00	34.77	PASS
		6	0	18.98	-1.3	15.53	3.00	34.77	PASS	
		16QAM	1	0	18.73	-1.3	15.28	3.00	34.77	PASS
1			2	18.81	-1.3	15.36	3.00	34.77	PASS	
1			5	18.68	-1.3	15.23	3.00	34.77	PASS	
3			0	19.25	-1.3	15.80	3.00	34.77	PASS	
3			1	19.09	-1.3	15.64	3.00	34.77	PASS	
3	2		18.74	-1.3	15.29	3.00	34.77	PASS		
6	0	18.17	-1.3	14.72	3.00	34.77	PASS			



Radiated Power (ERP) for LTE Band 12 /3M											
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit(W)	ERP Limit(dBm)	Verdict	
3	Lowest	1	0	QPSK	18.86	-1.3	15.41	3.00	34.77	PASS	
		1	7		19.19	-1.3	15.74	3.00	34.77	PASS	
		1	14		19.03	-1.3	15.58	3.00	34.77	PASS	
		8	0		17.66	-1.3	14.21	3.00	34.77	PASS	
		8	4		17.71	-1.3	14.26	3.00	34.77	PASS	
		8	7		17.71	-1.3	14.26	3.00	34.77	PASS	
		15	0	17.63	-1.3	14.18	3.00	34.77	PASS		
		1	0	17.45	-1.3	14.00	3.00	34.77	PASS		
		1	7	18.3	-1.3	14.85	3.00	34.77	PASS		
		1	14	18.43	-1.3	14.98	3.00	34.77	PASS		
		8	0	16.56	-1.3	13.11	3.00	34.77	PASS		
		8	4	16.61	-1.3	13.16	3.00	34.77	PASS		
		8	7	16.56	-1.3	13.11	3.00	34.77	PASS		
		15	0	16.61	-1.3	13.16	3.00	34.77	PASS		
		Middle	QPSK	1	0	19.02	-1.3	15.57	3.00	34.77	PASS
	1			7	19.1	-1.3	15.65	3.00	34.77	PASS	
	1			14	18.89	-1.3	15.44	3.00	34.77	PASS	
	8			0	18.34	-1.3	14.89	3.00	34.77	PASS	
	8			4	18.13	-1.3	14.68	3.00	34.77	PASS	
	8			7	18.25	-1.3	14.80	3.00	34.77	PASS	
	15		0	18.23	-1.3	14.78	3.00	34.77	PASS		
	16QAM		1	0	18.06	-1.3	14.61	3.00	34.77	PASS	
			1	7	17.93	-1.3	14.48	3.00	34.77	PASS	
			1	14	17.96	-1.3	14.51	3.00	34.77	PASS	
			8	0	17.41	-1.3	13.96	3.00	34.77	PASS	
			8	4	17.02	-1.3	13.57	3.00	34.77	PASS	
			8	7	17.19	-1.3	13.74	3.00	34.77	PASS	
			15	0	17.29	-1.3	13.84	3.00	34.77	PASS	
			Highest	QPSK	1	0	19.85	-1.3	16.40	3.00	34.77
		1			7	20.14	-1.3	16.69	3.00	34.77	PASS
	1	14			19.61	-1.3	16.16	3.00	34.77	PASS	
	8	0			18.75	-1.3	15.30	3.00	34.77	PASS	
	8	4			18.89	-1.3	15.44	3.00	34.77	PASS	
	8	7			18.7	-1.3	15.25	3.00	34.77	PASS	
	15	0		18.73	-1.3	15.28	3.00	34.77	PASS		
	16QAM	1		0	18.99	-1.3	15.54	3.00	34.77	PASS	
1		7		19.24	-1.3	15.79	3.00	34.77	PASS		
1		14		18.58	-1.3	15.13	3.00	34.77	PASS		
8		0		17.75	-1.3	14.30	3.00	34.77	PASS		
8		4		17.7	-1.3	14.25	3.00	34.77	PASS		
8		7		17.58	-1.3	14.13	3.00	34.77	PASS		
15		0		17.72	-1.3	14.27	3.00	34.77	PASS		



Radiated Power (ERP) for LTE Band 12 /5M										
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit(W)	ERP Limit(dBm)	Verdict
5	Lowest	1	0	QPSK	18.71	-1.3	15.26	3.00	34.77	PASS
		1	12		18.82	-1.3	15.37	3.00	34.77	PASS
		1	24		18.98	-1.3	15.53	3.00	34.77	PASS
		12	0		17.68	-1.3	14.23	3.00	34.77	PASS
		12	6		17.9	-1.3	14.45	3.00	34.77	PASS
		12	11		17.86	-1.3	14.41	3.00	34.77	PASS
		25	0	17.55	-1.3	14.10	3.00	34.77	PASS	
		1	0	16QAM	17.47	-1.3	14.02	3.00	34.77	PASS
		1	12		17.87	-1.3	14.42	3.00	34.77	PASS
		1	24		18.04	-1.3	14.59	3.00	34.77	PASS
		12	0		16.38	-1.3	12.93	3.00	34.77	PASS
		12	6		16.72	-1.3	13.27	3.00	34.77	PASS
		12	11		16.83	-1.3	13.38	3.00	34.77	PASS
		25	0	16.49	-1.3	13.04	3.00	34.77	PASS	
		1	0	QPSK	18.54	-1.3	15.09	3.00	34.77	PASS
	1	12	18.92		-1.3	15.47	3.00	34.77	PASS	
	1	24	18.69		-1.3	15.24	3.00	34.77	PASS	
	12	0	18.19		-1.3	14.74	3.00	34.77	PASS	
	12	6	18.05		-1.3	14.60	3.00	34.77	PASS	
	12	11	18.11		-1.3	14.66	3.00	34.77	PASS	
	25	0	18.19	-1.3	14.74	3.00	34.77	PASS		
	1	0	16QAM	17.63	-1.3	14.18	3.00	34.77	PASS	
	1	12		17.87	-1.3	14.42	3.00	34.77	PASS	
	1	24		17.73	-1.3	14.28	3.00	34.77	PASS	
	12	0		17.07	-1.3	13.62	3.00	34.77	PASS	
	12	6		16.9	-1.3	13.45	3.00	34.77	PASS	
	12	11		16.95	-1.3	13.50	3.00	34.77	PASS	
	25	0	17.02	-1.3	13.57	3.00	34.77	PASS		
	1	0	QPSK	19.13	-1.3	15.68	3.00	34.77	PASS	
	1	12		19.87	-1.3	16.42	3.00	34.77	PASS	
	1	24		19.44	-1.3	15.99	3.00	34.77	PASS	
	12	0		18.24	-1.3	14.79	3.00	34.77	PASS	
	12	6		18.57	-1.3	15.12	3.00	34.77	PASS	
	12	11		18.69	-1.3	15.24	3.00	34.77	PASS	
	25	0	18.58	-1.3	15.13	3.00	34.77	PASS		
	1	0	16QAM	17.82	-1.3	14.37	3.00	34.77	PASS	
	1	12		19.29	-1.3	15.84	3.00	34.77	PASS	
	1	24		18.34	-1.3	14.89	3.00	34.77	PASS	
	12	0		17.11	-1.3	13.66	3.00	34.77	PASS	
	12	6		17.77	-1.3	14.32	3.00	34.77	PASS	
	12	11		17.75	-1.3	14.30	3.00	34.77	PASS	
	25	0	17.49	-1.3	14.04	3.00	34.77	PASS		



Radiated Power (ERP) for LTE Band 12 /10M										
BW (MHz)	UL Channel	RB Size	RB offset	Modulation	Conduction AVG Power(dBm)	Ant Gain (dBi)	ERP (dBm)	ERP Limit(W)	ERP Limit(dBm)	Verdict
10	Lowest	1	0	QPSK	18.44	-1.3	14.99	3.00	34.77	PASS
		1	24		19.54	-1.3	16.09	3.00	34.77	PASS
		1	49		19.26	-1.3	15.81	3.00	34.77	PASS
		25	0		17.72	-1.3	14.27	3.00	34.77	PASS
		25	12		17.96	-1.3	14.51	3.00	34.77	PASS
		25	24		17.99	-1.3	14.54	3.00	34.77	PASS
		50	0		17.94	-1.3	14.49	3.00	34.77	PASS
	Middle	1	0	QPSK	18.63	-1.3	15.18	3.00	34.77	PASS
		1	24		18.79	-1.3	15.34	3.00	34.77	PASS
		1	49		19.1	-1.3	15.65	3.00	34.77	PASS
		25	0		18.1	-1.3	14.65	3.00	34.77	PASS
		25	12		18	-1.3	14.55	3.00	34.77	PASS
		25	24		18.28	-1.3	14.83	3.00	34.77	PASS
		50	0		18.13	-1.3	14.68	3.00	34.77	PASS
	Highest	1	0	QPSK	18.92	-1.3	15.47	3.00	34.77	PASS
		1	24		19.62	-1.3	16.17	3.00	34.77	PASS
		1	49		19.9	-1.3	16.45	3.00	34.77	PASS
		25	0		18.17	-1.3	14.72	3.00	34.77	PASS
		25	12		18.48	-1.3	15.03	3.00	34.77	PASS
		25	24		18.46	-1.3	15.01	3.00	34.77	PASS
		50	0		18.27	-1.3	14.82	3.00	34.77	PASS



## 5.2 PEAK TO AVERAGE RATIO


### TEST OVERVIEW

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 db.

### TEST PROCEDURES

1. The testing follows FCC KDB 971168 v03r01 section.
2. The eut was connected to the peak and av system simulator& spectrum analyzer.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure average power of the spectrum analysis,

### TEST SETUP

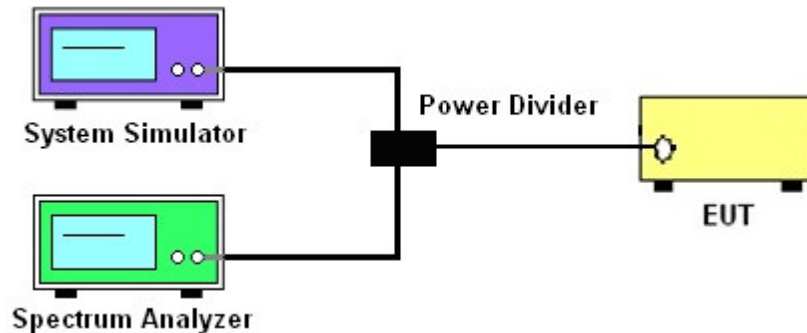

### TEST RESULT

Note: The test data please reference to attachment “STS2403302W08\_Appendix GSM” , “STS2403302W08\_Appendix WCDMA” and “STS2403302W08\_Appendix LTE”.

### 5.3 OCCUPIED BANDWIDTH

#### TEST OVERVIEW

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

All modes of operation were investigated and the worst case configuration results are reported in this section.

#### TEST PROCEDURE

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

#### TEST SETUP

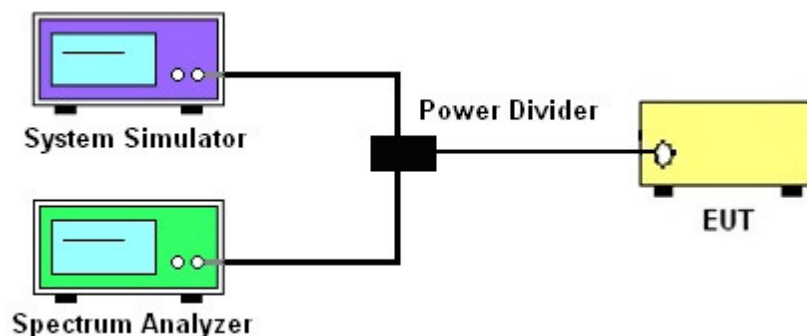

#### TEST RESULT

Note: The test data please reference to attachment "STS2403302W08\_Appendix GSM" , "STS2403302W08\_Appendix WCDMA" and "STS2403302W08\_Appendix LTE".

## 5.4 FREQUENCY STABILITY

### TEST OVERVIEW

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26 2015.

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  in  $10^{\circ}\text{C}$  increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### TEST PROCEDURE


#### Temperature Variation

1. The testing follows FCC KDB 971168 D01 section 9.0
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### TEST SETUP

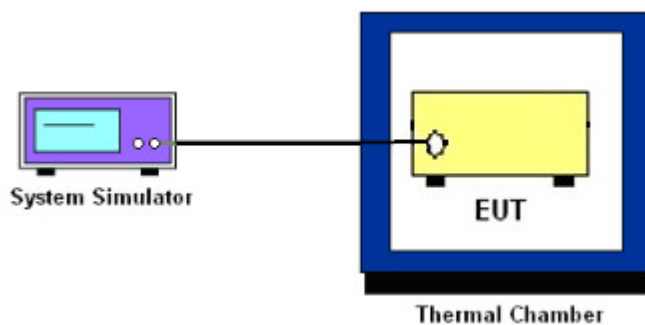



**TEST RESULT**

GPRS 850 /836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	36.41	0.044	2.5ppm	PASS
40		12.85	0.015		
30		13.71	0.016		
20		19.22	0.023		
10		28.92	0.035		
0		24.20	0.029		
-10		16.85	0.020		
-20		35.69	0.043		
-30		16.28	0.019		
20		Maximum Voltage	32.27		
20	BEP	26.81	0.032		

EGPRS 850 /836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	12.59	0.015	2.5ppm	PASS
40		14.35	0.017		
30		22.33	0.027		
20		21.00	0.025		
10		18.91	0.023		
0		23.29	0.028		
-10		26.33	0.031		
-20		19.39	0.023		
-30		30.13	0.036		
20		Maximum Voltage	29.68		
20	BEP	33.05	0.039		

GPRS 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	23.44	0.012	Within Authorized Band	PASS
40		12.85	0.007		
30		28.17	0.015		
20		35.84	0.019		
10		32.37	0.017		
0		35.70	0.019		
-10		20.04	0.011		
-20		28.46	0.015		
-30		12.33	0.007		
20		Maximum Voltage	32.58		
20	BEP	15.01	0.008		



EGPRS 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	23.46	0.012	Within Authorized Band	PASS
40		25.38	0.014		
30		17.14	0.009		
20		35.86	0.019		
10		21.23	0.011		
0		29.54	0.016		
-10		17.32	0.009		
-20		32.09	0.017		
-30		26.73	0.014		
20		Maximum Voltage	26.18		
20	BEP	18.15	0.010		

UMTS Band 2 /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	14.25	0.008	Within Authorized Band	PASS
40		28.60	0.015		
30		22.57	0.012		
20		14.76	0.008		
10		27.91	0.015		
0		28.79	0.015		
-10		22.89	0.012		
-20		28.47	0.015		
-30		31.90	0.017		
20		Maximum Voltage	27.62		
20	BEP	32.05	0.017		

HSDPA Band 2 /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	34.06	0.018	Within Authorized Band	PASS
40		32.10	0.017		
30		28.06	0.015		
20		18.04	0.010		
10		21.98	0.012		
0		15.36	0.008		
-10		12.58	0.007		
-20		22.87	0.012		
-30		31.94	0.017		
20		Maximum Voltage	28.35		
20	BEP	12.01	0.006		



HSUPA Band 2 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	14.82	0.008	Within Authorized Band	PASS
40		17.38	0.009		
30		26.79	0.014		
20		22.84	0.012		
10		32.16	0.017		
0		16.59	0.009		
-10		33.90	0.018		
-20		20.39	0.011		
-30		20.87	0.011		
20		Maximum Voltage	23.27		
20	BEP	15.79	0.008		

UMTS Band 5 / 836.4MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	13.21	0.016	2.5ppm	PASS
40		13.93	0.017		
30		16.29	0.019		
20		35.48	0.042		
10		34.63	0.041		
0		22.99	0.027		
-10		20.67	0.025		
-20		20.33	0.024		
-30		22.57	0.027		
20		Maximum Voltage	32.70		
20	BEP	34.26	0.041		

HSDPA Band 5 / 836.4MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)		(ppm)		
50	Normal Voltage	34.29	0.041	2.5ppm	PASS
40		34.73	0.042		
30		24.65	0.029		
20		32.37	0.039		
10		13.77	0.016		
0		35.37	0.042		
-10		13.47	0.016		
-20		15.42	0.018		
-30		36.39	0.043		
20		Maximum Voltage	24.65		
20	BEP	20.34	0.024		



HSUPA Band 5 / 836.4MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	26.99	0.032	2.5ppm	PASS
40		27.20	0.033		
30		18.59	0.022		
20		26.65	0.032		
10		34.01	0.041		
0		18.06	0.022		
-10		14.33	0.017		
-20		31.77	0.038		
-30		16.18	0.019		
20		Maximum Voltage	26.02		
20	BEP	23.25	0.028		

LTE Band 2 (QPSK) / 1880MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	33.53	0.018	2.5ppm	PASS
40		31.57	0.017		
30		13.51	0.007		
20		16.35	0.009		
10		27.51	0.015		
0		36.23	0.019		
-10		25.08	0.013		
-20		36.00	0.019		
-30		30.55	0.016		
20		Maximum Voltage	29.96		
20	BEP	31.34	0.017		

LTE Band 2 (QPSK) / 1880MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	36.36	0.019	2.5ppm	PASS
40		36.28	0.019		
30		33.01	0.018		
20		12.02	0.006		
10		16.01	0.009		
0		24.30	0.013		
-10		31.27	0.017		
-20		36.47	0.019		
-30		13.46	0.007		
20		Maximum Voltage	24.97		
20	BEP	32.98	0.018		



LTE Band 5 (QPSK) / 836.5MHz / BW5M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	32.21	0.045	2.5ppm	PASS
40		18.28	0.026		
30		15.99	0.023		
20		14.67	0.021		
10		19.29	0.027		
0		27.47	0.039		
-10		23.38	0.003		
-20		18.74	0.026		
-30		25.95	0.037		
20		Maximum Voltage	15.33		
20	BEP	23.43	0.033		

LTE Band 5 (QPSK) / 836.5MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	32.63	0.046	2.5ppm	PASS
40		27.78	0.039		
30		23.36	0.033		
20		12.31	0.017		
10		12.63	0.018		
0		23.20	0.033		
-10		13.45	0.002		
-20		13.85	0.020		
-30		30.57	0.043		
20		Maximum Voltage	29.52		
20	BEP	32.18	0.045		

LTE Band 12 (QPSK) / 707.5MHz / BW5M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	12.88	0.018	2.5ppm	PASS
40		18.47	0.026		
30		30.40	0.043		
20		24.52	0.035		
10		18.55	0.026		
0		26.56	0.037		
-10		12.36	0.002		
-20		31.75	0.045		
-30		22.73	0.032		
20		Maximum Voltage	34.81		
20	BEP	24.14	0.034		





LTE Band 12 (QPSK) / 707.5MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	25.57	0.036	2.5ppm	PASS
40		14.26	0.020		
30		17.98	0.025		
20		33.58	0.047		
10		18.90	0.027		
0		15.88	0.022		
-10		23.46	0.003		
-20		27.01	0.038		
-30		18.46	0.026		
20		Maximum Voltage	13.66		
20	BEP	21.36	0.030		

## 5.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### TEST OVERVIEW

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7:


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0. and ANSI C63.26-2015-Section 5.7.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13\text{dBm}$ .

### TEST SETUP

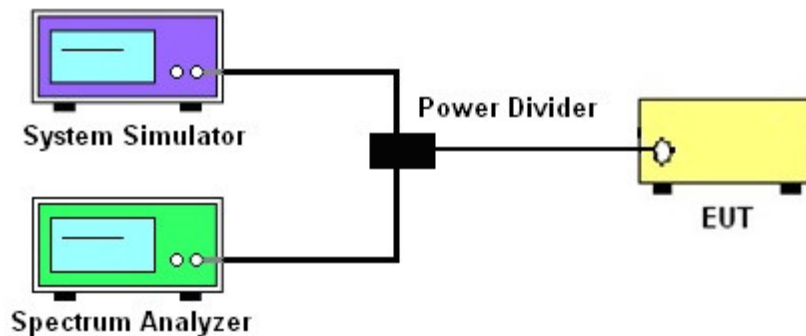

### TEST RESULT

Note: The test data please reference to attachment “STS2403302W08\_Appendix GSM” , “STS2403302W08\_Appendix WCDMA” and “STS2403302W08\_Appendix LTE”.



## 5.6 BAND EDGE

### TEST OVERVIEW

#### 1. §22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 2. §24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed

#### 3. §27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### 4. §27.53(m)(4)

For operations in the 2500 MHz ~ 2570 MHz band this section, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

#### 5. §27.53 (g)

For operations in the 698 -746 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

### TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0 and ANSI C63.26-2015-Section 5.7
2. Start and stop frequency were set such that the band edge would be placed in the center of the Plot.
3. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
4. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
5. The band edges of low and high channels for the highest RF powers were measured.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm.}$$


Band 7:

$$= P(W) - [55 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)}$$

$$= -25\text{dBm.}$$

### TEST SETUP

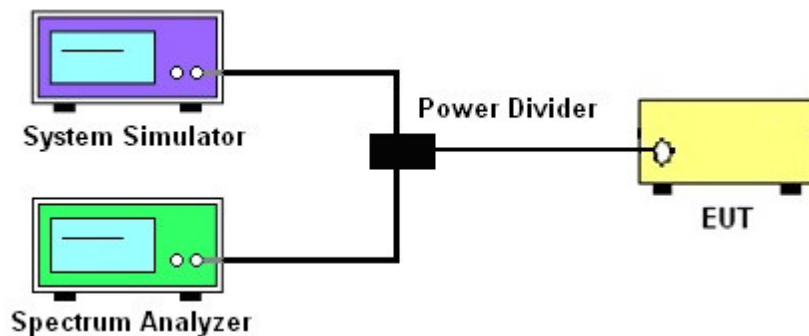

### TEST RESULT

Note: The test data please reference to attachment "STS2403302W08\_Appendix GSM", "STS2403302W08\_Appendix WCDMA" and "STS2403302W08\_Appendix LTE".



## 5.7 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

### TEST OVERVIEW

Radiated spurious emissions measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.


It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### TEST PROCEDURE


1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI C63.26-2015-Section 5.5.
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.  
PMea=S.G Level+ Ant-Cable loss; Margin=PMea-Limit.

**TEST SETUP**

For radiated test from 30MHz to 1GHz

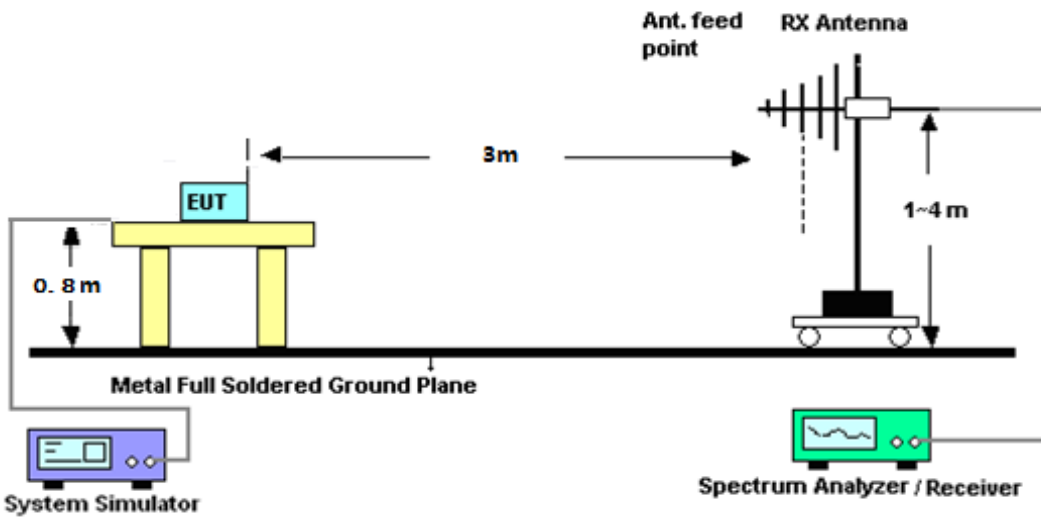

For radiated test from above 1GHz

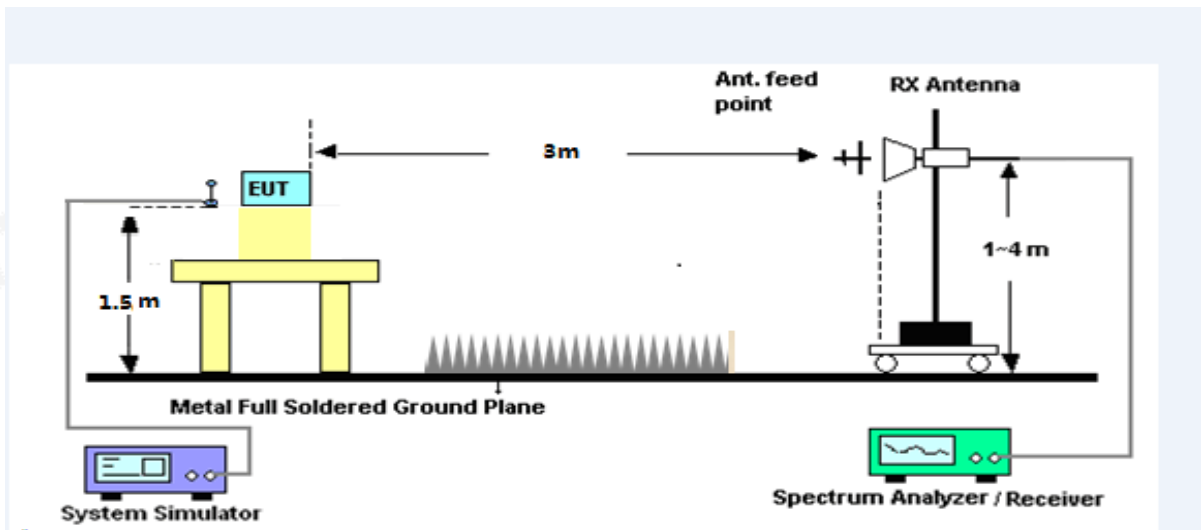

**TEST RESULT**

- Note:** (1) Spurious emissions which are attenuated by more than 20dB below the permissible value for frequency below 1000MHz.
- (2) Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value
- (3) Test is divided into three directions, X/Y/Z. X pattern for the worst.

GPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1648.41	-40.55	9.40	4.75	-35.90	-13.00	-22.90	H
2472.32	-40.04	10.60	8.39	-37.83	-13.00	-24.83	H
3296.73	-31.37	12.00	11.79	-31.16	-13.00	-18.16	H
1648.41	-43.51	9.40	4.75	-38.86	-13.00	-25.86	V
2472.32	-45.19	10.60	8.39	-42.98	-13.00	-29.98	V
3296.73	-43.54	12.00	11.79	-43.33	-13.00	-30.33	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1673.12	-40.58	9.50	4.76	-35.84	-13.00	-22.84	H
2509.59	-40.55	10.70	8.40	-38.25	-13.00	-25.25	H
3346.12	-31.41	12.20	11.80	-31.01	-13.00	-18.01	H
1673.12	-44.06	9.40	4.75	-39.41	-13.00	-26.41	V
2509.59	-44.40	10.60	8.39	-42.19	-13.00	-29.19	V
3346.12	-43.79	12.20	11.82	-43.41	-13.00	-30.41	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1697.42	-41.30	9.60	4.77	-36.47	-13.00	-23.47	H
2546.07	-39.56	10.80	8.50	-37.26	-13.00	-24.26	H
3395.27	-31.98	12.50	11.90	-31.38	-13.00	-18.38	H
1697.42	-44.29	9.60	4.77	-39.46	-13.00	-26.46	V
2546.07	-44.52	10.80	8.50	-42.22	-13.00	-29.22	V
3395.27	-43.66	12.50	11.90	-43.06	-13.00	-30.06	V



EGPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1648.08	-40.82	9.40	4.75	-36.17	-13.00	-23.17	H
2472.56	-39.46	10.60	8.39	-37.25	-13.00	-24.25	H
3296.50	-31.62	12.00	11.79	-31.41	-13.00	-18.41	H
1648.08	-44.06	9.40	4.75	-39.41	-13.00	-26.41	V
2472.56	-44.91	10.60	8.39	-42.70	-13.00	-29.70	V
3296.50	-43.27	12.00	11.79	-43.06	-13.00	-30.06	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1672.80	-40.78	9.50	4.76	-36.04	-13.00	-23.04	H
2509.62	-39.85	10.70	8.40	-37.55	-13.00	-24.55	H
3346.38	-31.53	12.20	11.80	-31.13	-13.00	-18.13	H
1672.80	-43.32	9.40	4.75	-38.67	-13.00	-25.67	V
2509.62	-44.72	10.60	8.39	-42.51	-13.00	-29.51	V
3346.38	-42.99	12.20	11.82	-42.61	-13.00	-29.61	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1697.61	-40.42	9.60	4.77	-35.59	-13.00	-22.59	H
2546.43	-39.70	10.80	8.50	-37.40	-13.00	-24.40	H
3394.98	-32.14	12.50	11.90	-31.54	-13.00	-18.54	H
1697.61	-43.74	9.60	4.77	-38.91	-13.00	-25.91	V
2546.43	-44.81	10.80	8.50	-42.51	-13.00	-29.51	V
3394.98	-43.08	12.50	11.90	-42.48	-13.00	-29.48	V





GPRS1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3700.35	-34.36	12.60	12.93	-34.69	-13.00	-21.69	H
5550.39	-34.68	13.10	17.11	-38.69	-13.00	-25.69	H
7400.58	-33.44	11.50	22.20	-44.14	-13.00	-31.14	H
3700.35	-35.29	12.60	12.93	-35.62	-13.00	-22.62	V
5550.39	-34.51	13.10	17.11	-38.52	-13.00	-25.52	V
7400.58	-32.28	11.50	22.20	-42.98	-13.00	-29.98	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3760.18	-34.54	12.60	12.93	-34.87	-13.00	-21.87	H
5640.01	-35.23	13.10	17.11	-39.24	-13.00	-26.24	H
7520.03	-32.96	11.50	22.20	-43.66	-13.00	-30.66	H
3760.18	-35.01	12.60	12.93	-35.34	-13.00	-22.34	V
5640.01	-34.27	13.10	17.11	-38.28	-13.00	-25.28	V
7520.03	-31.82	11.50	22.20	-42.52	-13.00	-29.52	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3819.26	-33.86	12.60	12.93	-34.19	-13.00	-21.19	H
5729.25	-35.44	13.10	17.11	-39.45	-13.00	-26.45	H
7639.21	-33.19	11.50	22.20	-43.89	-13.00	-30.89	H
3819.26	-35.33	12.60	12.93	-35.66	-13.00	-22.66	V
5729.25	-34.51	13.10	17.11	-38.52	-13.00	-25.52	V
7639.21	-32.90	11.50	22.20	-43.60	-13.00	-30.60	V



EGPRS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3700.02	-34.73	12.60	12.93	-35.06	-13.00	-22.06	H
5550.40	-34.08	13.10	17.11	-38.09	-13.00	-25.09	H
7400.71	-32.52	11.50	22.20	-43.22	-13.00	-30.22	H
3700.02	-34.84	12.60	12.93	-35.17	-13.00	-22.17	V
5550.40	-33.99	13.10	17.11	-38.00	-13.00	-25.00	V
7400.71	-32.81	11.50	22.20	-43.51	-13.00	-30.51	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3760.20	-34.55	12.60	12.93	-34.88	-13.00	-21.88	H
5640.17	-35.10	13.10	17.11	-39.11	-13.00	-26.11	H
7520.00	-33.34	11.50	22.20	-44.04	-13.00	-31.04	H
3760.20	-35.75	12.60	12.93	-36.08	-13.00	-23.08	V
5640.17	-34.77	13.10	17.11	-38.78	-13.00	-25.78	V
7520.00	-32.72	11.50	22.20	-43.42	-13.00	-30.42	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3819.45	-34.21	12.60	12.93	-34.54	-13.00	-21.54	H
5729.42	-35.20	13.10	17.11	-39.21	-13.00	-26.21	H
7639.04	-32.64	11.50	22.20	-43.34	-13.00	-30.34	H
3819.45	-35.96	12.60	12.93	-36.29	-13.00	-23.29	V
5729.42	-34.63	13.10	17.11	-38.64	-13.00	-25.64	V
7639.04	-32.82	11.50	22.20	-43.52	-13.00	-30.52	V



WCDMA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3704.02	-34.08	12.60	12.93	-34.41	-13.00	-21.41	H
5557.24	-34.63	13.10	17.11	-38.64	-13.00	-25.64	H
7409.81	-33.35	11.50	22.20	-44.05	-13.00	-31.05	H
3704.02	-35.47	12.60	12.93	-35.80	-13.00	-22.80	V
5557.24	-35.19	13.10	17.11	-39.20	-13.00	-26.20	V
7409.81	-31.91	11.50	22.20	-42.61	-13.00	-29.61	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3759.96	-33.49	12.60	12.93	-33.82	-13.00	-20.82	H
5639.98	-34.33	13.10	17.11	-38.34	-13.00	-25.34	H
7520.00	-33.30	11.50	22.20	-44.00	-13.00	-31.00	H
3759.96	-35.79	12.60	12.93	-36.12	-13.00	-23.12	V
5639.98	-34.06	13.10	17.11	-38.07	-13.00	-25.07	V
7520.00	-32.14	11.50	22.20	-42.84	-13.00	-29.84	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3815.40	-34.86	12.60	12.93	-35.19	-13.00	-22.19	H
5722.66	-34.61	13.10	17.11	-38.62	-13.00	-25.62	H
7630.17	-33.11	11.50	22.20	-43.81	-13.00	-30.81	H
3815.40	-34.67	12.60	12.93	-35.00	-13.00	-22.00	V
5722.66	-33.96	13.10	17.11	-37.97	-13.00	-24.97	V
7630.17	-32.08	11.50	22.20	-42.78	-13.00	-29.78	V



HSUPA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3704.35	-34.76	12.60	12.93	-35.09	-13.00	-22.09	H
5557.33	-35.13	13.10	17.11	-39.14	-13.00	-26.14	H
7409.49	-32.76	11.50	22.20	-43.46	-13.00	-30.46	H
3704.35	-35.46	12.60	12.93	-35.79	-13.00	-22.79	V
5557.33	-34.30	13.10	17.11	-38.31	-13.00	-25.31	V
7409.49	-31.73	11.50	22.20	-42.43	-13.00	-29.43	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3760.05	-33.54	12.60	12.93	-33.87	-13.00	-20.87	H
5640.03	-34.36	13.10	17.11	-38.37	-13.00	-25.37	H
7520.04	-33.16	11.50	22.20	-43.86	-13.00	-30.86	H
3760.05	-35.19	12.60	12.93	-35.52	-13.00	-22.52	V
5640.03	-34.73	13.10	17.11	-38.74	-13.00	-25.74	V
7520.04	-31.94	11.50	22.20	-42.64	-13.00	-29.64	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3815.73	-34.84	12.60	12.93	-35.17	-13.00	-22.17	H
5722.82	-34.29	13.10	17.11	-38.30	-13.00	-25.30	H
7630.21	-32.45	11.50	22.20	-43.15	-13.00	-30.15	H
3815.73	-35.34	12.60	12.93	-35.67	-13.00	-22.67	V
5722.82	-34.29	13.10	17.11	-38.30	-13.00	-25.30	V
7630.21	-32.66	11.50	22.20	-43.36	-13.00	-30.36	V



HSDPA Band 2: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3704.03	-34.20	12.60	12.93	-34.53	-13.00	-21.53	H
5557.59	-34.83	13.10	17.11	-38.84	-13.00	-25.84	H
7409.57	-33.38	11.50	22.20	-44.08	-13.00	-31.08	H
3704.03	-35.59	12.60	12.93	-35.92	-13.00	-22.92	V
5557.59	-33.78	13.10	17.11	-37.79	-13.00	-24.79	V
7409.57	-32.66	11.50	22.20	-43.36	-13.00	-30.36	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3760.26	-34.17	12.60	12.93	-34.50	-13.00	-21.50	H
5640.13	-35.14	13.10	17.11	-39.15	-13.00	-26.15	H
7520.02	-32.25	11.50	22.20	-42.95	-13.00	-29.95	H
3760.26	-35.95	12.60	12.93	-36.28	-13.00	-23.28	V
5640.13	-34.80	13.10	17.11	-38.81	-13.00	-25.81	V
7520.02	-32.31	11.50	22.20	-43.01	-13.00	-30.01	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
3815.63	-34.67	12.60	12.93	-35.00	-13.00	-22.00	H
5722.67	-33.99	13.10	17.11	-38.00	-13.00	-25.00	H
7630.10	-32.92	11.50	22.20	-43.62	-13.00	-30.62	H
3815.63	-34.56	12.60	12.93	-34.89	-13.00	-21.89	V
5722.67	-35.03	13.10	17.11	-39.04	-13.00	-26.04	V
7630.10	-33.15	11.50	22.20	-43.85	-13.00	-30.85	V



WCDMA Band 5: (30-9000)MHz							
The most testresults channel 4132/826.4MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
1652.84	-41.15	9.40	4.75	-36.50	-13.00	-23.50	H
2479.04	-39.25	10.60	8.39	-37.04	-13.00	-24.04	H
3305.93	-32.23	12.00	11.79	-32.02	-13.00	-19.02	H
1652.84	-43.32	9.40	4.75	-38.67	-13.00	-25.67	V
2479.04	-44.29	10.60	8.39	-42.08	-13.00	-29.08	V
3305.93	-43.72	12.00	11.79	-43.51	-13.00	-30.51	V
The Worst Test Results Channel 4182/836.4MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
1672.91	-40.90	9.40	4.75	-36.25	-13.00	-23.25	H
2509.41	-39.30	10.60	8.39	-37.09	-13.00	-24.09	H
3345.75	-30.92	12.00	11.79	-30.71	-13.00	-17.71	H
1672.91	-44.09	9.40	4.75	-39.44	-13.00	-26.44	V
2509.41	-45.10	10.60	8.39	-42.89	-13.00	-29.89	V
3345.75	-42.80	12.00	11.79	-42.59	-13.00	-29.59	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
1693.41	-40.84	9.40	4.75	-36.19	-13.00	-23.19	H
2539.69	-40.15	10.60	8.39	-37.94	-13.00	-24.94	H
3386.12	-31.84	12.00	11.79	-31.63	-13.00	-18.63	H
1693.41	-43.60	9.40	4.75	-38.95	-13.00	-25.95	V
2539.69	-44.50	10.60	8.39	-42.29	-13.00	-29.29	V
3386.12	-42.83	12.00	11.79	-42.62	-13.00	-29.62	V



HSUPA Band 5: (30-9000)MHz							
The most testresults channel 4132/826.4MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
1652.72	-40.46	9.40	4.75	-35.81	-13.00	-22.81	H
2479.40	-40.47	10.60	8.39	-38.26	-13.00	-25.26	H
3305.73	-31.66	12.00	11.79	-31.45	-13.00	-18.45	H
1652.72	-44.53	9.40	4.75	-39.88	-13.00	-26.88	V
2479.40	-44.24	10.60	8.39	-42.03	-13.00	-29.03	V
3305.73	-43.39	12.00	11.79	-43.18	-13.00	-30.18	V
The Worst Test Results Channel 4182/836.4MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
1672.57	-40.78	9.40	4.75	-36.13	-13.00	-23.13	H
2509.30	-39.45	10.60	8.39	-37.24	-13.00	-24.24	H
3345.55	-31.62	12.00	11.79	-31.41	-13.00	-18.41	H
1672.57	-44.16	9.40	4.75	-39.51	-13.00	-26.51	V
2509.30	-45.38	10.60	8.39	-43.17	-13.00	-30.17	V
3345.55	-42.70	12.00	11.79	-42.49	-13.00	-29.49	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
1693.28	-41.17	9.40	4.75	-36.52	-13.00	-23.52	H
2539.60	-39.30	10.60	8.39	-37.09	-13.00	-24.09	H
3386.34	-32.24	12.00	11.79	-32.03	-13.00	-19.03	H
1693.28	-43.49	9.40	4.75	-38.84	-13.00	-25.84	V
2539.60	-44.87	10.60	8.39	-42.66	-13.00	-29.66	V
3386.34	-43.69	12.00	11.79	-43.48	-13.00	-30.48	V



HSDPA Band 5: (30-9000)MHz							
The most testresults channel 4132/826.4MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
1652.75	-41.50	9.40	4.75	-36.85	-13.00	-23.85	H
2479.11	-40.41	10.60	8.39	-38.20	-13.00	-25.20	H
3305.89	-31.36	12.00	11.79	-31.15	-13.00	-18.15	H
1652.75	-44.60	9.40	4.75	-39.95	-13.00	-26.95	V
2479.11	-45.10	10.60	8.39	-42.89	-13.00	-29.89	V
3305.89	-43.91	12.00	11.79	-43.70	-13.00	-30.70	V
The Worst Test Results Channel 4182/836.4MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
1672.95	-41.04	9.40	4.75	-36.39	-13.00	-23.39	H
2509.30	-39.34	10.60	8.39	-37.13	-13.00	-24.13	H
3345.86	-31.45	12.00	11.79	-31.24	-13.00	-18.24	H
1672.95	-44.58	9.40	4.75	-39.93	-13.00	-26.93	V
2509.30	-45.20	10.60	8.39	-42.99	-13.00	-29.99	V
3345.86	-43.17	12.00	11.79	-42.96	-13.00	-29.96	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	( dBm )	(dBm)	
1693.32	-40.70	9.40	4.75	-36.05	-13.00	-23.05	H
2539.87	-39.61	10.60	8.39	-37.40	-13.00	-24.40	H
3386.10	-31.29	12.00	11.79	-31.08	-13.00	-18.08	H
1693.32	-44.53	9.40	4.75	-39.88	-13.00	-26.88	V
2539.87	-44.43	10.60	8.39	-42.22	-13.00	-29.22	V
3386.10	-43.53	12.00	11.79	-43.32	-13.00	-30.32	V





LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3701.08	-34.19	12.60	12.93	-34.52	-13.00	-21.52	H
5552.16	-35.05	13.10	17.11	-39.06	-13.00	-26.06	H
7402.42	-32.74	11.50	22.20	-43.44	-13.00	-30.44	H
3701.08	-34.68	12.60	12.93	-35.01	-13.00	-22.01	V
5552.16	-34.65	13.10	17.11	-38.66	-13.00	-25.66	V
7402.42	-32.41	11.50	22.20	-43.11	-13.00	-30.11	V
LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.92	-34.67	12.60	12.93	-35.00	-13.00	-22.00	H
5640.06	-35.08	13.10	17.11	-39.09	-13.00	-26.09	H
7520.18	-33.34	11.50	22.20	-44.04	-13.00	-31.04	H
3759.92	-35.98	12.60	12.93	-36.31	-13.00	-23.31	V
5640.06	-35.11	13.10	17.11	-39.12	-13.00	-26.12	V
7520.18	-32.06	11.50	22.20	-42.76	-13.00	-29.76	V
LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3818.45	-33.91	12.60	12.93	-34.24	-13.00	-21.24	H
5727.78	-35.36	13.10	17.11	-39.37	-13.00	-26.37	H
7637.16	-32.96	11.50	22.20	-43.66	-13.00	-30.66	H
3818.45	-35.01	12.60	12.93	-35.34	-13.00	-22.34	V
5727.78	-33.97	13.10	17.11	-37.98	-13.00	-24.98	V
7637.16	-33.19	11.50	22.20	-43.89	-13.00	-30.89	V



LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3702.93	-33.96	12.60	12.93	-34.29	-13.00	-21.29	H
5554.53	-34.73	13.10	17.11	-38.74	-13.00	-25.74	H
7405.99	-32.36	11.50	22.20	-43.06	-13.00	-30.06	H
3702.93	-34.75	12.60	12.93	-35.08	-13.00	-22.08	V
5554.53	-35.03	13.10	17.11	-39.04	-13.00	-26.04	V
7405.99	-31.81	11.50	22.20	-42.51	-13.00	-29.51	V
LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.94	-34.52	12.60	12.93	-34.85	-13.00	-21.85	H
5639.95	-34.55	13.10	17.11	-38.56	-13.00	-25.56	H
7519.91	-32.30	11.50	22.20	-43.00	-13.00	-30.00	H
3759.94	-34.54	12.60	12.93	-34.87	-13.00	-21.87	V
5639.95	-35.13	13.10	17.11	-39.14	-13.00	-26.14	V
7519.91	-31.93	11.50	22.20	-42.63	-13.00	-29.63	V
LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3816.96	-34.35	12.60	12.93	-34.68	-13.00	-21.68	H
5725.33	-34.54	13.10	17.11	-38.55	-13.00	-25.55	H
7634.14	-32.55	11.50	22.20	-43.25	-13.00	-30.25	H
3816.96	-35.94	12.60	12.93	-36.27	-13.00	-23.27	V
5725.33	-34.39	13.10	17.11	-38.40	-13.00	-25.40	V
7634.14	-32.34	11.50	22.20	-43.04	-13.00	-30.04	V



LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3705.11	-33.46	12.60	12.93	-33.79	-13.00	-20.79	H
5557.55	-34.74	13.10	17.11	-38.75	-13.00	-25.75	H
7410.20	-33.58	11.50	22.20	-44.28	-13.00	-31.28	H
3705.11	-35.84	12.60	12.93	-36.17	-13.00	-23.17	V
5557.55	-34.37	13.10	17.11	-38.38	-13.00	-25.38	V
7410.20	-31.90	11.50	22.20	-42.60	-13.00	-29.60	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.84	-34.50	12.60	12.93	-34.83	-13.00	-21.83	H
5639.92	-34.15	13.10	17.11	-38.16	-13.00	-25.16	H
7519.80	-33.12	11.50	22.20	-43.82	-13.00	-30.82	H
3759.84	-34.72	12.60	12.93	-35.05	-13.00	-22.05	V
5639.92	-34.34	13.10	17.11	-38.35	-13.00	-25.35	V
7519.80	-32.80	11.50	22.20	-43.50	-13.00	-30.50	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3814.98	-34.79	12.60	12.93	-35.12	-13.00	-22.12	H
5722.54	-34.73	13.10	17.11	-38.74	-13.00	-25.74	H
7630.01	-33.37	11.50	22.20	-44.07	-13.00	-31.07	H
3814.98	-35.06	12.60	12.93	-35.39	-13.00	-22.39	V
5722.54	-34.22	13.10	17.11	-38.23	-13.00	-25.23	V
7630.01	-32.82	11.50	22.20	-43.52	-13.00	-30.52	V



LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3710.11	-33.64	12.60	12.93	-33.97	-13.00	-20.97	H
5565.00	-34.09	13.10	17.11	-38.10	-13.00	-25.10	H
7420.24	-33.22	11.50	22.20	-43.92	-13.00	-30.92	H
3710.11	-35.49	12.60	12.93	-35.82	-13.00	-22.82	V
5565.00	-34.06	13.10	17.11	-38.07	-13.00	-25.07	V
7420.24	-31.82	11.50	22.20	-42.52	-13.00	-29.52	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.19	-33.53	12.60	12.93	-33.86	-13.00	-20.86	H
5639.87	-34.18	13.10	17.11	-38.19	-13.00	-25.19	H
7520.27	-33.57	11.50	22.20	-44.27	-13.00	-31.27	H
3760.19	-35.55	12.60	12.93	-35.88	-13.00	-22.88	V
5639.87	-35.17	13.10	17.11	-39.18	-13.00	-26.18	V
7520.27	-33.17	11.50	22.20	-43.87	-13.00	-30.87	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3810.16	-34.44	12.60	12.93	-34.77	-13.00	-21.77	H
5715.02	-34.67	13.10	17.11	-38.68	-13.00	-25.68	H
7620.05	-32.29	11.50	22.20	-42.99	-13.00	-29.99	H
3810.16	-35.72	12.60	12.93	-36.05	-13.00	-23.05	V
5715.02	-34.37	13.10	17.11	-38.38	-13.00	-25.38	V
7620.05	-32.42	11.50	22.20	-43.12	-13.00	-30.12	V



LTE Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3715.04	-33.67	12.60	12.93	-34.00	-13.00	-21.00	H
5572.40	-34.81	13.10	17.11	-38.82	-13.00	-25.82	H
7430.65	-32.54	11.50	22.20	-43.24	-13.00	-30.24	H
3715.04	-34.83	12.60	12.93	-35.16	-13.00	-22.16	V
5572.40	-34.18	13.10	17.11	-38.19	-13.00	-25.19	V
7430.65	-33.04	11.50	22.20	-43.74	-13.00	-30.74	V
LTE Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.24	-34.41	12.60	12.93	-34.74	-13.00	-21.74	H
5640.07	-34.66	13.10	17.11	-38.67	-13.00	-25.67	H
7520.10	-32.96	11.50	22.20	-43.66	-13.00	-30.66	H
3760.24	-34.96	12.60	12.93	-35.29	-13.00	-22.29	V
5640.07	-34.94	13.10	17.11	-38.95	-13.00	-25.95	V
7520.10	-32.12	11.50	22.20	-42.82	-13.00	-29.82	V
LTE Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3805.26	-34.62	12.60	12.93	-34.95	-13.00	-21.95	H
5707.48	-34.55	13.10	17.11	-38.56	-13.00	-25.56	H
7610.23	-32.74	11.50	22.20	-43.44	-13.00	-30.44	H
3805.26	-35.12	12.60	12.93	-35.45	-13.00	-22.45	V
5707.48	-34.92	13.10	17.11	-38.93	-13.00	-25.93	V
7610.23	-31.86	11.50	22.20	-42.56	-13.00	-29.56	V



LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3720.02	-33.64	12.60	12.93	-33.97	-13.00	-20.97	H
5580.25	-35.36	13.10	17.11	-39.37	-13.00	-26.37	H
7439.77	-33.30	11.50	22.20	-44.00	-13.00	-31.00	H
3720.02	-35.38	12.60	12.93	-35.71	-13.00	-22.71	V
5580.25	-34.55	13.10	17.11	-38.56	-13.00	-25.56	V
7439.77	-32.24	11.50	22.20	-42.94	-13.00	-29.94	V
LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.88	-34.26	12.60	12.93	-34.59	-13.00	-21.59	H
5640.22	-35.08	13.10	17.11	-39.09	-13.00	-26.09	H
7520.00	-32.27	11.50	22.20	-42.97	-13.00	-29.97	H
3759.88	-35.49	12.60	12.93	-35.82	-13.00	-22.82	V
5640.22	-33.78	13.10	17.11	-37.79	-13.00	-24.79	V
7520.00	-32.51	11.50	22.20	-43.21	-13.00	-30.21	V
LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3799.82	-33.59	12.60	12.93	-33.92	-13.00	-20.92	H
5699.71	-35.39	13.10	17.11	-39.40	-13.00	-26.40	H
7600.01	-32.41	11.50	22.20	-43.11	-13.00	-30.11	H
3799.82	-35.71	12.60	12.93	-36.04	-13.00	-23.04	V
5699.71	-34.02	13.10	17.11	-38.03	-13.00	-25.03	V
7600.01	-32.96	11.50	22.20	-43.66	-13.00	-30.66	V



LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.93	-34.69	9.56	9.72	-34.85	-13.00	-21.85	H
2473.82	-34.30	10.50	10.86	-34.66	-13.00	-21.66	H
3298.52	-33.50	12.78	11.57	-32.29	-13.00	-19.29	H
1648.93	-35.68	9.56	9.72	-35.84	-13.00	-22.84	V
2473.82	-34.82	10.50	10.86	-35.18	-13.00	-22.18	V
3298.52	-31.97	12.78	11.57	-30.76	-13.00	-17.76	V
LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.73	-33.99	9.56	9.72	-34.15	-13.00	-21.15	H
2509.13	-34.07	10.50	10.86	-34.43	-13.00	-21.43	H
3345.52	-33.30	12.78	11.57	-32.09	-13.00	-19.09	H
1672.73	-34.84	9.56	9.72	-35.00	-13.00	-22.00	V
2509.13	-34.35	10.50	10.86	-34.71	-13.00	-21.71	V
3345.52	-32.52	12.78	11.57	-31.31	-13.00	-18.31	V
LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1696.25	-34.55	9.56	9.72	-34.71	-13.00	-21.71	H
2544.49	-34.41	10.50	10.86	-34.77	-13.00	-21.77	H
3392.69	-33.19	12.78	11.57	-31.98	-13.00	-18.98	H
1696.25	-35.89	9.56	9.72	-36.05	-13.00	-23.05	V
2544.49	-34.57	10.50	10.86	-34.93	-13.00	-21.93	V
3392.69	-32.55	12.78	11.57	-31.34	-13.00	-18.34	V



LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1650.17	-34.41	9.56	9.72	-34.57	-13.00	-21.57	H
2476.04	-35.15	10.50	10.86	-35.51	-13.00	-22.51	H
3301.43	-32.41	12.78	11.57	-31.20	-13.00	-18.20	H
1650.17	-34.89	9.56	9.72	-35.05	-13.00	-22.05	V
2476.04	-34.90	10.50	10.86	-35.26	-13.00	-22.26	V
3301.43	-32.90	12.78	11.57	-31.69	-13.00	-18.69	V
LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.53	-33.73	9.56	9.72	-33.89	-13.00	-20.89	H
2508.88	-34.59	10.50	10.86	-34.95	-13.00	-21.95	H
3345.69	-33.35	12.78	11.57	-32.14	-13.00	-19.14	H
1672.53	-35.33	9.56	9.72	-35.49	-13.00	-22.49	V
2508.88	-34.60	10.50	10.86	-34.96	-13.00	-21.96	V
3345.69	-32.40	12.78	11.57	-31.19	-13.00	-18.19	V
LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1694.38	-34.41	9.56	9.72	-34.57	-13.00	-21.57	H
2542.17	-34.17	10.50	10.86	-34.53	-13.00	-21.53	H
3389.50	-33.49	12.78	11.57	-32.28	-13.00	-19.28	H
1694.38	-35.78	9.56	9.72	-35.94	-13.00	-22.94	V
2542.17	-35.24	10.50	10.86	-35.60	-13.00	-22.60	V
3389.50	-32.87	12.78	11.57	-31.66	-13.00	-18.66	V





LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1652.47	-34.82	9.56	9.72	-34.98	-13.00	-21.98	H
2478.79	-34.39	10.50	10.86	-34.75	-13.00	-21.75	H
3305.63	-32.94	12.78	11.57	-31.73	-13.00	-18.73	H
1652.47	-35.79	9.56	9.72	-35.95	-13.00	-22.95	V
2478.79	-34.52	10.50	10.86	-34.88	-13.00	-21.88	V
3305.63	-32.58	12.78	11.57	-31.37	-13.00	-18.37	V
LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.40	-34.39	9.56	9.72	-34.55	-13.00	-21.55	H
2508.98	-35.33	10.50	10.86	-35.69	-13.00	-22.69	H
3345.23	-32.84	12.78	11.57	-31.63	-13.00	-18.63	H
1672.40	-34.96	9.56	9.72	-35.12	-13.00	-22.12	V
2508.98	-34.16	10.50	10.86	-34.52	-13.00	-21.52	V
3345.23	-32.64	12.78	11.57	-31.43	-13.00	-18.43	V
LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1692.11	-34.88	9.56	9.72	-35.04	-13.00	-22.04	H
2538.93	-34.72	10.50	10.86	-35.08	-13.00	-22.08	H
3385.78	-33.64	12.78	11.57	-32.43	-13.00	-19.43	H
1692.11	-35.94	9.56	9.72	-36.10	-13.00	-23.10	V
2538.93	-35.10	10.50	10.86	-35.46	-13.00	-22.46	V
3385.78	-32.19	12.78	11.57	-30.98	-13.00	-17.98	V



LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1657.95	-34.64	9.56	9.72	-34.80	-13.00	-21.80	H
2486.26	-34.76	10.50	10.86	-35.12	-13.00	-22.12	H
3315.43	-32.51	12.78	11.57	-31.30	-13.00	-18.30	H
1657.95	-34.93	9.56	9.72	-35.09	-13.00	-22.09	V
2486.26	-34.05	10.50	10.86	-34.41	-13.00	-21.41	V
3315.43	-32.58	12.78	11.57	-31.37	-13.00	-18.37	V
LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1672.35	-34.37	9.56	9.72	-34.53	-13.00	-21.53	H
2509.02	-34.68	10.50	10.86	-35.04	-13.00	-22.04	H
3345.19	-32.70	12.78	11.57	-31.49	-13.00	-18.49	H
1672.35	-35.44	9.56	9.72	-35.60	-13.00	-22.60	V
2509.02	-34.06	10.50	10.86	-34.42	-13.00	-21.42	V
3345.19	-32.15	12.78	11.57	-30.94	-13.00	-17.94	V
LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1687.56	-34.37	9.56	9.72	-34.53	-13.00	-21.53	H
2531.52	-34.53	10.50	10.86	-34.89	-13.00	-21.89	H
3375.45	-33.44	12.78	11.57	-32.23	-13.00	-19.23	H
1687.56	-35.83	9.56	9.72	-35.99	-13.00	-22.99	V
2531.52	-33.98	10.50	10.86	-34.34	-13.00	-21.34	V
3375.45	-32.92	12.78	11.57	-31.71	-13.00	-18.71	V



LTE Band 12 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1399.12	-34.57	8.17	9.34	-35.74	-13.00	-22.74	H
2098.74	-35.33	9.53	10.42	-36.22	-13.00	-23.22	H
2798.71	-32.66	11.27	11.12	-32.51	-13.00	-19.51	H
1399.12	-34.91	8.17	9.34	-36.08	-13.00	-23.08	V
2098.74	-34.61	9.53	10.42	-35.50	-13.00	-22.50	V
2798.71	-32.28	11.27	11.12	-32.13	-13.00	-19.13	V
LTE Band 12 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1414.96	-34.22	8.17	9.34	-35.39	-13.00	-22.39	H
2122.46	-34.25	9.53	10.42	-35.14	-13.00	-22.14	H
2829.90	-33.45	11.27	11.12	-33.30	-13.00	-20.30	H
1414.96	-35.91	8.17	9.34	-37.08	-13.00	-24.08	V
2122.46	-34.80	9.53	10.42	-35.69	-13.00	-22.69	V
2829.90	-31.99	11.27	11.12	-31.84	-13.00	-18.84	V
LTE Band 12 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1430.18	-33.54	8.17	9.34	-34.71	-13.00	-21.71	H
2145.42	-34.30	9.53	10.42	-35.19	-13.00	-22.19	H
2860.71	-32.76	11.27	11.12	-32.61	-13.00	-19.61	H
1430.18	-35.35	8.17	9.34	-36.52	-13.00	-23.52	V
2145.42	-34.25	9.53	10.42	-35.14	-13.00	-22.14	V
2860.71	-31.90	11.27	11.12	-31.75	-13.00	-18.75	V



LTE Band 12 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1400.97	-33.85	8.17	9.34	-35.02	-13.00	-22.02	H
2101.37	-35.25	9.53	10.42	-36.14	-13.00	-23.14	H
2801.83	-33.36	11.27	11.12	-33.21	-13.00	-20.21	H
1400.97	-34.77	8.17	9.34	-35.94	-13.00	-22.94	V
2101.37	-35.17	9.53	10.42	-36.06	-13.00	-23.06	V
2801.83	-32.49	11.27	11.12	-32.34	-13.00	-19.34	V
LTE Band 12 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1414.66	-34.30	8.17	9.34	-35.47	-13.00	-22.47	H
2122.05	-34.93	9.53	10.42	-35.82	-13.00	-22.82	H
2829.75	-32.29	11.27	11.12	-32.14	-13.00	-19.14	H
1414.66	-35.12	8.17	9.34	-36.29	-13.00	-23.29	V
2122.05	-34.57	9.53	10.42	-35.46	-13.00	-22.46	V
2829.75	-32.33	11.27	11.12	-32.18	-13.00	-19.18	V
LTE Band 12 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1428.56	-33.47	8.17	9.34	-34.64	-13.00	-21.64	H
2143.39	-34.46	9.53	10.42	-35.35	-13.00	-22.35	H
2857.53	-33.11	11.27	11.12	-32.96	-13.00	-19.96	H
1428.56	-34.86	8.17	9.34	-36.03	-13.00	-23.03	V
2143.39	-34.94	9.53	10.42	-35.83	-13.00	-22.83	V
2857.53	-31.73	11.27	11.12	-31.58	-13.00	-18.58	V



LTE Band 12 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1402.52	-34.06	8.17	9.34	-35.23	-13.00	-22.23	H
2104.42	-34.13	9.53	10.42	-35.02	-13.00	-22.02	H
2805.89	-32.59	11.27	11.12	-32.44	-13.00	-19.44	H
1402.52	-34.78	8.17	9.34	-35.95	-13.00	-22.95	V
2104.42	-34.60	9.53	10.42	-35.49	-13.00	-22.49	V
2805.89	-32.70	11.27	11.12	-32.55	-13.00	-19.55	V
LTE Band 12 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1414.62	-33.89	8.17	9.34	-35.06	-13.00	-22.06	H
2122.45	-34.57	9.53	10.42	-35.46	-13.00	-22.46	H
2829.59	-32.61	11.27	11.12	-32.46	-13.00	-19.46	H
1414.62	-35.95	8.17	9.34	-37.12	-13.00	-24.12	V
2122.45	-34.25	9.53	10.42	-35.14	-13.00	-22.14	V
2829.59	-32.96	11.27	11.12	-32.81	-13.00	-19.81	V
LTE Band 12 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1426.94	-34.73	8.17	9.34	-35.90	-13.00	-22.90	H
2140.40	-34.20	9.53	10.42	-35.09	-13.00	-22.09	H
2853.54	-32.17	11.27	11.12	-32.02	-13.00	-19.02	H
1426.94	-35.11	8.17	9.34	-36.28	-13.00	-23.28	V
2140.40	-34.48	9.53	10.42	-35.37	-13.00	-22.37	V
2853.54	-32.44	11.27	11.12	-32.29	-13.00	-19.29	V



LTE Band 12 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1407.73	-33.77	8.17	9.34	-34.94	-13.00	-21.94	H
2111.78	-34.68	9.53	10.42	-35.57	-13.00	-22.57	H
2815.53	-32.46	11.27	11.12	-32.31	-13.00	-19.31	H
1407.73	-35.05	8.17	9.34	-36.22	-13.00	-23.22	V
2111.78	-34.74	9.53	10.42	-35.63	-13.00	-22.63	V
2815.53	-32.50	11.27	11.12	-32.35	-13.00	-19.35	V
LTE Band 12 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1414.77	-33.97	8.17	9.34	-35.14	-13.00	-22.14	H
2122.46	-35.19	9.53	10.42	-36.08	-13.00	-23.08	H
2829.86	-33.43	11.27	11.12	-33.28	-13.00	-20.28	H
1414.77	-35.72	8.17	9.34	-36.89	-13.00	-23.89	V
2122.46	-35.13	9.53	10.42	-36.02	-13.00	-23.02	V
2829.86	-32.56	11.27	11.12	-32.41	-13.00	-19.41	V
LTE Band 12 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1421.64	-34.79	8.17	9.34	-35.96	-13.00	-22.96	H
2132.97	-34.61	9.53	10.42	-35.50	-13.00	-22.50	H
2843.82	-32.82	11.27	11.12	-32.67	-13.00	-19.67	H
1421.64	-34.85	8.17	9.34	-36.02	-13.00	-23.02	V
2132.97	-34.62	9.53	10.42	-35.51	-13.00	-22.51	V
2843.82	-33.07	11.27	11.12	-32.92	-13.00	-19.92	V



APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*