




# TEST REPORT


Test Report No. : UL-RPT-RP13946797-1116A V2.0

**Customer** : Buddi Limited  
**Model No. / HVIN** : 3430013  
**PMN** : Smart Tag 4  
**FCC ID** : ZDLST6  
**ISED Certification No.** : IC: 20371-ST6  
**Technology** : LTE Cat M1 – Band 5  
**Test Standard(s)** : FCC Parts 2.1053, 22.917 & 15.209(a)  
Innovation, Science and Economic Development Canada  
RSS-132 Issue 3 Section 5.5  
RSS-Gen Issue 5 Section 6.13  
**Test Laboratory** : UL International (UK) Ltd, Basingstoke, Hampshire, RG24 8AH,  
United Kingdom

1. This test report shall not be reproduced except in full, without the written approval of UL International (UK) Ltd.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 2.0 supersedes all previous versions.

**Date of Issue:** 01 December 2021

**Checked by:**   
Sarah Williams  
RF Operations Leader, Radio Laboratory

**Company Signatory:**   
Ben Mercer  
Lead Project Engineer, Radio Laboratory



**UL International (UK) LTD**

Unit 1-3 Horizon, Kingsland Business Park, Wade Road, Basingstoke, Hampshire, RG24 8AH, UK  
Telephone: +44 (0)1256 312000  
Facsimile: +44 (0)1256 312001

**Customer Information**

<b>Company Name:</b>	Buddi Limited
<b>Address:</b>	Talbot House 17 Church Street Rickmansworth Hertfordshire WD3 1DE United Kingdom

**Report Revision History**

<b>Version Number</b>	<b>Issue Date</b>	<b>Revision Details</b>	<b>Revised By</b>
1.0	01/12/2021	Initial Version	Sarah Williams
2.0	01/12/2021	Hardware Version updated	Sarah Williams

## **Table of Contents**

<b>Customer Information.....</b>	<b>2</b>
<b>Report Revision History .....</b>	<b>2</b>
<b>Table of Contents.....</b>	<b>3</b>
<b>1 Attestation of Test Results.....</b>	<b>4</b>
1.1 Description of EUT	4
1.2 General Information	4
1.3 Summary of Test Results	4
1.4 Deviations from the Test Specification	4
<b>2 Summary of Testing.....</b>	<b>5</b>
2.1 Facilities and Accreditation	5
2.2 Methods and Procedures	5
2.3 Calibration and Uncertainty	6
2.4 Test and Measurement Equipment	7
<b>3 Equipment Under Test (EUT) .....</b>	<b>8</b>
3.1 Identification of Equipment Under Test (EUT)	8
3.2 Modifications Incorporated in the EUT	8
3.3 Additional Information Related to Testing	8
3.4 Description of Available Antennas	8
3.5 Description of Test Setup	9
<b>4 Radiated Test Results.....</b>	<b>12</b>
4.1 Transmitter Out of Band Radiated Emissions	12

## 1 Attestation of Test Results




### 1.1 Description of EUT

The equipment under test was an Electronic Monitoring (EM) device which communicates to a server-based monitoring platform providing data such as: event time, GPS location, geo-fence data, position type, speed of motion, battery level, signal strength, strap on/off, alerts. It contains a 2G and 4G cellular module (FCC ID: XPYUBX18ZO01, IC: 8595A-UBX18ZO01), a 2.4 GHz WLAN transceiver and a 915 MHz ISM transceiver.

### 1.2 General Information

<b>Specification Reference:</b>	47CFR22
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 22 Subpart H (Public Mobile Services)
<b>Specification Reference:</b>	47CFR15.209
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.209
<b>Specification Reference:</b>	RSS-Gen Issue 5, February 2021
<b>Specification Title:</b>	General Requirements for Compliance of Radio Apparatus
<b>Specification Reference:</b>	RSS-132 Issue 3, January 2013
<b>Specification Title:</b>	Cellular Telephone Systems Operating in the Bands: 824-849 MHz and 869-894 MHz
<b>Site Registration:</b>	FCC: 685609, ISEDC: 20903
<b>FCC Lab. Designation No.:</b>	UK2011
<b>ISEDC CABID:</b>	UK0001
<b>Location of Testing:</b>	Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, G24 8AH, United Kingdom
<b>Test Dates:</b>	09 November 2021 to 16 November 2021

### 1.3 Summary of Test Results

FCC Reference (47CFR)	ISED Canada Reference	Measurement	Result
Part 15.209(a) / 2.1053 / 22.917	RSS-Gen 6.13 / RSS-132 5.5	Transmitter Out of Band Radiated Emissions	
<b>Key to Results</b>			
 = Complied  = Did not comply			

### 1.4 Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

## **2 Summary of Testing**

### **2.1 Facilities and Accreditation**

The test site and measurement facilities used to collect data are located at Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	X
Site 2	-
Site 17	-

UL International (UK) Ltd is accredited by the United Kingdom Accreditation Service (UKAS). UKAS is one of the signatories to the International Laboratory Accreditation Co-operation (ILAC) Arrangement for the mutual recognition of test reports. The tests reported herein have been performed in accordance with its terms of accreditation.

### **2.2 Methods and Procedures**

<b>Reference:</b>	ANSI/TIA-603-E 2016
<b>Title:</b>	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
<b>Reference:</b>	ANSI C63.26-2015
<b>Title:</b>	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
<b>Reference:</b>	FCC KDB 971168 D01 v03r01, April 9, 2018
<b>Title:</b>	Measurement Guidance for Certification of Licensed Digital Transmitters
<b>Reference:</b>	Notice 2020 - DRS0023
<b>Title:</b>	Guidance on magnetic field strength radiated emission measurements (9 kHz - 30 MHz)

## **2.3 Calibration and Uncertainty**

### **Measuring Instrument Calibration**

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

### **Measurement Uncertainty & Decision Rule**

#### **Overview**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

#### **Decision Rule**

The decision rule applied is based upon the accuracy method criteria. The measurement uncertainty is met and the result is considered in conformance with the requirement criteria if the observed value is within the prescribed limit.

#### **Measurement Uncertainty**

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

<b>Measurement Type</b>	<b>Range</b>	<b>Confidence Level (%)</b>	<b>Calculated Uncertainty</b>
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	±5.32 dB
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±3.30 dB
Radiated Spurious Emissions	1 GHz to 9 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## **2.4 Test and Measurement Equipment**

### **Test Equipment Used for Transmitter Radiated Emissions Tests**

<b>Asset No.</b>	<b>Instrument</b>	<b>Manufacturer</b>	<b>Type No.</b>	<b>Serial No.</b>	<b>Date Calibration Due</b>	<b>Cal. Interval (Months)</b>
M2040	Thermohygrometer	Testo	608-H1	45124934	10 Dec 2021	12
K0001	3m RSE Chamber	Rainford	N/A	N/A	06 Sep 2022	12
M2044	Test Receiver	Rohde & Schwarz	ESU26	100122	29 Apr 2022	12
A3154	Pre-Amplifier	Com-Power	PAM-103	18020012	24 Aug 2022	12
A3155	Pre-Amplifier	Com-Power	PAM-118A	18040037	24 Aug 2022	12
A3198	Magnetic Loop Antenna	ETS-Lindgren	6502	00221887	12 Aug 2022	12
A553	Antenna	Chase	CBL6111A	1593	15 Mar 2022	6
A3138	Antenna	Schwarzbeck	BBHA 9120 B	00702	27 Aug 2022	12
A3139	Antenna	Schwarzbeck	HWRD750	00027	27 Aug 2022	12
A2937	Attenuator	AtlanTecRF	AN18W5-06	208147#1	03 Feb 2022	12
A2523	Attenuator	AtlanTecRF	AN18W5-10	832827#1	03 Feb 2022	12
A3083	Low Pass Filter	AtlanTecRF	AFL-01000	18010900076	03 Feb 2022	12
A3093	High Pass Filter	AtlanTecRF	AFH-03000	18051800077	03 Feb 2022	12
A3095	High Pass Filter	AtlanTecRF	AFH-07000	18051600012	03 Feb 2022	12

### **3 Equipment Under Test (EUT)**

#### **3.1 Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	Buddi
<b>Model Name or Number / HVIN:</b>	3430013
<b>PMN:</b>	Smart Tag 4
<b>Test Sample Serial Number:</b>	STV00007
<b>Test Sample IMEI:</b>	359159970397353
<b>Hardware Version:</b>	3430013
<b>Firmware Version:</b>	1.40.12
<b>FCC ID:</b>	ZDLST6
<b>ISED Canada Certification Number:</b>	IC: 20371-ST6

#### **3.2 Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

#### **3.3 Additional Information Related to Testing**

<b>Technology Tested:</b>	LTE Cat M1- Band 5		
<b>Type of Equipment:</b>	Transceiver		
<b>Channel Bandwidth:</b>	1.4 MHz		
<b>Modulation:</b>	QPSK		
<b>Power Supply Requirement(s):</b>	3.7 VDC		
<b>Transmit Frequency Range:</b>	824 MHz to 849 MHz		
<b>Transmit Channels Tested:</b>	<b>Channel ID</b>	<b>N<sub>ul</sub></b>	<b>Frequency of Uplink (MHz)</b>
	Bottom	20407	824.7
	Middle	20525	836.5
	Top	20643	848.3

#### **3.4 Description of Available Antennas**

The radio utilizes an integrated antenna, with the following maximum gain:

<b>Frequency Range (MHz)</b>	<b>Antenna Gain (dBi)</b>
824 to 849	0.4



### **3.5 Description of Test Setup**

#### **Support Equipment**

The following support equipment was used to exercise the EUT during testing:

<b>Description:</b>	Buddi
<b>Brand Name:</b>	On Body Charger (Battery pack)
<b>Model Name or Number:</b>	OBC V3/3610000
<b>Serial Number:</b>	OBX00012

<b>Description:</b>	Buddi
<b>Brand Name:</b>	On Body Charger (Battery pack)
<b>Model Name or Number:</b>	OBC
<b>Serial Number:</b>	OBZ03018

<b>Description:</b>	Buddi
<b>Brand Name:</b>	AC Dock (to charge the OBC)
<b>Model Name or Number:</b>	OBC V3 Dock/3620000
<b>Serial Number:</b>	Not marked or stated

#### **Operating Modes**

The EUT was tested in the following operating mode(s):

- Transmitting at maximum power on bottom, middle or top channel as required.

#### **Configuration and Peripherals**


The EUT was tested in the following configuration(s):

- The EUT was connected via a radiated link to an Anritsu LTE system simulator, operating in a transceiver mode. The Anritsu LTE simulator was used to configure the EUT operating mode.
- The EUT was placed in three orthogonal orientations X, Y and Z with and without the battery pack to determine the worst case orientation for radiated spurious emissions. This was determined to be the Y position without the battery pack. All pre-scans and final measurements were performed in this orientation.

**Test Setup Diagrams**


**Radiated Tests:**

**Test Setup for Transmitter Radiated Emissions**

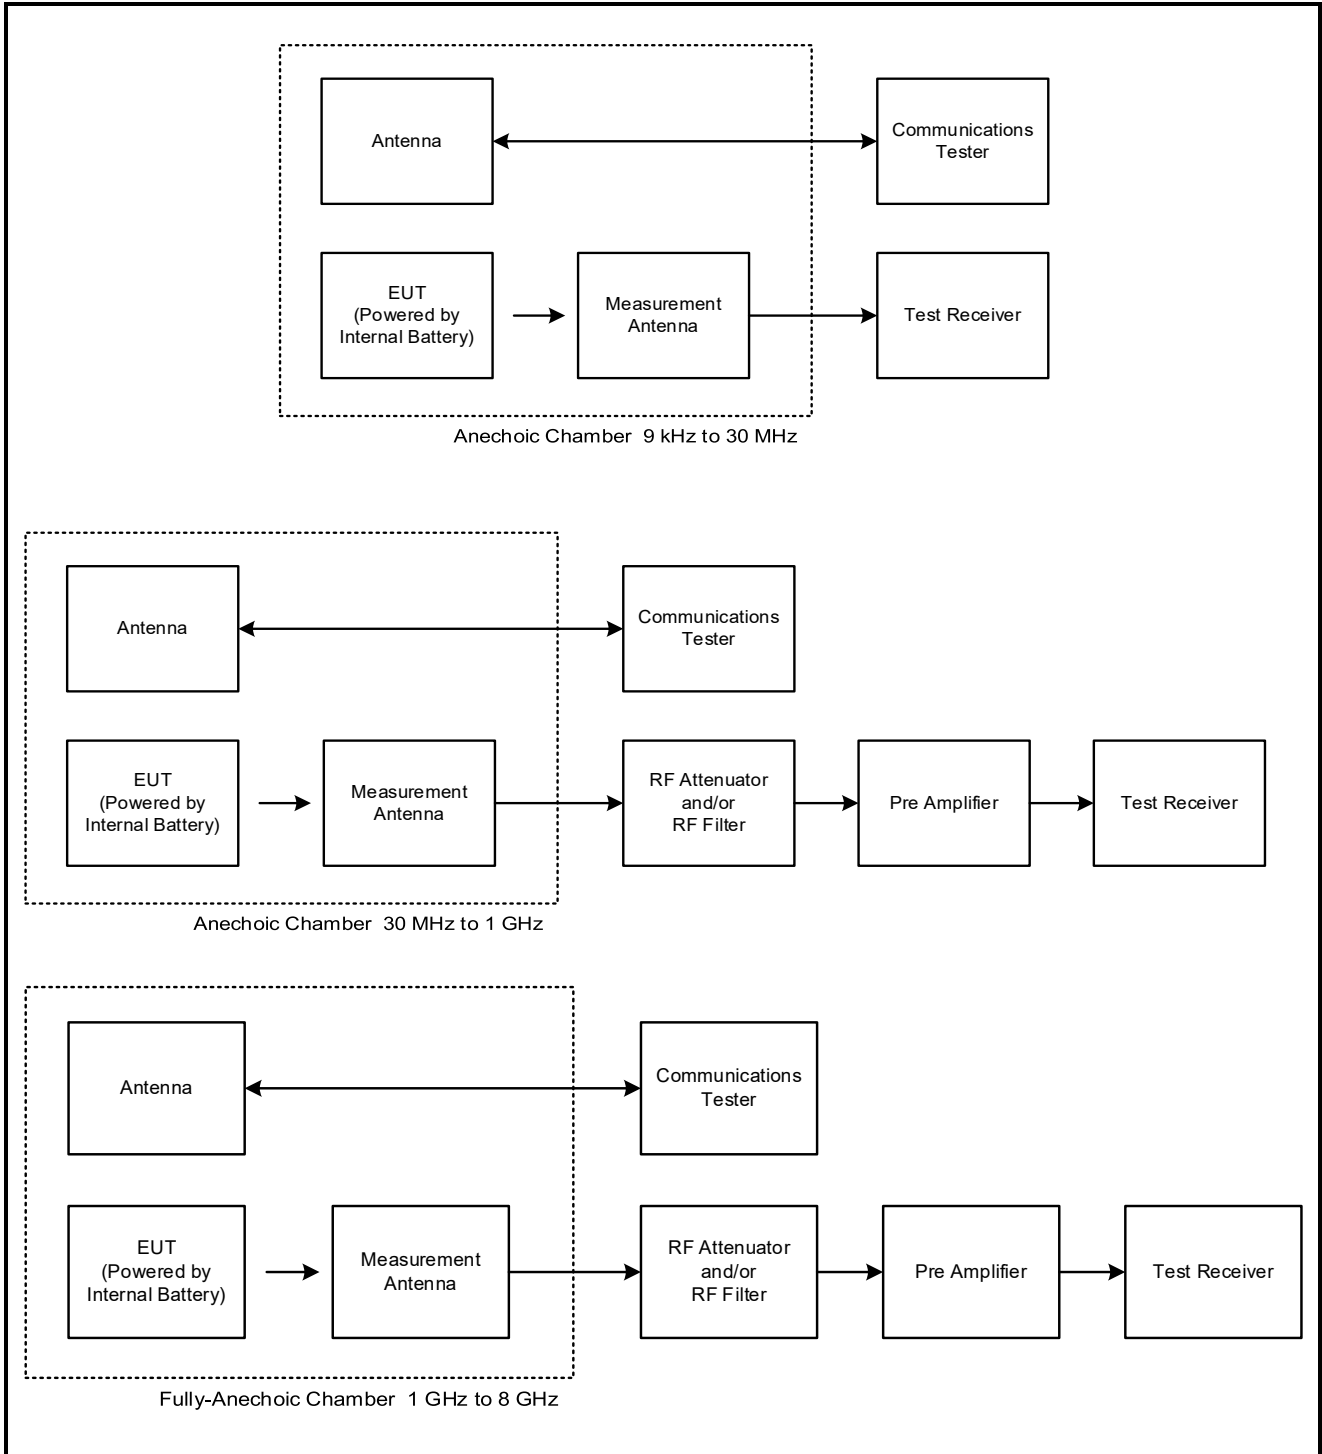

**Test Setup Diagrams (continued)**

**Test Setup for Transmitter Radiated Emissions (continued)**

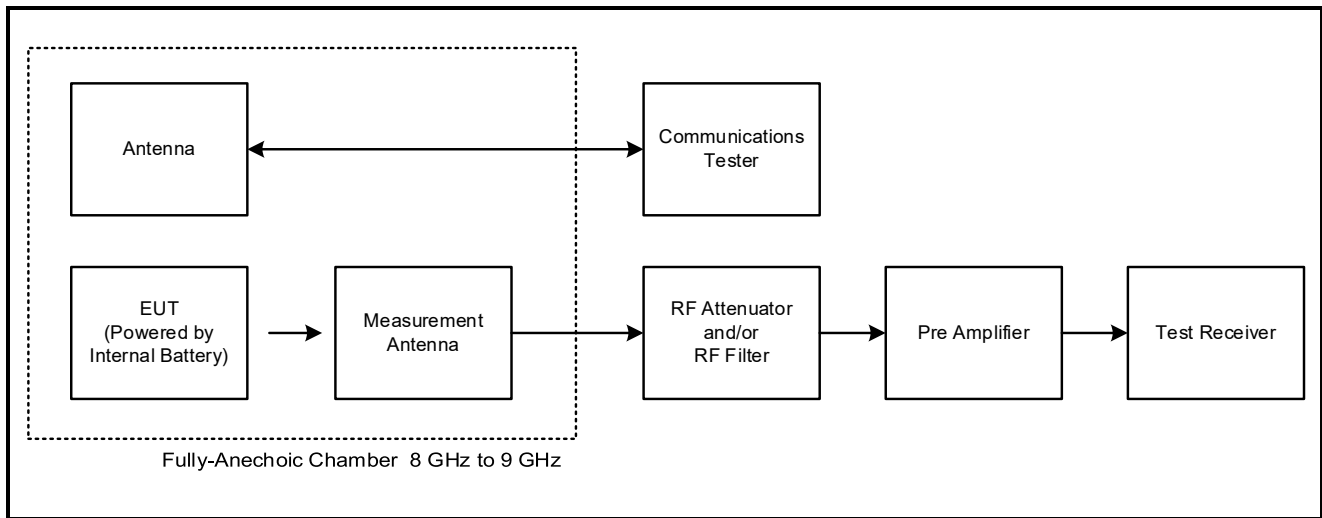

## **4 Radiated Test Results**

### **4.1 Transmitter Out of Band Radiated Emissions**

#### **Test Summary:**

<b>Test Engineers:</b>	Marco Zunarelli & Nick Raptopoulos	<b>Test Dates:</b>	09 November 2021 to 16 November 2021
<b>Test Sample IMEI:</b>	359159970397353		

<b>FCC Reference:</b>	Parts 2.1053, 15.209(a) & 22.917
<b>ISED Canada Reference:</b>	RSS-Gen 6.13 / RSS-132 5.5
<b>Test Method Used:</b>	KDB 971168 Section 6 referencing ANSI C63.26 Section 5.7
<b>Frequency Range</b>	9 kHz to 9 GHz

#### **Environmental Conditions:**

<b>Temperature (°C):</b>	22 to 23
<b>Relative Humidity (%):</b>	41 to 46





#### **Note(s):**

1. The EUT was set to transmit with a 1.4 MHz channel bandwidth with QPSK modulation applied and 2 resource block with 0 offset, as this was found to be the worst case modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest transmit output power level, it was deemed to be the worst case.
2. The emission seen on the 30 MHz to 1 GHz plot at approximately 836.5 MHz is the EUT carrier.
3. All emissions shown on the pre-scans were investigated and found to be ambient, or > 20 dB below the appropriate limit or below the noise floor of the measurement system. Therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
4. FCC: Measurements below 30 MHz were performed in a semi-anechoic chamber (Asset Number K0001) at 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. The limit was extrapolated to 3 metres in accordance ANSI C63.10 clause 6.4.3; measurements may be performed at a closer distance and the measured level extrapolated to the specified measurement distance using the method described in clause 6.4.4.2.
5. ISEDC: Measurements below 30 MHz were performed in a semi-anechoic chamber (Asset Number K0001) at 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. The limit was extrapolated to 3 metres, as allowed by ANSI C63.10 clause 5.2; an alternative test site that can demonstrate equivalence to an open area test site may be used for measurements below 30 MHz. Therefore, measurements were performed in a semi-anechoic chamber. The correlation data between semi-anechoic chamber and an open field test site is available upon request.
6. Measurements from 30 MHz to 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
7. Pre-scans above 1 GHz were performed in a fully-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.



**Transmitter Out of Band Radiated Emissions (continued)**

**Results: Middle Channel**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1673.077	-33.4	-13.0	20.4	Complied

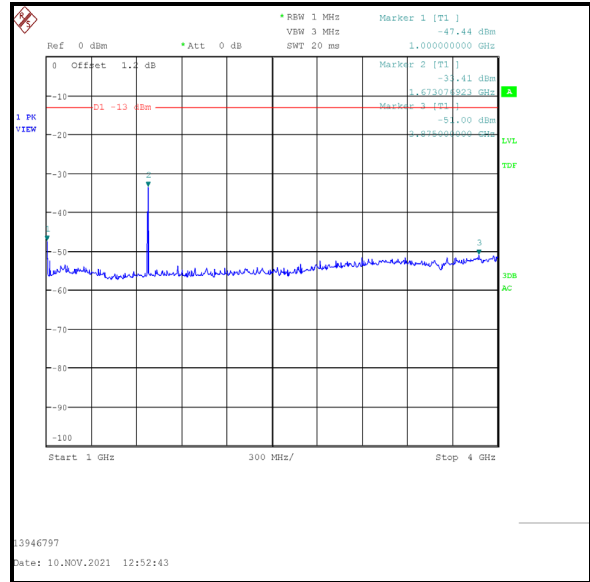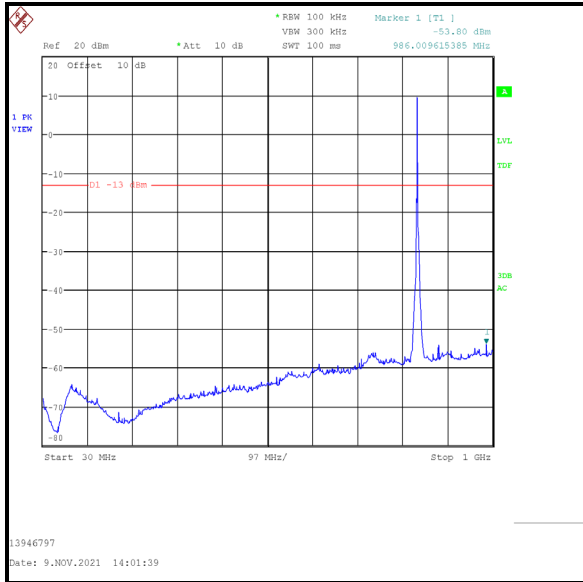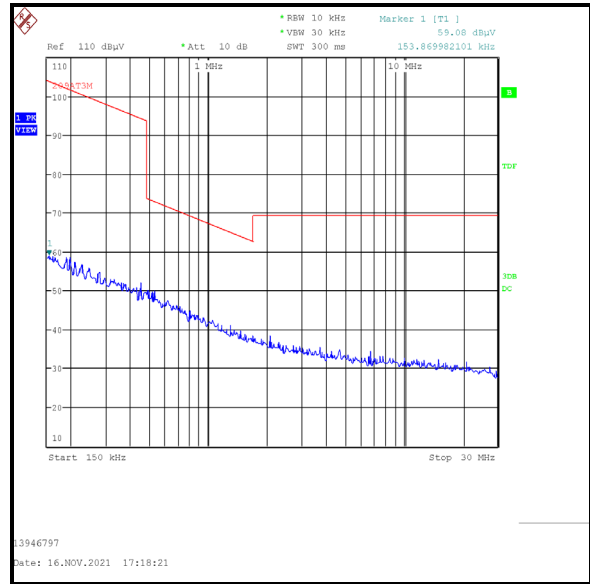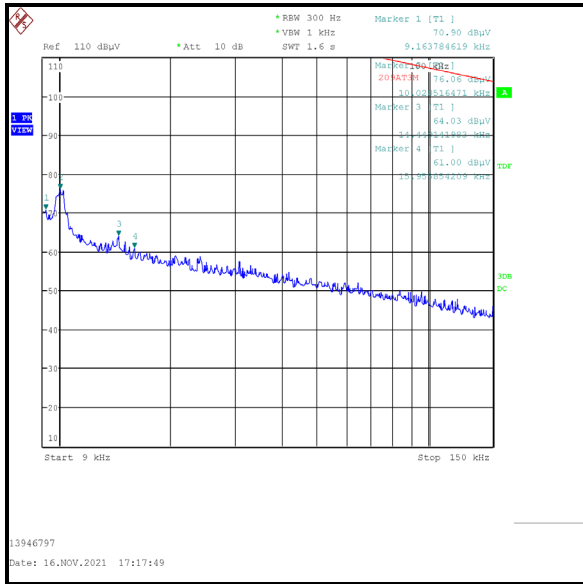

**Transmitter Out of Band Radiated Emissions (continued)**

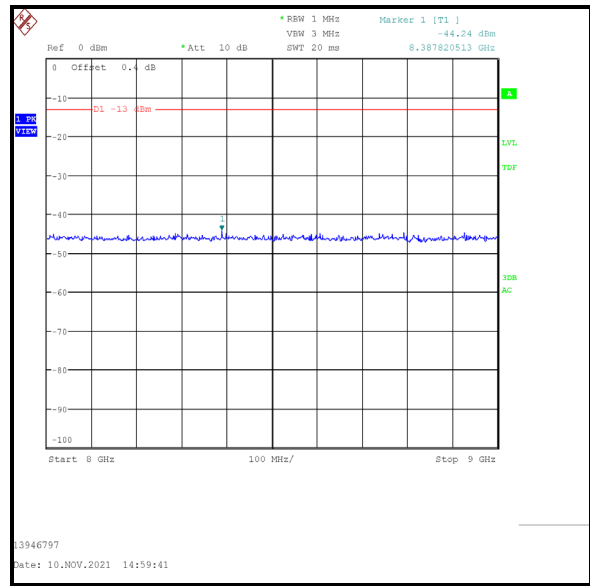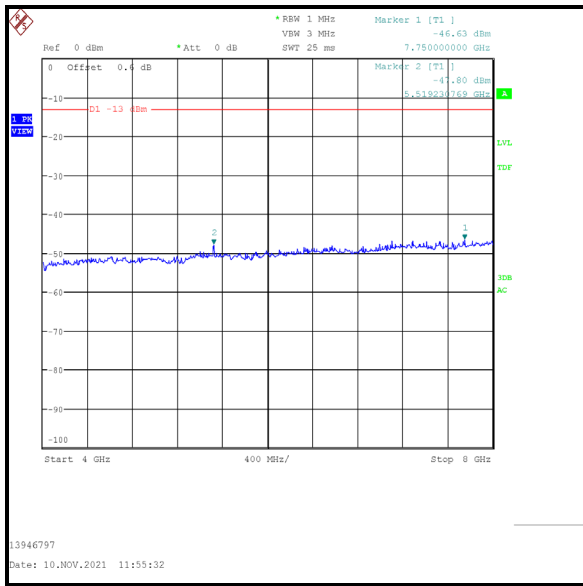

--- END OF REPORT ---