

# TEST REPORT

Reference No..... : WTX24X03057339W001  
FCC ID ..... : ZE9-ST-Q2CCM  
Applicant ..... : Sariana LLC  
Address ..... : 7365 Mission Gorge Road Suite G, San Diego, CA 92120 U.S.A.  
Manufacturer ..... : The same as Applicant  
Address ..... : The same as Applicant  
Product Name ..... : Qi2 Wireless Car Charger  
Model No..... : ST-Q2CCM  
Standards ..... : FCC Part 15C  
Date of Receipt sample .... : 2024-03-19  
Date of Test..... : 2024-03-19 to 2024-04-24  
Date of Issue ..... : 2024-04-24  
Test Report Form No. .... : WTX\_Part 15CW  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.


**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Gala Wang

Approved by:



Jason Su

**ABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**  
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4  
1.2 TEST STANDARDS.....5  
1.3 TEST METHODOLOGY .....5  
1.4 TEST FACILITY .....5  
1.5 EUT SETUP AND OPERATION MODE .....6  
1.6 MEASUREMENT UNCERTAINTY .....7  
1.7 TEST EQUIPMENT LIST AND DETAILS .....8

**2. SUMMARY OF TEST RESULTS .....10**

**3. RF EXPOSURE .....11**  
3.1 STANDARD APPLICABLE.....11  
3.2 TEST RESULT.....11

**4. ANTENNA REQUIREMENT .....12**  
4.1 STANDARD APPLICABLE.....12  
4.2 EVALUATION INFORMATION .....12

**5. CONDUCTED EMISSIONS .....13**  
5.1 TEST PROCEDURE.....13  
5.2 BASIC TEST SETUP BLOCK DIAGRAM.....13  
5.3 ENVIRONMENTAL CONDITIONS .....13  
5.4 TEST RECEIVER SETUP .....14  
5.5 SUMMARY OF TEST RESULTS/PLOTS .....14

**6. FIELD STRENGTH OF SPURIOUS EMISSIONS .....15**  
6.1 STANDARD APPLICABLE.....15  
6.2 TEST PROCEDURE.....15  
6.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....16  
6.4 ENVIRONMENTAL CONDITIONS .....17  
6. REFERENCE MEASUREMENT AT OPEN FIELD SITE .....17  
6.5 SUMMARY OF TEST RESULTS/PLOTS .....17

**7. 20DB EMISSION BANDWIDTH. ....24**  
7.1 STANDARD APPLICABLE.....24  
7.2 TEST PROCEDURE.....24  
7.3 ENVIRONMENTAL CONDITIONS .....24  
7.4 SUMMARY OF TEST RESULTS/PLOTS .....24

**APPENDIX PHOTOGRAPHS.....26**

**Report version**

Version No.	Date of issue	Description
Rev.00	2024-04-24	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Qi2 Wireless Car Charger
Trade Name:	SATECHI
Model No.:	ST-Q2CCM
Adding Model:	CT-Q2CCM
Battery Capacity	/
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model ST-Q2CCM, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Frequency Range:	127kHz-205kHz@5W 127kHz-360kHz@15W
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Antenna Gain	0dBi
Rated Voltage:	Input: DC5V/9V
Rated Current:	Input: 3A/2.2A
Rated Power:	Output: 5W/15W
<p><i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i></p>	

## 1.2 Test Standards

**FCC Part 15 Subpart C:** Intentional Radiators.

**FCC Rules Part 15.207:** Conducted limits.

**FCC Rules Part 15.209:** Radiated emission limits; general requirements.

**FCC Rules Part 15.215:** Additional provisions to the general radiated emission limitations.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **Address of the test laboratory**

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

## 1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

### Test Mode List:

Test Mode	Description	Remark	Power Supply Mode
TM1	Wireless Charging	Connect to the Car Charger	DC 24V for adapter, Wireless Charging 5W
TM2	Wireless Charging	Connect to the Car Charger	DC 24V for adapter, Wireless Charging 15W

### EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Type-C Cable	0.95	Shielded	Without Core

### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

### Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

### 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

## 1.7 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2024-02-27	2025-02-26
<input type="checkbox"/> Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2024-02-24	2025-02-23
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2024-02-24	2025-02-23
<input type="checkbox"/> Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2024-02-24	2025-02-23
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	2002	2024-02-27	2025-02-26
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2024-02-26	2025-02-25
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-02-24	2025-02-23
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2021-04-09	2024-04-08
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1010A	Trilog	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27



1013-1	Broadband Antenna					
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2024-02-26	2025-02-25
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2024-02-27	2025-02-26
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2024-02-27	2025-02-26
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2024-03-17	2025-03-16
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2024-02-29	2025-02-28
<input type="checkbox"/> Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2023-12-12	2024-12-11
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2024-02-24	2025-02-23
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2024-02-24	2025-02-23
<input checked="" type="checkbox"/> Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2024-02-24	2025-02-23
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2024-02-24	2025-02-23

## 2. SUMMARY OF TEST RESULTS

---

Description of Test	Result
§15.207(a) Conducted Emission	N/A
§15.209(a) Radiated Emission	Compliant
§15.215 20dB Emission Bandwidth	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to §1.1307 and §2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has a Coil antenna, fulfill the requirement of this section.


## 5. Conducted Emissions

### 5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 5.2 Basic Test Setup Block Diagram

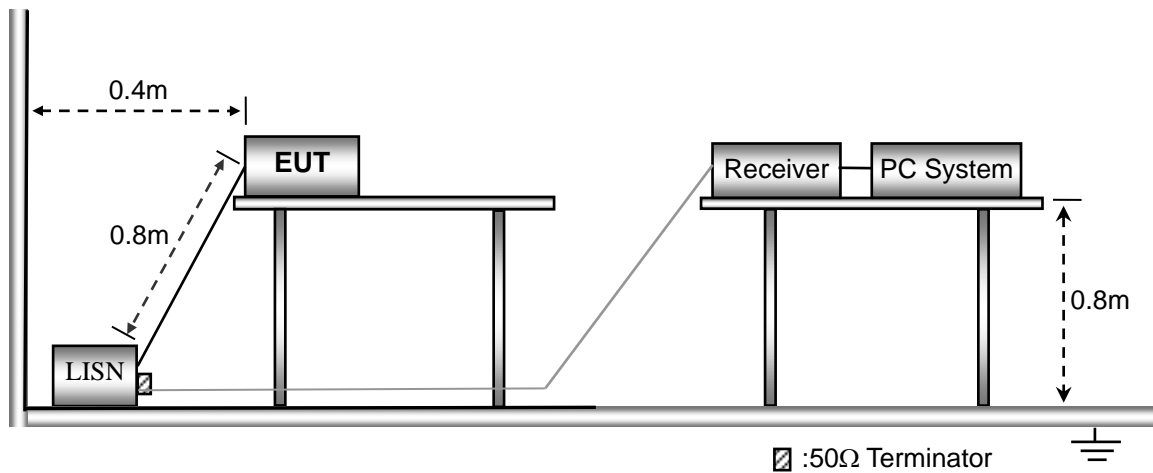

### 5.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

### 5.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
Stop Frequency ..... 30 MHz  
Sweep Speed ..... Auto  
IF Bandwidth..... 10 kHz  
Quasi-Peak Adapter Bandwidth..... 9 kHz  
Quasi-Peak Adapter Mode ..... Normal

### 5.5 Summary of Test Results/Plots

Not applicable

## 6. Field Strength of Spurious Emissions

### 6.1 Standard Applicable

According to §15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 6.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

The test setup for emission measurement below 30MHz..

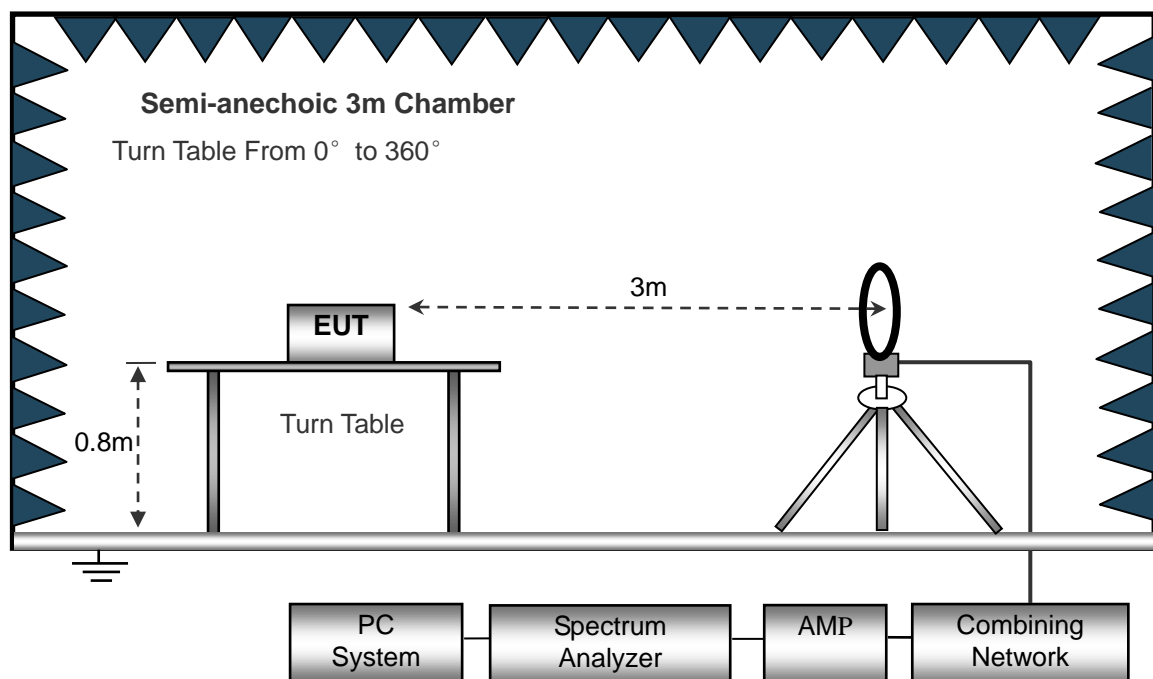

The test setup for emission measurement from 30 MHz to 1 GHz..

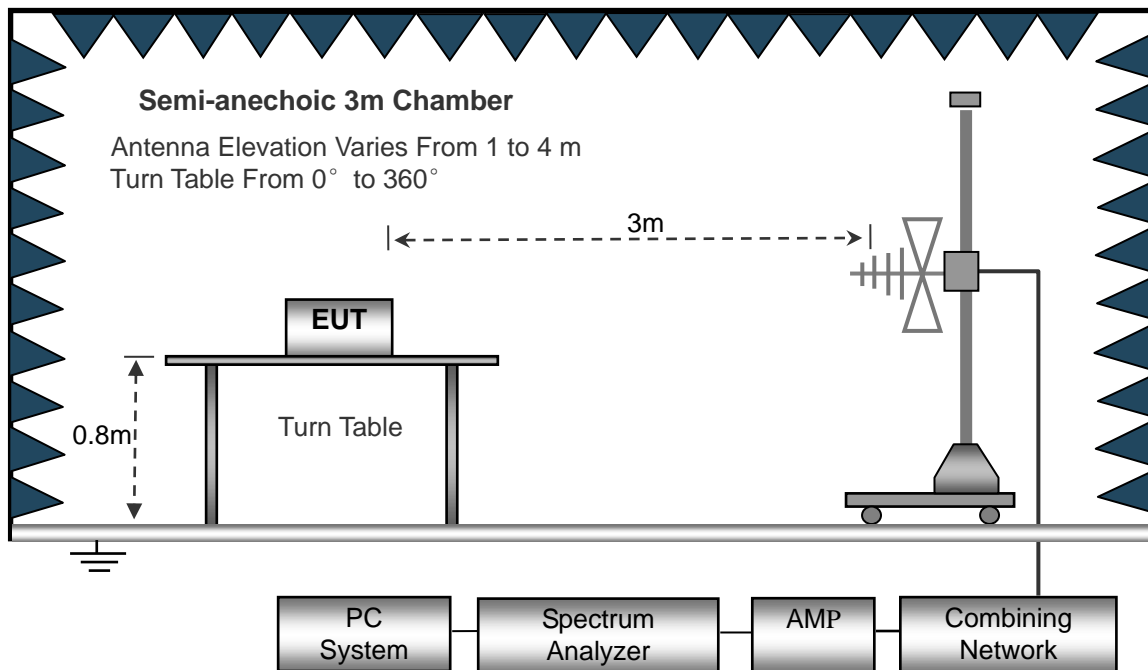

Frequency :9kHz-30MHz

RBW=10KHz

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

### 6.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$



## 6.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

## 6. Reference Measurement at open field site


The measurement was performed with set-up consisting of a single turn loop antenna with a diameter of 0.15 m, fed by a signal generator. The loop dimension was chosen to simulate the EUT as far as possible. The signal generator was set to a fixed output level with an unmodulated 10 kHz and 14 kHz sinusoidal signal. The radiated H fieldstrength at 10 kHz and 14 kHz generated by this set-up was measured with the same test setup as used in the SAC in 3 m distance first, and then repeated at the open field site in 3 m and 10 m distance

## 6.5 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


**Radiated Emissions Test Data (Below 30MHz)( Worst case EUT X axis)**

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

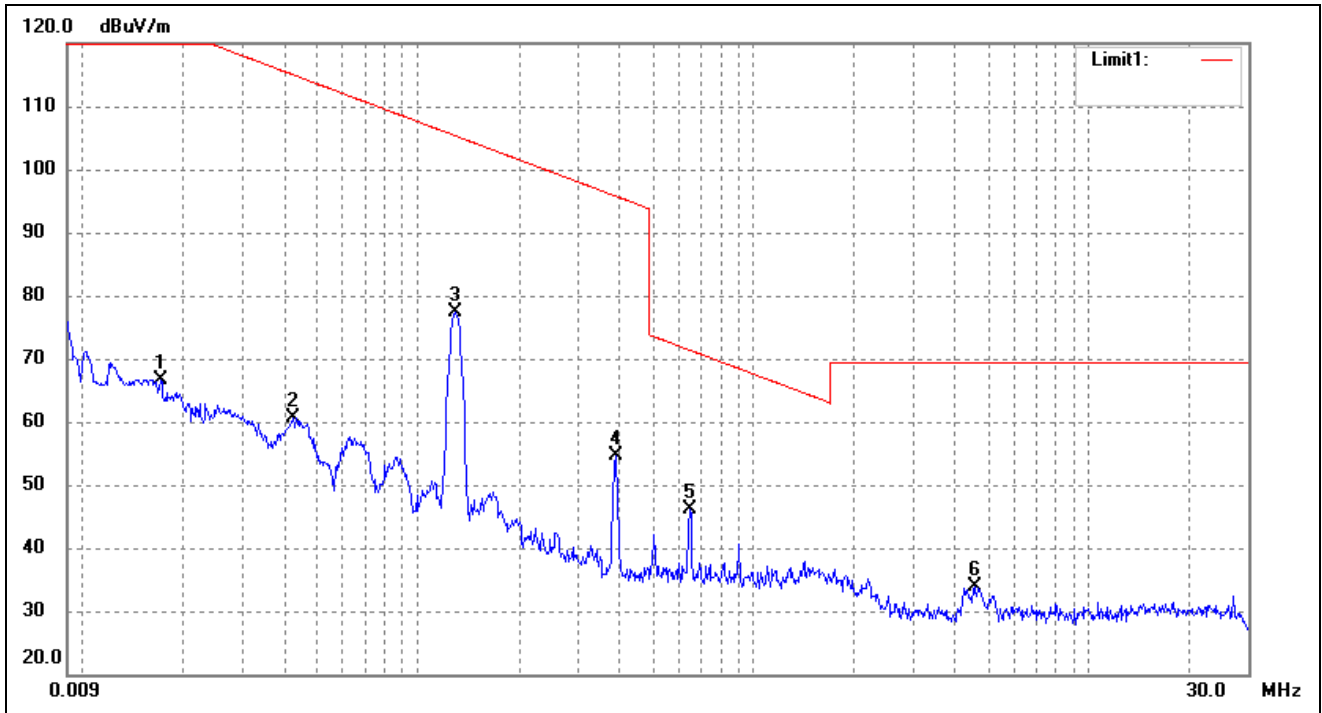

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	0.0171	73.69	-7.03	66.66	122.93	-56.27	-	-	peak
2	0.0424	66.44	-5.84	60.60	115.04	-54.44	-	-	peak
3	0.1298	83.70	-6.44	77.26	105.33	-28.07	-	-	peak
4	0.3880	62.33	-7.70	54.63	95.83	-41.20	-	-	peak
5	0.6468	53.07	-6.87	46.20	71.40	-25.20	-	-	peak
6	4.6061	39.44	-5.61	33.83	69.50	-35.67	-	-	peak


Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

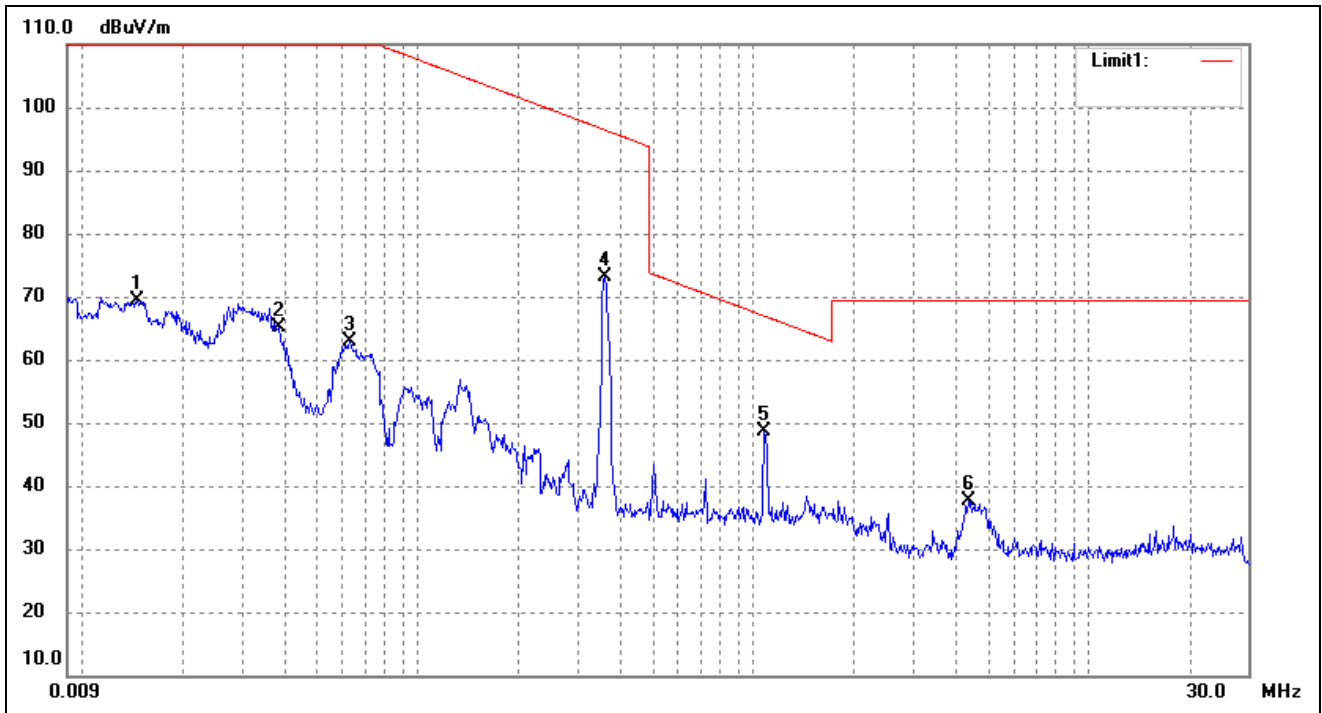

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	0.0145	76.43	-7.01	69.42	124.36	-54.94	-	-	peak
2	0.0384	71.19	-6.06	65.13	115.91	-50.78	-	-	peak
3	0.0625	68.72	-5.93	62.79	111.68	-48.89	-	-	peak
4	0.3607	80.77	-7.75	73.02	96.46	-23.44	-	-	peak
5	1.0783	54.82	-6.23	48.59	66.97	-18.38	-	-	peak
6	4.3873	43.21	-5.66	37.55	69.50	-31.95	-	-	peak


**Plot of Radiated Emissions Test Data ( Above 30MHz)**

Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

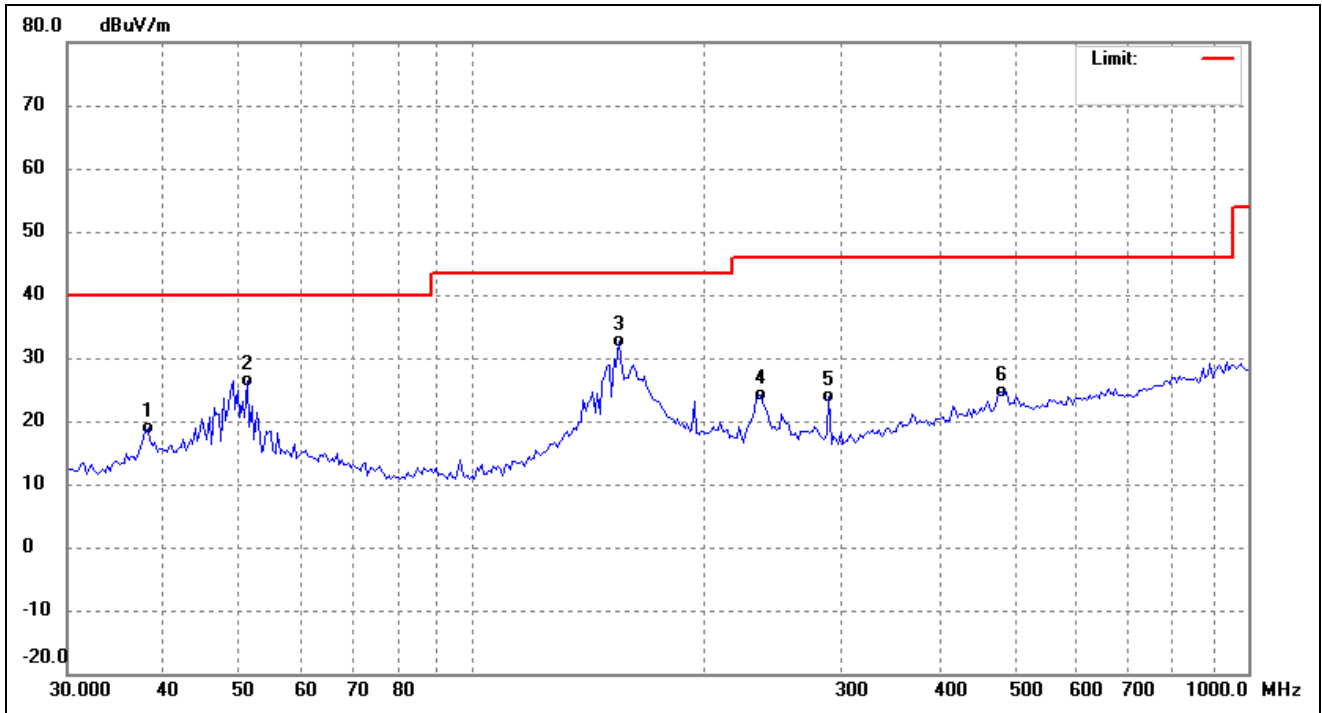


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	38.0965	31.79	-12.89	18.90	40.00	-21.10	-	-	QP
2	51.1756	38.71	-12.22	26.49	40.00	-13.51	-	-	QP
3	154.2428	45.25	-12.60	32.65	43.50	-10.85	-	-	QP
4	235.1346	39.25	-15.08	24.17	46.00	-21.83	-	-	QP
5	288.2840	36.61	-12.66	23.95	46.00	-22.05	-	-	QP
6	481.5112	32.86	-8.15	24.71	46.00	-21.29	-	-	QP

Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

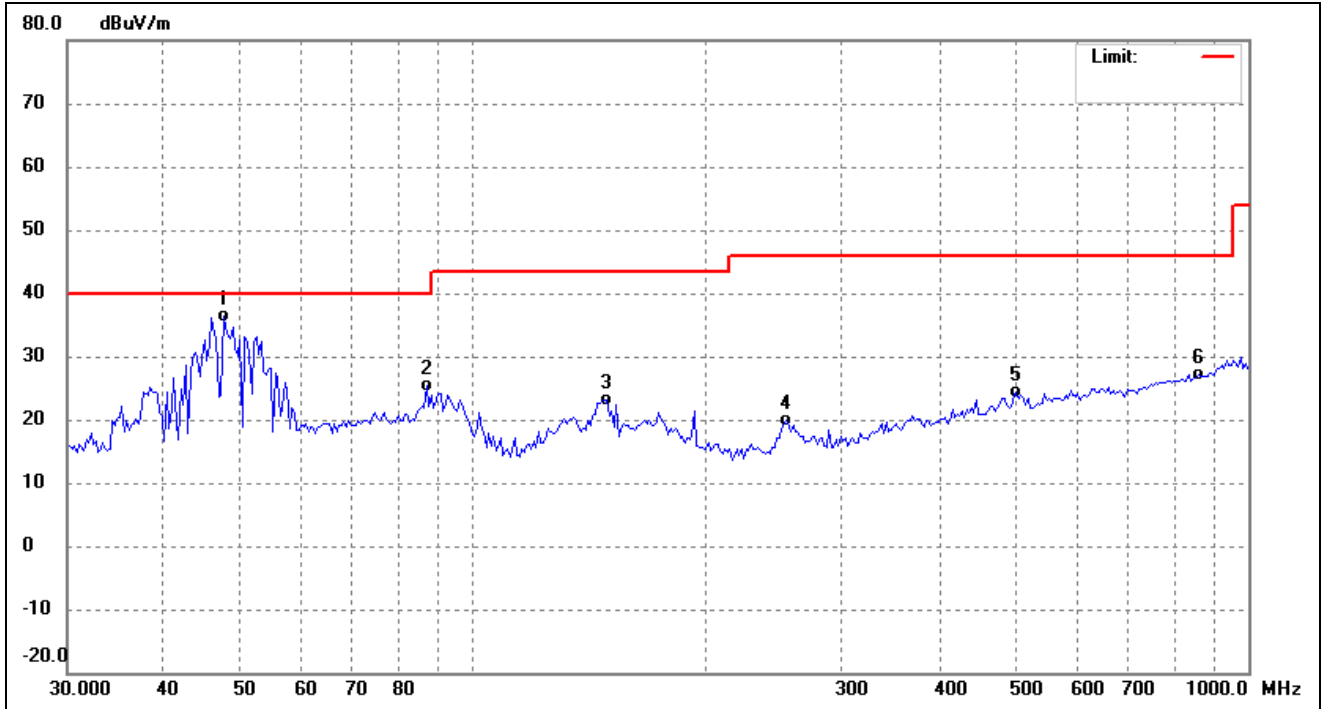


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.7028	48.56	-12.27	36.29	40.00	-3.71	-	-	QP
2	87.2980	42.35	-17.07	25.28	40.00	-14.72	-	-	QP
3	148.9175	35.91	-12.68	23.23	43.50	-20.27	-	-	QP
4	254.0312	34.01	-14.03	19.98	46.00	-26.02	-	-	QP
5	502.2473	32.34	-7.87	24.47	46.00	-21.53	-	-	QP
6	862.8015	30.32	-3.18	27.14	46.00	-18.86	-	-	QP

Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

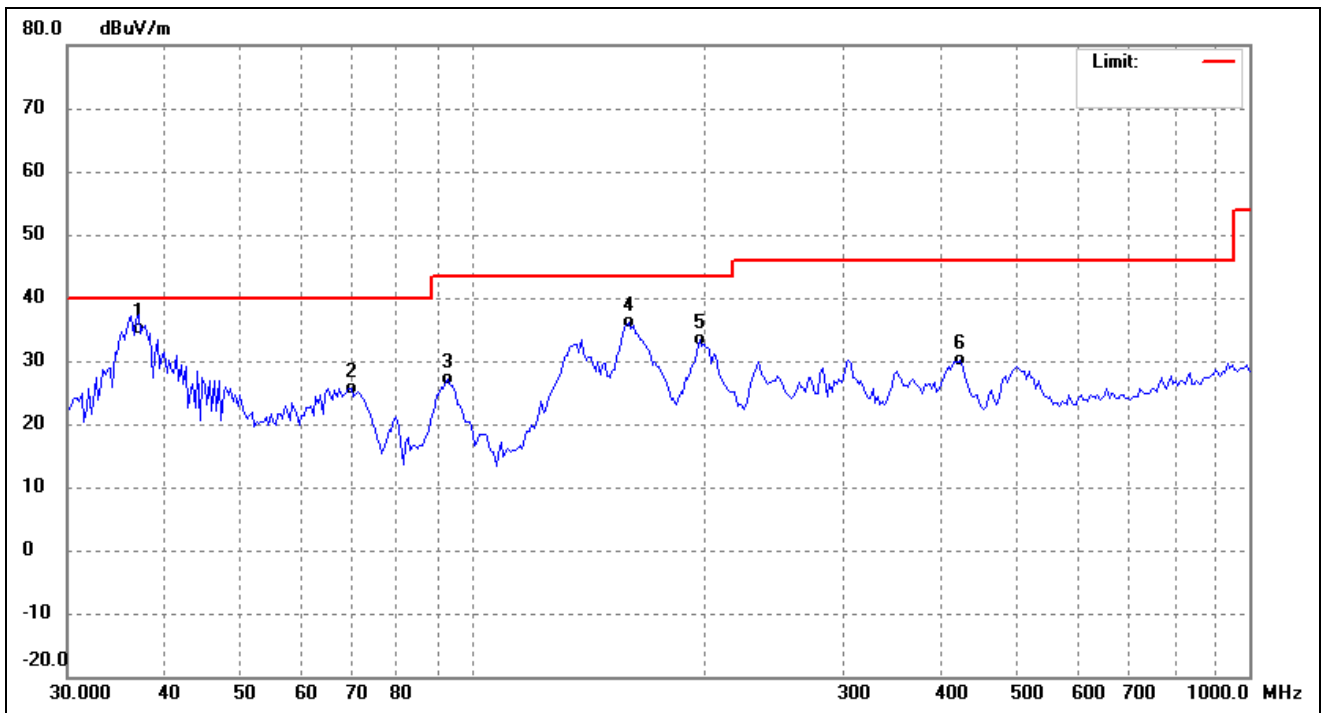

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	37.0405	48.16	-13.11	35.05	40.00	-4.95	-	-	QP
2	69.7179	40.45	-14.71	25.74	40.00	-14.26	-	-	QP
3	92.9974	44.14	-16.92	27.22	43.50	-16.28	-	-	QP
4	158.6399	48.74	-12.61	36.13	43.50	-7.37	-	-	QP
5	195.8701	49.13	-15.75	33.38	43.50	-10.12	-	-	QP
6	424.2999	39.41	-9.30	30.11	46.00	-15.89	-	-	QP

Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

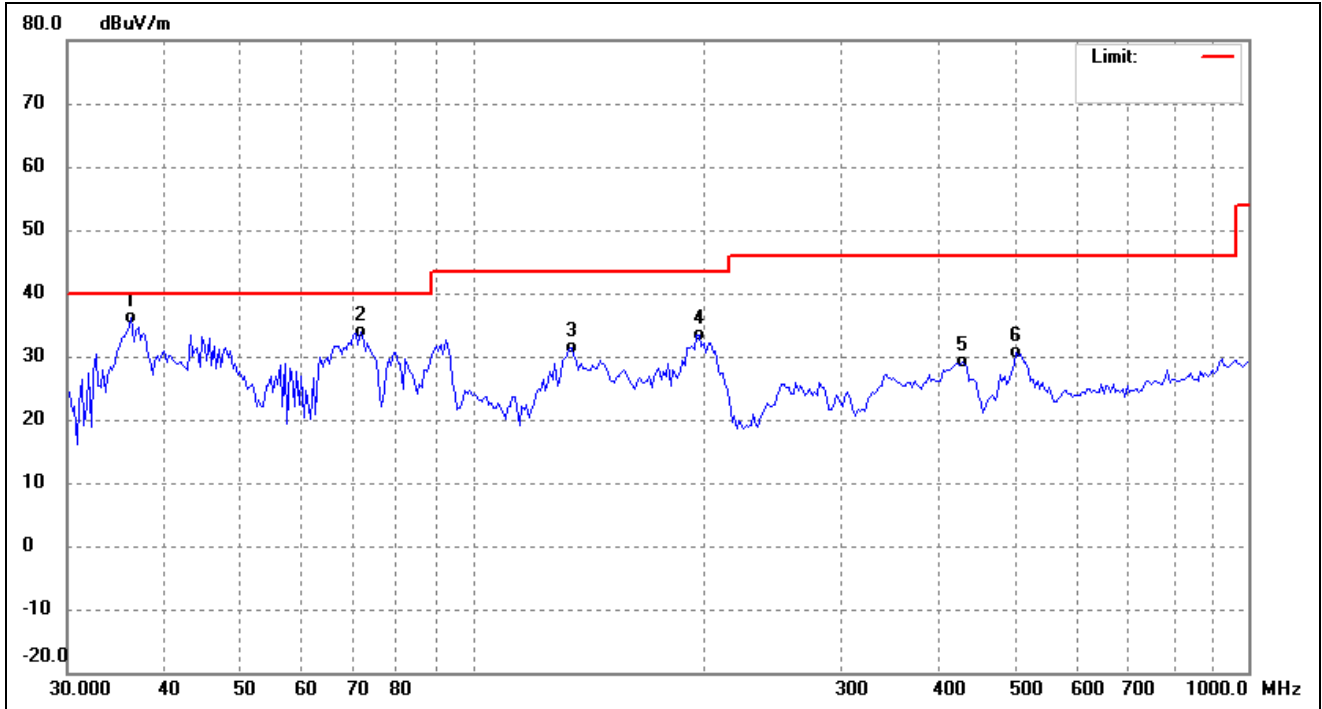

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	36.2678	49.51	-13.28	36.23	40.00	-3.77	-	-	QP
2	71.7054	48.91	-15.14	33.77	40.00	-6.23	-	-	QP
3	134.0194	44.94	-13.68	31.26	43.50	-12.24	-	-	QP
4	195.8701	49.22	-15.75	33.47	43.50	-10.03	-	-	QP
5	427.2920	38.34	-9.22	29.12	46.00	-16.88	-	-	QP
6	502.2473	38.42	-7.87	30.55	46.00	-15.45	-	-	QP

Remark: '-Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

## 7. 20dB Emission bandwidth.

---

### 7.1 Standard Applicable

According to 15.215, 20dB emission bandwidth.

### 7.2 Test Procedure

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.


### 7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 7.4 Summary of Test Results/Plots

Test Mode	20dB Emission Bandwidth(kHz)
TM1	27.20
TM2	28.40



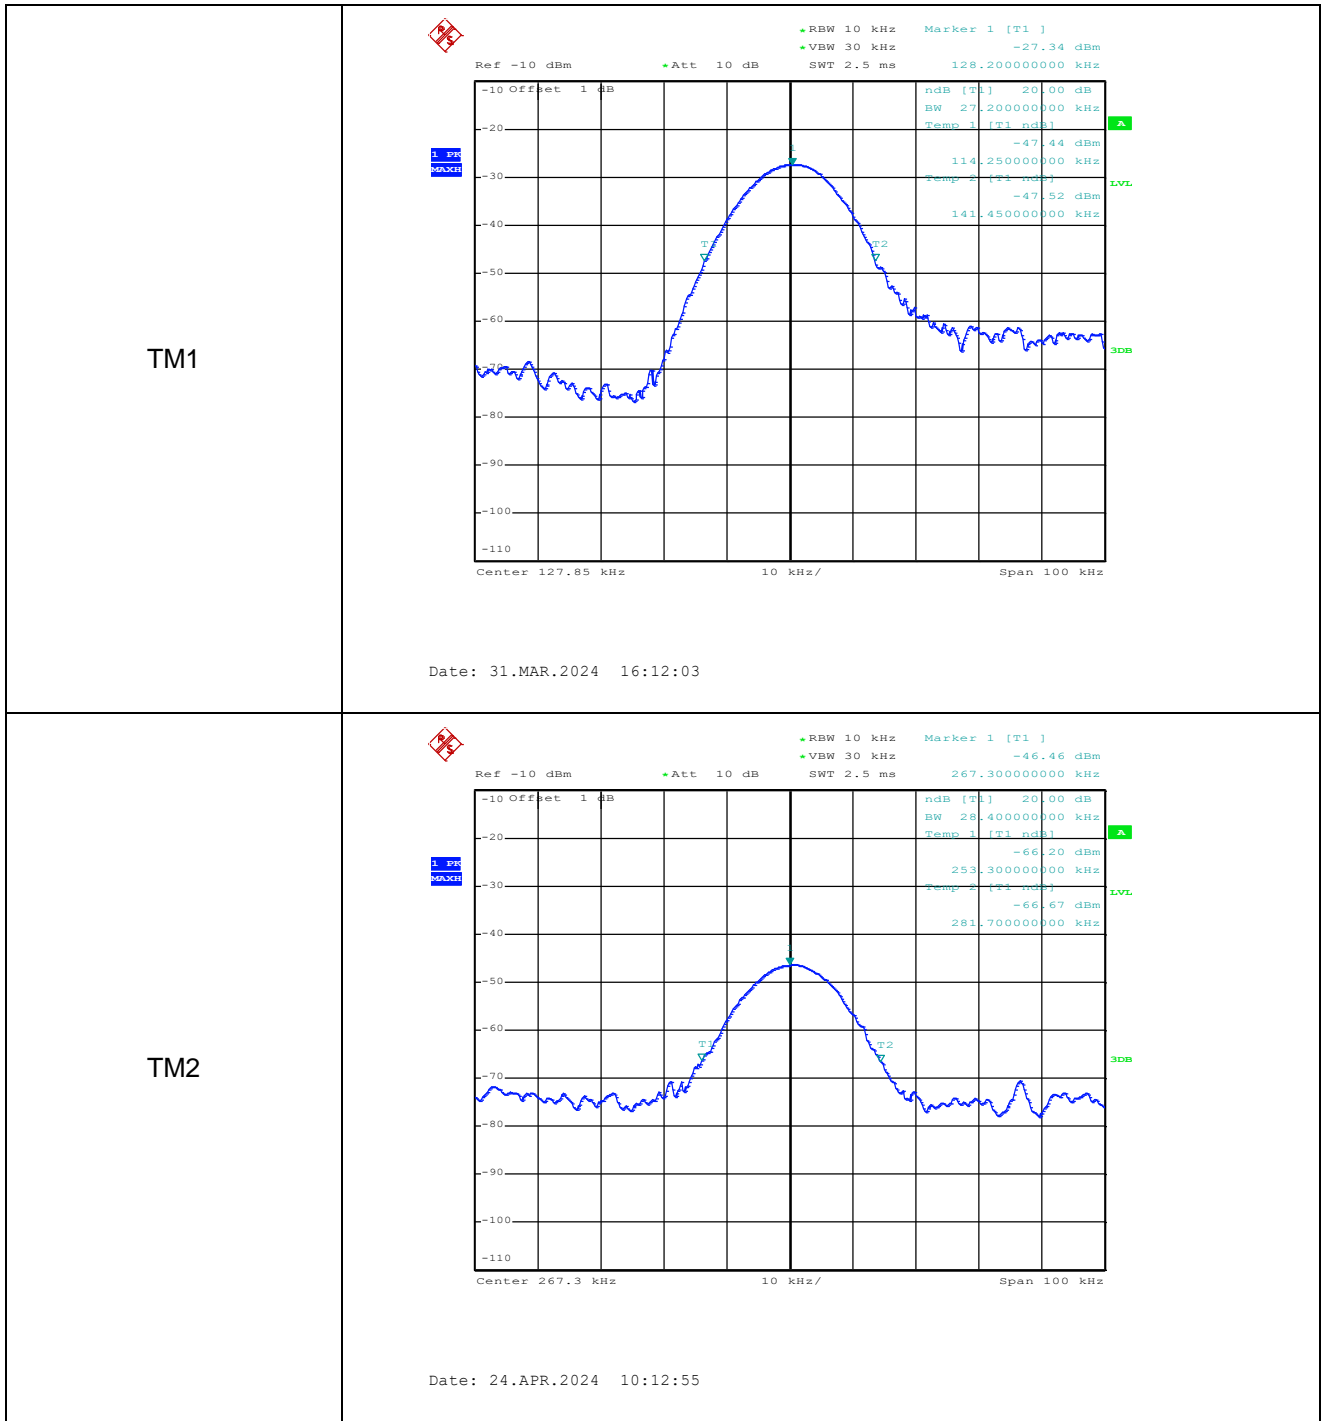

Note: The RBW of the analyzer measuring Bandwidth cannot be adjusted to 1%-5% occupied bandwidth, the RBW of the test setting is the closest value.

## APPENDIX PHOTOGRAPHS

---

Please refer to "ANNEX"

\*\*\*\*\* END OF REPORT \*\*\*\*\*