

TEST REPORT

Product Name : BLUETOOTH RECEIVER AMPLIFIER
Brand Mark : MAGNADYNE/LINEAR SERIES
Model No. : LSBT1B-AMP
FCC ID : ZGM-LSBT1B-AMP
Report Number : BLA-EMC-202403-A0402
Date of Sample Receipt : 2024/3/4
Date of Test : 2024/3/5 to 2024/3/15
Date of Issue : 2024/3/21
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Magnadyne Corporation
1111 W. Victoria Street Compton, CA 90220 USA

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Lucas

Review by:

Sueels

Approved by:

Blue Zheng

Date:

2024/3/21



REPORT REVISE RECORD

Version No.	Date	Description
00	2024/3/21	Original

BLUEASIA

TABLE OF CONTENTS

1 TEST SUMMARY	6
2 GENERAL INFORMATION	7
3 GENERAL DESCRIPTION OF E.U.T.	7
4 OPERATION FREQUENCY EACH OF CHANNEL	8
5 TEST ENVIRONMENT	10
6 TEST MODE	10
7 MEASUREMENT UNCERTAINTY	10
8 DESCRIPTION OF SUPPORT UNIT	11
9 TEST FACILITY	11
10 LABORATORY LOCATION	11
11 TEST INSTRUMENTS LIST	12
12 DWELL TIME	14
12.1 LIMITS	14
12.2 BLOCK DIAGRAM OF TEST SETUP	14
12.3 TEST DATA	15
13 HOPPING CHANNEL NUMBER	16
13.1 LIMITS	16
13.2 BLOCK DIAGRAM OF TEST SETUP	16
13.3 TEST DATA	16
14 CARRIER FREQUENCIES SEPARATION	17
14.1 LIMITS	17
14.2 BLOCK DIAGRAM OF TEST SETUP	17
14.3 TEST DATA	17
15 20DB BANDWIDTH	18
15.1 BLOCK DIAGRAM OF TEST SETUP	18
15.2 TEST DATA	18
16 CONDUCTED PEAK OUTPUT POWER	19
16.1 LIMITS	19
16.2 BLOCK DIAGRAM OF TEST SETUP	19

16.3 TEST DATA	20
17 RADIATED SPURIOUS EMISSIONS	21
17.1 LIMITS	21
17.2 BLOCK DIAGRAM OF TEST SETUP	22
17.3 PROCEDURE	22
17.4 TEST DATA	24
18 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	32
18.1 LIMITS	32
18.2 BLOCK DIAGRAM OF TEST SETUP	33
18.3 PROCEDURE	33
18.4 TEST DATA	35
19 ANTENNA REQUIREMENT	39
19.1 CONCLUSION	39
20 CONDUCTED SPURIOUS EMISSIONS	40
20.1 LIMITS	40
20.2 BLOCK DIAGRAM OF TEST SETUP	41
20.3 TEST DATA	41
21 CONDUCTED BAND EDGES MEASUREMENT	42
21.1 LIMITS	42
21.2 BLOCK DIAGRAM OF TEST SETUP	43
21.3 TEST DATA	43
22 APPENDIX	44
22.1 MAXIMUM CONDUCTED OUTPUT POWER	44
22.2 -20dB BANDWIDTH	49
22.3 OCCUPIED CHANNEL BANDWIDTH	54
22.4 BAND EDGE	59
22.5 BAND EDGE(HOPPING)	66
22.6 CONDUCTED RF SPURIOUS EMISSION	73
22.7 CARRIER FREQUENCIES SEPARATION	83
22.8 NUMBER OF HOPPING CHANNEL	85
22.9 DWELL TIME	87
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	97

APPENDIX B: PHOTOGRAPHS OF EUT 98

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass

Remark:

N/A: Not Applicable

2 GENERAL INFORMATION

Applicant	Magnadyne Corporation
Address	1111 W. Victoria Street Compton, CA 90220 USA
Manufacturer	Magnadyne Corporation
Address	1111 W. Victoria Street Compton, CA 90220 USA
Factory	Magnadyne Corporation
Address	1111 W. Victoria Street Compton, CA 90220 USA
Product Name	BLUETOOTH RECEIVER AMPLIFIER
Test Model No.	LSBT1B-AMP

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.0
Software Version	XY_2835P2.0_BT50A_20240123_V1.1.0_BTNAME_Lsbt1b-AMP.fw
Engineer sample no:	BLA-EMC-202403-A04
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	PCB Antenna
Antenna Gain:	-0.21 dBi(Provided by the customer)

4 OPERATION FREQUENCY EACH OF CHANNEL

BT:

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz

The middle channel	2441MHz
The Highest channel	2480MHz

BlueAsia

5 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	12-24Vdc

6 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)
Remark: Full battery is used during all test except ac conducted emission,	

7 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission(9kHz-30MHz)	±4.34dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

8 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
DC Power SUPPLY	UNI-T	UTP1605S	N/A	From lab (BLA-YQ-GC-2023006)
PC	lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)

9 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

- FCC — Designation No.: CN1252

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252.

- ISED — CAB identifier No.: CN0028

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028.

- CNAS -Designation No.: L9788

BlueAsia Technical Services(Shenzhen) Co., Ltd is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is 19788.

10 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

11 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2023/11/16	2026/11/15
Chamber 2	SKET	966	N/A	2021/07/20	2024/7/19
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Receiver	R&S	ESR7	101199	2023/08/30	2024/08/29
Receiver	R&S	ESPI7	101477	2023/07/07	2024/07/06
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/10/12	2025/10/11
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Horn Antenna	Schwarzbeck	BBHA 9170	1106	2022/04/24	2024/04/23
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2023/07/07	2024/07/06
Amplifier	SKET	PA-000318G-45	N/A	2023/08/30	2024/08/29
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2023/07/14	2024/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/09/14	2025/09/13
1kHz calibration audio source	SKET	MCS-ABT-C35	N/A	2023/09/04	2024/09/03
Free Field Microphone	SKET	MGS MP 663	0414	2023/09/04	2024/09/03
Audio shielding box	SKET	SB-ABT-C35	N/A	2023/03/30	2024/03/29
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A

Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A
Signal Generator DTV	ECREDIX	DSG-1000	N/A	N/A	N/A

Test Equipment Of RF Conducted Test					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY49100060	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY54420161	2023/08/30	2024/08/29
Signal Generator	Agilent	N5182A	MY47420955	2023/08/30	2024/08/29
Signal Generator	Agilent	N5181A	MY46240904	2023/07/07	2024/07/06
Signal Generator	R&S	CMW500	132429	2023/08/30	2024/08/29
BluetoothTester	Anritsu	MT8852B	06262047872	2023/08/30	2024/08/29
Power probe	DARE	RPR3006W	14I00889SN042	2023/09/01	2024/08/31
Power detection box	CDKMV	MW100-PSB	MW201020JYT	2023/07/07	2024/07/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2023/08/30	2024/08/29
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2023/08/30	2024/08/29
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audio Precision	ATS-1	ATS141094	2023/07/07	2024/07/06


12 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23°C
Humidity	48%

12.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

12.2 BLOCK DIAGRAM OF TEST SETUP

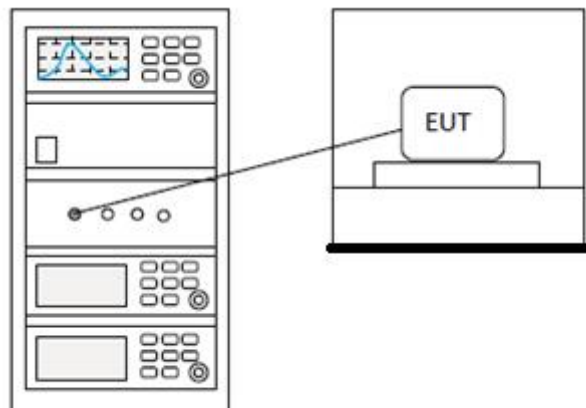

12.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BLUEASIA


13 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23°C
Humidity	48%

13.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

13.2 BLOCK DIAGRAM OF TEST SETUP

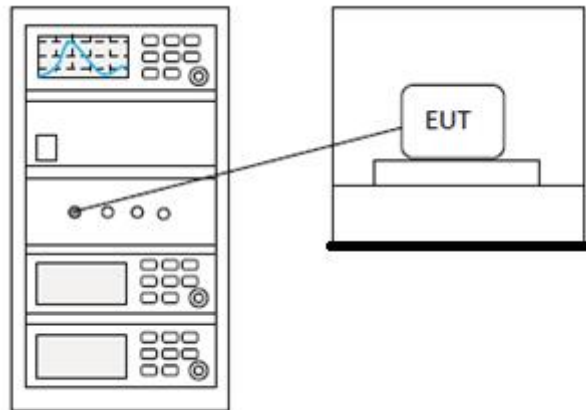

13.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


14 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23°C
Humidity	48%

14.1 LIMITS

Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

14.2 BLOCK DIAGRAM OF TEST SETUP

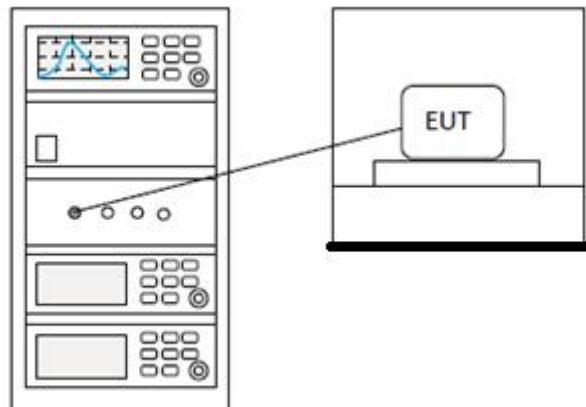


14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

15 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23°C
Humidity	48%

15.1 BLOCK DIAGRAM OF TEST SETUP

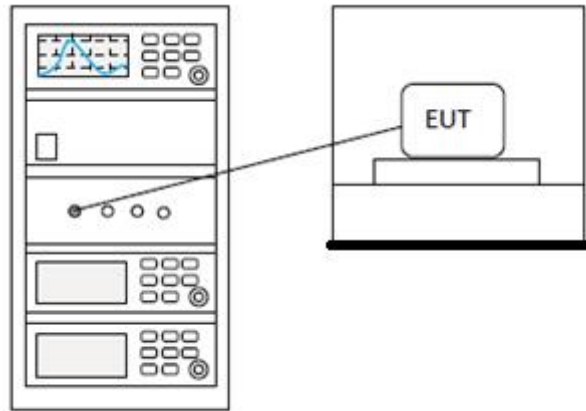

15.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


16 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23°C
Humidity	48%

16.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

16.2 BLOCK DIAGRAM OF TEST SETUP

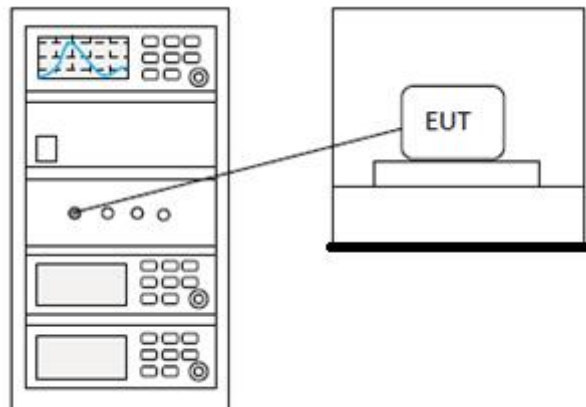

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BLUEASIA

17 RADIATED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23℃
Humidity	48%

17.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

17.2 BLOCK DIAGRAM OF TEST SETUP



17.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

17.4 TEST DATA


Below 1GHz

[TestMode: TX]; [Polarity: Horizontal]

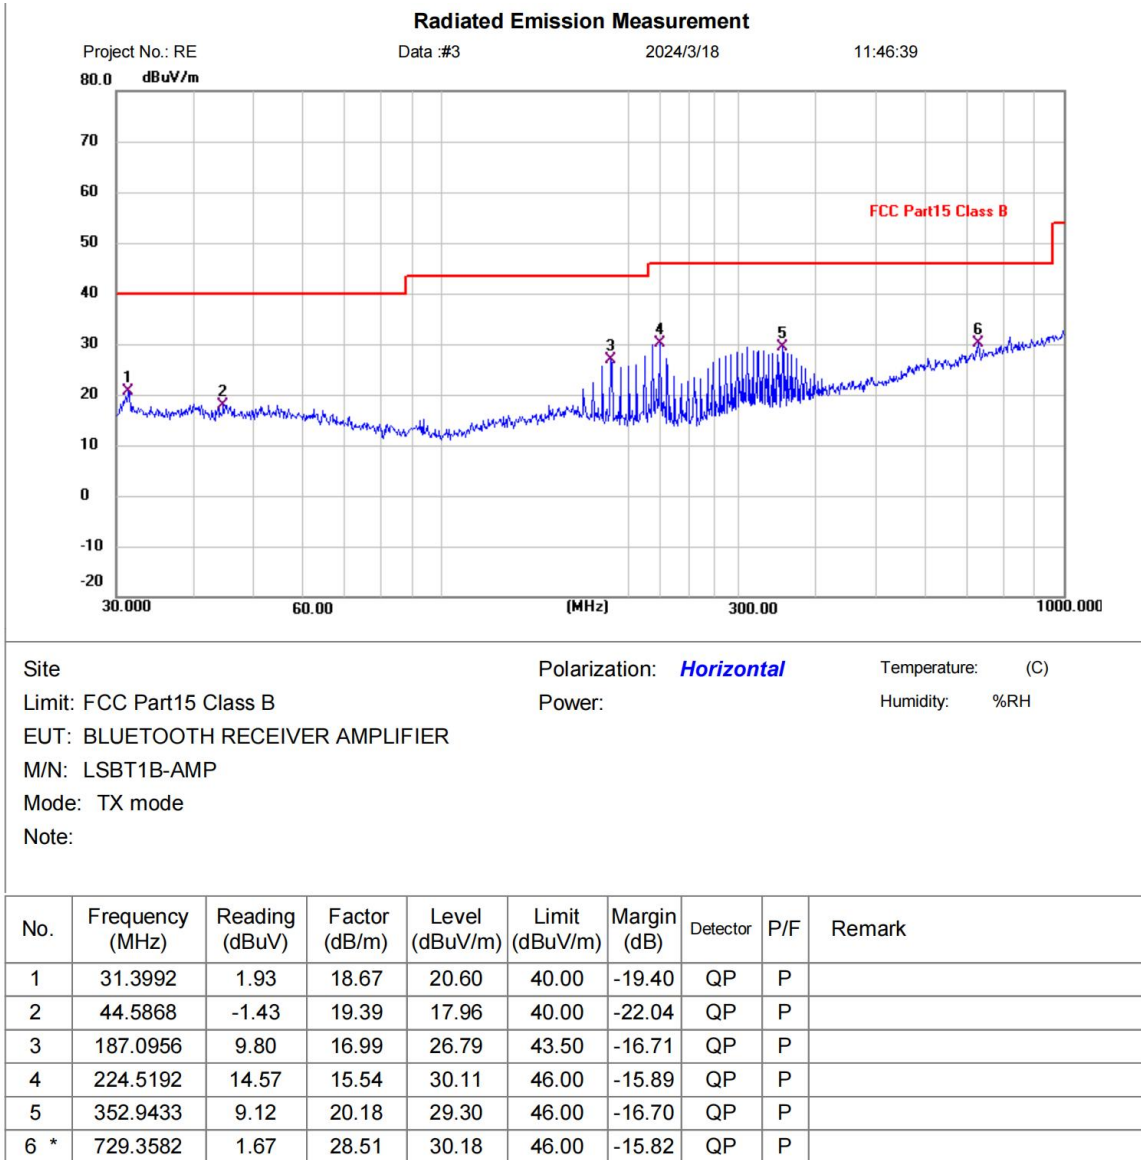

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

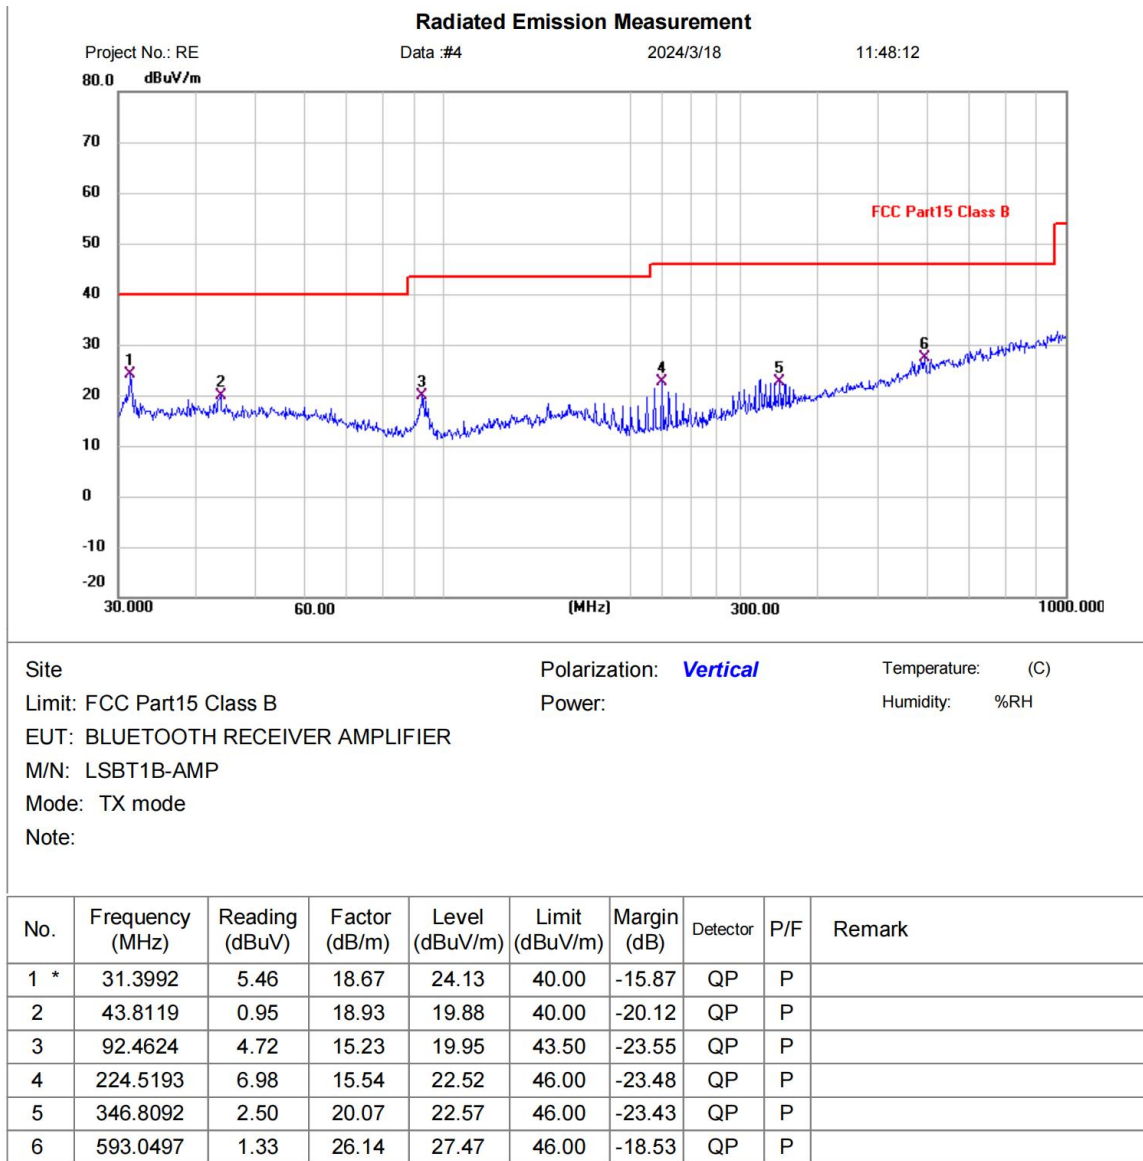


Test Result: Pass

Above 1GHz

[TestMode: TX lowest channel]; [Polarity: Horizontal]

Radiated Emission Measurement

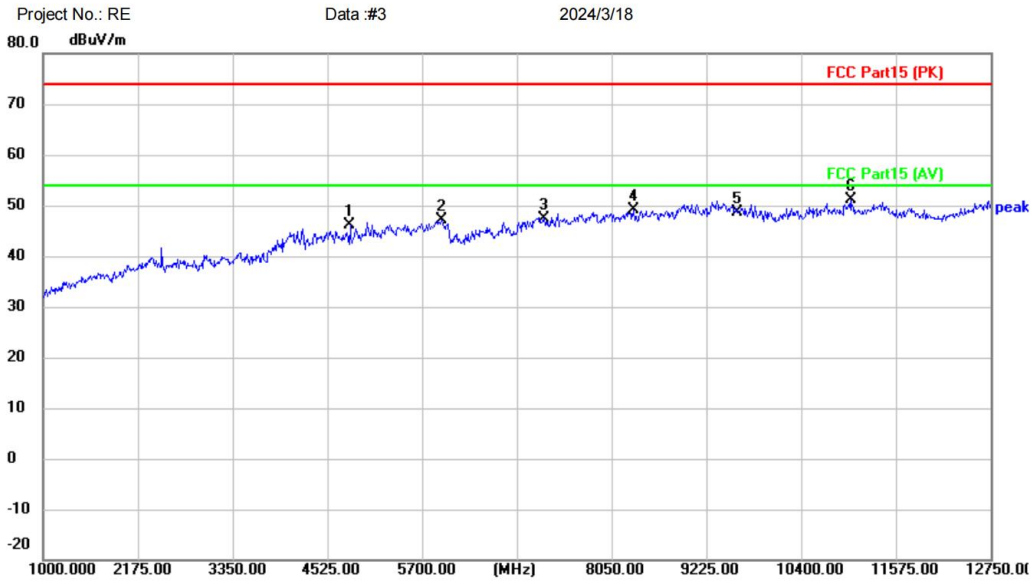

Project No.: RE Data: #3 2024/3/18

Site: Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: BLUETOOTH RECEIVER AMPLIFIER

M/N: LSBT1B-AMP


Mode: TX 2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	40.57	5.64	46.21	74.00	-27.79	peak	
2		5946.750	38.32	8.71	47.03	74.00	-26.97	peak	
3		7206.000	38.03	9.24	47.27	74.00	-26.73	peak	
4		8320.250	38.88	10.21	49.09	74.00	-24.91	peak	
5		9608.000	36.44	12.31	48.75	74.00	-25.25	peak	
6	*	11011.00	37.62	13.40	51.02	74.00	-22.98	peak	

Test Result: Pass

[TestMode:TX lowest channel]; [Polarity: Vertical]

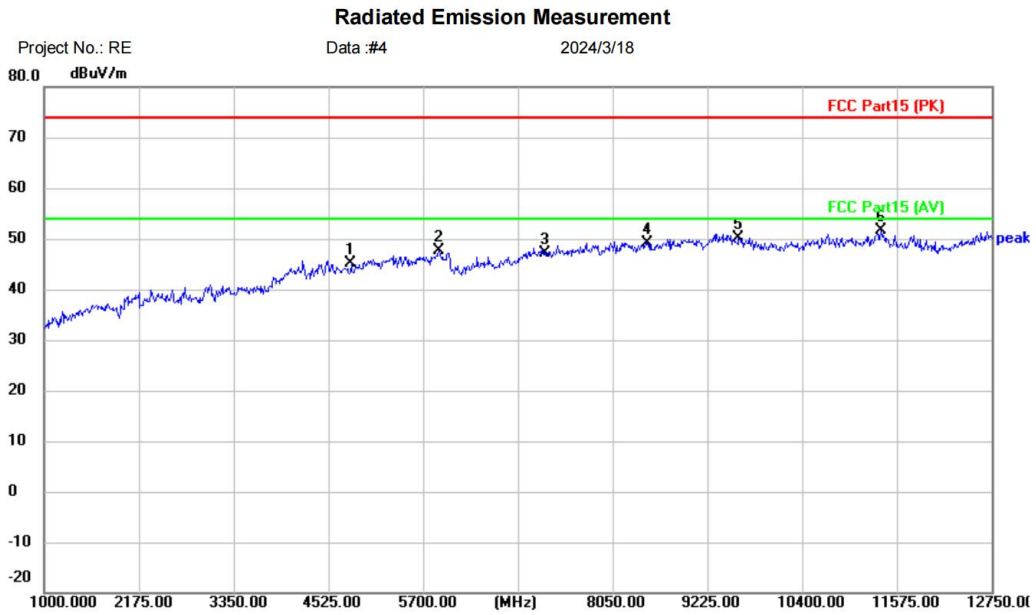


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: BLUETOOTH RECEIVER AMPLIFIER		
M/N: LSBT1B-AMP		
Mode: TX 2402		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	39.37	5.64	45.01	74.00	-28.99	peak	
2		5888.000	39.15	8.60	47.75	74.00	-26.25	peak	
3		7206.000	37.86	9.24	47.10	74.00	-26.90	peak	
4		8484.750	38.36	10.84	49.20	74.00	-24.80	peak	
5		9608.000	37.71	12.31	50.02	74.00	-23.98	peak	
6	*	11375.25	39.11	12.63	51.74	74.00	-22.26	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

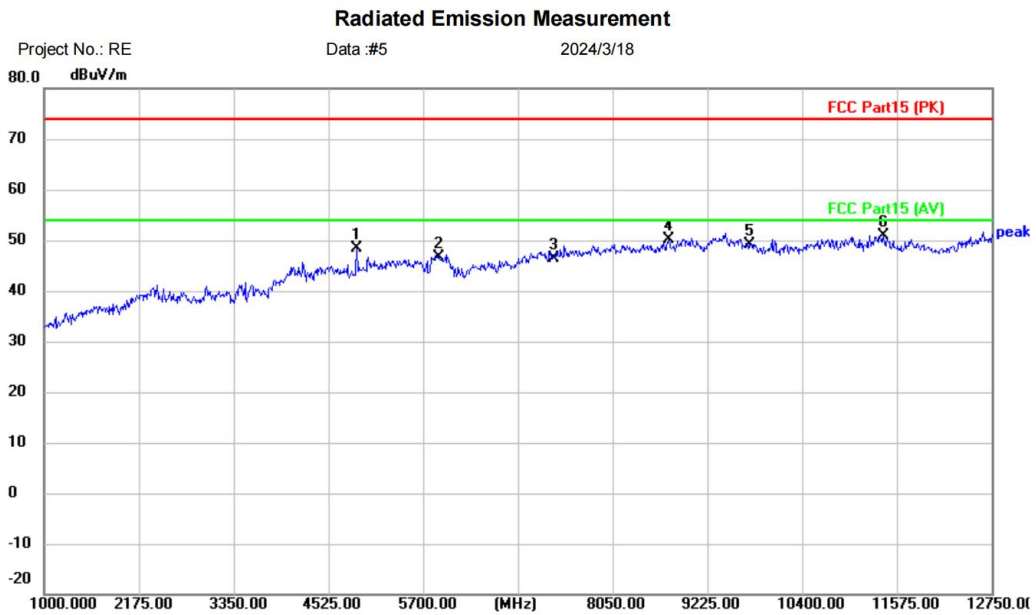


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: BLUETOOTH RECEIVER AMPLIFIER		
M/N: LSBT1B-AMP		
Mode: TX 2441		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4877.500	42.61	5.72	48.33	74.00	-25.67	peak	
2		5899.750	37.97	8.66	46.63	74.00	-27.37	peak	
3		7323.000	36.85	9.43	46.28	74.00	-27.72	peak	
4		8743.250	38.58	11.57	50.15	74.00	-23.85	peak	
5		9764.000	37.01	12.21	49.22	74.00	-24.78	peak	
6	*	11410.50	38.30	12.61	50.91	74.00	-23.09	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

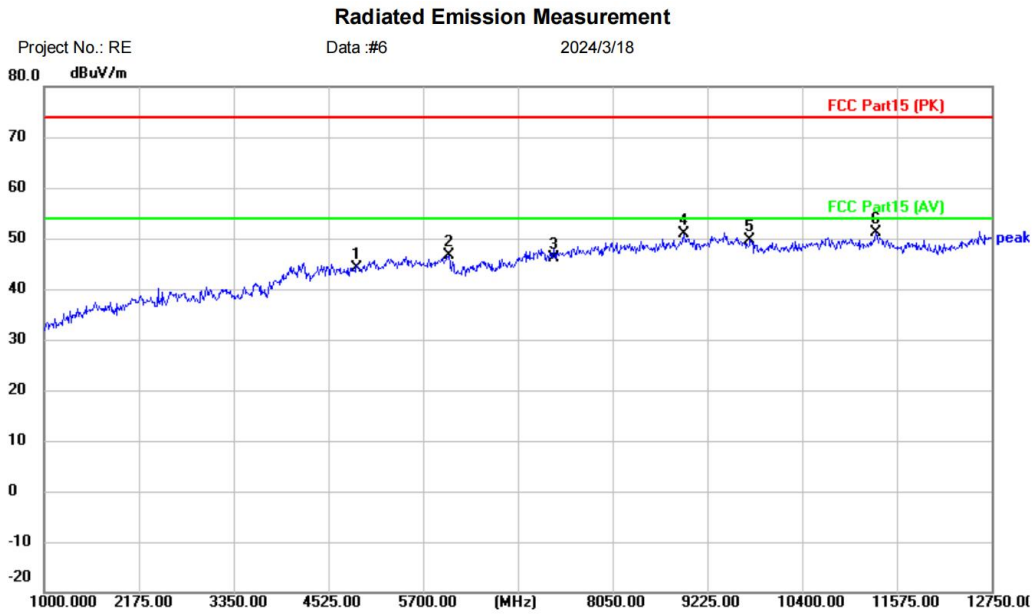


Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: BLUETOOTH RECEIVER AMPLIFIER		
M/N: LSBT1B-AMP		
Mode: TX 2441		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4882.000	38.30	5.73	44.03	74.00	-29.97	peak	
2		6017.250	40.88	5.63	46.51	74.00	-27.49	peak	
3		7323.000	36.72	9.43	46.15	74.00	-27.85	peak	
4		8931.250	38.71	12.19	50.90	74.00	-23.10	peak	
5		9764.000	37.32	12.21	49.53	74.00	-24.47	peak	
6	*	11316.50	38.34	12.69	51.03	74.00	-22.97	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

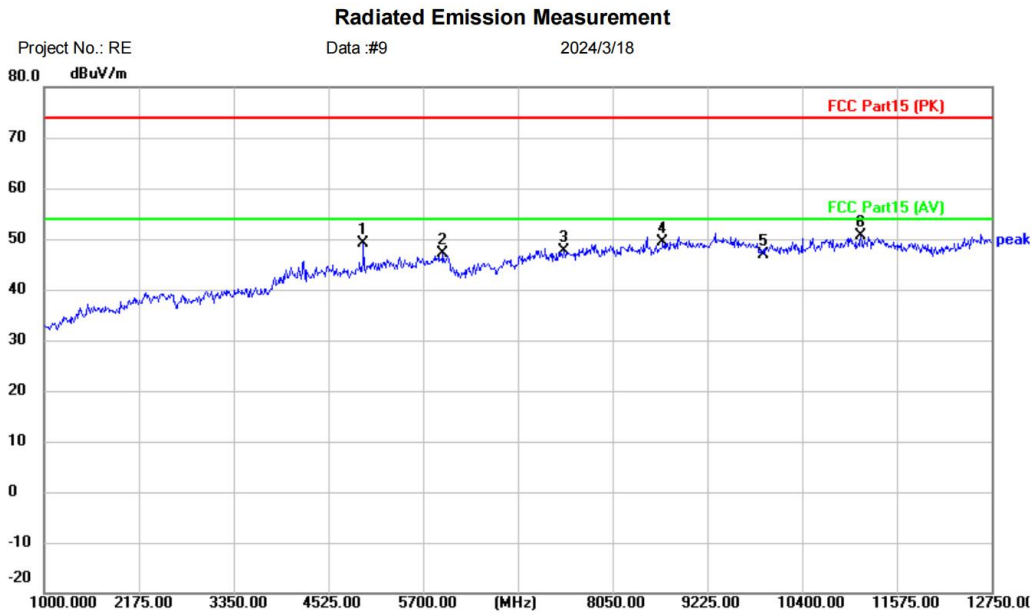


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: BLUETOOTH RECEIVER AMPLIFIER		
M/N: LSBT1B-AMP		
Mode: TX 2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4959.750	42.46	6.60	49.06	74.00	-24.94	peak	
2		5946.750	38.40	8.71	47.11	74.00	-26.89	peak	
3		7440.000	38.08	9.64	47.72	74.00	-26.28	peak	
4		8672.750	37.90	11.40	49.30	74.00	-24.70	peak	
5		9920.000	34.63	12.14	46.77	74.00	-27.23	peak	
6	*	11128.50	37.90	12.76	50.66	74.00	-23.34	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

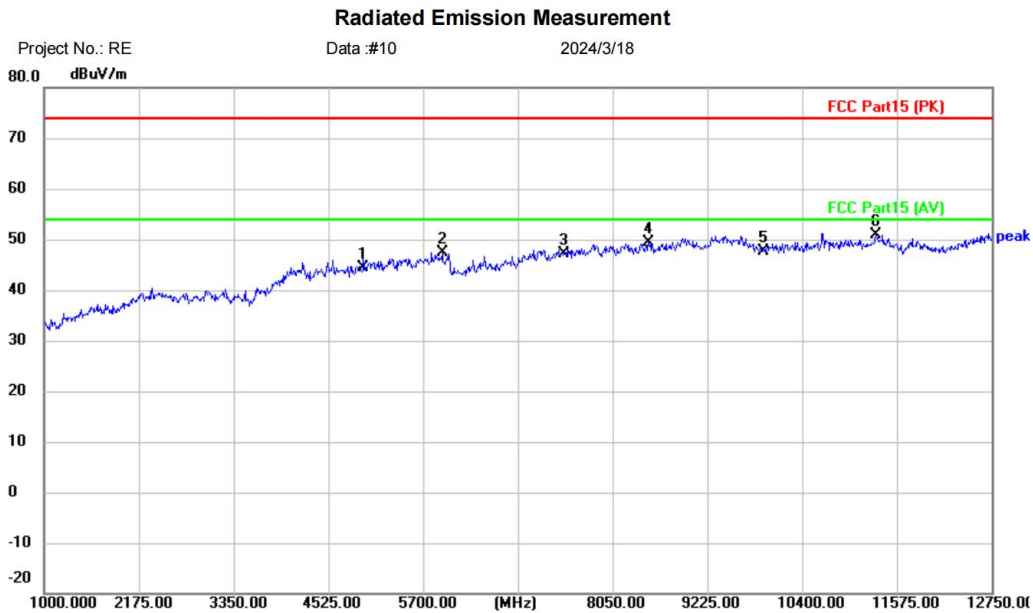

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: BLUETOOTH RECEIVER AMPLIFIER		
M/N: LSBT1B-AMP		
Mode: TX 2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4960.000	37.86	6.60	44.46	74.00	-29.54	peak	
2		5935.000	38.61	8.70	47.31	74.00	-26.69	peak	
3		7440.000	37.53	9.64	47.17	74.00	-26.83	peak	
4		8496.500	38.36	10.90	49.26	74.00	-24.74	peak	
5		9920.000	35.60	12.14	47.74	74.00	-26.26	peak	
6	*	11316.50	38.24	12.69	50.93	74.00	-23.07	peak	

Test Result: Pass

DH1, DH3, DH5 all have been tested, during the test, GFSK, pi/4DQPSK, 8DPSK, modulation were all pre-scanned Only the GFSK of the worst mode would be recorded in this report.

18 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23°C
Humidity	48%

18.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

18.2 BLOCK DIAGRAM OF TEST SETUP



18.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BLUEASIA

18.4 TEST DATA

[TestMode: TX lowest channel]; [Polarity: Horizontal]

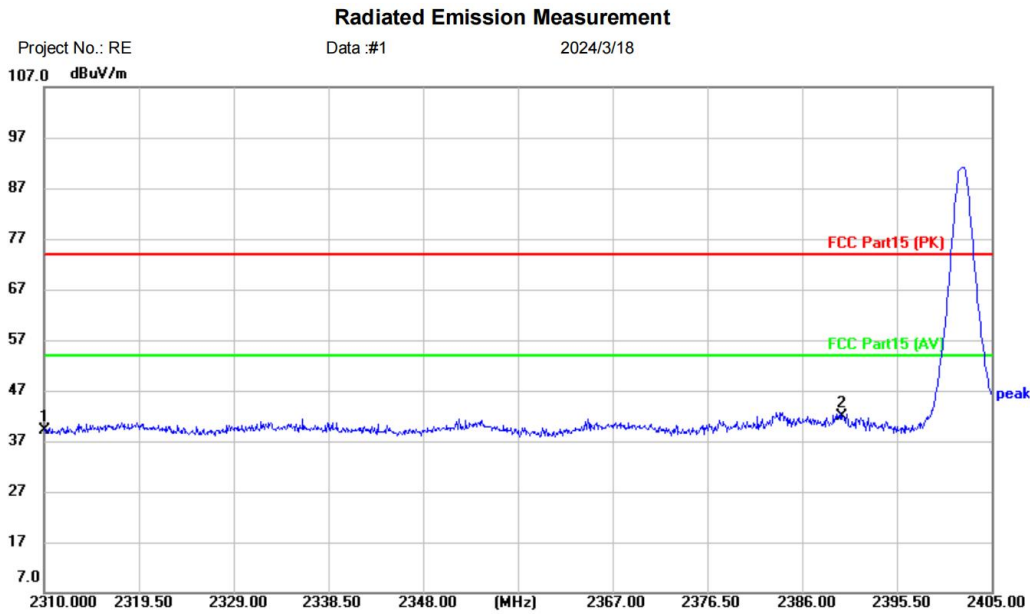


Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: BLUETOOTH RECEIVER AMPLIFIER		
M/N: LSBT1B-AMP		
Mode: TX 2402		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2310.000	42.08	-2.89	39.19	74.00	-34.81	peak	
2	*	2390.000	44.46	-2.70	41.76	74.00	-32.24	peak	

Test Result: Pass

[TestMode: TX lowest channel]; [Polarity: Vertical]

Radiated Emission Measurement

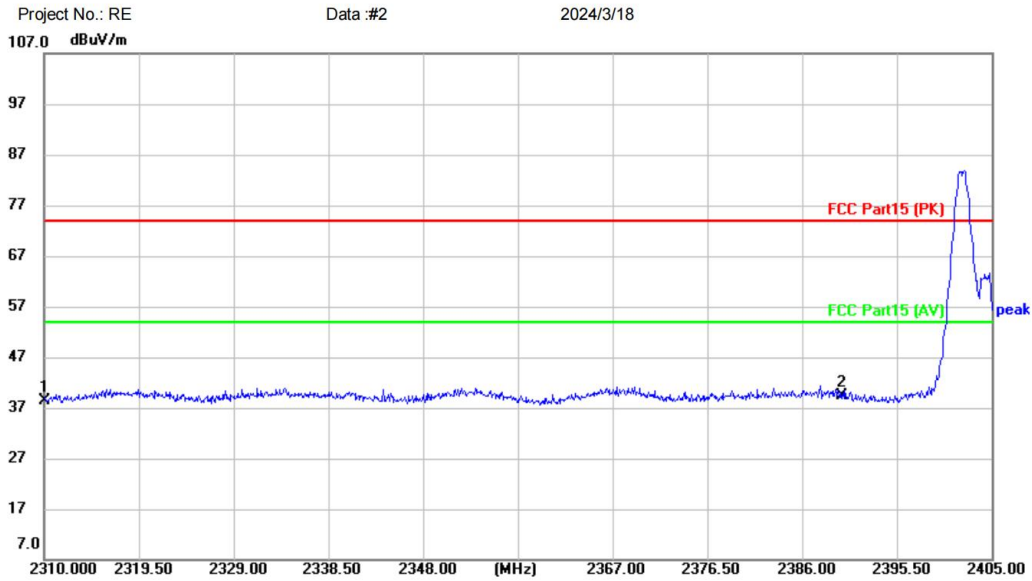

Site: Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: BLUETOOTH RECEIVER AMPLIFIER

M/N: LSBT1B-AMP

Mode: TX 2402


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2310.000	41.35	-2.89	38.46	74.00	-35.54	peak	
2	*	2390.000	42.08	-2.70	39.38	74.00	-34.62	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

Radiated Emission Measurement

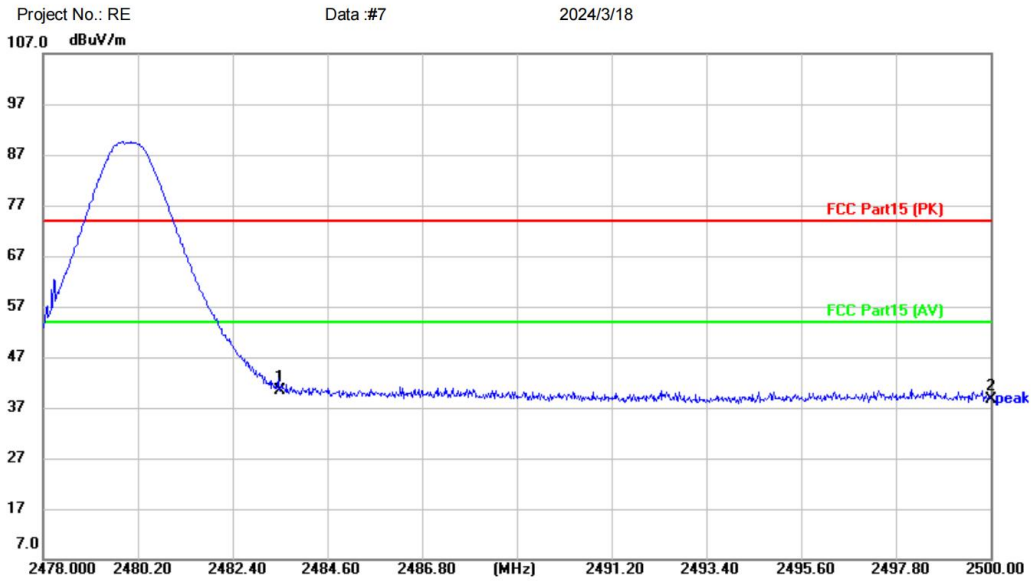


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: BLUETOOTH RECEIVER AMPLIFIER
 M/N: LSBT1B-AMP
 Mode: TX 2480
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2483.500	43.28	-2.91	40.37	74.00	-33.63	peak	
2		2500.000	41.59	-3.00	38.59	74.00	-35.41	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

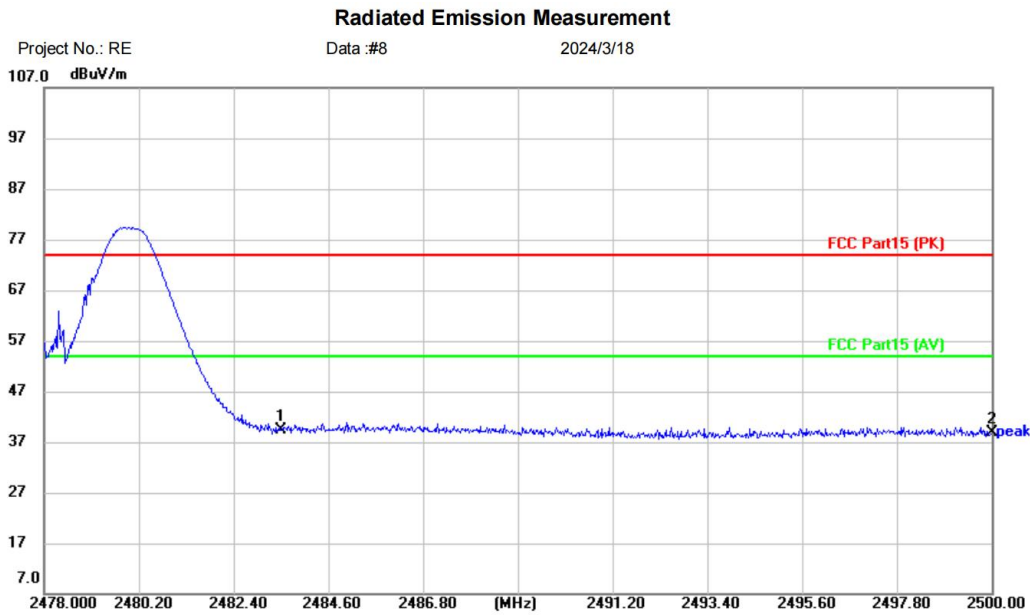

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: BLUETOOTH RECEIVER AMPLIFIER		
M/N: LSBT1B-AMP		
Mode: TX 2480		
Note:		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	42.32	-2.91	39.41	74.00	-34.59	peak	
2		2500.000	41.85	-3.00	38.85	74.00	-35.15	peak	

Test Result: Pass

DH1, DH3, DH5 all have been tested, during the test, GFSK, pi/4DQPSK, 8DPSK, modulation were all pre-scanned Only the GFSK of the worst mode would be recorded in this report.

19 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


19.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.21dBi.

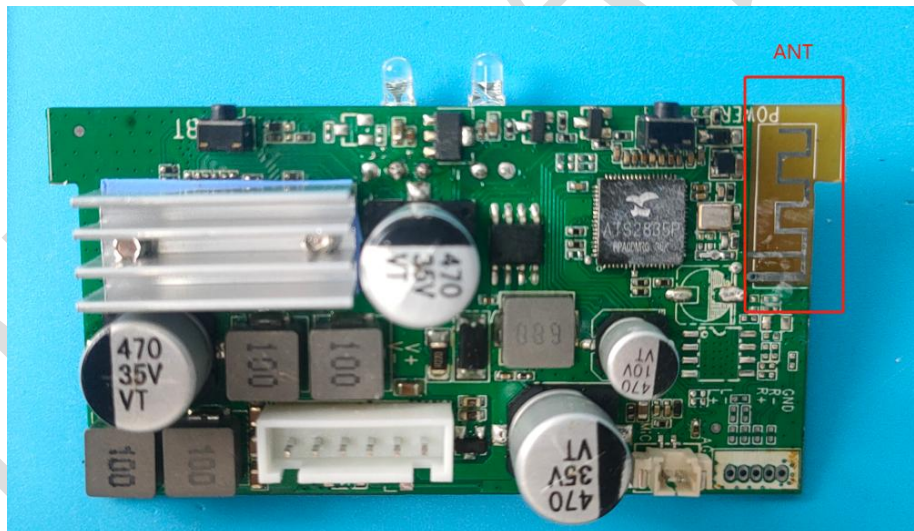


20 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23°C
Humidity	48%

20.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

20.2 BLOCK DIAGRAM OF TEST SETUP

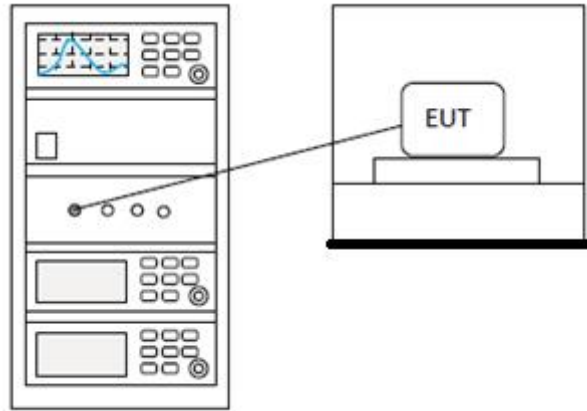

20.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


21 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Miata
Temperature	23°C
Humidity	48%

21.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

21.2 BLOCK DIAGRAM OF TEST SETUP

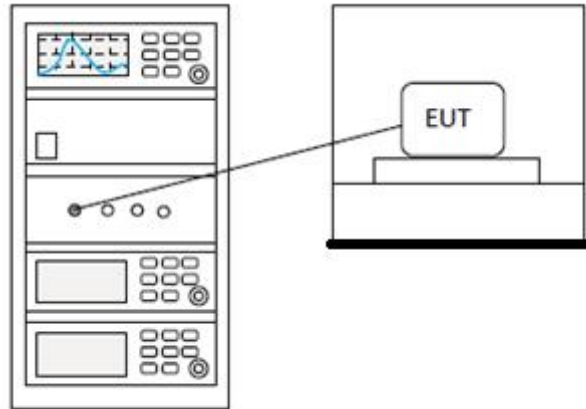

21.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


22 APPENDIX

Appendix1


22.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-0.809	21	Pass
NVNT	1-DH1	2441	Ant1	-1.083	21	Pass
NVNT	1-DH1	2480	Ant1	-1.17	21	Pass
NVNT	2-DH1	2402	Ant1	-0.811	21	Pass
NVNT	2-DH1	2441	Ant1	-1.08	21	Pass
NVNT	2-DH1	2480	Ant1	-1.17	21	Pass
NVNT	3-DH1	2402	Ant1	-0.796	21	Pass
NVNT	3-DH1	2441	Ant1	-1.055	21	Pass
NVNT	3-DH1	2480	Ant1	-1.182	21	Pass

Power NVNT 1-DH1 2402MHz Ant1

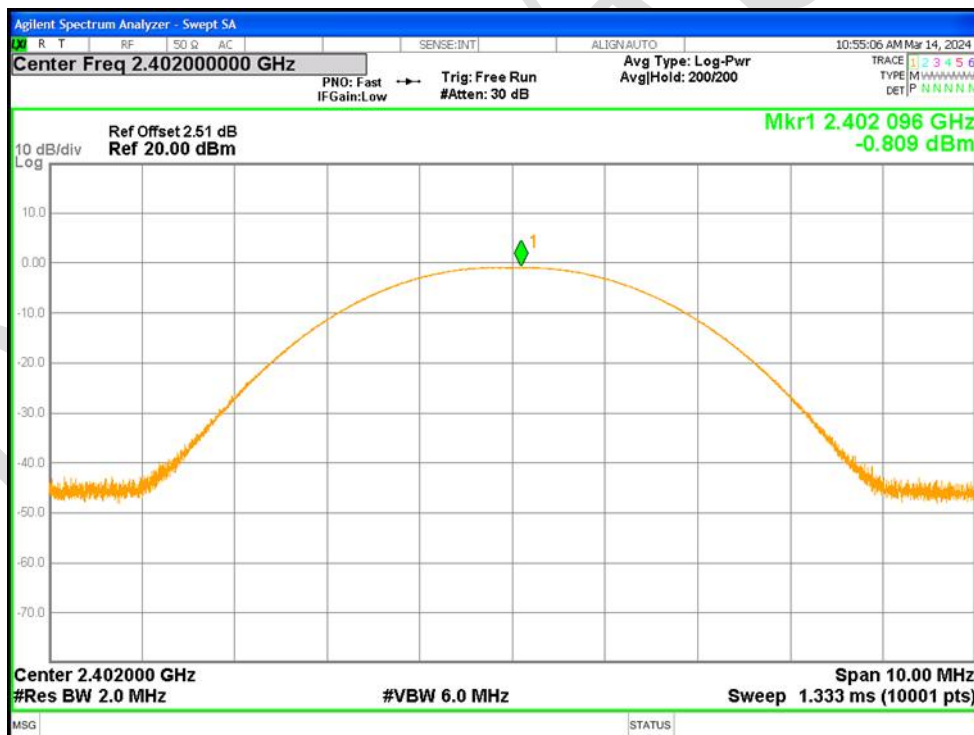

Power NVNT 1-DH1 2441MHz Ant1

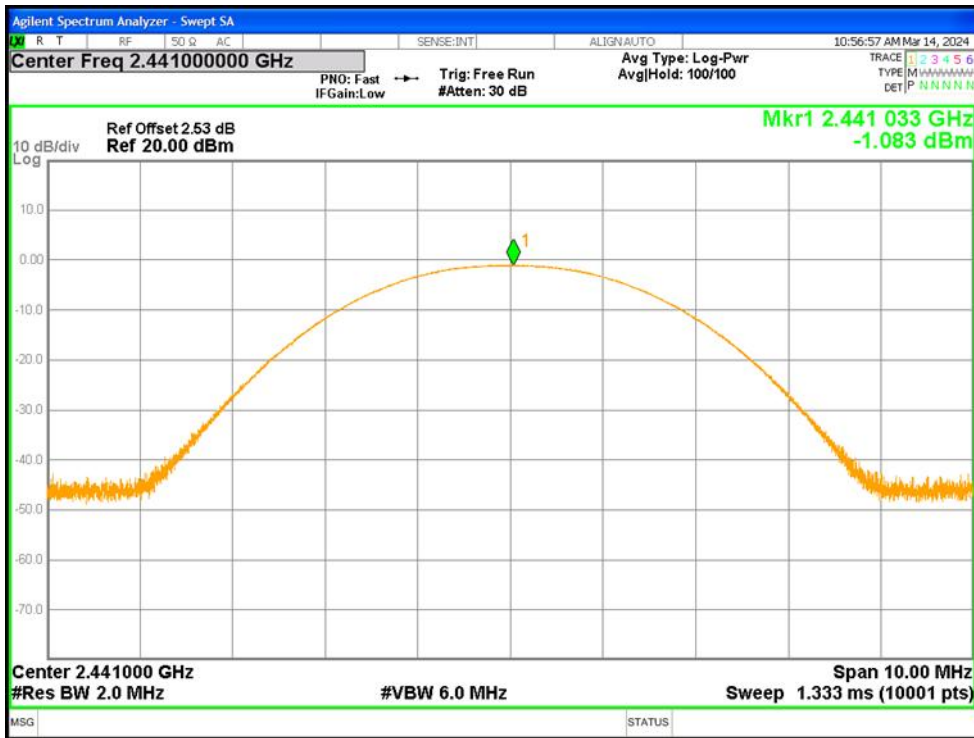

Power NVNT 1-DH1 2480MHz Ant1

