

---

# FCC Test Report

---

Report No.: AGC05U110601-02F2B

**FCC ID** : ZGRCOM  
**PRODUCT DESIGNATION** : GSM Mobile Phone  
**BRAND NAME** : Ice Mobile  
**TEST MODEL** : Comet II  
**CLIENT** : Dynamics Hong Kong Limited  
**DATE OF ISSUE** : July 25, 2011  
**STANDARD(S)** : FCC Part 15 Rules

Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.


## VERIFICATION OF COMPLIANCE

|                     |  |
|---------------------|--|
| Applicant           | Dynamics Hong Kong Limited<br>Room A4,3/F,Friend's House ,No.6A Carnarvon Road,<br>Tsim Sha Tsui,Kowloon,Hong Kong |
| Manufacturer        | Dynamics Hong Kong Limited<br>Room A4,3/F,Friend's House ,No.6A Carnarvon Road,<br>Tsim Sha Tsui,Kowloon,Hong Kong |
| Product Designation | GSM Mobile Phone   |
| Brand Name          | Ice Mobile   |
| Model Name          | Comet II   |
| FCC ID              | ZGRCOM   |
| Report Number       | AGC05U110601-02F2B   |
| Date of Test        | July 21, 2011 to July 23, 2011   |

### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Tested By:



Curoky Chen July 25, 2011

Reviewed By:



Forrest Lei July 25, 2011

Approved By:



Solger Zhang July 25, 2011

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. GENERAL INFORMATION .....</b>                        | <b>4</b>  |
| 1.1 PRODUCT DESCRIPTION .....                              | 4         |
| 1.2 TABLE OF CARRIER FREQUENCIES .....                     | 4         |
| 1.3 RECEIVER INPUT BANDWIDTH .....                         | 4         |
| 1.4 EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE .....       | 5         |
| 1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR ..... | 5         |
| 1.6 RELATED SUBMITTAL(S) / GRANT (S) .....                 | 5         |
| 1.7 TEST METHODOLOGY .....                                 | 5         |
| 1.8 TEST FACILITY .....                                    | 6         |
| 1.9 SPECIAL ACCESSORIES .....                              | 6         |
| 1.10 EQUIPMENT MODIFICATIONS .....                         | 6         |
| <b>2. SYSTEM TEST CONFIGURATION .....</b>                  | <b>7</b>  |
| 2.1 CONFIGURATION OF TESTED SYSTEM .....                   | 7         |
| 2.2 EQUIPMENT USED IN TESTED SYSTEM .....                  | 7         |
| <b>3. SUMMARY OF TEST RESULTS .....</b>                    | <b>8</b>  |
| <b>4. DESCRIPTION OF TEST MODES .....</b>                  | <b>8</b>  |
| <b>5. PEAK OUTPUT POWER .....</b>                          | <b>9</b>  |
| 5.1 MEASUREMENT PROCEDURE .....                            | 9         |
| 5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....     | 9         |
| 5.3 MEASUREMENT EQUIPMENT USED .....                       | 10        |
| 5.4 LIMITS AND MEASUREMENT RESULT .....                    | 10        |
| <b>6 20 DB BANDWIDTH .....</b>                             | <b>11</b> |
| 6.1 MEASUREMENT PROCEDURE .....                            | 11        |
| 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....     | 11        |
| 6.3 MEASUREMENT EQUIPMENT USED .....                       | 11        |
| 6.4 LIMITS AND MEASUREMENT RESULTS .....                   | 11        |
| <b>7 CONDUCTED SPURIOUS EMISSION .....</b>                 | <b>13</b> |
| 7.1 MEASUREMENT PROCEDURE .....                            | 13        |
| 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....     | 13        |
| 7.3 MEASUREMENT EQUIPMENT USED .....                       | 13        |
| 7.4 LIMITS AND MEASUREMENT RESULT .....                    | 13        |
| <b>8 RADIATED EMISSION .....</b>                           | <b>17</b> |
| 8.1 MEASUREMENT PROCEDURE .....                            | 17        |
| 8.2 TEST SETUP .....                                       | 18        |
| 8.4 TEST RESULT .....                                      | 20        |
| <b>9 BAND EDGE EMISSION .....</b>                          | <b>24</b> |
| 9.1 MEASUREMENT PROCEDURE .....                            | 24        |
| 9.2 TEST SET-UP .....                                      | 24        |
| 9.3 TEST RESULT .....                                      | 24        |
| <b>10 NUMBER OF HOPPING FREQUENCY .....</b>                | <b>28</b> |
| 10.1 MEASUREMENT PROCEDURE .....                           | 28        |
| 10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....     | 28        |
| 10.3 MEASUREMENT EQUIPMENT USED .....                      | 28        |
| 10.4 LIMITS AND MEASUREMENT RESULT .....                   | 28        |

|   |           |
|---|-----------|
| <b>11 TIME OF OCCUPANCY (DWELL TIME) .....</b>                          | <b>29</b> |
| <b>11.1 MEASUREMENT PROCEDURE .....</b>                                 | <b>29</b> |
| <b>11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....</b>           | <b>29</b> |
| <b>11.3 MEASUREMENT EQUIPMENT USED .....</b>                            | <b>29</b> |
| <b>11.4 LIMITS AND MEASUREMENT RESULT .....</b>                         | <b>29</b> |
| <b>12. FREQUENCY SEPARATION .....</b>                                   | <b>30</b> |
| <b>12.1 MEASUREMENT PROCEDURE .....</b>                                 | <b>32</b> |
| <b>12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) .....</b>           | <b>32</b> |
| <b>12.3 MEASUREMENT EQUIPMENT USED .....</b>                            | <b>32</b> |
| <b>12.4 LIMITS AND MEASUREMENT RESULT .....</b>                         | <b>32</b> |
| <b>13 FCC LINE CONDUCTED EMISSION TEST .....</b>                        | <b>33</b> |
| <b>13.1 LIMITS OF LINE CONDUCTED EMISSION TEST .....</b>                | <b>33</b> |
| <b>13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST .....</b>         | <b>33</b> |
| <b>13.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....</b> | <b>34</b> |
| <b>13.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST .....</b>       | <b>34</b> |
| <b>13.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST .....</b>           | <b>35</b> |
| <b>APPENDIX I .....</b>   | <b>37</b> |
| <b>PHOTOGRAPHS OF THE EUT .....</b>                                     | <b>37</b> |
| <b>APPENDIX II .....</b>  | <b>43</b> |
| <b>PHOTOGRAPHS OF THE TEST SETUP .....</b>                              | <b>43</b> |

## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

The EUT is a **GSM Mobile Phone** designed as an “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

|  |  |
|--|--|
| Operation Frequency  | 2.402 GHz to 2.480GHz                                |
| Rated Output Power   | 3.43dBm  |
| Bluetooth Version:   | V2.0 without EDR                                     |
| Modulation   | GFSK   |
| Number of channels   | 79   |
| Antenna Designation  | Integrated Antenna                                   |
| Antenna Gain   | 0.8dBi   |
| Power Supply   | DC3.7V by Built-in Li-ion Battery(or charging by PC) |
| <i>**note: the EUT can charged by PC while transfer information.</i> |  |

### 1.2 TABLE OF CARRIER FREQUENCYS

| Frequency Band | Channel Number | Frequency |
|----------------|----------------|-----------|
| 2400~2483.5MHZ | 0              | 2402MHZ   |
|                | 1              | 2403MHZ   |
|                | :              | :         |
|                | 38             | 2440 MHZ  |
|                | 39             | 2441 MHZ  |
|                | 40             | 2442 MHZ  |
|                | :              | :         |
|                | 77             | 2479 MHZ  |
|                | 78             | 2480 MHZ  |

### 1.3 RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1MHZ, In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single or multislots packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

#### 1.4 EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE

Example of a 79 hopping sequence in data mode:

40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67  
56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59  
72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75  
09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06  
01,51,03,55,05,04

#### 1.5 EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

1 LAP/UAP of the master of the connection

##### 2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about One day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations)are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it cannot be shorter)than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

#### 1.6 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: ZGRCOM** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

#### 1.7 TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

## **1.8 TEST FACILITY**

All measurement facilities used to collect the measurement data are located at  
Attestation of Global Compliance Co., Ltd.  
1&2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, XiXiang, Baoan District, Shenzhen  
The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.  
FCC register No.: 259865

## **1.9 SPECIAL ACCESSORIES**

Refer to section 2.2.


## **1.10 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 CONFIGURATION OF EUT SYSTEM

Configure :

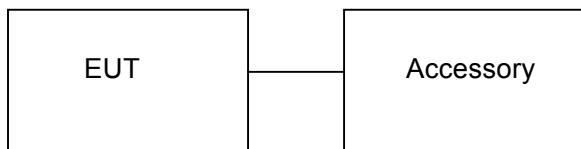

### 2.2 EQUIPMENT USED IN EUT SYSTEM

| Item | Equipment        | Mfr/Brand  | Model/Type No. | Remark    |
|------|------------------|------------|----------------|-----------|
| 1    | GSM Mobile Phone | Ice Mobile | Comet II       | EUT       |
| 2    | Adapter          | Ice Mobile | Comet II       | accessory |
| 3    | battery          | Ice Mobile | Comet II       | accessory |
| 4    | USB Cable        | N/A        | N/A            | accessory |
| 5    | Earphone         | N/A        | N/A            | accessory |

*Note: All the accessories have been used during the test. the Earphone and the adapter can't both connect to the mobile phone, all the following "EUT" in setup diagram means EUT system.*

### 3. SUMMARY OF TEST RESULTS

| FCC RULES | DESCRIPTION OF TEST         | RESULT    |
|-----------|-----------------------------|-----------|
| §15.247   | Peak Output Power           | Compliant |
| §15.247   | 20 dB Bandwidth             | Compliant |
| §15.247   | Spurious Emission           | Compliant |
| §15.209   | Radiated Emission           | Compliant |
| §15.247   | Band Edges                  | Compliant |
| §15.207   | Conduction Emission         | Compliant |
| §15.247   | Number of Hopping Frequency | Compliant |
| §15.247   | Time of Occupancy           | Compliant |
| §15.247   | Frequency Separation        | Compliant |

### 4. DESCRIPTION OF TEST MODES

The following operating modes were applied for the related test items. For Radiated Emission, 3 axis were chosen for testing for each applicable modes.

| No. | TEST MODES         |
|-----|--------------------|
| 1   | Low Channel(TX)    |
| 2   | Middle Channel(TX) |
| 3   | High Channel(TX)   |
| 4   | Normal Hopping     |


**Note:** All the test modes can be supply by Built-in Li-ion battery and adapter, only the result of the worst case was recorded in the report.

## 5. PEAK OUTPUT POWER

### 5.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
4. Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
RBW > the 20 dB bandwidth of the emission being measured  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak
5. Set SPA Trace 1 Max hold, then View.

### 5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

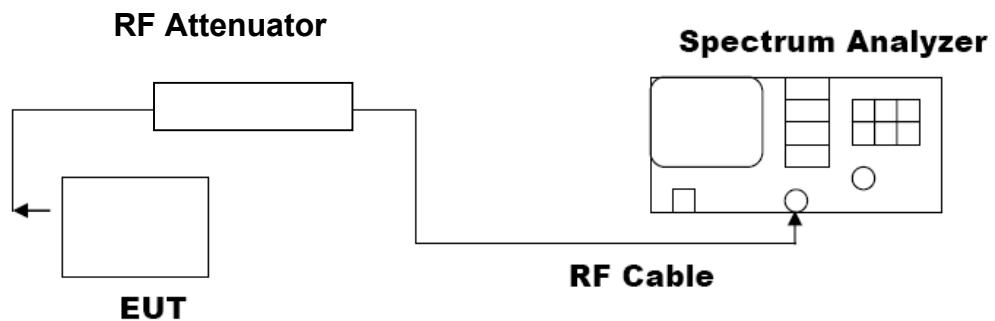

### 5.3 MEASUREMENT EQUIPMENT USED

| Description       | Manufacturer | Model   | SERIAL NUMBER | Cal. Date  | Cal. Due   |
|-------------------|--------------|---------|---------------|------------|------------|
| Spectrum Analyzer | Agilent      | E4440A  | N/A           | 06/27/2011 | 06/26/2012 |
| RF attenuator     | N/A          | RFA20db | N/A           | N/A        | N/A        |

### 5.4 LIMITS AND MEASUREMENT RESULT

| LIMITS AND MEASUREMENT RESULT |              |                         |              |
|-------------------------------|--------------|-------------------------|--------------|
| Frequency (GHz)               | Result (dBm) | Applicable Limits (dBm) | Pass or Fail |
| 2.402                         | 3.43         | 30                      | Pass         |
| 2.441                         | 3.39         | 30                      | Pass         |
| 2.480                         | 3.37         | 30                      | Pass         |

## 6 20 DB BANDWIDTH

### 6.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
4. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW; Sweep = auto; Detector function = peak
5. Set SPA Trace 1 Max hold, then View.

### 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in Section 5.2

### 6.3 MEASUREMENT EQUIPMENT USED

The same as described in Section 5.3


### 6.4 LIMITS AND MEASUREMENT RESULTS

| LIMITS AND MEASUREMENT RESULT |                    |       |          |
|-------------------------------|--------------------|-------|----------|
| Applicable Limits             | Measurement Result |       |          |
|                               | Test Data (MHz)    |       | Criteria |
| N/A                           | Low Channel        | 0.957 | PASS     |
|                               | Middle Channel     | 0.960 | PASS     |
|                               | High Channel       | 0.969 | PASS     |

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR GSM MIDDLE CHANNEL

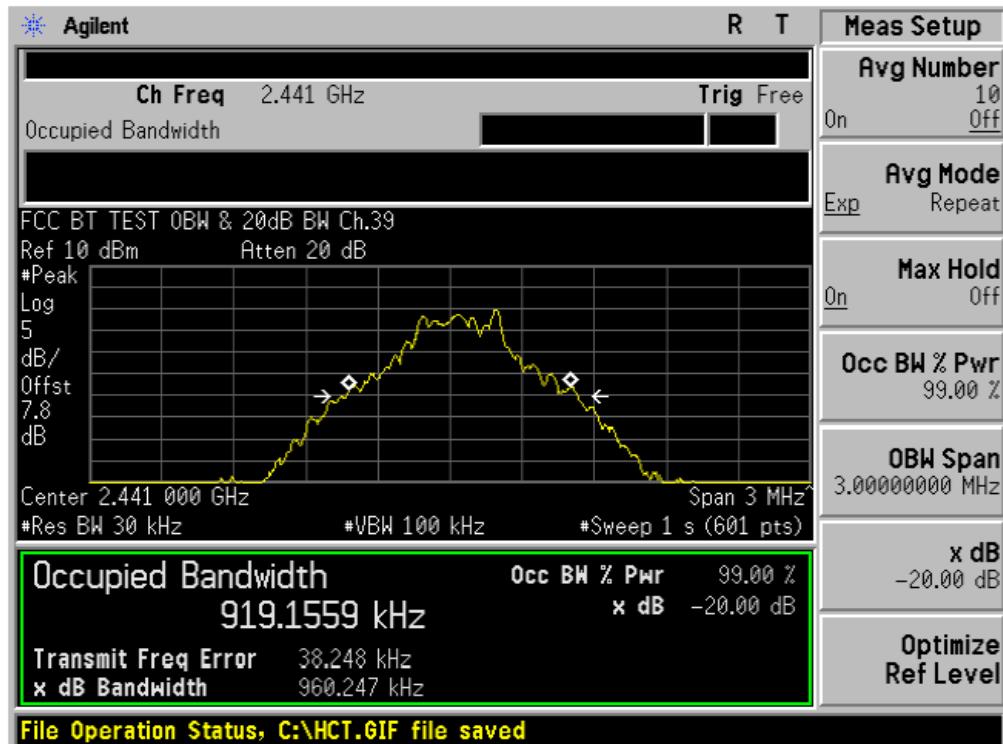

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



## 7 CONDUCTED SPURIOUS EMISSION

### 7.1 MEASUREMENT PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
4. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.  
RBW = 100 kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak.
5. Set SPA Trace 1 Max hold, then View.

### 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The Same as described in section 5.2



### 7.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 5.3



### 7.4 LIMITS AND MEASUREMENT RESULT



| LIMITS AND MEASUREMENT RESULT   |  |          |
|---|--|----------|
| Applicable Limits   | Measurement Result   |          |
|   | Test Data  | Criteria |
| In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. | At least -20dBc than the limit Specified on the BOTTOM Channel | PASS     |
| In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))   | At least -20dBc than the limit Specified on the TOP Channel    | PASS     |

TEST PLOT OF OUT OF BAND EMISSIONS FOR LOW CHANNEL

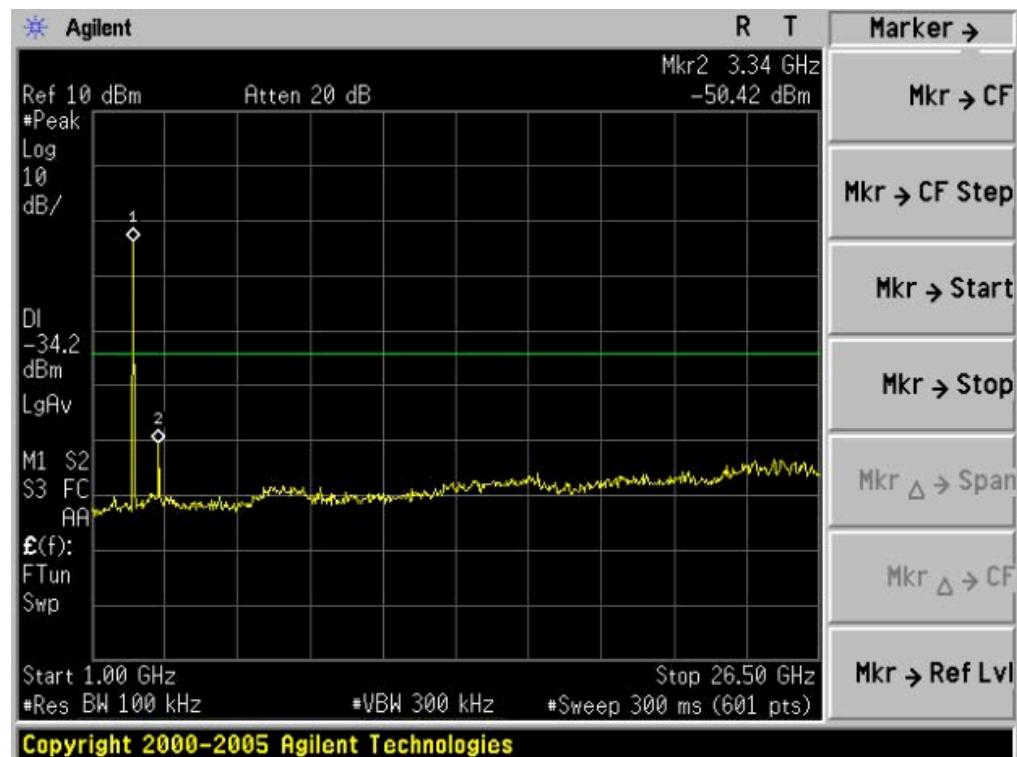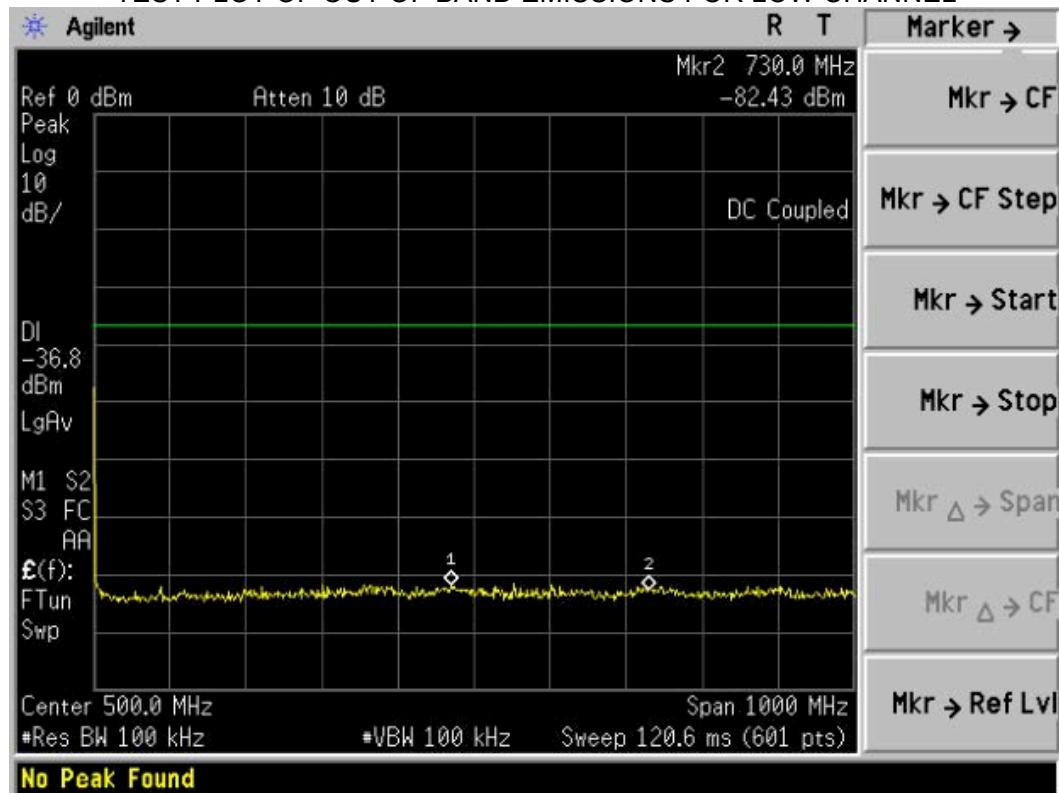

TEST PLOT OF OUT OF BAND EMISSIONS FOR MIDDLE CHANNEL

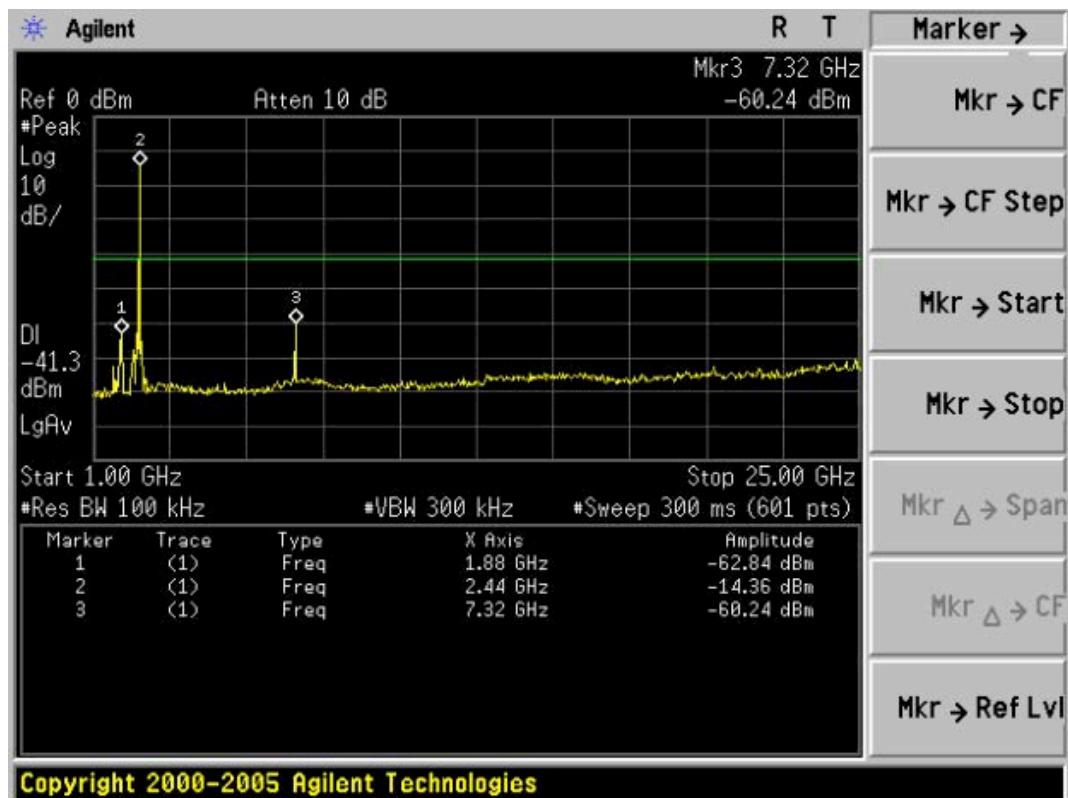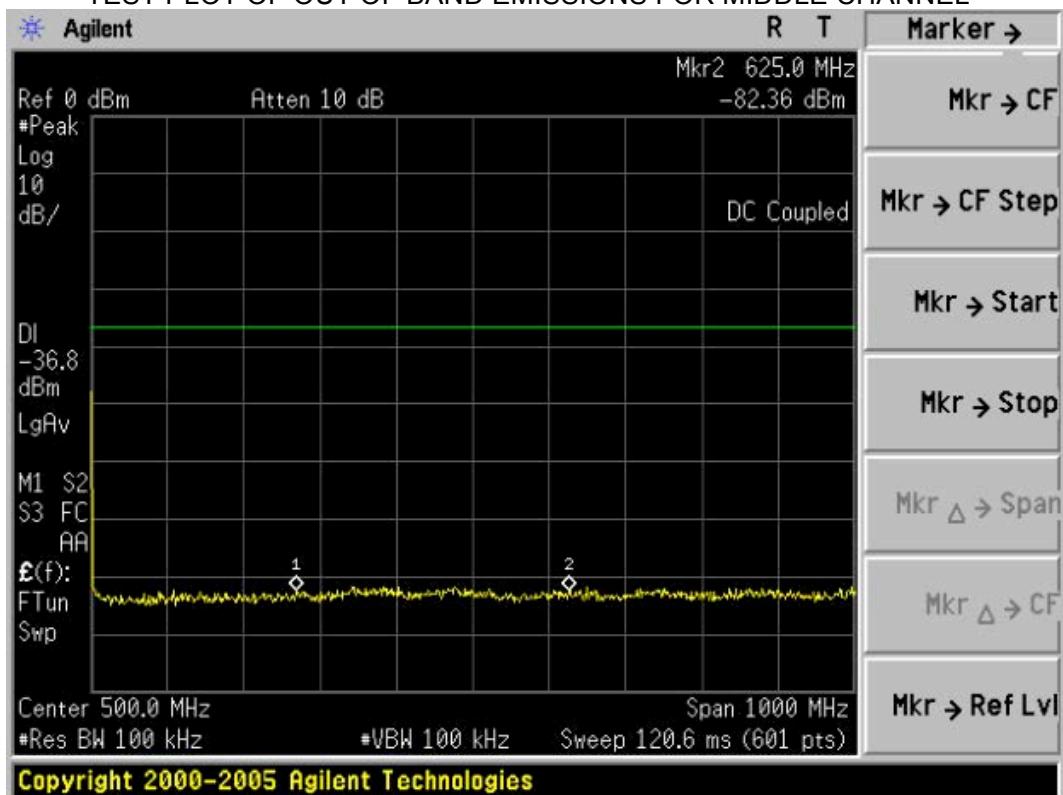

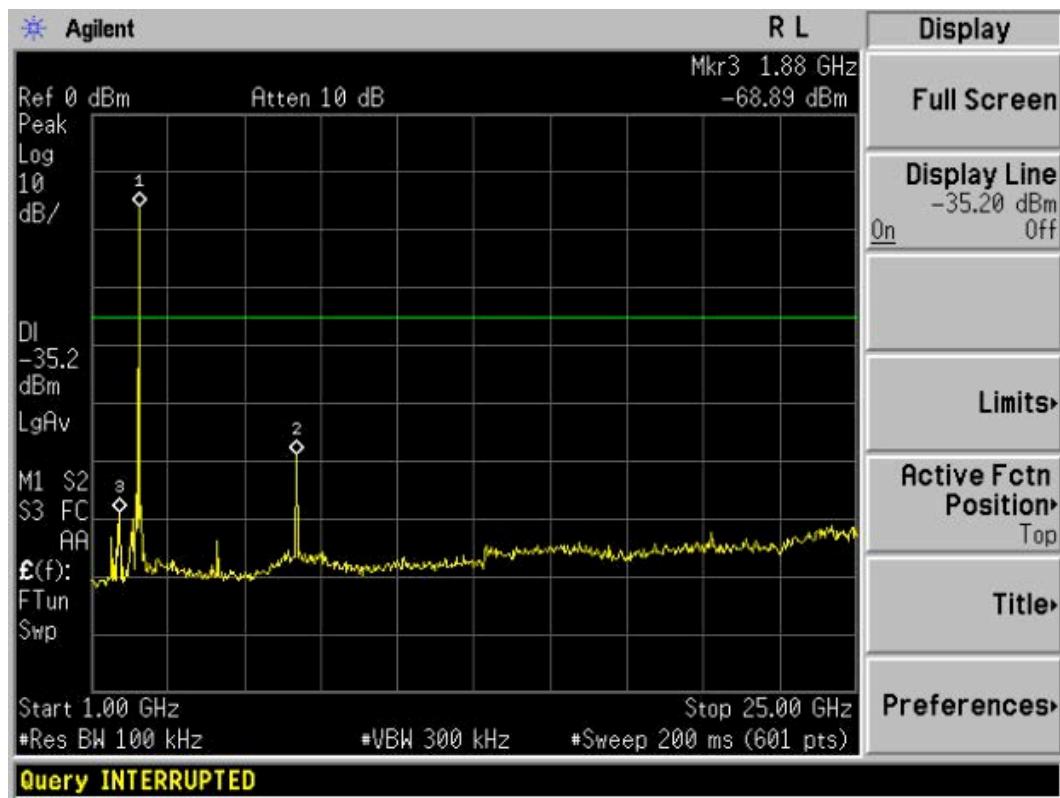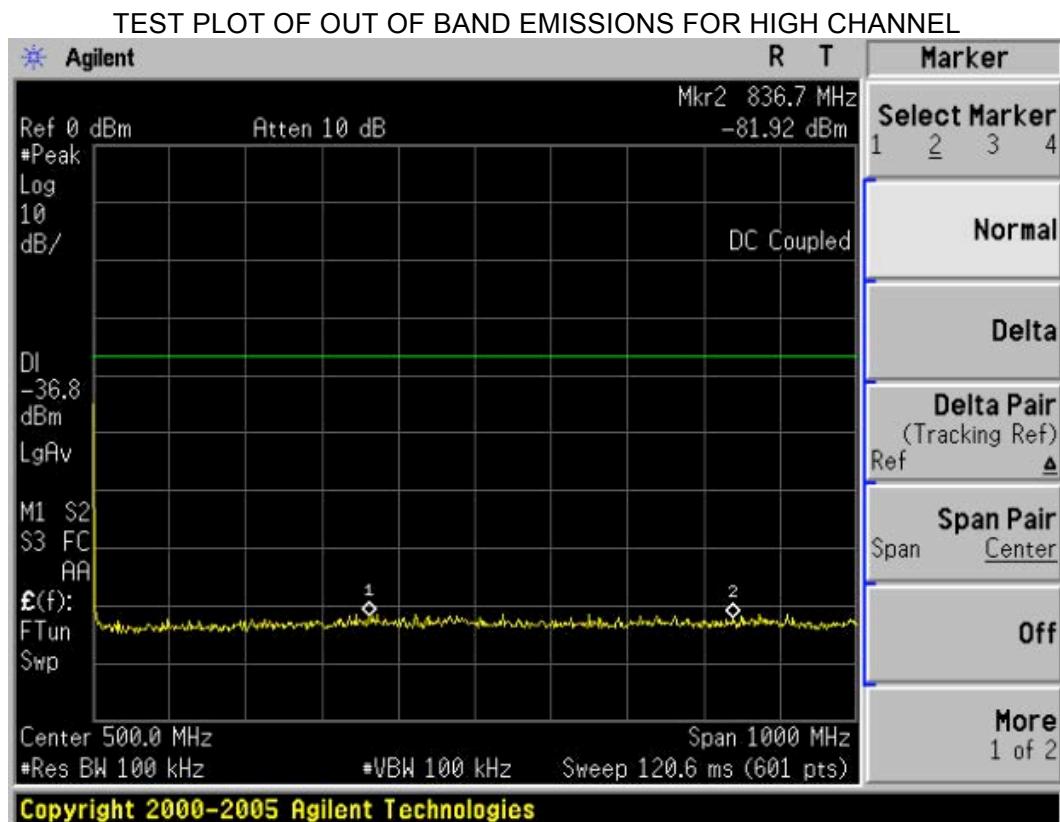

## 8 RADIATED EMISSION

### 8.1 MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.'

| Spectrum Parameter    | Setting   |
|-----------------------|---|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP                               |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP                               |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP                            |
| Start ~Stop Frequency | 1GHz~26.5GHz<br>1MHz/1MHz for Peak, 1MHz/10Hz for Average |


| Receiver Parameter    | Setting                        |
|-----------------------|--------------------------------|
| Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP    |
| Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP    |
| Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |

## 8.2 TEST SETUP


### RADIATED EMISSION TEST SETUP BELOW 30MHz

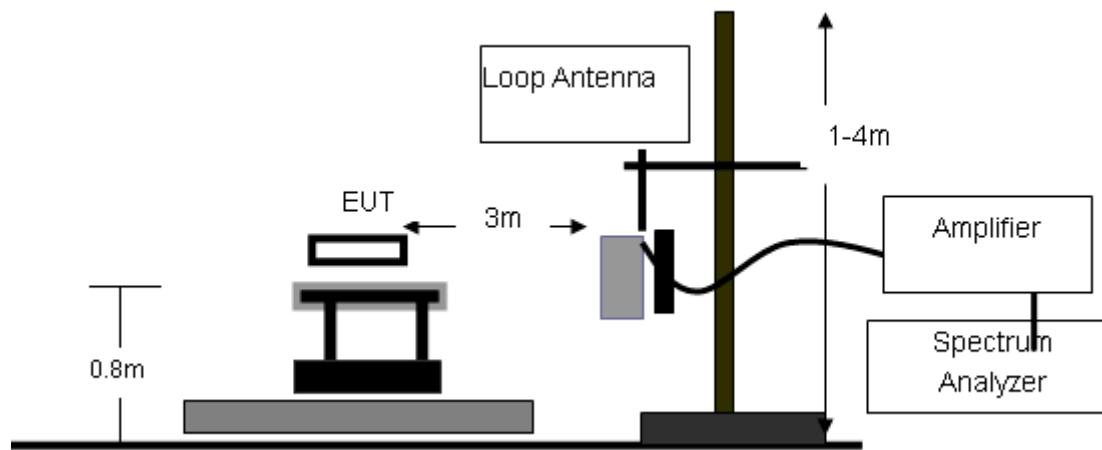

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

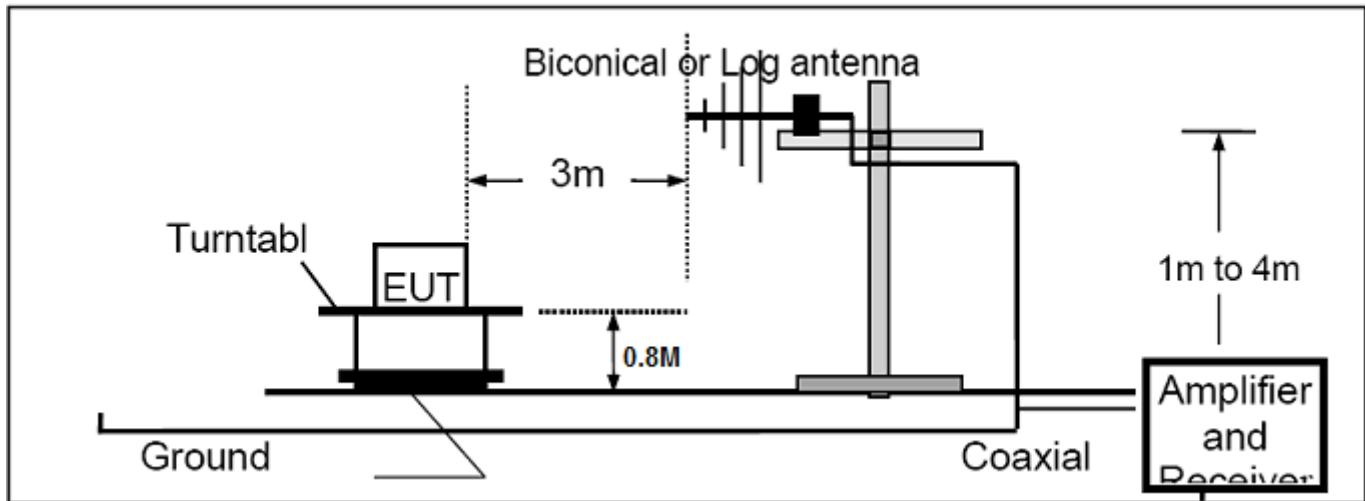

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

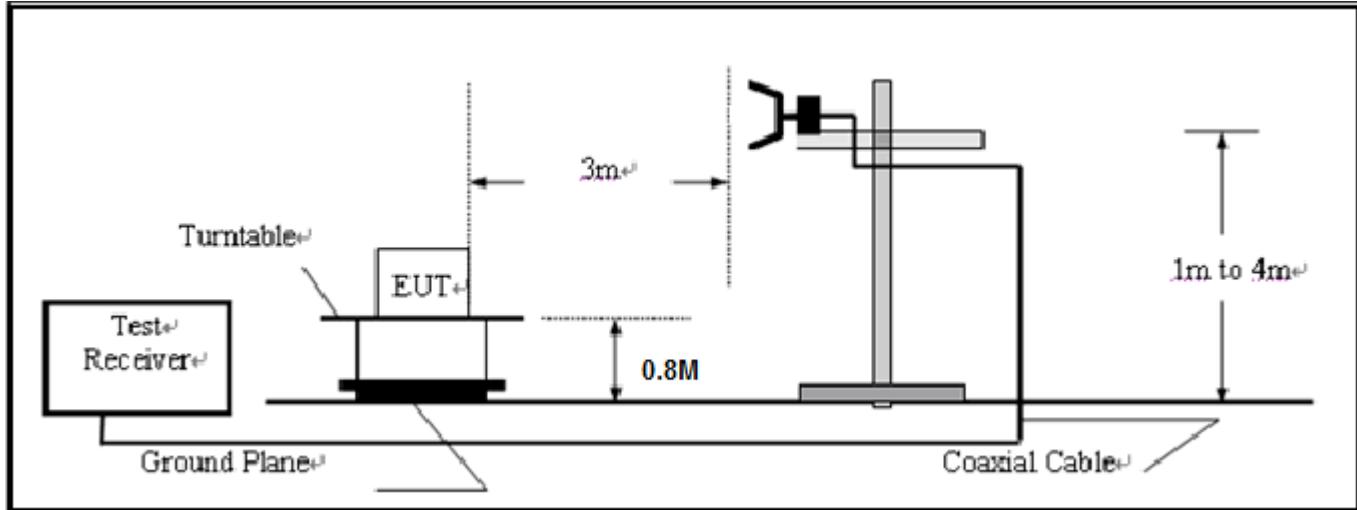

### 8.3 TEST EQUIPMENT LIST


| Description           | Manufacturer      | Model       | SERIAL NUMBER | Cal. Date  | Cal. Due   |
|-----------------------|-------------------|-------------|---------------|------------|------------|
| Spectrum Analyzer     | Agilent           | E4440A      | N/A           | 06/27/2011 | 06/26/2012 |
| Amplifier             | EM                | EM30180     | 0607030       | 06/27/2011 | 06/26/2012 |
| Horn Antenna          | EM                | EM-AH-10180 | N/A           | 06/27/2011 | 06/26/2012 |
| Horn Antenna          | A.H. Systems Inc. | SAS-574     | --            | 06/27/2011 | 06/26/2012 |
| EMI Test Receiver     | Rohde & Schwarz   | ESCI        | N/A           | 06/27/2011 | 06/26/2012 |
| Amplifier             | EM                | EM30180     | N/A           | 06/27/2011 | 06/26/2012 |
| Biological Antenna    | A.H. Systems Inc. | SAS-521-4   | N/A           | 06/27/2011 | 06/26/2012 |
| Loop Antenna          | Daze              | ZN30900N    | SEL0097       | 06/27/2011 | 06/26/2012 |
| Isolation Transformer | LETEAC            | LTBK        | --            | 06/27/2011 | 06/26/2012 |

## 8.4 TEST RESULT

## RADIATED EMISSION BELOW 30MHZ


No emission found between lowest internal used/generated frequency to 30MHz.

## RADIATED EMISSION BELOW 1GHZ

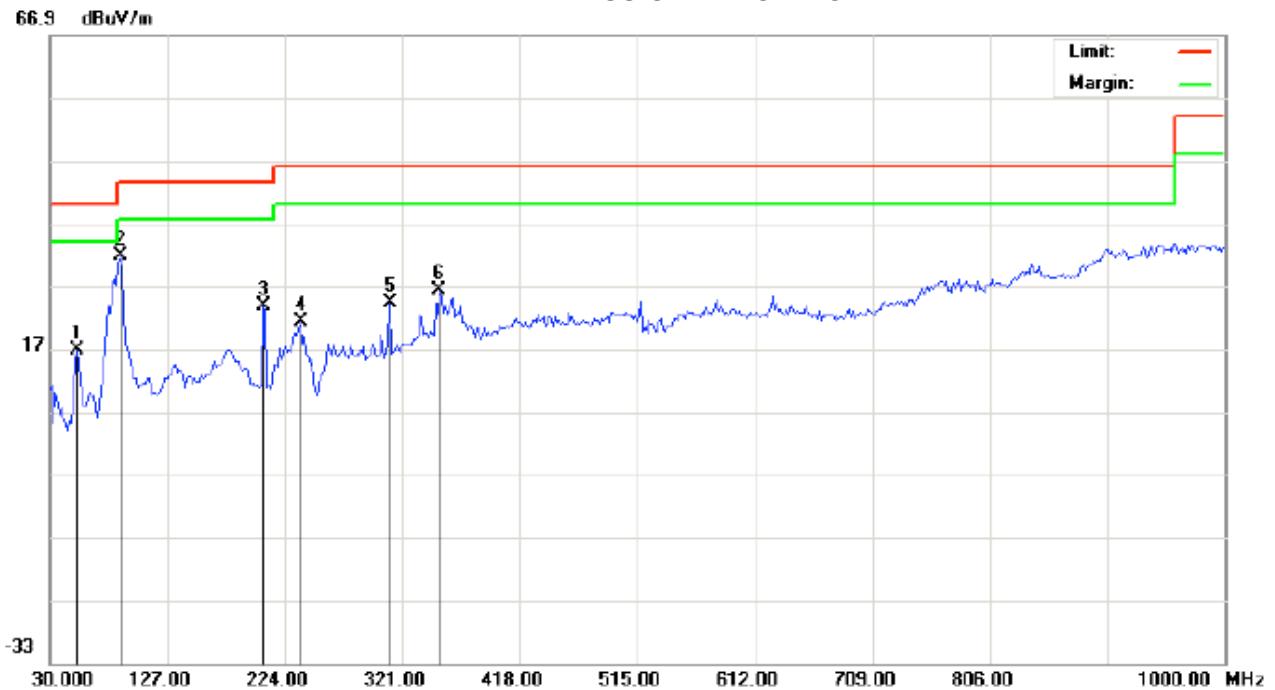

|                                 |                                 |                 |
|---------------------------------|---------------------------------|-----------------|
| Site: site #1                   | Polarization: <i>Horizontal</i> | Temperature: 26 |
| Limit: FCC Class B 3M Radiation | Power:                          | Humidity: 60 %  |
| EUT: GSM Mobile Phone           | Distance: 3m                    |                 |
| M/N: Comet II                   |                                 |                 |
| Mode: Normal Hopping            |                                 |                 |
| Note:                           |                                 |                 |

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   |    | 52.6333  | 13.22   | 3.45   | 16.67       | 40.00  | -23.33 | peak     |                |              |         |
| 2   | *  | 88.2000  | 15.67   | 16.03  | 31.70       | 43.50  | -11.80 | peak     |                |              |         |
| 3   |    | 206.2167 | 12.46   | 11.26  | 23.72       | 43.50  | -19.78 | peak     |                |              |         |
| 4   |    | 236.9333 | 4.54    | 16.70  | 21.24       | 46.00  | -24.76 | peak     |                |              |         |
| 5   |    | 311.3000 | 6.61    | 17.74  | 24.35       | 46.00  | -21.65 | peak     |                |              |         |
| 6   |    | 351.7167 | 7.15    | 19.06  | 26.21       | 46.00  | -19.79 | peak     |                |              |         |

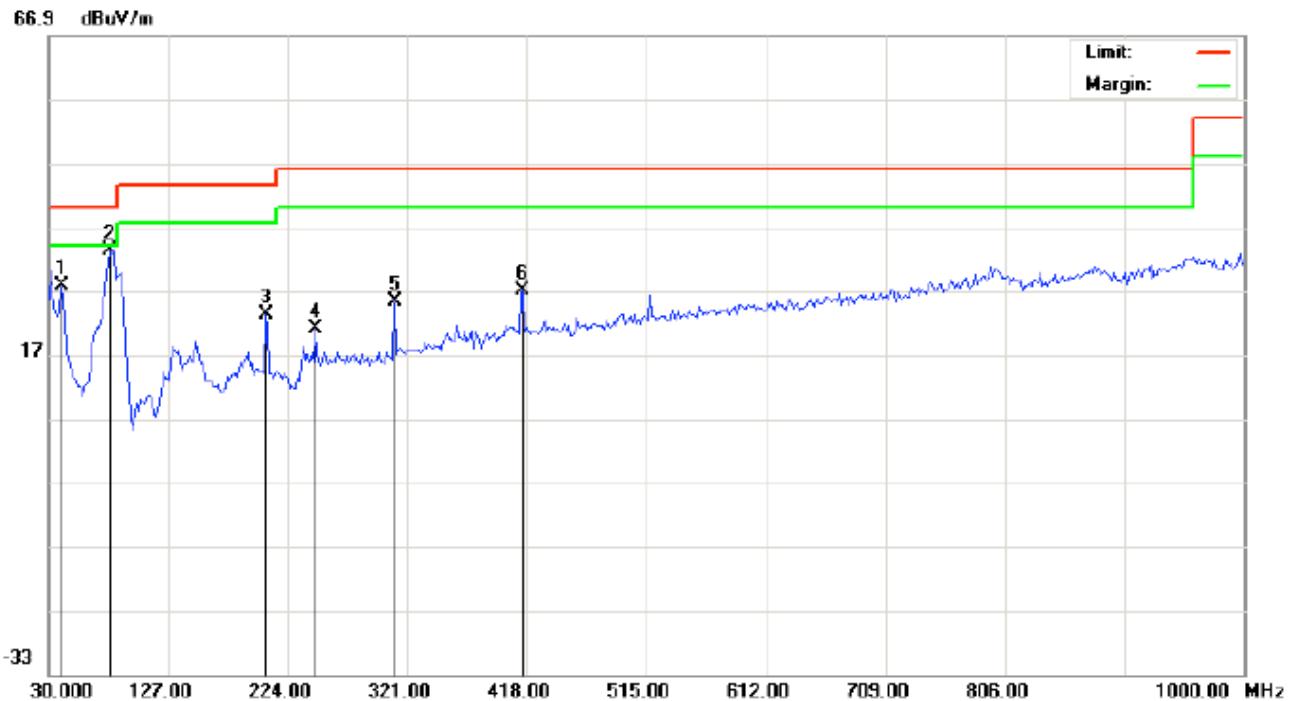



---

|                                 |                               |                 |
|---------------------------------|-------------------------------|-----------------|
| Site: site #1                   | Polarization: <b>Vertical</b> | Temperature: 26 |
| Limit: FCC Class B 3M Radiation | Power:                        | Humidity: 60 %  |
| EUT: GSM Mobile Phone           | Distance: 3m                  |                 |
| M/N: Comet II                   |                               |                 |
| Mode: Normal Hopping            |                               |                 |
| Note:                           |                               |                 |


| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   |    | 41.3167  | 15.83   | 11.95  | 27.78       | 40.00  | -12.22 | peak     |                |              |         |
| 2   | *  | 80.1167  | 30.91   | 2.46   | 33.37       | 40.00  | -6.63  | peak     |                |              |         |
| 3   |    | 206.2167 | 8.31    | 14.89  | 23.20       | 43.50  | -20.30 | peak     |                |              |         |
| 4   |    | 246.6333 | 3.80    | 17.23  | 21.03       | 46.00  | -24.97 | peak     |                |              |         |
| 5   |    | 311.3000 | 7.61    | 17.74  | 25.35       | 46.00  | -20.65 | peak     |                |              |         |
| 6   |    | 414.7667 | 5.75    | 21.28  | 27.03       | 46.00  | -18.97 | peak     |                |              |         |

## RADIATED EMISSION ABOVE 1GHZ(1-10<sup>th</sup> Harmonics)

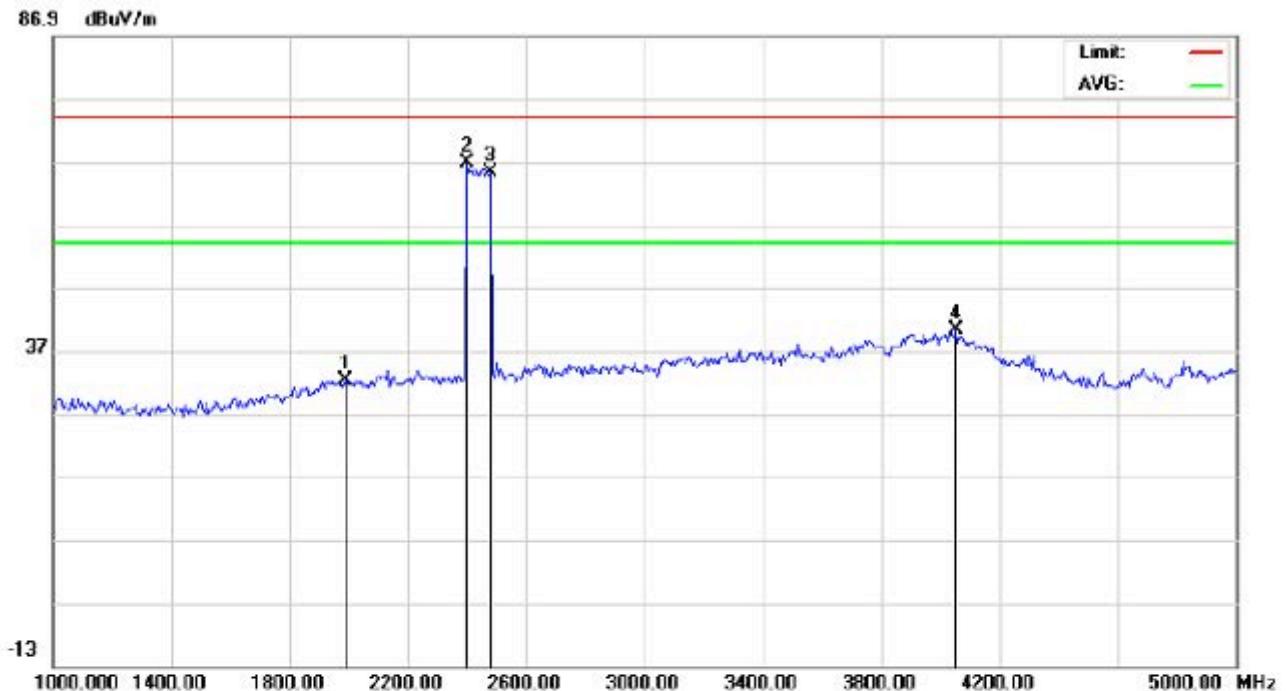

Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: GSM Mobile Phone Distance: 3m  
M/N: Comet II  
Mode: Normal Hopping  
Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   |    | 1986.667 | 32.50   | -0.26  | 32.24       | 74.00  | -41.76 | peak     |                |              |         |
| 2   | *  | 2402.000 | 66.35   | 0.32   | 66.67       | 74.00  | -7.33  | peak     |                |              |         |
| 3   |    | 2480.000 | 64.82   | 0.41   | 65.23       | 74.00  | -8.77  | peak     |                |              |         |
| 4   |    | 4053.333 | 35.93   | 4.30   | 40.23       | 74.00  | -33.77 | peak     |                |              |         |

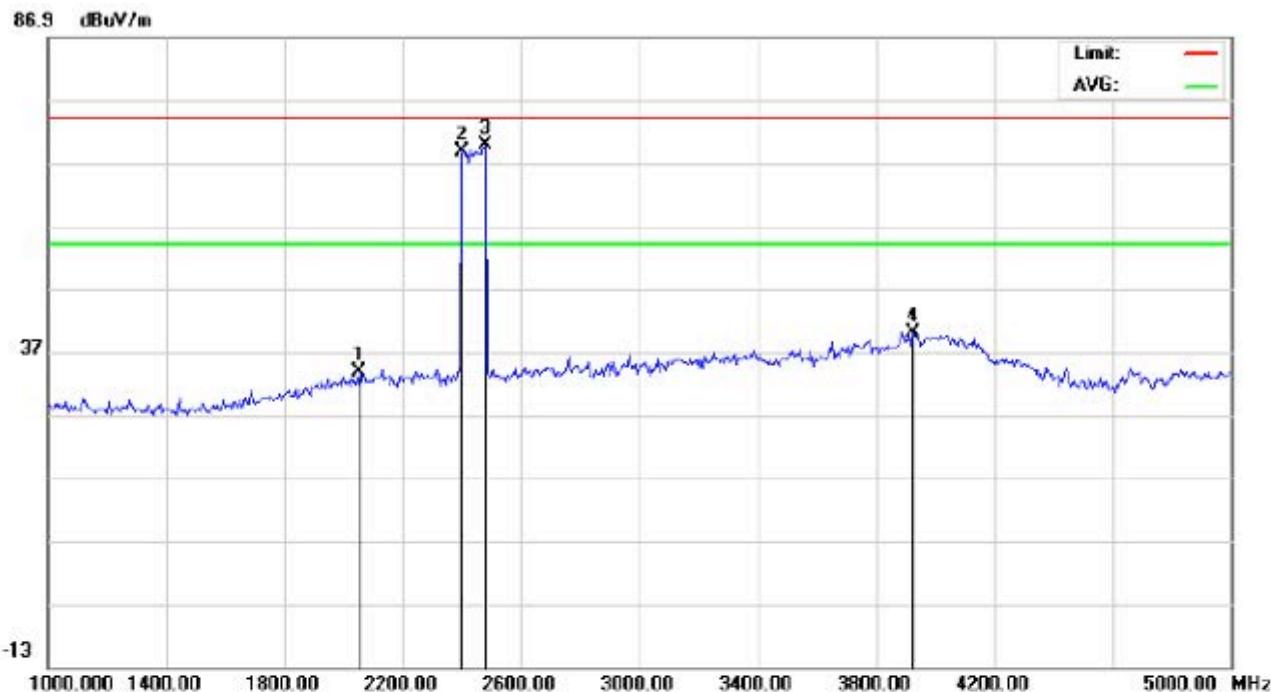

Site: site #1 Polarization: **Horizontal** Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT: GSM Mobile Phone Distance: 3m  
 M/N: Comet II  
 Mode: Normal Hopping  
 Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   |    | 2053.333 | 33.81   | -0.06  | 33.75       | 74.00  | -40.25 | peak     |                |              |         |
| 2   |    | 2402.000 | 68.37   | 0.32   | 68.69       | 74.00  | -5.31  | peak     |                |              |         |
| 3   | *  | 2480.000 | 69.38   | 0.41   | 69.79       | 74.00  | -4.21  | peak     |                |              |         |
| 4   |    | 3926.667 | 40.12   | 4.74   | 40.12       | 74.00  | -33.88 | peak     |                |              |         |

**Note:** 5~25GHz at least have 20dB margin. no recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

## 9 BAND EDGE EMISSION


## 9.1 MEASUREMENT PROCEDURE

- 1, Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency = Operation Frequency,  $RBW \geq 1\% \text{span}$ ,  $VBW \geq RBW$
3. The band edges was measured and recorded.

## 9.2 TEST SET-UP


Radiated same as 8.2

### 9.3 TEST RESULT

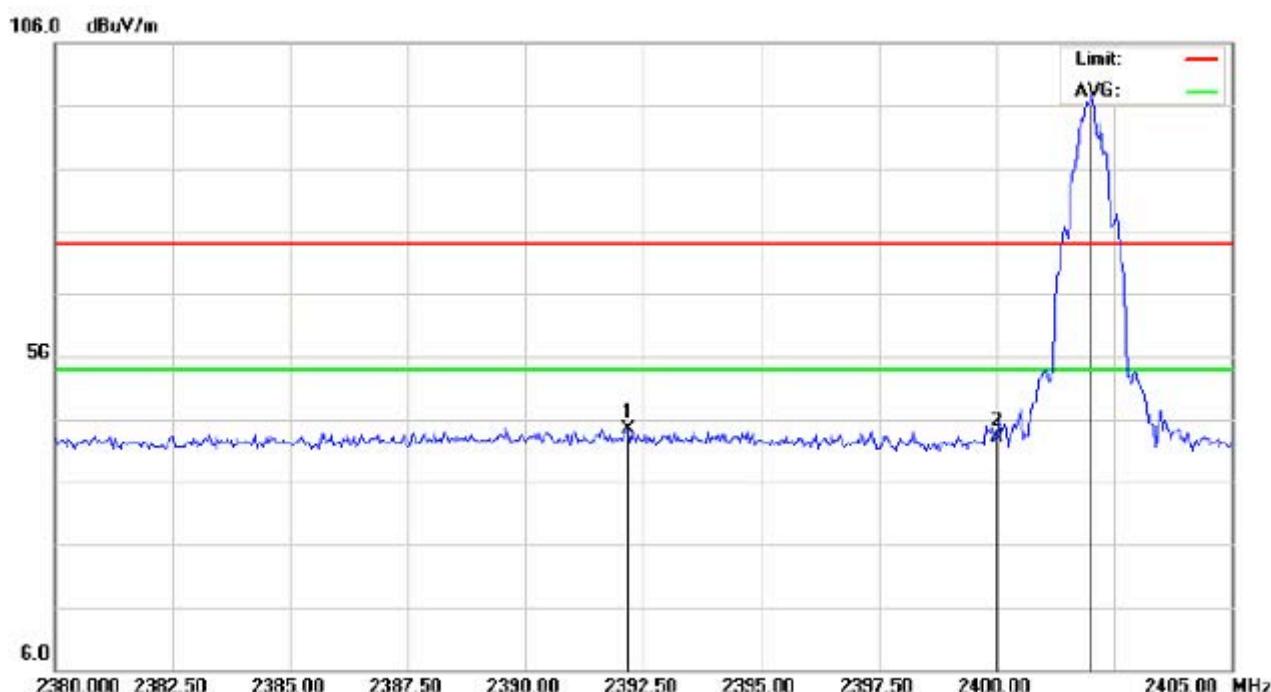


Site: site #1 Polarization: **Vertical** Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
EUT: GSM MOBILE PHONE Distance: 3m  
M/N: Comet II  
Mode: 2402TX  
Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   |    | 2392.167 | 44.07   | 0.31   | 44.38       | 74.00  | -29.62 | peak     |                |              |         |
| 2   |    | 2400.000 | 42.73   | 0.32   | 43.05       | 74.00  | -30.95 | peak     |                |              |         |
| 3   | *  | 2402.000 | 97.39   | 0.32   | 97.71       | 74.00  | 23.71  | peak     |                |              |         |

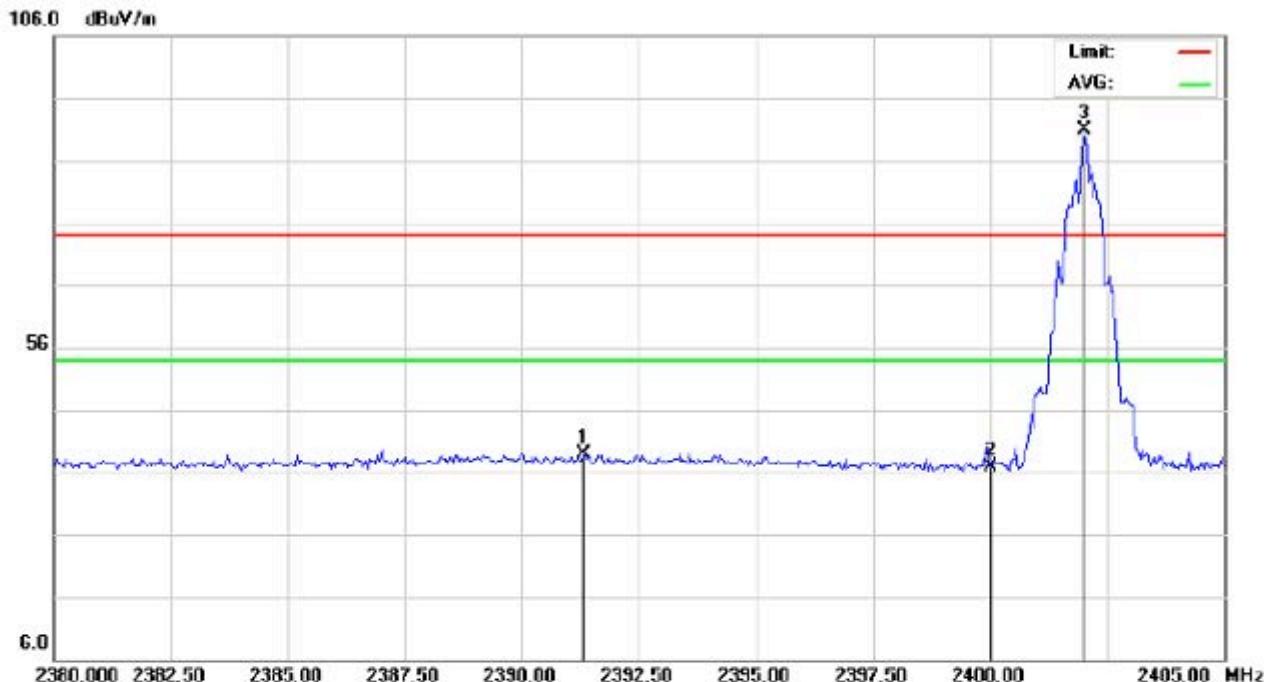


Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT: GSM MOBILE PHONE Distance: 3m  
 M/N: Comet II  
 Mode: 2402TX  
 Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   |    | 2391.333 | 38.88   | 0.31   | 39.19       | 74.00  | -34.81 | peak     |                |              |         |
| 2   |    | 2400.000 | 36.83   | 0.32   | 37.15       | 74.00  | -36.85 | peak     |                |              |         |
| 3   | *  | 2402.000 | 90.98   | 0.32   | 91.30       | 74.00  | 17.30  | peak     |                |              |         |

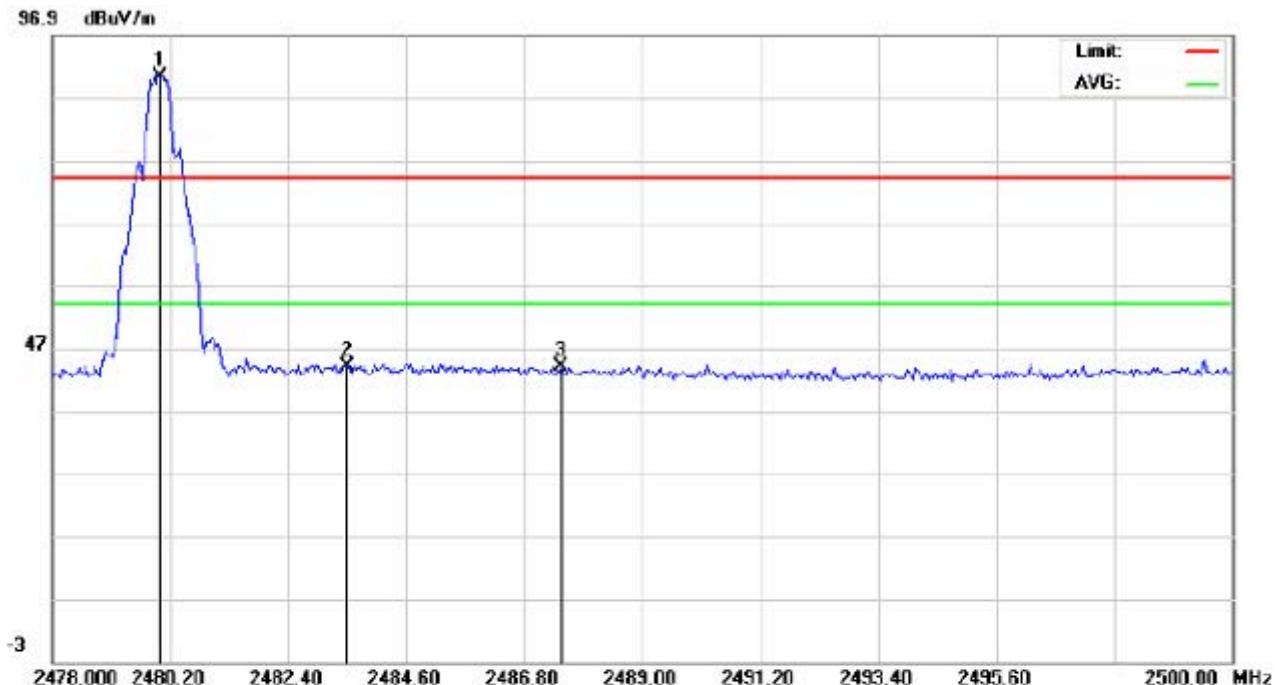

Site: site #1      Polarization: **Vertical**      Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK)      Power:      Humidity: 60 %  
 EUT: GSM MOBILE PHONE      Distance: 3m  
 M/N: Comet II  
 Mode: 2480TX  
 Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   | *  | 2480.000 | 89.77   | 0.41   | 90.18       | 74.00  | 16.18  | peak     |                |              |         |
| 2   |    | 2483.500 | 43.59   | 0.41   | 44.00       | 74.00  | -30.00 | peak     |                |              |         |
| 3   |    | 2487.497 | 43.62   | 0.42   | 44.04       | 74.00  | -29.96 | peak     |                |              |         |

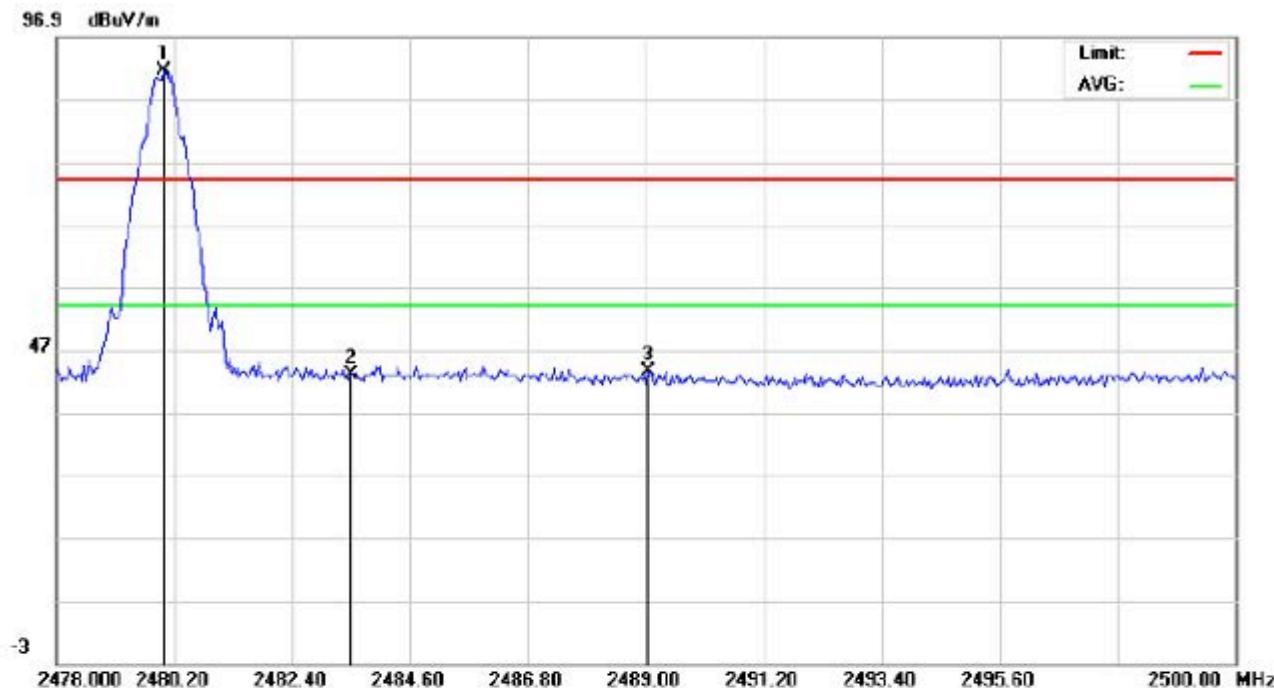

Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT: GSM MOBILE PHONE Distance: 3m  
 M/N: Comet II  
 Mode: 2480TX  
 Note:

| No. | Mk | Freq.    | Reading | Factor | Measurement | Limit  | Over   | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|----------------|--------------|---------|
|     |    | MHz      | dBuV    | dB/m   | dBuV/m      | dBuV/m | dB     |          | cm             | degree       |         |
| 1   | *  | 2480.000 | 91.04   | 0.41   | 91.45       | 74.00  | 17.45  | peak     |                |              |         |
| 2   |    | 2483.500 | 42.68   | 0.41   | 43.09       | 74.00  | -30.91 | peak     |                |              |         |
| 3   |    | 2489.037 | 43.16   | 0.42   | 43.58       | 74.00  | -30.42 | peak     |                |              |         |

## 10 NUMBER OF HOPPING FREQUENCY

### 10.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=RBW.

### 10.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)


Same as described in section 5.2

### 10.3 MEASUREMENT EQUIPMENT USED

The Same as described in section 5.3

### 10.4 LIMITS AND MEASUREMENT RESULT

| TOTAL NO. OF HOPPING CHANNEL | LIMIT (NO. OF CH) | MEASUREMENT (NO. OF CH) | RESULT |
|------------------------------|-------------------|-------------------------|--------|
|                              | >=15              | 79                      | PASS   |

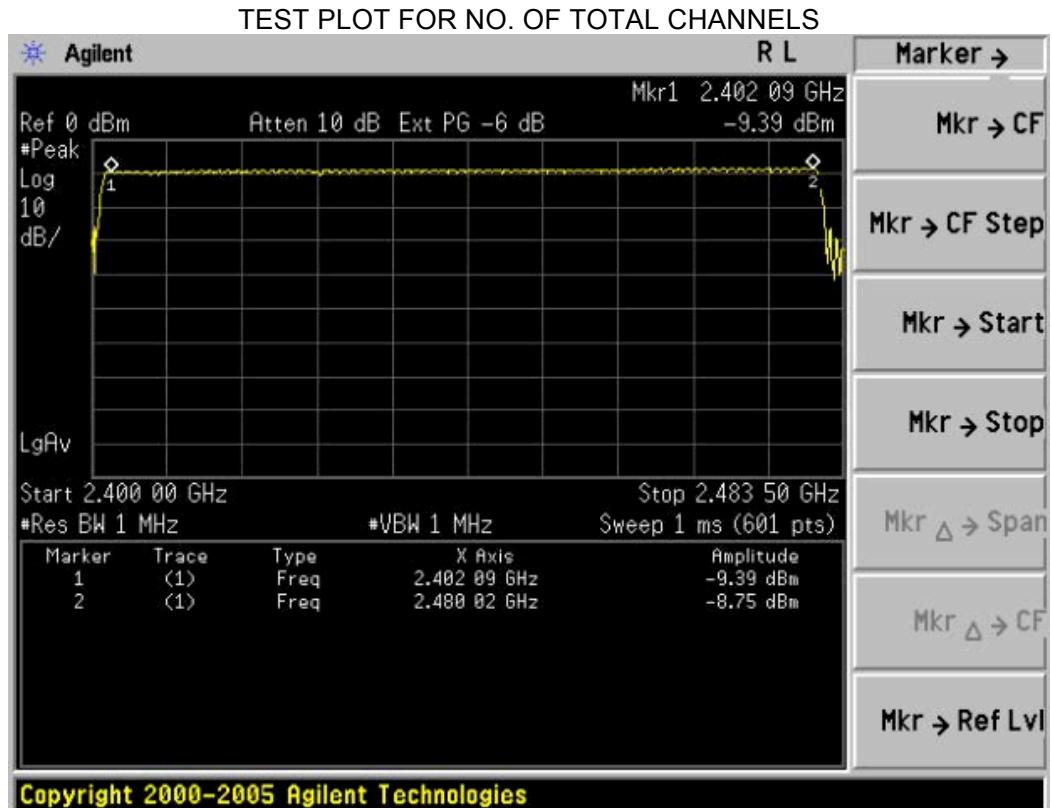

## 11 TIME OF OCCUPANCY (DWELL TIME)

### 11.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set Span = zero span, centered on a hoping channel
4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

### 11.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 5.2

### 11.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

### 11.4 LIMITS AND MEASUREMENT RESULT

| Channel | Time of Pulse for DH5 (ms) | Period Time (s) | Sweep Time (ms) | Limit (ms) |
|---------|----------------------------|-----------------|-----------------|------------|
| Low     | 2.905                      | 31.6            | 309.87          | 400        |
| Middle  | 2.905                      | 31.6            | 309.87          | 400        |
| High    | 2.917                      | 31.6            | 311.15          | 400        |

Low Channel Time

$2.905 * (1600/6) / 79 * 31.6 = 309.87 \text{ ms}$


Middle Channel Time

$2.905 * (1600/6) / 79 * 31.6 = 309.87 \text{ ms}$


High Channel Time


$2.917 * (1600/6) / 79 * 31.6 = 311.15 \text{ ms}$

TEST PLOT OF LOW CHANNEL

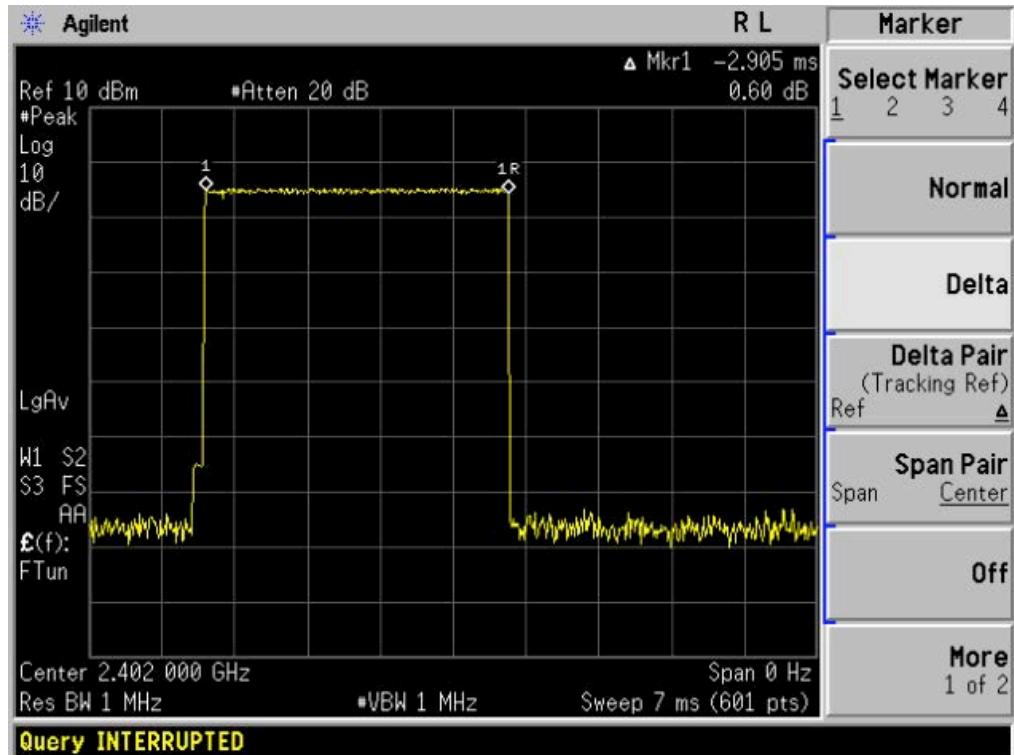

TEST PLOT OF GSM MIDDLE CHANNEL

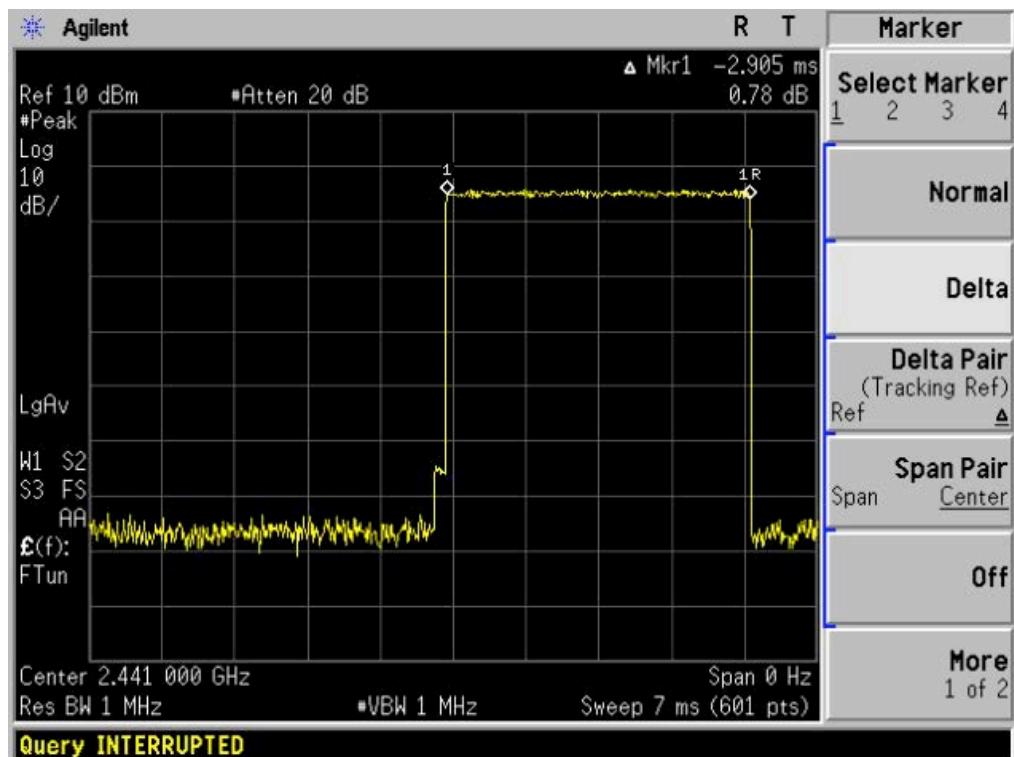

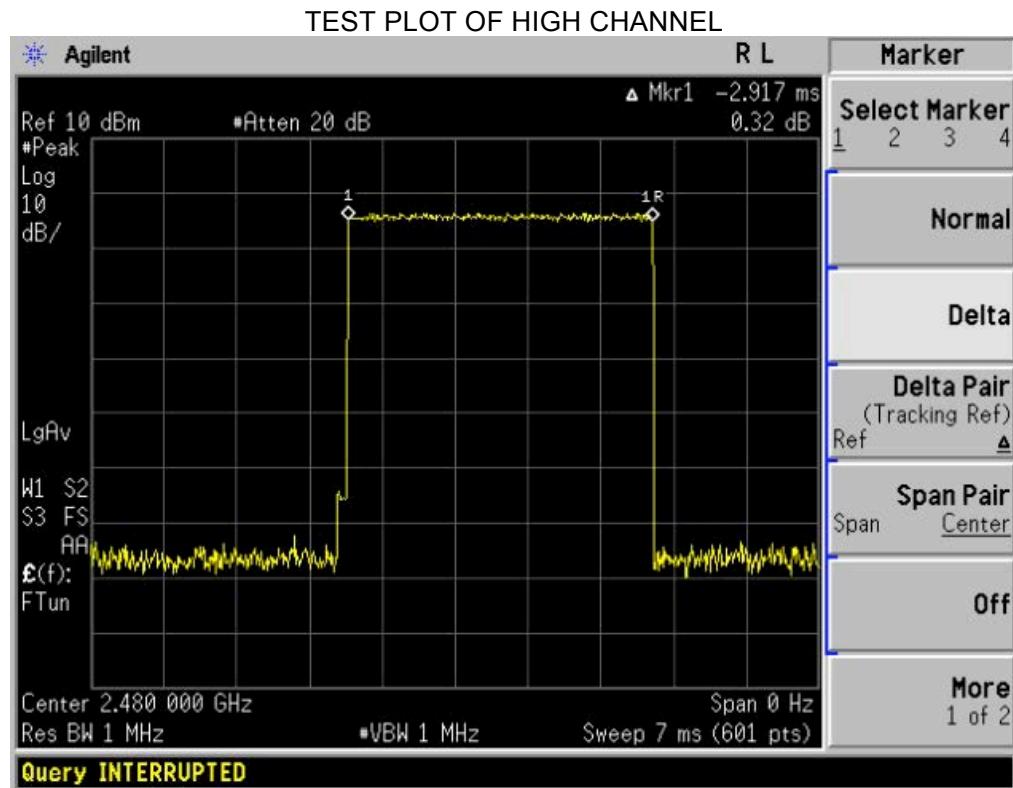

## 12. FREQUENCY SEPARATION

### 12.1 MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold

### 12.2 TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)


Same as described in section 5.2

### 12.3 MEASUREMENT EQUIPMENT USED

The same as described in section 5.3

### 12.4 LIMITS AND MEASUREMENT RESULT

| CHANNEL   | CHANNEL<br>SEPARATION | LIMIT                            | RESULT |
|-----------|-----------------------|----------------------------------|--------|
|           | KHz                   | KHz                              |        |
| CH00-CH01 | 1000                  | $\geq 25$ KHz or 2/3 20 dB<br>BW | Pass   |

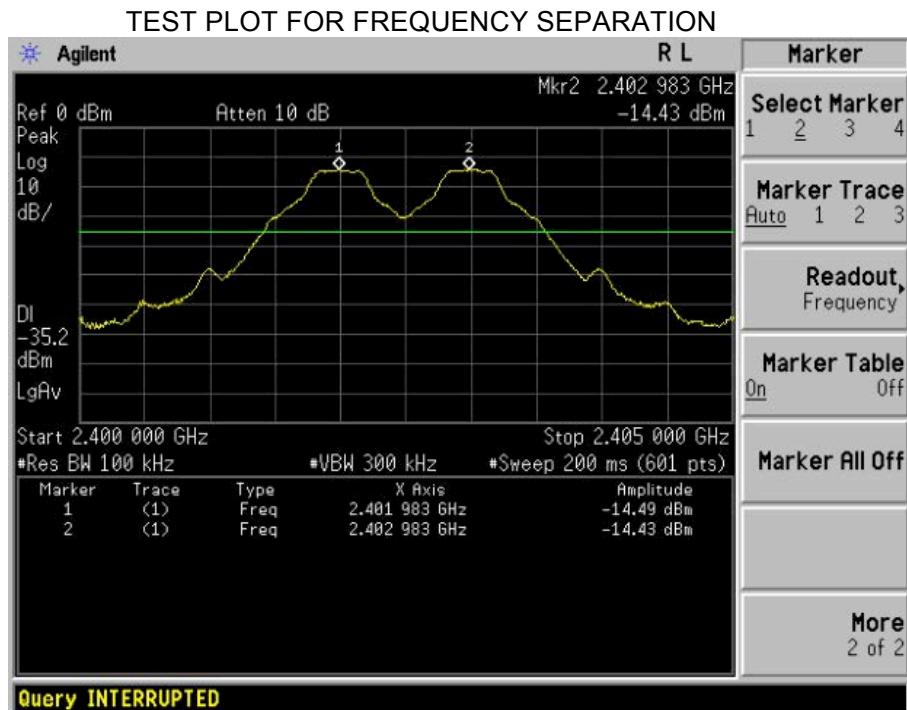

## 13 FCC LINE CONDUCTED EMISSION TEST


### 13.1 LIMITS OF LINE CONDUCTED EMISSION TEST

| Frequency     | Maximum RF Line Voltage |                |
|---------------|-------------------------|----------------|
|               | Q.P. ( dBuV)            | Average( dBuV) |
| 150kHz~500kHz | 66-56                   | 56-46          |
| 500kHz~5MHz   | 56                      | 46             |
| 5MHz~30MHz    | 60                      | 50             |

\*\*Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 13.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

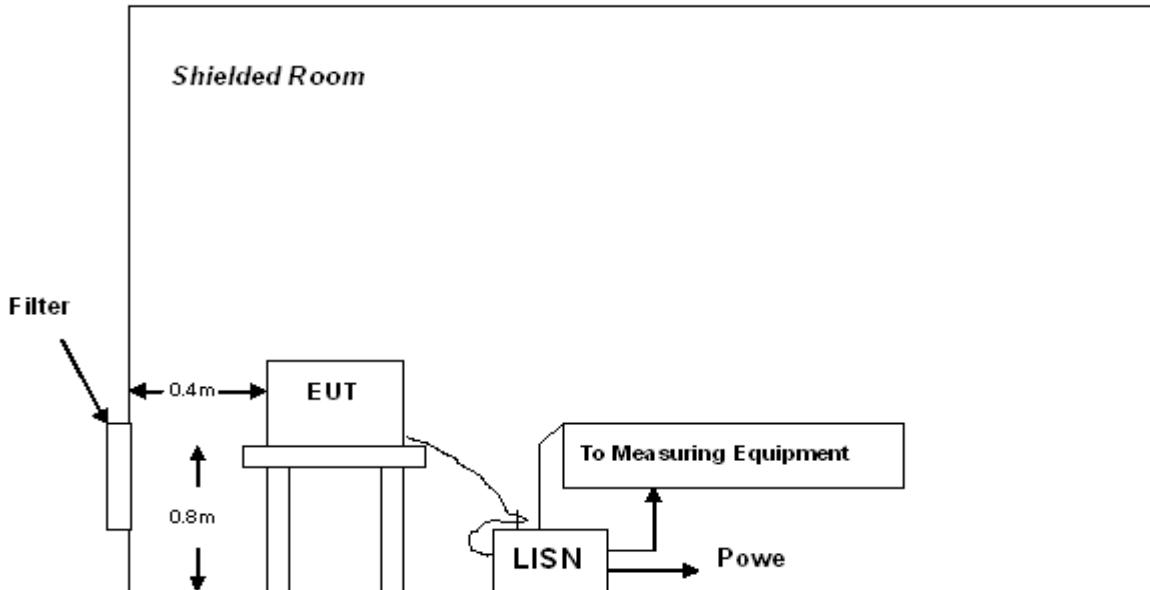

A: Powered through filter

### 13.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received power by adapter which received power by a LISN..
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 13.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

### 13.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST


Line Conducted Emission Test Line 1-L

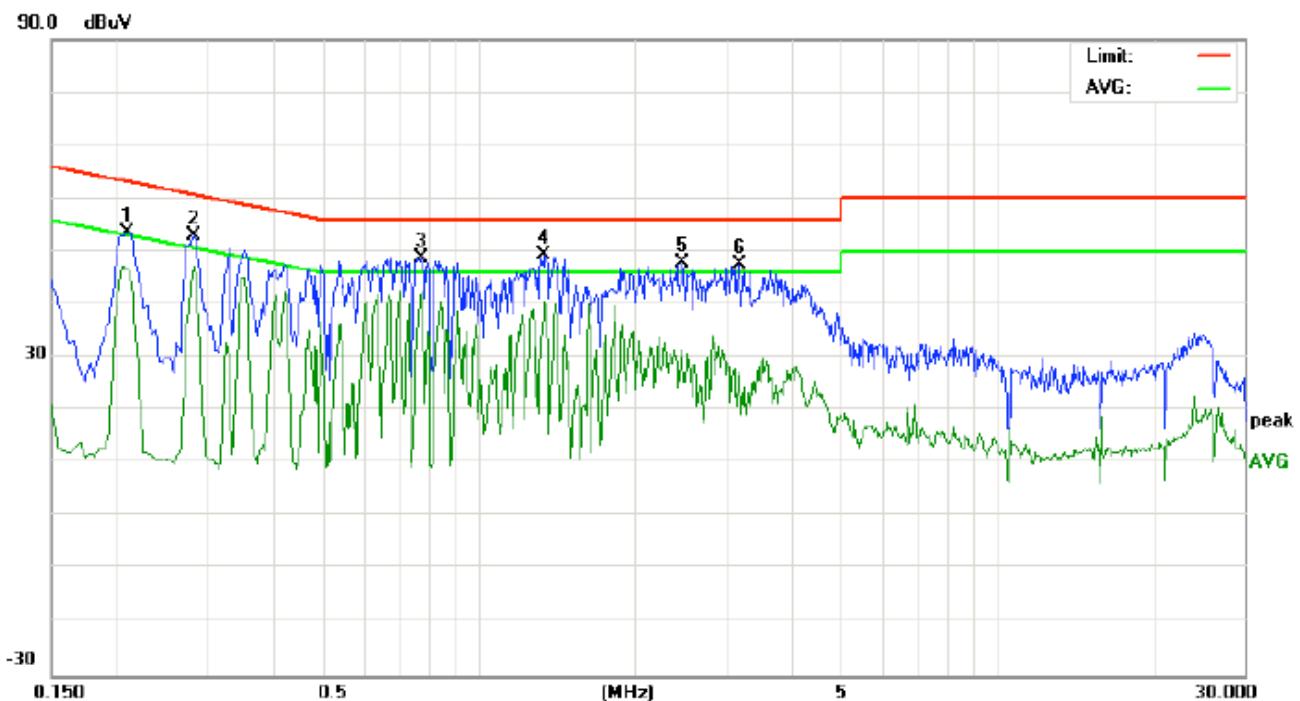

Site: Conduction Phase: **L1** Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %  
 EUT: GSM Mobile Phone  
 M/N: Comet II  
 Mode: Normal Hopping  
 Note:

| No. | Freq.<br>(MHz) | Reading_Level<br>(dBuV) |    |       | Correct<br>Factor | Measurement<br>(dBuV) |    |       | Limit<br>(dBuV) |       | Margin<br>(dB) |        | P/F | Comment |
|-----|----------------|-------------------------|----|-------|-------------------|-----------------------|----|-------|-----------------|-------|----------------|--------|-----|---------|
|     |                | Peak                    | QP | AVG   |                   | Peak                  | QP | AVG   | QP              | AVG   | QP             | AVG    |     |         |
| 1   | 0.2099         | 43.34                   |    | 36.42 | 10.23             | 53.57                 |    | 46.65 | 63.21           | 53.21 | -9.64          | -6.56  | P   |         |
| 2   | 0.2819         | 42.71                   |    | 37.12 | 10.28             | 52.99                 |    | 47.40 | 60.76           | 50.76 | -7.77          | -3.36  | P   |         |
| 3   | 0.7780         | 38.40                   |    | 32.11 | 10.30             | 48.70                 |    | 42.41 | 56.00           | 46.00 | -7.30          | -3.59  | P   |         |
| 4   | 1.3380         | 38.90                   |    | 30.14 | 10.38             | 49.28                 |    | 40.52 | 56.00           | 46.00 | -6.72          | -5.48  | P   |         |
| 5   | 2.4739         | 37.33                   |    | 18.93 | 10.42             | 47.75                 |    | 29.35 | 56.00           | 46.00 | -8.25          | -16.65 | P   |         |
| 6   | 3.1819         | 36.96                   |    | 16.57 | 10.54             | 47.50                 |    | 27.11 | 56.00           | 46.00 | -8.50          | -18.89 | P   |         |

Line Conducted Emission Test Line 2-N

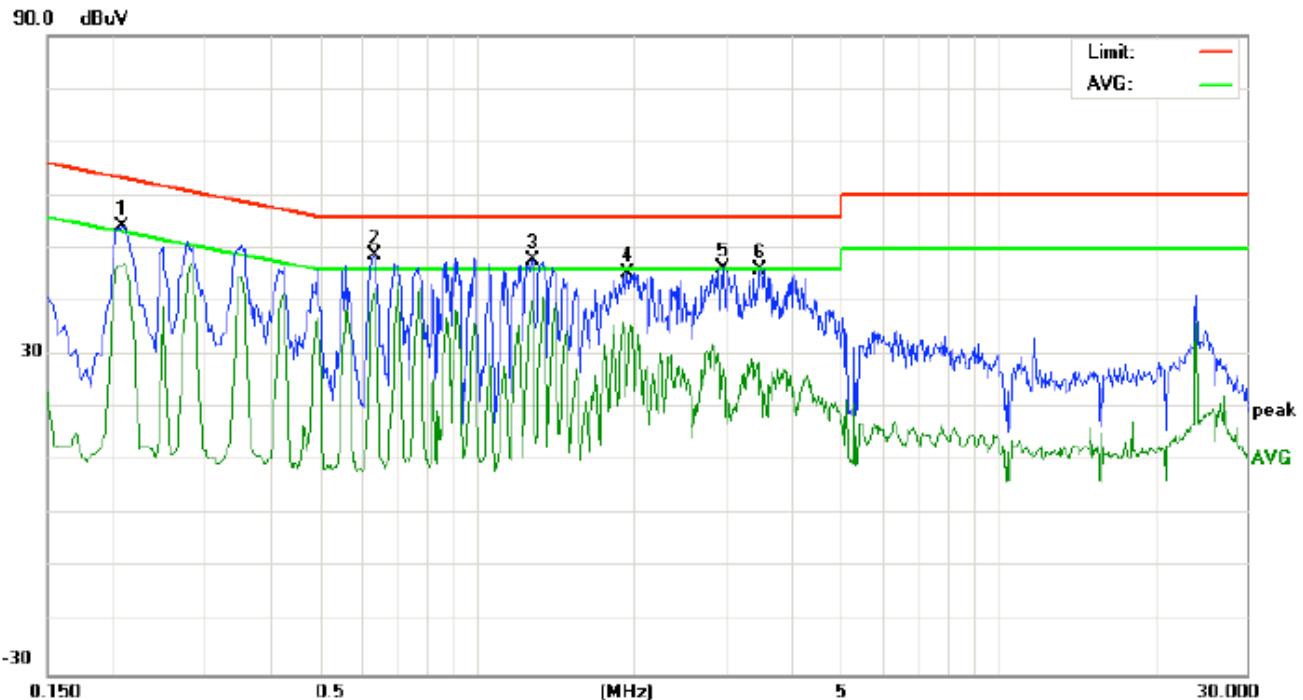

| No. | Freq.<br>(MHz) | Reading Level<br>(dBuV) |    |       | Correct<br>Factor | Measurement<br>(dBuV) |    |       | Limit<br>(dBuV) |       | Margin<br>(dB) |        | P/F | Comment |
|-----|----------------|-------------------------|----|-------|-------------------|-----------------------|----|-------|-----------------|-------|----------------|--------|-----|---------|
|     |                | Peak                    | QP | AVG   |                   | Peak                  | QP | AVG   | QP              | AVG   | QP             | AVG    |     |         |
| 1   | 0.2083         | 44.01                   |    | 36.87 | 10.22             | 54.23                 |    | 47.09 | 63.27           | 53.27 | -9.04          | -6.18  | P   |         |
| 2   | 0.6340         | 38.37                   |    | 32.37 | 10.32             | 48.69                 |    | 42.69 | 56.00           | 46.00 | -7.31          | -3.31  | P   |         |
| 3   | 1.2860         | 37.51                   |    | 15.53 | 10.38             | 47.89                 |    | 25.91 | 56.00           | 46.00 | -8.11          | -20.09 | P   |         |
| 4   | 1.9459         | 35.33                   |    | 15.61 | 10.24             | 45.57                 |    | 25.85 | 56.00           | 46.00 | -10.43         | -20.15 | P   |         |
| 5   | 2.9660         | 35.81                   |    | 16.87 | 10.54             | 46.35                 |    | 27.41 | 56.00           | 46.00 | -9.65          | -18.59 | P   |         |
| 6   | 3.5059         | 35.51                   |    | 14.83 | 10.51             | 46.02                 |    | 25.34 | 56.00           | 46.00 | -9.98          | -20.66 | P   |         |

**APPENDIX I**  
**PHOTOGRAPHS OF THE EUT**  
**TOP VIEW OF SAMPLE**



**BOTTOM VIEW OF SAMPLE**



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



ALL VIEW OF SAMPLE



OPEN VIEW OF SAMPLE-1




OPEN VIEW OF SAMPLE-2




OPEN VIEW OF SAMPLE-3



INTERNAL VIEW OF SAMPLE – 1

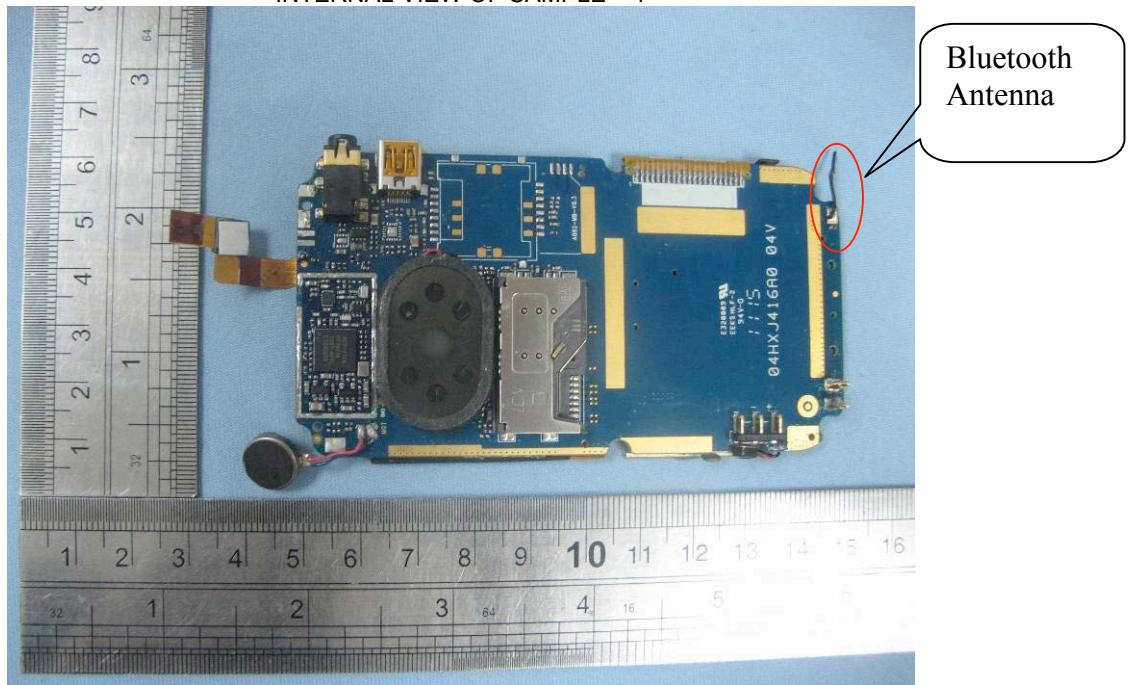


INTERNAL VIEW OF SAMPLE – 2

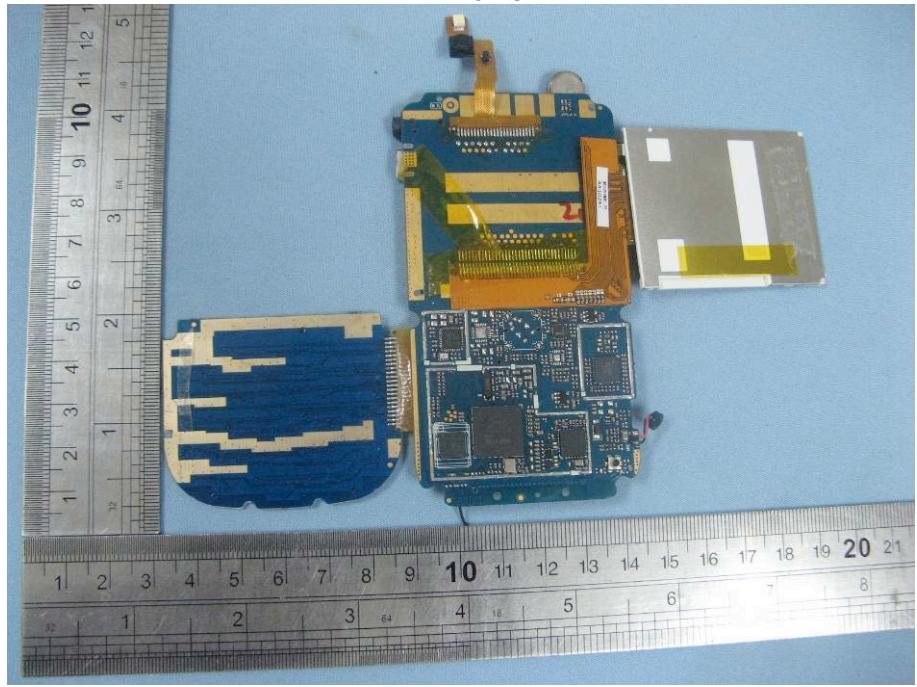

**APPENDIX II**  
**PHOTOGRAPHS OF THE TEST SETUP**  
**CONDUCTED EMISSION TEST SETUP**



**RADIATED EMISSION TEST SETUP**

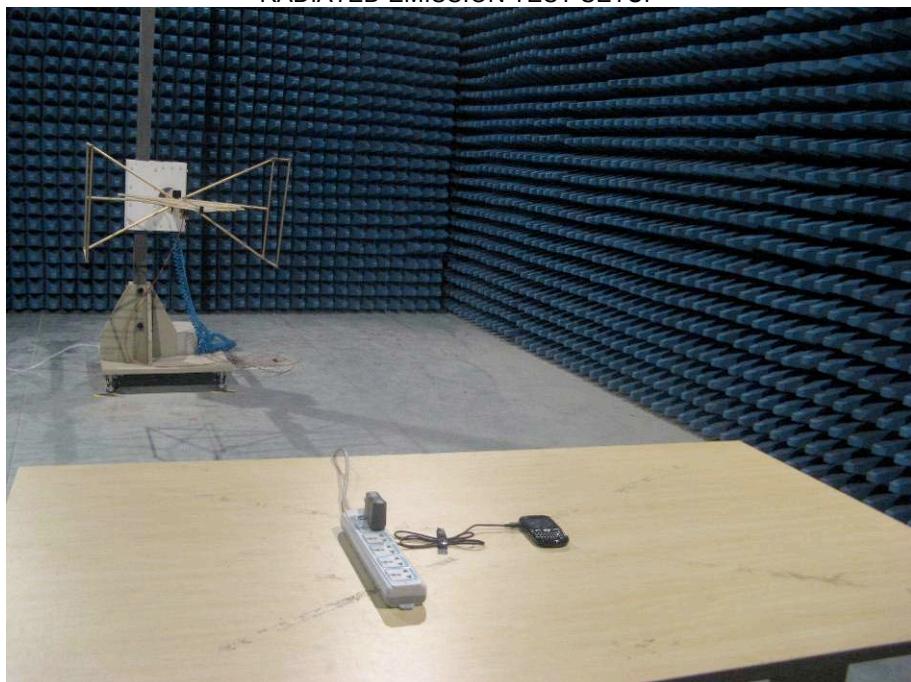

**----END OF REPORT----**