




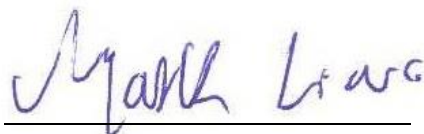
FCC RADIO TEST REPORT

Applicant : SteelSeries ApS.
Address : Dirch Passers Allé 27, 5. Sal 2000 Frederiksberg
Denmark.
Equipment : HEADSET
Model No. : HS-00019
Trade Name : 
FCC ID. : ZHK-HS00019

I HEREBY CERTIFY THAT :

The sample was received on Aug. 30, 2018 and the testing was carried out on Jan. 10, 2019 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:



Mark Liao / Supervisor

Tested by:



Spree Yeh / Engineer

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	4
1.1 Applicable Standards	4
2. Test Configuration of Equipment under Test	5
2.1 Feature of Equipment under Test.....	5
2.2 Test Mode and Test Software	6
2.3 Description of Test System.....	6
2.4 General Information of Test.....	7
2.5 Measurement Uncertainty	7
3. Test Equipment and Ancillaries Used for Tests	8
4. Test of AC Power Line Conducted Emission	9
4.1 Test Limit	9
4.2 Test Procedures	9
4.3 Typical Test Setup	10
4.4 Test Result and Data	11
4.5 Test Photographs	15
5. Test of Spurious Emission (Radiated)	16
5.1 Test Limit	16
5.2 Test Procedures	16
5.3 Typical Test Setup	17
5.4 Test Result and Data (9kHz ~ 30MHz).....	18
5.5 Test Result and Data (30MHz ~ 1GHz).....	18
5.6 Test Result and Data (1GHz ~ 25GHz).....	22
5.7 Restricted Bands of Operation	26
5.8 Test Photographs (30MHz ~ 1GHz).....	27
5.9 Test Photographs (1GHz ~ 25GHz).....	28



History of this test report

Report No.	Issue Date	Description
TEFU1808244	Mar. 06, 2019	Original



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.4:2014

ANSI C63.10:2013

FCC Rule	Description of Test	Result
15.203	CO-LOCATION	PASS



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	BT / BLE: 2400-2483.5MHz 802.11g/n: 2400-2483.5MHz 802.11a/n: 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5850MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK 802.11g/n/a: BPSK, QPSK, 16QAM, 64QAM
Modulation Technology	FHSS, DTS, DSSS, OFDM
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps WLAN: 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS7, HT20 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps
Antenna Type	PCB Antenna
Antenna Gain	BT/BLE: 2400-2483.5MHz: 3.92dBi 2.4G: 2400-2483.5MHz: 1.85dBi 5150-5250MHz: 3.60dBi 5250-5350MHz: 3.79dBi 5470-5725MHz: 3.62dBi 5725-5850MHz: -0.23dBi

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.2 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included Notebook, AP and EUT for RF test.
- c. An executive program, "AVBootUI: 1.5.0" was executed to transmit and receive data via Bluetooth.
- d. The following test modes were performed for the test:

Test Mode	Operating Description
1	8DPSK(3Mbps) CH78 + 2.4G 11n HT20 CH1
2	8DPSK(3Mbps) CH78 + 5G 11n HT20 CH44

2.3 Description of Test System

Device	Manufacturer	Model No.	Description
NB	DELL	LatitudeE5450/5450, TX	Power Cable, Unshielding, 1.8m
AP	NETGEAR	R7800	Power Cable, Unshielding, 1.5m
Network cable	N/A	N/A	N/A



2.4 General Information of Test

Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582	
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4399, R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

2.5 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±5.007dB
Radiated Spurious Emission(30MHz~1GHz)	±5.157dB
Radiated Spurious Emission(1GHz~18GHz)	±6.383dB
Radiated Spurious Emission(18GHz~40GHz)	±6.648dB
Conducted Spurious Emission	±1.253dB
6dB Bandwidth	±6.89%
Power Spectral Density	±0.630dB
26 dB Occupied Bandwidth	±6.10%
Frequency Stability	±375KHz
Channel Frequencies Separation	±6.10%
20dB Bandwidth	±6.12%
Dwell Time	±1.34%
Peak Output Power(Conducted Power Meter)	±0.86dB
Temperature	±1.2°C
Humidity	±2.7%
Channel Move Time	±4.53%
Channel Closing Transmission Time	±6.61%
Threshold	±0.631dB
Non occupancy period	±1.17%



3. Test Equipment and Ancillaries Used for Tests

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2018/09/17	2019/09/16
Active Loop Antenna	EMCO	6507	40855	2018/05/22	2019/05/21
Horn Antenna	EMCO	3115	31589	2018/04/02	2019/04/01
Horn Antenna	EMCO	3116	31974	2018/09/07	2019/09/06
EMI Receiver	ROHDE & SCHWARZ	ESCI 3	101402	2018/02/23	2019/02/22
Spectrum Analyzer	ROHDE & SCHWARZ	FSP40	100047	2018/03/20	2019/03/19
Preamplifier	EM Electronics corp.	EM330	60660	2018/03/08	2019/03/07
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2018/09/18	2019/09/17
BLUETOOTH TESTER	ROHDE & SCHWARZ	CBT	101133	2018/04/02	2019/04/01
Cable-3in1-(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2018/04/20	2019/04/19
Cable-0.5m-(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2018/03/27	2019/03/26
Cable-1m-(1G-40G)	Rapidtek	40GHZ 300CM	38MS-38MS300314	2018/03/27	2019/03/26
Cable-6m-(1G-40G)	Rapidtek	40GHZ 800CM	38MS-38MS800314	2018/03/27	2019/03/26
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA
Spectrum Analyzer	ROHDE & SCHWARZ	FSP40	100219	2018/07/03	2019/07/02
BLUETOOTH TESTER	ROHDE & SCHWARZ	CBT	101133	2018/04/02	2019/04/01
Attenuator	KEYSIGHT	8491B	MY39250705	2018/09/04	2019/09/03
TEMP & HUMIDITY CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2018/08/30	2019/08/29
Power Sensor	Anritsu	MA2411B	1207295	2018/03/23	2019/03/22
EMI Receiver	ROHDE & SCHWARZ	ESCI 3	100443	2018/3/15	2019/3/14
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-740	2018/6/13	2019/6/12
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2018/9/4	2019/9/3
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Test of AC Power Line Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz, according to the methods defined in ANSI C63.4-2014. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




4.3 Typical Test Setup

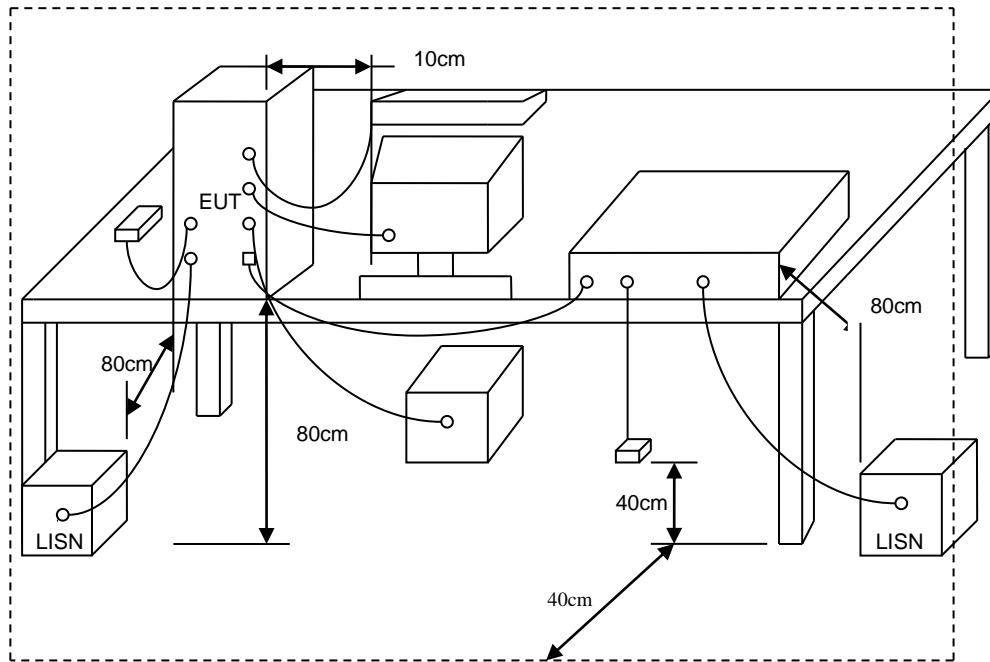



4.4 Test Result and Data

Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 1	Temperature	: 23 °C
Test date	: Jan. 10, 2019	Humidity	: 45 %

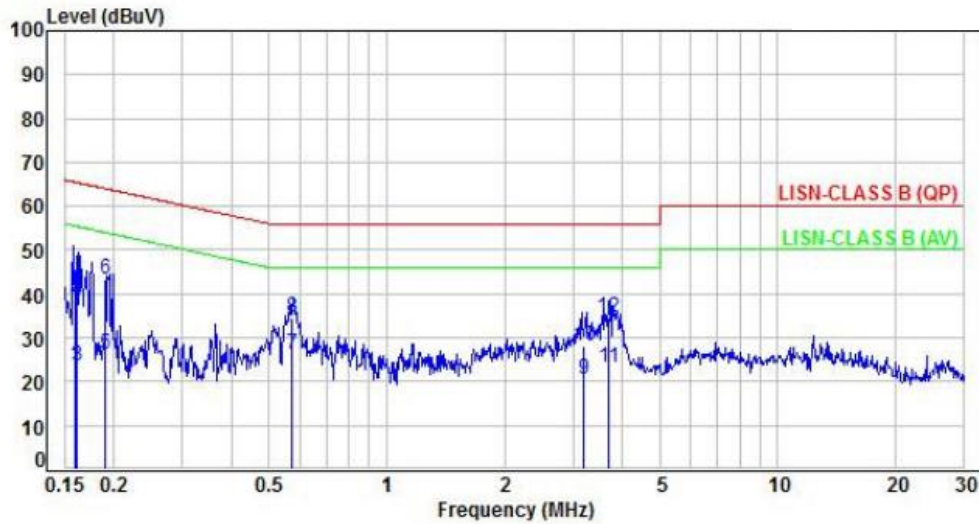


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.94	13.78	23.72	55.52	-31.80	Average	P
2	0.16	9.94	29.32	39.26	65.52	-26.26	QP	P
3	0.16	9.94	13.51	23.45	55.40	-31.95	Average	P
4	0.16	9.94	28.36	38.30	65.40	-27.10	QP	P
5	0.19	9.94	16.33	26.27	54.02	-27.75	Average	P
6	0.19	9.94	33.31	43.25	64.02	-20.77	QP	P
7	0.57	9.95	16.10	26.05	46.00	-19.95	Average	P
8	0.57	9.95	24.67	34.62	56.00	-21.38	QP	P
9	3.18	10.10	10.56	20.66	46.00	-25.34	Average	P
10	3.18	10.10	18.05	28.15	56.00	-27.85	QP	P
11	3.68	10.12	12.88	23.00	46.00	-23.00	Average	P
12	3.68	10.12	24.36	34.48	56.00	-21.52	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1	Temperature	: 23 °C
Test date	: Jan. 10, 2019	Humidity	: 45 %

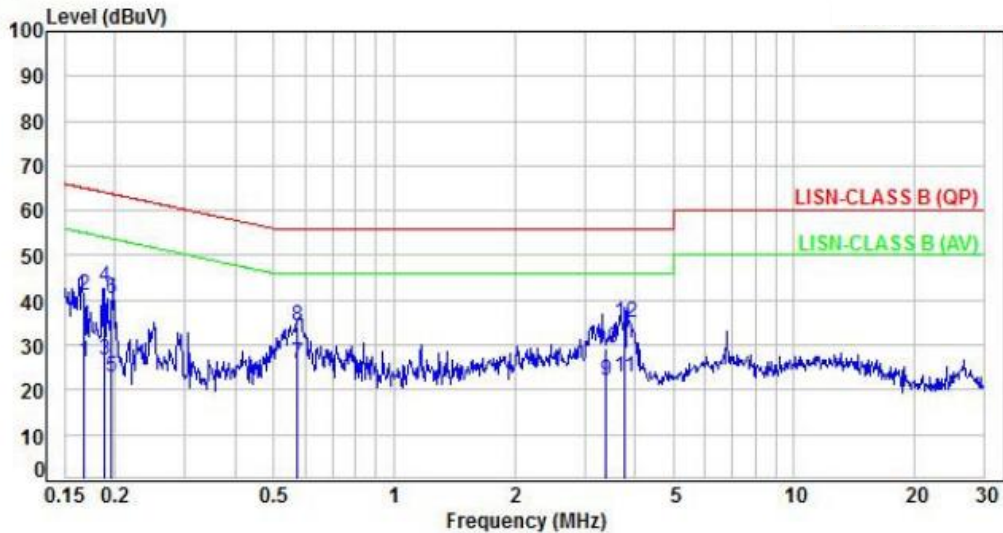


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.17	9.94	16.13	26.07	55.08	-29.01	Average	P
2	0.17	9.94	31.28	41.22	65.08	-23.86	QP	P
3	0.19	9.94	16.82	26.76	54.09	-27.33	Average	P
4	0.19	9.94	33.01	42.95	64.09	-21.14	QP	P
5	0.20	9.94	13.02	22.96	53.81	-30.85	Average	P
6	0.20	9.94	30.40	40.34	63.81	-23.47	QP	P
7	0.57	9.95	15.77	25.72	46.00	-20.28	Average	P
8	0.57	9.95	24.25	34.20	56.00	-21.80	QP	P
9	3.39	10.10	11.94	22.04	46.00	-23.96	Average	P
10	3.39	10.10	19.31	29.41	56.00	-26.59	QP	P
11	3.77	10.12	12.70	22.82	46.00	-23.18	Average	P
12	3.77	10.12	25.01	35.13	56.00	-20.87	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: LINE
Test Mode	: Mode 2	Temperature	: 23 °C
Test date	: Jan. 10, 2019	Humidity	: 45 %

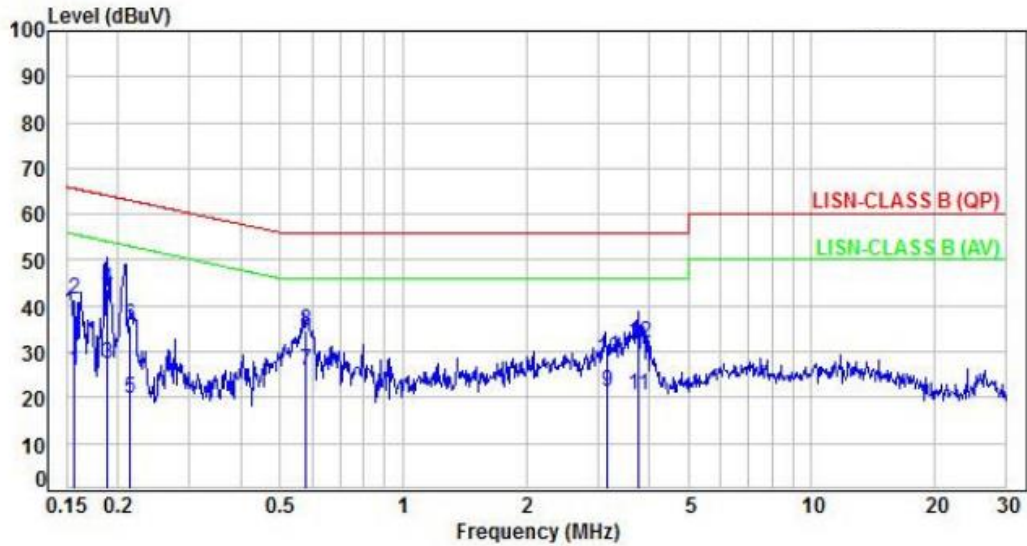


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.16	9.94	15.83	25.77	55.69	-29.92	Average	P
2	0.16	9.94	31.48	41.42	65.69	-24.27	QP	P
3	0.19	9.94	17.44	27.38	54.10	-26.72	Average	P
4	0.19	9.94	33.64	43.58	64.10	-20.52	QP	P
5	0.21	9.94	9.91	19.85	53.04	-33.19	Average	P
6	0.21	9.94	25.64	35.58	63.04	-27.46	QP	P
7	0.58	9.95	16.00	25.95	46.00	-20.05	Average	P
8	0.58	9.95	24.51	34.46	56.00	-21.54	QP	P
9	3.15	10.09	11.02	21.11	46.00	-24.89	Average	P
10	3.15	10.09	18.53	28.62	56.00	-27.38	QP	P
11	3.76	10.12	10.27	20.39	46.00	-25.61	Average	P
12	3.76	10.12	21.84	31.96	56.00	-24.04	QP	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 120V	Pol/Phase	: NEUTRAL
Test Mode	: Mode 2	Temperature	: 23 °C
Test date	: Jan. 10, 2019	Humidity	: 45 %

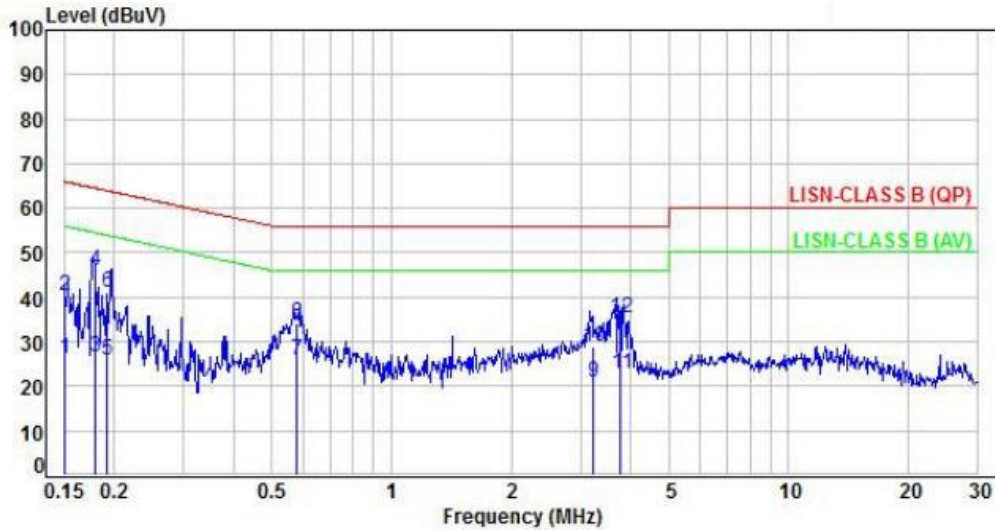

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.15	9.94	16.13	26.07	55.99	-29.92	Average	P
2	0.15	9.94	30.40	40.34	65.99	-25.65	QP	P
3	0.18	9.94	16.70	26.64	54.48	-27.84	Average	P
4	0.18	9.94	36.22	46.16	64.48	-18.32	QP	P
5	0.19	9.94	15.79	25.73	53.94	-28.21	Average	P
6	0.19	9.94	31.09	41.03	63.94	-22.91	QP	P
7	0.58	9.95	15.78	25.73	46.00	-20.27	Average	P
8	0.58	9.95	24.39	34.34	56.00	-21.66	QP	P
9	3.21	10.10	11.00	21.10	46.00	-24.90	Average	P
10	3.21	10.10	18.97	29.07	56.00	-26.93	QP	P
11	3.79	10.12	12.75	22.87	46.00	-23.13	Average	P
12	3.79	10.12	25.09	35.21	56.00	-20.79	QP	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



5. Test of Spurious Emission (Radiated)

5.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


5.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.




5.3 Typical Test Setup


Below 30MHz test setup

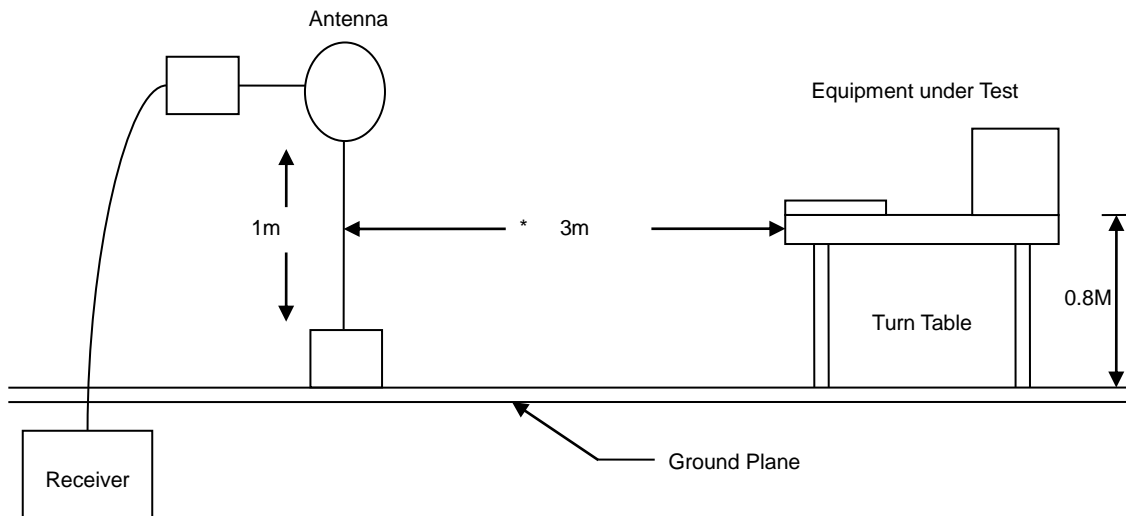

30MHz- 1GHz Test Setup

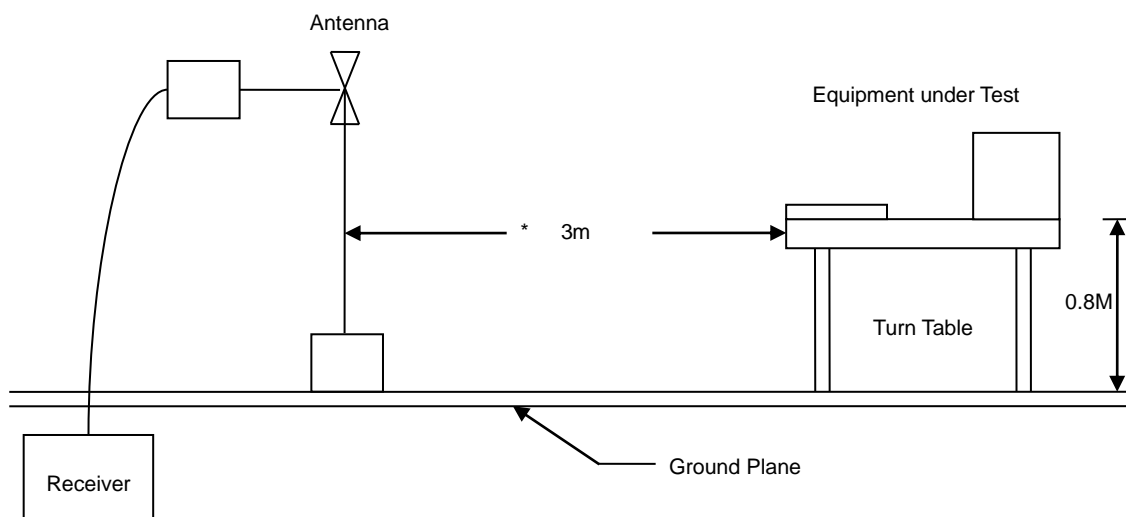

Above 1GHz Test Setup

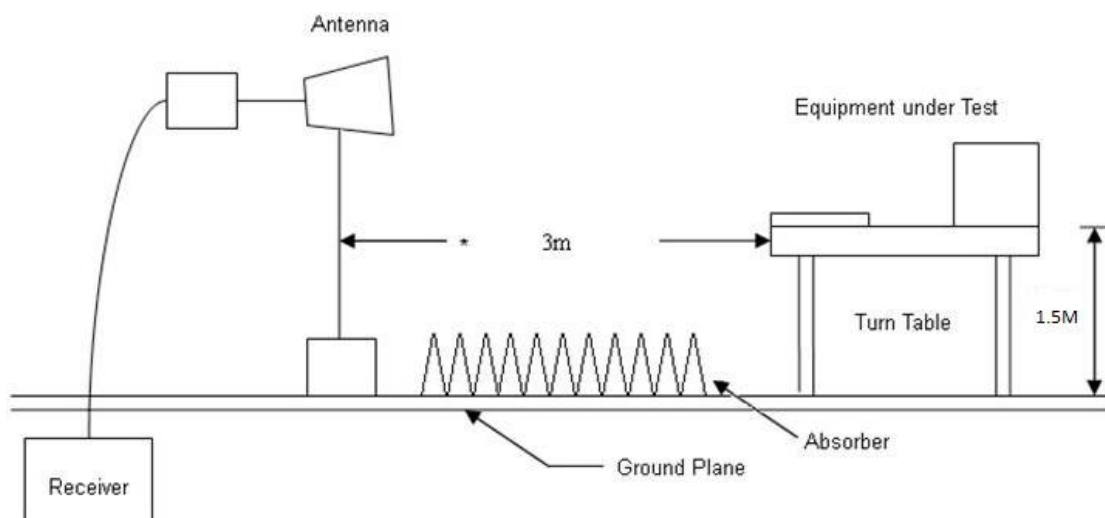




5.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

5.5 Test Result and Data (30MHz ~ 1GHz)

Power	: DC 5V From system	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 22 °C
Test Date	: Jan. 04, 2019	Humidity	: 59 %

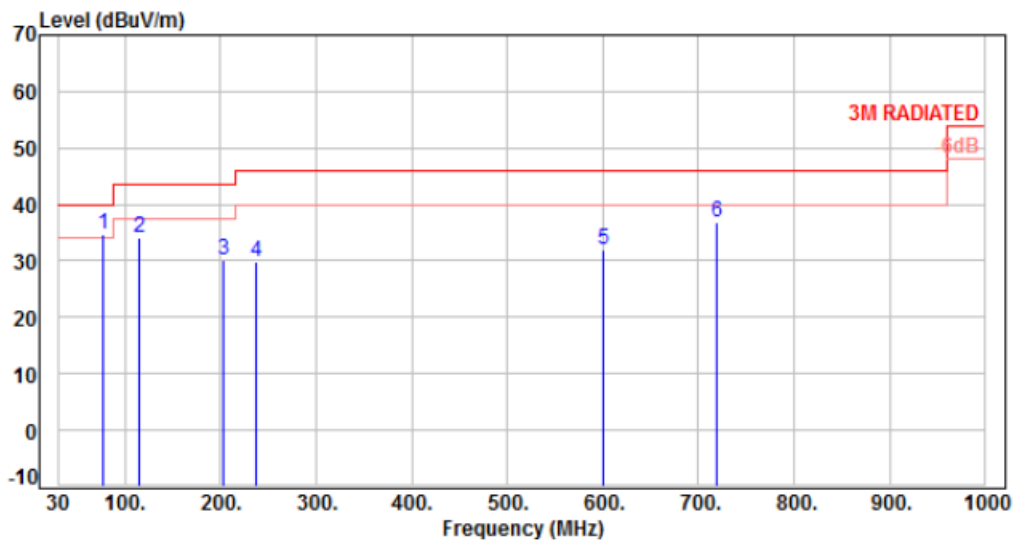


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	77.53	-12.95	47.64	34.69	40.00	-5.31	Peak	400	0	P
2	115.36	-12.22	46.43	34.21	43.50	-9.29	Peak	400	0	P
3	202.66	-11.99	42.18	30.19	43.50	-13.31	Peak	400	0	P
4	237.58	-10.75	40.53	29.78	46.00	-16.22	Peak	400	0	P
5	600.36	-1.52	33.35	31.83	46.00	-14.17	Peak	400	0	P
6	719.67	0.30	36.46	36.76	46.00	-9.24	Peak	400	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 5V From system	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 22 °C
Test Date	: Jan. 04, 2019	Humidity	: 59 %

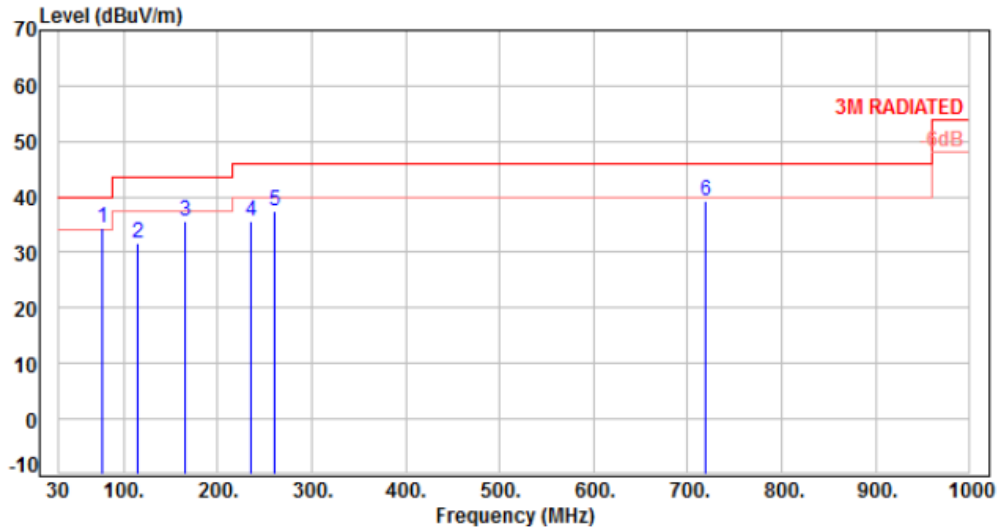


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	76.56	-12.71	47.10	34.39	40.00	-5.61	Peak	100	0	P
2	115.36	-12.22	43.95	31.73	43.50	-11.77	Peak	100	0	P
3	165.80	-9.28	44.88	35.60	43.50	-7.90	Peak	100	0	P
4	235.64	-10.92	46.50	35.58	46.00	-10.42	Peak	100	0	P
5	260.86	-9.88	47.40	37.52	46.00	-8.48	Peak	100	0	P
6	718.70	0.32	38.94	39.26	46.00	-6.74	Peak	100	0	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 5V From system	Pol/Phase	: VERTICAL
Test Mode	: Mode 2	Temperature	: 22 °C
Test Date	: Jan. 04, 2019	Humidity	: 59 %

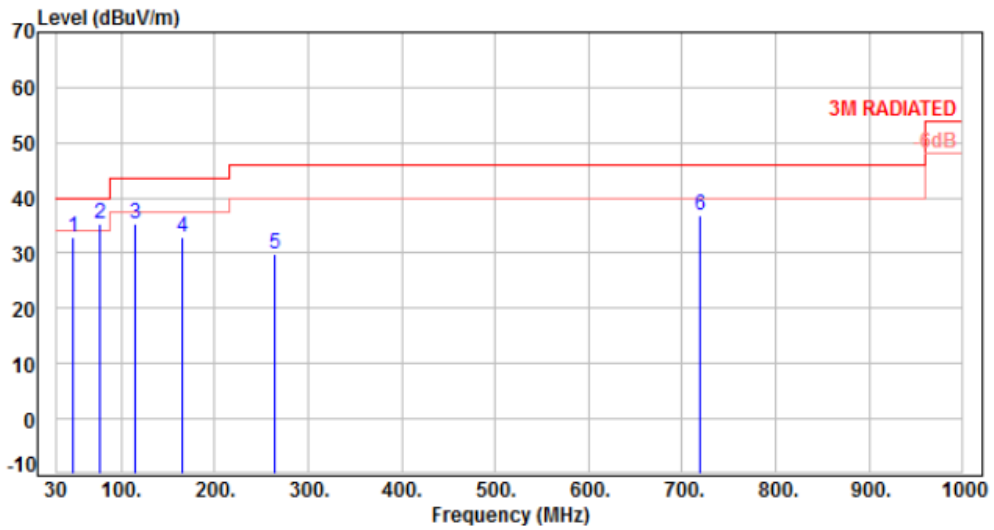


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	48.43	-9.42	42.40	32.98	40.00	-7.02	Peak	400	0	P
2	76.56	-12.71	48.08	35.37	40.00	-4.63	Peak	400	0	P
3	115.36	-12.22	47.43	35.21	43.50	-8.29	Peak	400	0	P
4	164.83	-9.30	42.10	32.80	43.50	-10.70	Peak	400	0	P
5	264.74	-9.78	39.51	29.73	46.00	-16.27	Peak	400	0	P
6	719.67	0.30	36.46	36.76	46.00	-9.24	Peak	400	0	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 5V From system	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2	Temperature	: 22 °C
Test Date	: Jan. 04, 2019	Humidity	: 59 %

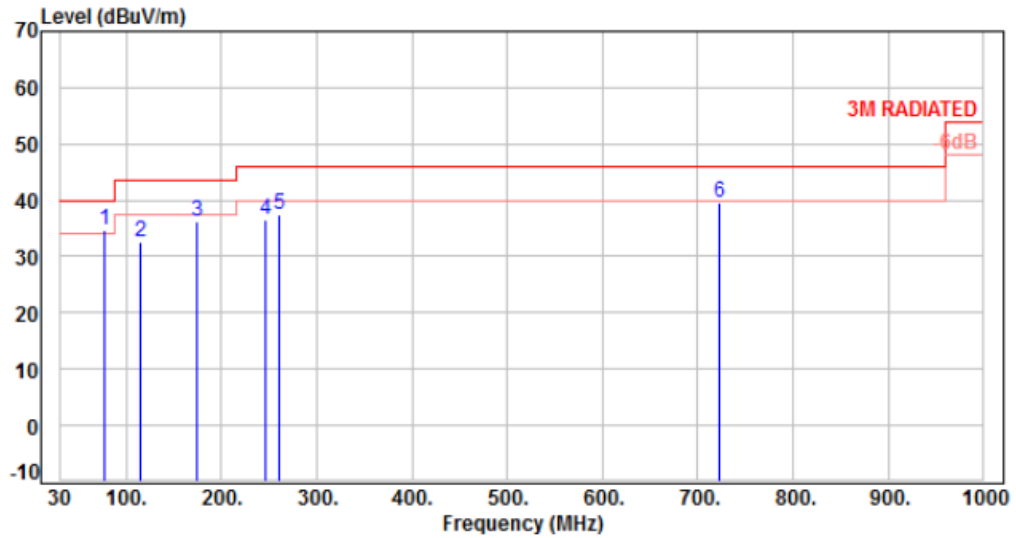


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	77.53	-12.95	47.60	34.65	40.00	-5.35	Peak	100	0	P
2	115.36	-12.22	44.95	32.73	43.50	-10.77	Peak	100	0	P
3	173.56	-10.03	46.24	36.21	43.50	-7.29	Peak	100	0	P
4	246.31	-10.32	46.72	36.40	46.00	-9.60	Peak	100	0	P
5	260.86	-9.88	47.40	37.52	46.00	-8.48	Peak	100	0	P
6	722.58	0.34	39.14	39.48	46.00	-6.52	Peak	100	0	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



5.6 Test Result and Data (1GHz ~ 25GHz)

Power	: DC 5V From system	Pol/Phase	: VERTICAL
Test Mode	: Mode 1	Temperature	: 22 °C
Test Date	: Jan. 04, 2019	Humidity	: 59 %

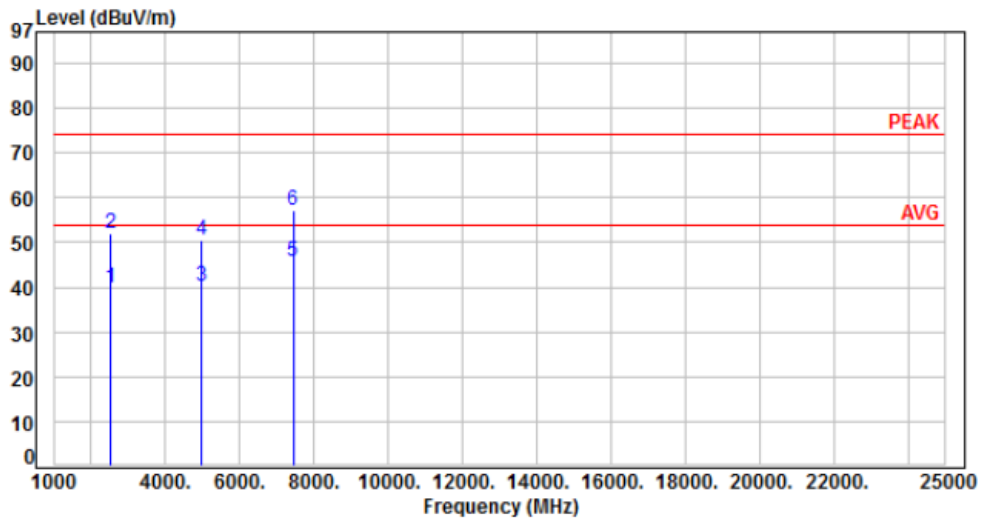


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2510.00	-15.26	55.20	39.94	54.00	-14.06	Average	100	171	P
2	2510.00	-15.26	67.20	51.94	74.00	-22.06	Peak	100	171	P
3	4960.00	-8.07	48.20	40.13	54.00	-13.87	Average	100	219	P
4	4960.00	-8.07	58.50	50.43	74.00	-23.57	Peak	100	219	P
5	7440.00	-3.52	49.20	45.68	54.00	-8.32	Average	100	259	P
6	7440.00	-3.52	60.60	57.08	74.00	-16.92	Peak	100	259	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 5V From system	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 1	Temperature	: 22 °C
Test Date	: Jan. 04, 2019	Humidity	: 59 %

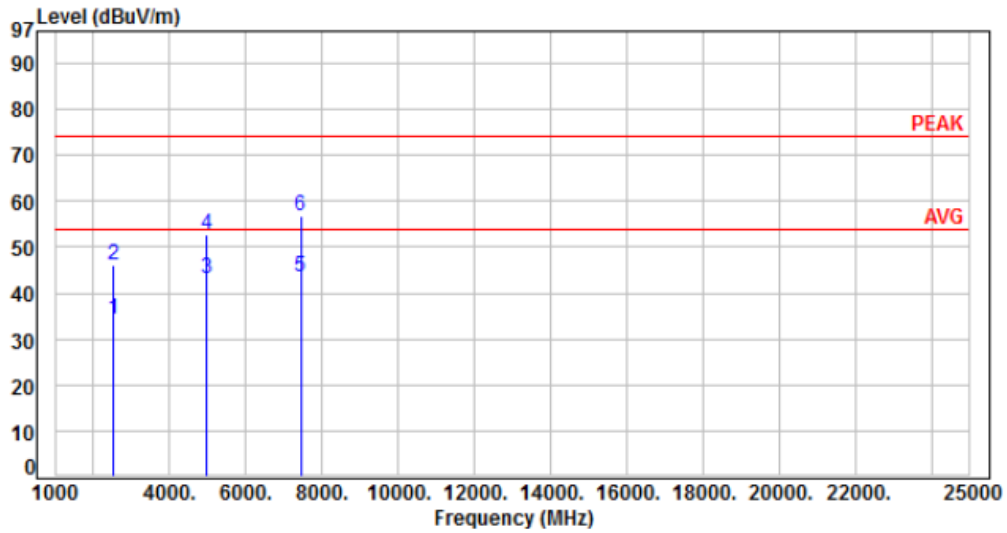


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	2510.00	-15.26	49.50	34.24	54.00	-19.76	Average	100	100	P
2	2510.00	-15.26	61.20	45.94	74.00	-28.06	Peak	100	100	P
3	4960.00	-8.07	51.19	43.12	54.00	-10.88	Average	100	235	P
4	4960.00	-8.07	60.79	52.72	74.00	-21.28	Peak	100	235	P
5	7440.00	-3.52	46.88	43.36	54.00	-10.64	Average	100	320	P
6	7440.00	-3.52	60.20	56.68	74.00	-17.32	Peak	100	320	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 5V From system	Pol/Phase	: VERTICAL
Test Mode	: Mode 2	Temperature	: 22 °C
Test Date	: Jan. 04, 2019	Humidity	: 59 %

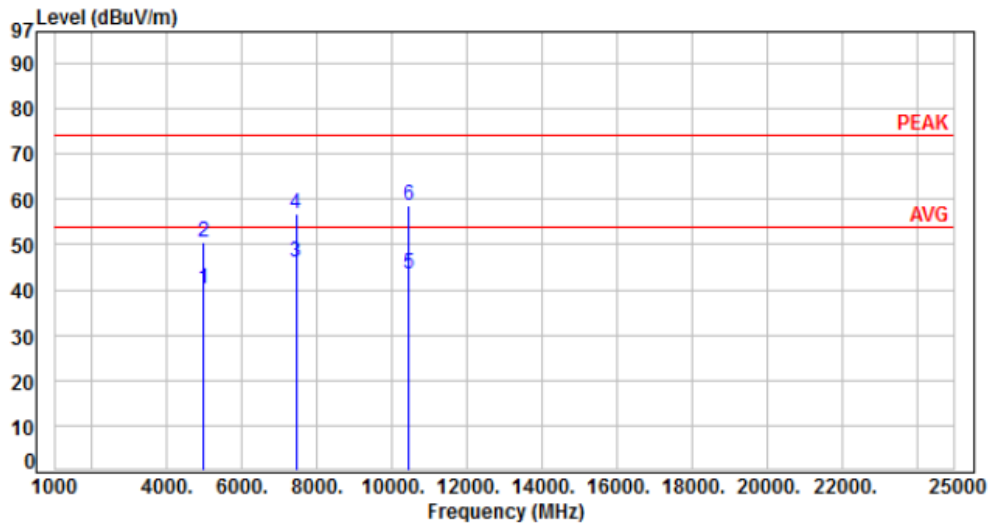


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4960.00	-8.07	48.30	40.23	54.00	-13.77	Average	100	253	P
2	4960.00	-8.07	58.54	50.47	74.00	-23.53	Peak	100	253	P
3	7440.00	-3.52	49.47	45.95	54.00	-8.05	Average	100	244	P
4	7440.00	-3.52	60.25	56.73	74.00	-17.27	Peak	100	244	P
5	10440.00	-0.03	43.55	43.52	54.00	-10.48	Average	100	82	P
6	10440.00	-0.03	58.66	58.63	74.00	-15.37	Peak	100	82	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: DC 5V From system	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2	Temperature	: 22 °C
Test Date	: Jan. 04, 2019	Humidity	: 59 %

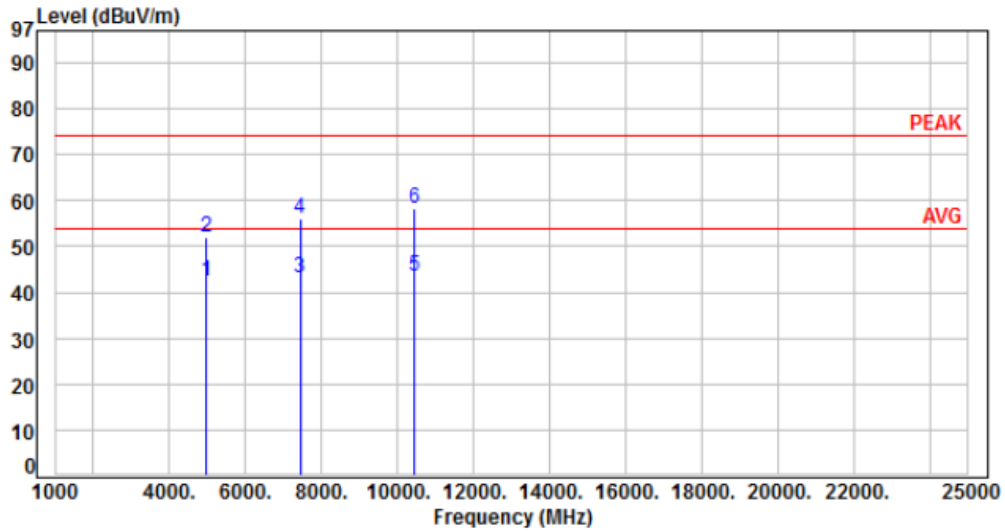

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	4960.00	-8.07	50.66	42.59	54.00	-11.41	Average	100	277	P
2	4960.00	-8.07	60.23	52.16	74.00	-21.84	Peak	100	277	P
3	7440.00	-3.52	46.53	43.01	54.00	-10.99	Average	100	352	P
4	7440.00	-3.52	59.76	56.24	74.00	-17.76	Peak	100	352	P
5	10440.00	-0.03	43.50	43.47	54.00	-10.53	Average	100	295	P
6	10440.00	-0.03	58.22	58.19	74.00	-15.81	Peak	100	295	P

Note: Level=Reading+Factor
 Margin=Level-Limit
 Factor=Antenna Factor + cable loss - Amplifier Factor



5.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz