

TEST REPORT

Applicant: Dragino Technology Co., Limited.

Address of Applicant: Room 202,BaoChengTai industrial park,No.8 CaiYun LongCheng Street,LongGang District, Shenzhen 518116, China

Manufacturer/Factory: Dragino Technology Co., Limited.

Address of Manufacturer/Factory: Room 202,BaoChengTai industrial park,No.8 CaiYun LongCheng Street,LongGang District, Shenzhen 518116, China

Equipment Under Test (EUT)

Product Name: LoRaWAN Gateway

Model No.: LPS8

Trade Mark : Dragino

FCC ID: ZHZLPS8

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: Nov 21,2019

Date of Test: Nov 21,2019-December 11,2019

Date of report issued: December 12,2019

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Lo

Laboratory Manager


This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	December 12,2019	Original

Prepared By:  **Date:** December 12,2019

Project Engineer

Check By:  **Date:** December 12,2019

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
4.1 MEASUREMENT UNCERTAINTY.....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT.....	5
5.2 TEST MODE.....	7
5.3 DESCRIPTION OF SUPPORT UNITS.....	7
5.4 DEVIATION FROM STANDARDS.....	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
5.6 TEST FACILITY.....	8
5.7 TEST LOCATION.....	8
6 TEST INSTRUMENTS LIST.....	9
7 TEST RESULTS AND MEASUREMENT DATA.....	11
7.1 ANTENNA REQUIREMENT.....	11
7.2 CONDUCTED EMISSIONS.....	12
7.3 RADIATED EMISSION METHOD.....	15
7.3.1 <i>Field Strength of The Fundamental Signal</i>	17
7.3.2 <i>Spurious emissions</i>	18
7.3.3 <i>Bandedge emissions</i>	22
7.4 20dB OCCUPIED BANDWIDTH.....	23
8 TEST SETUP PHOTO.....	25
9 EUT CONSTRUCTIONAL DETAILS.....	25

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	LoRaWAN Gateway
Model No.:	LPS8
Serial No.:	N/A
Test sample(s) ID:	GTS201912000229-1
Sample(s) Status	Engineered sample
Operation Frequency:	902.2MHz to 927.8MHz
Channel numbers:	129
Channel separation:	200KHz
Modulation type:	GFSK
Antenna Type:	External antenna
Antenna gain:	2.69dBi (Declared by applicant)
Power supply:	DC 5.0V

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.2	33	908.8	67	915.4	100	922.0
2	902.4	35	909.0	68	915.6	101	922.2
3	902.6	36	909.2	69	915.8	102	922.4
4	902.8	37	909.4	70	916.0	103	922.6
.
.
.
30	908.0	63	914.6	96	921.2	129	927.8
31	908.2	64	914.8	97	921.4		
32	908.4	65	915.0	98	921.6		
33	908.6	66	915.2	99	921.8		

The test frequencies are below:

Channel	Frequency(MHz)
lowe channel	902.2
middle channel	915.2
High channel	927.8

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	90.73	92.34	89.57

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
N/A	N/A	N/A	N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 26 2019	June. 25 2020
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 26 2019	June. 25 2020
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 26 2019	June. 25 2020
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 26 2019	June. 25 2020
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 26 2019	June. 25 2020
9	Coaxial Cable	GTS	N/A	GTS211	June. 26 2019	June. 25 2020
10	Coaxial cable	GTS	N/A	GTS210	June. 26 2019	June. 25 2020
11	Coaxial Cable	GTS	N/A	GTS212	June. 26 2019	June. 25 2020
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 26 2019	June. 25 2020
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 26 2019	June. 25 2020
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 26 2019	June. 25 2020
15	Band filter	Amindeon	82346	GTS219	June. 26 2019	June. 25 2020
16	Power Meter	Anritsu	ML2495A	GTS540	June. 26 2019	June. 25 2020
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 26 2019	June. 25 2020
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 26 2019	June. 25 2020
19	Splitter	Agilent	11636B	GTS237	June. 26 2019	June. 25 2020
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 26 2019	June. 25 2020
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 26 2019	June. 25 2020


Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 26 2019	June. 25 2020
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 26 2019	June. 25 2020
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 26 2019	June. 25 2020
8	Absorbing clamp	Elektronik- Feinmechanik	MDS21	GTS229	June. 26 2019	June. 25 2020
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 26 2019	June. 25 2020

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 26 2019	June. 25 2020
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 26 2019	June. 25 2020
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 26 2019	June. 25 2020
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 26 2019	June. 25 2020
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 26 2019	June. 25 2020
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 26 2019	June. 25 2020
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 26 2019	June. 25 2020
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 26 2019	June. 25 2020

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 26 2019	June. 25 2020
2	Barometer	ChangChun	DYM3	GTS255	June. 26 2019	June. 25 2020

7 Test results and Measurement Data

7.1 Antenna requirement

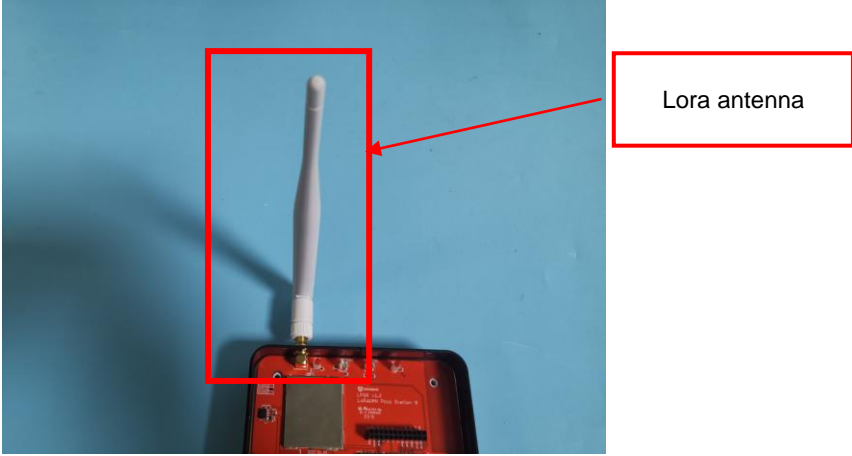
Standard requirement:
FCC part 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna: The antenna is external antenna, the best case gain of the antenna is 2.69dBi


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
5-30		60		50		
* Decreases with the logarithm of the frequency.						
Test setup:	<p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.3 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test results:	Pass					
Test voltage:	AC120V 60Hz					


Measurement data:

Line:

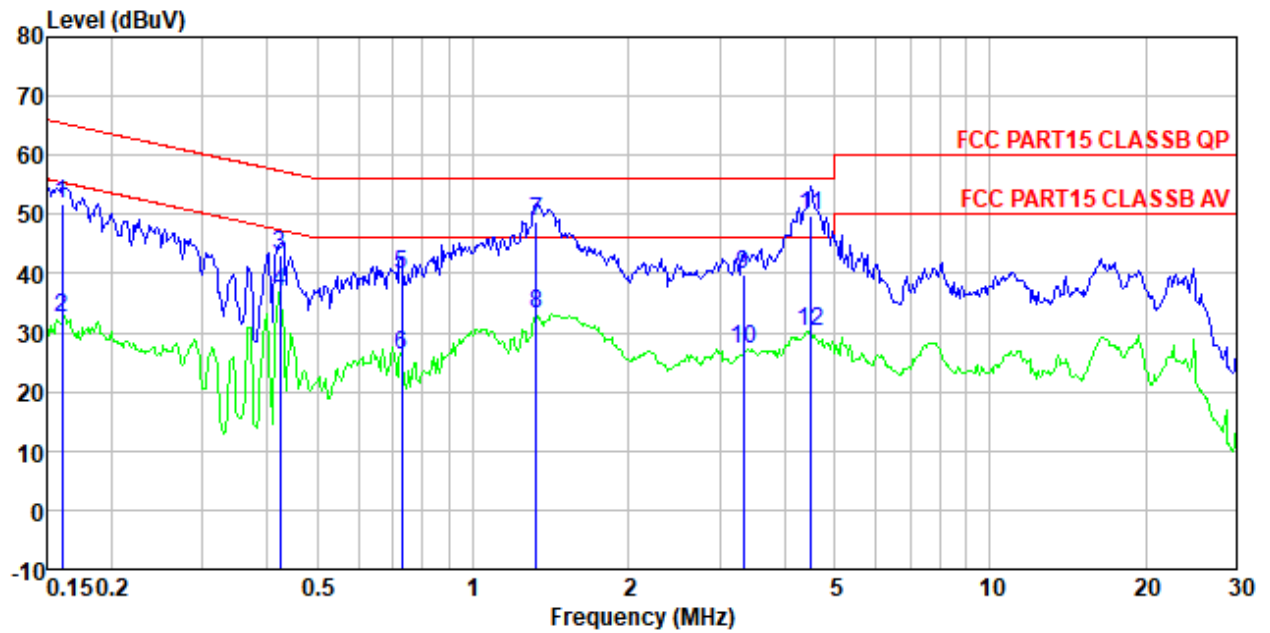

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.16	51.40	0.40	0.08	51.88	65.43	-13.55	QP
0.16	31.88	0.40	0.08	32.36	55.43	-23.07	Average
0.42	42.83	0.34	0.11	43.28	57.37	-14.09	QP
0.42	36.28	0.34	0.11	36.73	47.37	-10.64	Average
0.73	39.56	0.25	0.13	39.94	56.00	-16.06	QP
0.73	25.94	0.25	0.13	26.32	46.00	-19.68	Average
1.32	48.31	0.20	0.16	48.67	56.00	-7.33	QP
1.32	32.67	0.20	0.16	33.03	46.00	-12.97	Average
3.33	39.30	0.20	0.19	39.69	56.00	-16.31	QP
3.33	26.69	0.20	0.19	27.08	46.00	-18.92	Average
4.50	49.40	0.20	0.17	49.77	56.00	-6.23	QP
4.50	29.77	0.20	0.17	30.14	46.00	-15.86	Average

Neutral:

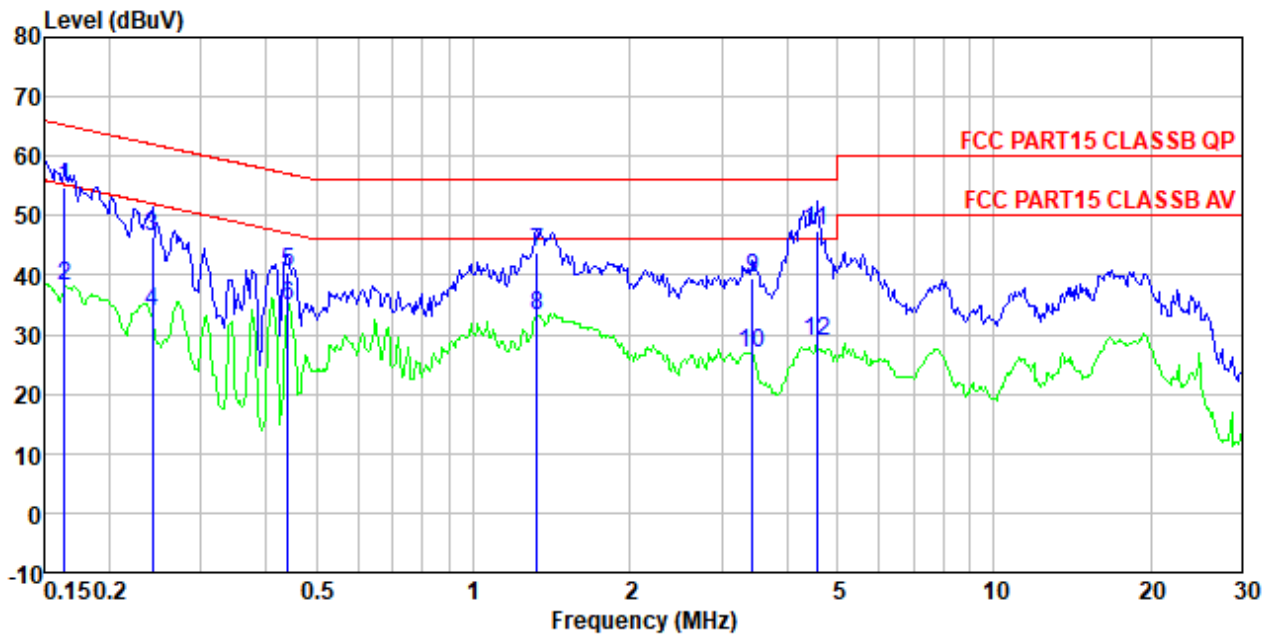



Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.16	54.17	0.40	0.08	54.65	65.25	-10.60	QP
0.16	37.66	0.40	0.08	38.14	55.25	-17.11	Average
0.24	45.80	0.40	0.11	46.31	62.04	-15.73	QP
0.24	33.31	0.40	0.11	33.82	52.04	-18.22	Average
0.44	40.07	0.34	0.11	40.52	57.07	-16.55	QP
0.44	34.51	0.34	0.11	34.96	47.07	-12.11	Average
1.32	43.35	0.20	0.16	43.71	56.00	-12.29	QP
1.32	32.71	0.20	0.16	33.07	46.00	-12.93	Average
3.44	39.23	0.20	0.18	39.61	56.00	-16.39	QP
3.44	26.61	0.20	0.18	26.99	46.00	-19.01	Average
4.57	47.15	0.20	0.17	47.52	56.00	-8.48	QP
4.57	28.53	0.20	0.17	28.90	46.00	-17.10	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

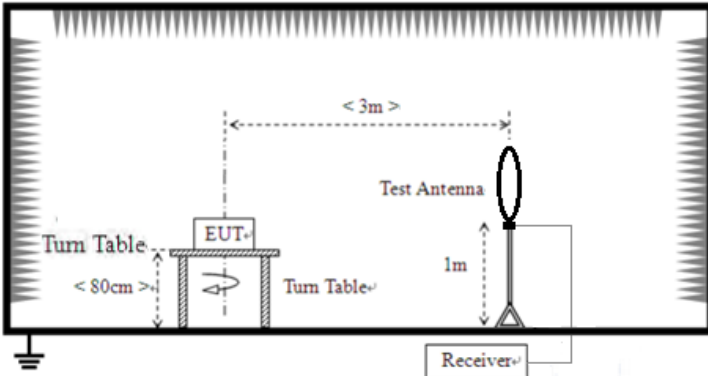Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	902MHz-928MHz	94.00		Quasi-peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)		Remark	
	0.009MHz-0.490MHz	2400/F(kHz) @300m		Quasi-peak Value	
	0.490MHz-1.705MHz	24000/F(kHz) @30m		Quasi-peak Value	
	1.705MHz-30.0MHz	30 @30m		Quasi-peak Value	
	30MHz-88MHz	100 @3m		Quasi-peak Value	
	88MHz-216MHz	150 @3m		Quasi-peak Value	
	216MHz-960MHz	200 @3m		Quasi-peak Value	
	960MHz-1GHz	500 @3m		Quasi-peak Value	
	Above 1GHz	500 @3m		Average Value	
5000 @3m		Peak Value			
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>				

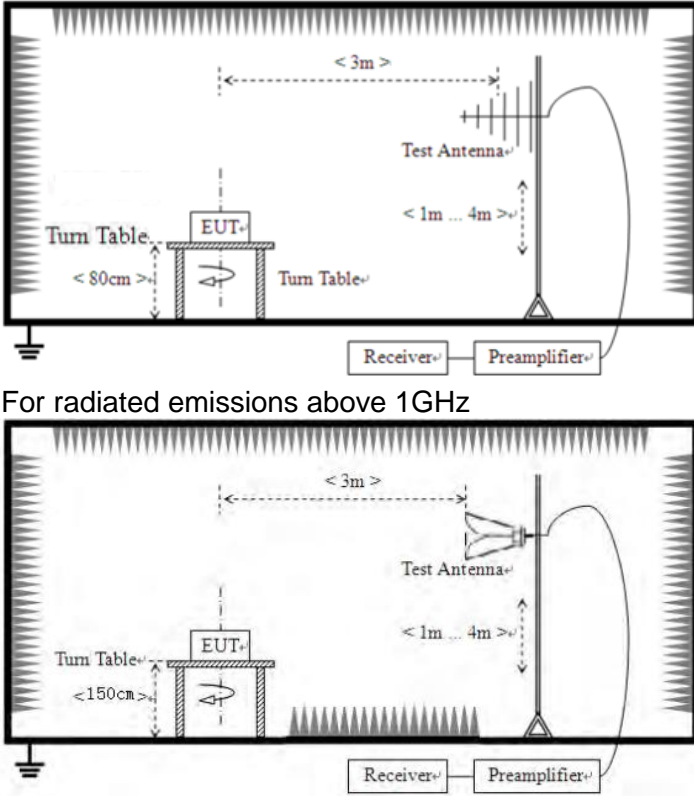	 <p>For radiated emissions above 1GHz</p>						
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 						
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>						
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>						
<p>Test environment:</p>	<table border="1"> <tr> <td>Temp.:</td> <td>25 °C</td> <td>Humid.:</td> <td>52%</td> <td>Press.:</td> <td>1012mbar</td> </tr> </table>	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar		
<p>Test results:</p>	<p>Pass</p>						
<p>Test voltage:</p>	<p>AC120V 60Hz</p>						

Measurement data:**7.3.1 Field Strength of The Fundamental Signal****Quasi-peak:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
902.20	102.62	22.37	4.93	37.58	92.34	94	-1.66	Vertical
902.20	102.23	22.37	4.93	37.58	91.95	94	-2.05	Horizontal
915.20	102.15	22.39	4.93	37.58	91.89	94	-2.11	Vertical
915.20	102.29	22.39	4.93	37.58	92.03	94	-1.97	Horizontal
927.80	100.69	22.41	4.95	37.58	90.47	94	-3.53	Vertical
927.80	102.35	22.41	4.95	37.58	92.13	94	-1.87	Horizontal


7.3.2 Spurious emissions

■ 9kHz~30MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


■ Below 1GHz

Horizontal

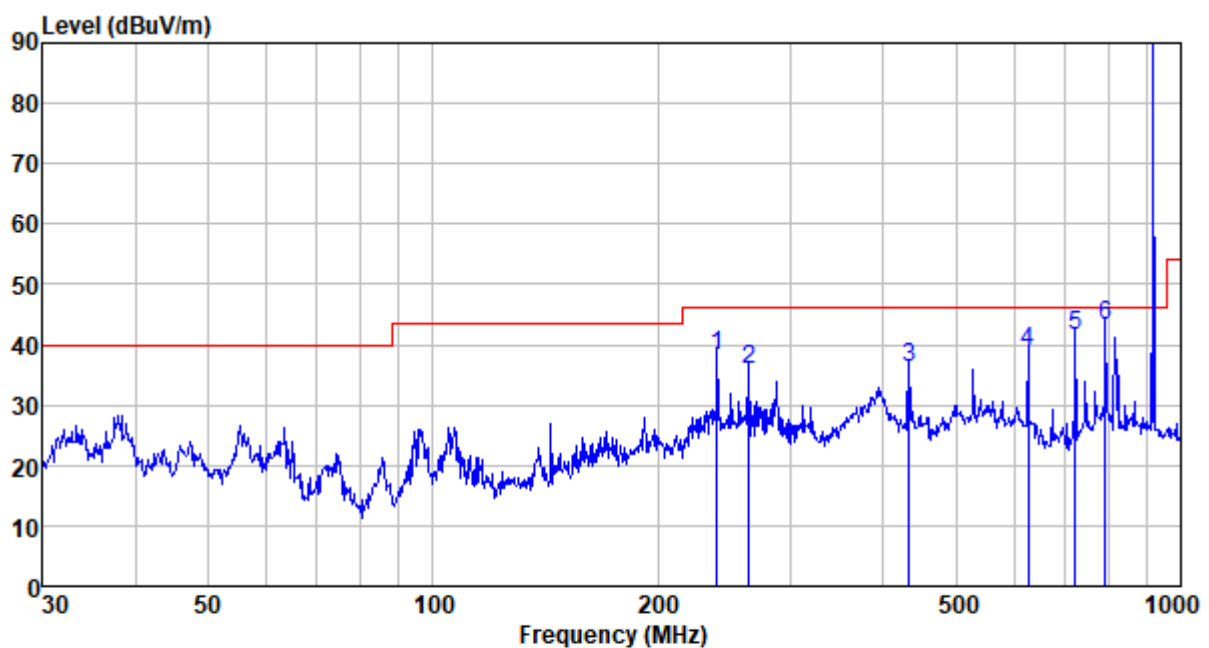

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
239.987	61.81	11.85	2.07	37.37	38.36	46.00	-7.64	QP
264.746	58.41	12.62	2.19	37.39	35.83	46.00	-10.17	QP
432.546	54.71	15.99	3.01	37.52	36.19	46.00	-9.81	QP
625.078	52.97	19.52	3.82	37.56	38.75	46.00	-7.25	QP
721.726	54.78	20.03	4.17	37.63	41.35	46.00	-4.65	QP
793.396	55.21	21.28	4.43	37.62	43.30	46.00	-2.70	QP

Vertical:

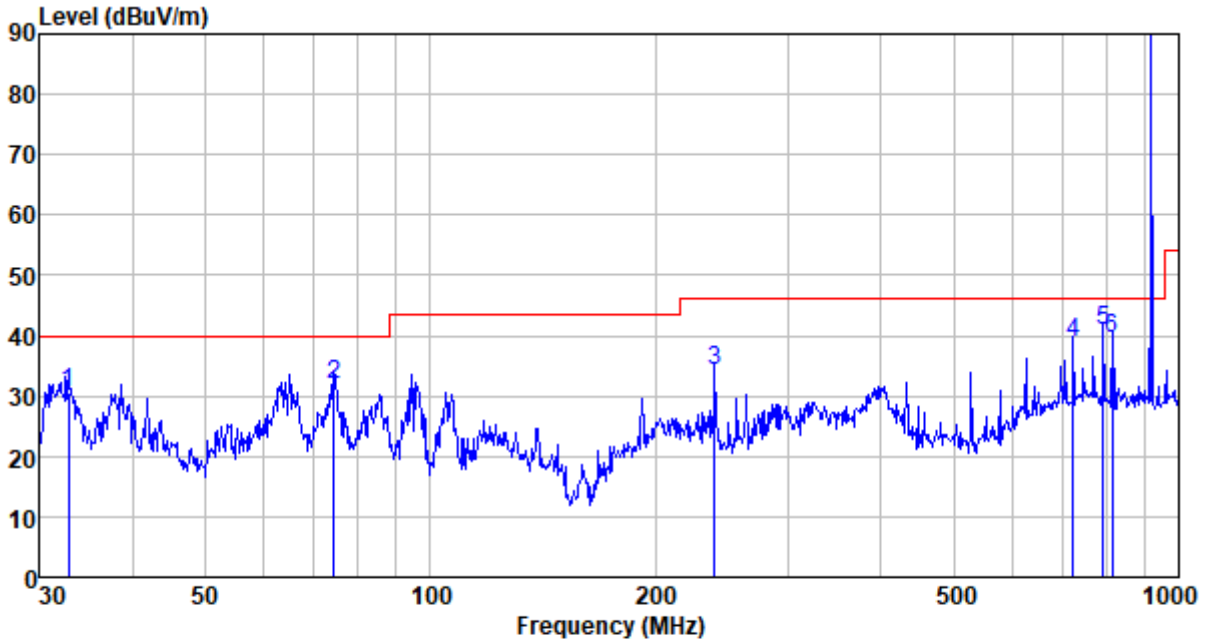

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
32.864	53.84	11.26	0.58	35.21	30.47	40.00	-9.53	QP
74.396	59.77	7.46	0.98	36.49	31.72	40.00	-8.28	QP
239.987	57.79	11.85	2.07	37.37	34.34	46.00	-11.66	QP
721.726	52.38	20.03	4.17	37.63	38.95	46.00	-7.05	QP
793.396	52.89	21.28	4.43	37.62	40.98	46.00	-5.02	QP
815.968	51.14	21.54	4.52	37.62	39.58	46.00	-6.42	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1288.00	36.89	25.61	4.54	35.99	31.05	74.00	-42.95	Vertical
2503.00	33.73	27.55	5.49	36.94	29.83	74.00	-44.17	Vertical
3709.00	30.51	29.25	7.34	37.37	29.73	74.00	-44.27	Vertical
5500.00	28.62	31.98	9.51	37.07	33.04	74.00	-40.96	Vertical
7561.00	26.87	36.75	11.86	35.52	39.96	74.00	-34.04	Vertical
8704.00	27.68	36.87	13.23	34.74	43.04	74.00	-30.96	Horizontal
1369.00	36.41	25.66	4.59	36.06	30.60	74.00	-43.40	Horizontal
2440.00	33.34	27.48	5.43	36.89	29.36	74.00	-44.64	Horizontal
3736.00	31.57	29.29	7.40	37.38	30.88	74.00	-43.12	Horizontal
5428.00	28.42	31.86	9.40	37.18	32.50	74.00	-41.50	Horizontal

Test channel:	Middle channel
---------------	----------------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1342.00	36.82	25.7	4.57	36.04	31.05	74.00	-42.95	Vertical
2467.00	34.75	27.49	5.45	36.91	30.78	74.00	-43.22	Vertical
3772.00	31.43	29.33	7.46	37.38	30.84	74.00	-43.16	Vertical
5473.00	28.69	31.95	9.47	37.11	33.00	74.00	-41.00	Vertical
7534.00	27.84	36.72	11.85	35.53	40.88	74.00	-33.12	Vertical
8677.00	26.87	36.84	13.19	34.76	42.14	74.00	-31.86	Horizontal
1324.00	36.73	25.67	4.56	36.02	30.94	74.00	-43.06	Horizontal
2530.00	35.28	27.58	5.52	36.96	31.42	74.00	-42.58	Horizontal
3754.00	32.65	29.3	7.44	37.38	32.01	74.00	-41.99	Horizontal
5455.00	28.09	31.89	9.45	37.13	32.30	74.00	-41.70	Horizontal

Test channel:	Highest channel
---------------	-----------------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
1216.00	37.48	25.42	4.48	35.93	31.45	74.00	-42.55	Vertical
2566.00	34.65	27.68	5.55	36.99	30.89	74.00	-43.11	Vertical
3655.00	30.24	29.19	7.25	37.37	29.31	74.00	-44.69	Vertical
5617.00	29.31	32.27	9.67	36.91	34.34	74.00	-39.66	Vertical
7318.00	28.75	36.37	11.72	35.60	41.24	74.00	-32.76	Vertical
8551.00	26.69	36.63	12.97	34.90	41.39	74.00	-32.61	Horizontal
1234.00	36.83	25.48	4.49	35.94	30.86	74.00	-43.14	Horizontal
2620.00	35.47	27.86	5.60	37.03	31.90	74.00	-42.10	Horizontal
3907.00	29.75	29.52	7.69	37.39	29.57	74.00	-44.43	Horizontal
5563.00	28.78	32.13	9.61	36.98	33.54	74.00	-40.46	Horizontal

Remark:

2. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
4. *“**”, means this data is the too weak instrument of signal is unable to test.*

7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
902.00	35.07	22.30	4.87	37.60	24.64	74.00	-49.36	Horizontal
902.00	39.12	22.30	4.87	37.60	28.69	74.00	-45.31	Vertical
928.00	40.95	22.41	4.96	37.57	30.75	74.00	-43.25	Horizontal
928.00	35.68	22.41	4.96	37.57	25.48	74.00	-48.52	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
902.00	24.69	22.30	4.87	37.60	14.26	54.00	-39.74	Horizontal
902.00	26.93	22.30	4.87	37.60	16.50	54.00	-37.50	Vertical
928.00	28.95	22.41	4.96	37.57	18.75	54.00	-35.25	Horizontal
928.00	25.14	22.41	4.96	37.57	14.94	54.00	-39.06	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
902.00	34.85	22.30	4.87	37.60	24.42	74.00	-49.58	Horizontal
902.00	38.79	22.30	4.87	37.60	28.36	74.00	-45.64	Vertical
928.00	38.65	22.41	4.96	37.57	28.45	74.00	-45.55	Horizontal
928.00	37.91	22.41	4.96	37.57	27.71	74.00	-46.29	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
902.00	28.69	22.30	4.87	37.60	18.26	54.00	-35.74	Horizontal
902.00	27.18	22.30	4.87	37.60	16.75	54.00	-37.25	Vertical
928.00	28.68	22.41	4.96	37.57	18.48	54.00	-35.52	Horizontal
928.00	27.51	22.41	4.96	37.57	17.31	54.00	-36.69	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor


7.4 20dB Occupied Bandwidth

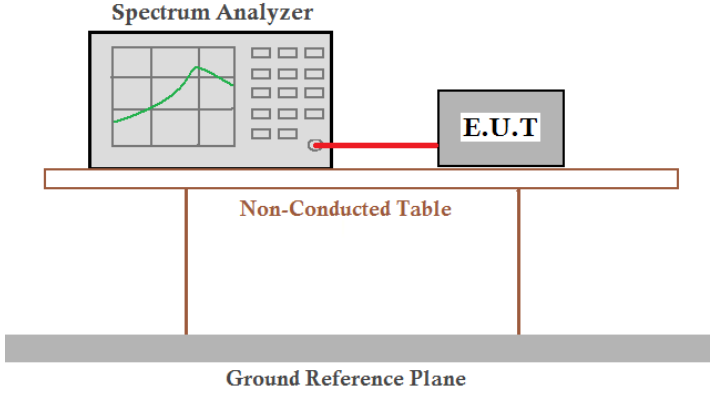Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 902MHz~928MHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Test Frequency	20dB bandwidth(MHz)	Result
902.2	0.1697	Pass
915.2	0.1681	Pass
927.8	0.1674	Pass


Test plot as follows:

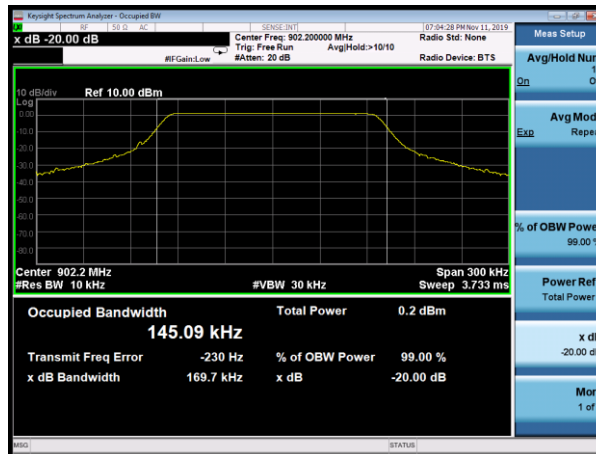

Lowest channel

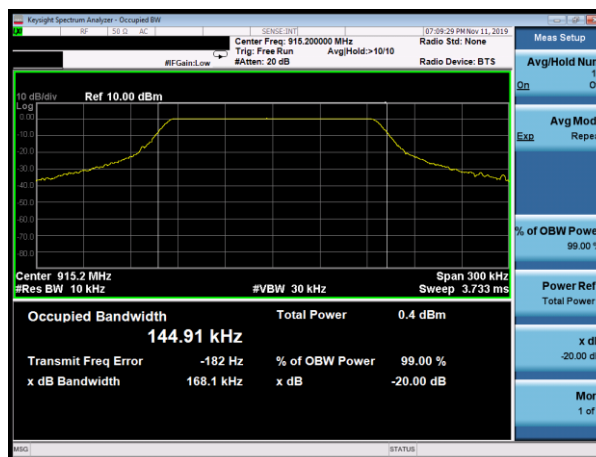

Middle channel

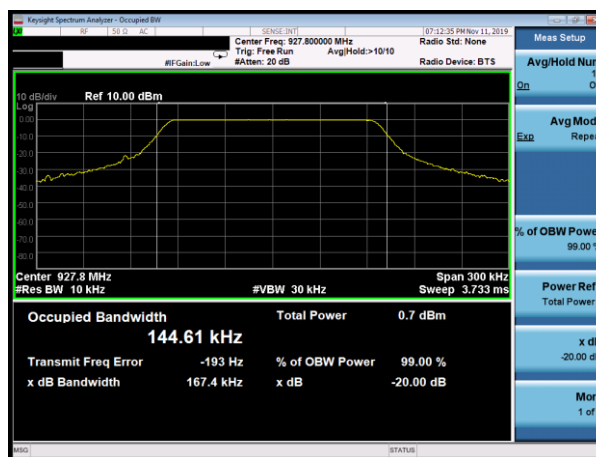

Highest channel

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----