



Test Report Serial Number:	45461752 R2.0
Test Report Date:	22 August 2022
Project Number:	1598

EMC Test Report - Class II Permissive Change

Applicant:



BossPac Engineering and Technology Inc

**Bay 8 1450 28th Street NE
Calgary, AB, T2A7W6
Canada**

**Bay 8, 1450 28th Steet NE
Calgary, AB, T2A 7W6
Canada**

FCC ID:

Z18EA206

Product Model Number / HVIN

EA000206

IC Registration Number

9648A-EA206

Product Name / PMN

WASPMESH

In Accordance With:

CFR Title 47, Part 15 Subpart C (§15.247), Part 15 Subpart B

Digital Transmission System (DTS)

RSS-Gen, RSS-247

Digital Transmission Systems (DTSs)

Approved By:

Ben Hewson, President

Celltech Labs Inc.

21-364 Lougheed Rd.

Kelowna, BC, V1X 7R8

Canada



Test Lab Certificate: 2470.01



**Industry
Canada**

IC Registration 3874A-1



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 REVISION HISTORY	4
2.0 CLIENT AND DUT INFORMATION	5
3.0 SCOPE.....	7
4.0 TEST SUMMARY.....	8
5.0 NORMATIVE REFERENCES	9
6.0 FACILITIES AND ACCREDITATIONS	10
7.0 OCCUPIED BANDWIDTH	11
8.0 CONDUCTED POWER.....	16
9.0 RADIATED TX EMISSIONS – RESTRICTED BAND	21
10.0 RADIATED RX EMISSIONS.....	39
11.0 LINE CONDUCTED EMISSIONS.....	53
APPENDIX A – TEST SETUP DRAWINGS AND CONDITIONS.....	60
APPENDIX B – EQUIPMENT LIST AND CALIBRATION.....	65
APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY.....	66
END OF REPORT.....	66

Table of Figures

Figure A.1 – Test Setup – Conducted Measurements.....	60
Figure A.2 – Test Setup Radiated Measurements 9kHzMHz – 30MHz	62
Figure A.3 – Test Setup Radiated Measurements 30MHz – 1GHz.....	62
Figure A.4 – Test Setup Radiated Measurements 30MHz – 1GHz, Signal Substitution.....	62
Figure A.5 – Test Setup Radiated Measurements 1 – 18GHz	63
Figure A.6 – Test Setup Conducted Emissions Measurements	64

Table of Plots

Plot 7.1 – Occupied Bandwidth, 906MHz	12
Plot 7.2 – Occupied Bandwidth, 916MHz	13
Plot 7.3 – Occupied Bandwidth, 924MHz	14
Plot 8.1 – Conducted Power, 906 MHz.....	17
Plot 8.2 – Conducted Power, 916 MHz.....	18
Plot 8.3 – Conducted Power, 924 MHz.....	19
Plot 9.1 – Radiated Tx Emissions, 30 – 1000MHz, EA000344, Horizontal	22
Plot 9.2 – Radiated Tx Emissions, 30 – 1000MHz, EA000344, Vertical	23
Plot 9.3 – Radiated Tx Emissions, 30 – 1000MHz, EA000406, Horizontal	24
Plot 9.4 – Radiated Tx Emissions, 30 – 1000MHz, EA000406, Vertical	25
Plot 9.5 – Radiated Tx Emissions, 1 – 3GHz, EA000344, Horizontal.....	26
Plot 9.6 – Radiated Tx Emissions, 1 – 3GHz, EA000344, Vertical.....	27
Plot 9.7 – Radiated Tx Emissions, 3 - 10GHz, EA000344, Horizontal	28
Plot 9.8 – Radiated Tx Emissions, 3 - 10GHz, EA000344, Vertical.....	29
Plot 9.9 – Radiated Tx Emissions, 2 nd Harmonic, EA000344, Horizontal.....	30
Plot 9.10 – Radiated Tx Emissions, 2 nd Harmonic, EA000344, Vertical.....	31
Plot 9.11 – Radiated Tx Emissions, 1 – 3GHz, EA000406, Horizontal	32
Plot 9.12 – Radiated Tx Emissions, 1 – 3GHz, EA000406, Vertical.....	33
Plot 9.13 – Radiated Tx Emissions, 3 - 10GHz, EA000406, Horizontal	34
Plot 9.14 – Radiated Tx Emissions, 3 - 10GHz, EA000406, Vertical.....	35
Plot 9.15 – Radiated Tx Emissions, 2 nd Harmonic, EA000406, Horizontal.....	36
Plot 9.16 – Radiated Tx Emissions, 2 nd Harmonic, EA000406, Vertical.....	37
Plot 10.1 – Radiated Rx Emissions, 30 - 1000MHz, EA000344, Horizontal.....	40
Plot 10.2 – Radiated Rx Emissions, 30 - 1000MHz, EA000344, Vertical.....	41
Plot 10.3 – Radiated Rx Emissions, 30 - 1000MHz, EA000406, Horizontal.....	42
Plot 10.4 – Radiated Rx Emissions, 30 - 1000MHz, EA000406, Vertical.....	43
Plot 10.5 – Radiated Rx Emissions, 1 – 3GHz, EA000344, Horizontal	44
Plot 10.6 – Radiated Rx Emissions, 1 – 3GHz, EA000344, Vertical	45
Plot 10.7 – Radiated Rx Emissions, 3 - 5GHz, EA000344, Horizontal.....	46
Plot 10.8 – Radiated Rx Emissions, 3 - 5GHz, EA000344, Vertical	47
Plot 10.9 – Radiated Rx Emissions, 1 - 3GHz, EA000406, Horizontal.....	48
Plot 10.10 – Radiated Rx Emissions, 1 - 3GHz, EA000406, Vertical	49
Plot 10.11 – Radiated Rx Emissions, 3 - 5GHz, EA000406, Horizontal.....	50
Plot 10.12 – Radiated Rx Emissions, 3 - 5GHz, EA000406, Vertical	51
Plot 11.1 – Line Conducted Emissions, EA000344, L1	54
Plot 11.2 – Line Conducted Emissions, EA000344, L2	55
Plot 11.3 – Line Conducted Emissions, EA000406, L1	56
Plot 11.4 – Line Conducted Emissions, EA000406, L2	57

Table of Tables

Table 7.1 – Summary of Occupied Bandwidth Measurements.....	15
Table 10.1 – Summary of Conducted Power Measurements.....	20
Table 9.1 – Summary of Radiated Tx Measurements	38
Table 15.1 – Summary of Radiated Rx Measurements.....	52
Table 11.1 – Summary of Line Conducted Measurements, L1	58
Table 11.2 – Summary of Line Conducted Measurements, L2	59
Table A.1 – Conducted Measurement Setup and Environmental.....	60
Table A.2 – Radiated Emissions Measurement Equipment	61
Table A.3 – Setup – Conducted Emissions Equipment List	64

1.0 REVISION HISTORY

Revision History					
Samples Tested By:		Art Voss, P.Eng.		Date(s) of Evaluation:	9 - 12 July, 2022
Report Prepared By:		Art Voss, P.Eng.		Report Reviewed By:	Ben Hewson
Report Revision	Description of Revision	Revised Section	Revised By	Revision Date	
1.0	Initial Release	n/a	Art Voss	21 July 2022	
2.0	Corrected Release Date	1.0	Art Voss	22 August 2022	

2.0 CLIENT AND DUT INFORMATION

Client Information	
Applicant Name	BossPac Engineering and Technology Inc
Applicant Address (FCC)	Bay 8 1450 28th Street NE
	Calgary, Alberta, T2A7W6
	Canada
Applicant Address (ISED)	Bay 8, 1450 28th Street NE
	Calgary, AB, T2A 7W6
	Canada
DUT Information	
Device Identifier(s):	FCC ID: ZI8EA206
	ISED ID: 9648A-EA206
Device Type:	Digital Transceiver Module
Type of Equipment:	Digital QPSK Transceiver Module, IEEE 802.15.4
Device Model(s) / HVIN:	EA000206
Device Marketing Name / PMN:	WASPMESH
Firmware Version ID Number / FVIN:	-
Host 4 Marketing Name / HMN:	NEST4
Host 4 Model Number / HVIN:	EA000344
Host 5 Marketing Name / HMN:	EA000406
Host 5 Model Number / HVIN:	EA000406

Client Information	
Applicant Name	BossPac Engineering and Technology Inc
Applicant Address (FCC)	Bay 8 1450 28th Street NE
	Calgary, Alberta, T2A7W6
	Canada
Applicant Address (ISED)	Bay 8, 1450 28th Street NE
	Calgary, AB, T2A 7W6
	Canada
DUT Information (Cont.)	
Test Sample Serial No.:	T/A Sample - Identical Prototype
Transmit Frequency Range:	906-924MHz
Test Channels:	Programmable
Manuf. Max. Rated Output Power:	30dBm, 1W, EIRP
Manuf. Max. Rated BW/Data Rate:	250kbps
Antenna Make and Model:	Laird Connectivity, TRAB9023NP
Antenna Type and Gain:	Omni-Directional, 3dBi
Antenna Make and Model:	Laird Connectivity, OD9-11D1
Antenna Type and Gain:	Omni-Directional Whip, 11dBi
Antenna Make and Model:	Linx Technologies, ANT-916-CW-HWR-SMA
Antenna Type and Gain:	Omni Directional Whip, 1.2dBi
Antenna Make and Model:	Taoglas Limited, OMB.915.B08F21
Antenna Type and Gain:	Omni Directional Whip, 8dBi
Modulation:	O-QPSK
DUT Power Source:	5VDC, Provided by Host
DUT Dimensions [HxWxL] (mm)	H x W x L: 3mm x 18mm x 27mm
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

Note: Information on antenna gain provided by applicant

3.0 SCOPE

This Certification Report was prepared on behalf of:

BossPac Engineering and Technology Inc.

, (the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and, unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

As per FCC CFR 47 Part §2.1091 and §2.1093 and Health Canada Safety Code 6, an RF Exposure evaluation report is required for this *Equipment* and the results of the RF Exposure evaluation appear in a separate exhibit from this report.

This *Equipment* is subject to FCC Declaration of Conformity (DoC). DoC evaluations were performed on this *Equipment* and the results of the DoC evaluation appear in a separate exhibit from this report.

Application:

This application is for an FCC Class II Permissive Change, ISED Class IV Permissive Change to add two additional hosts to the existing list of approved hosts.

The hosts are identical to those previously examined with the exception of number of inputs. The host additions were evaluated for Radiated Tx and Rx emissions. The parameters of the EA000206 module were evaluated for conducted power and occupied bandwidth and compared to those of the original filing.

Host 4, Model/HVIN: EA000344, "NEST4", is a smart receiver and gateway identical to EA000244 [Added]

Host 5, Model/HVIN: EA000406, "EA000406", is a router device identical to EA000406 [Added]

These hosts are **Class A** digital devices. They are not sold to the general public and require professional installation.

4.0 TEST SUMMARY

TEST SUMMARY						
Section	Description of Test	Procedure Reference	Applicable Rule Part(s) FCC	Applicable Rule Part(s) ISED	Test Date	Result
7.0	Occupied Bandwidth	ANSI C63.10-2013 KDB 558074 D01v05	§2.1049 n/a	RSS-Gen RSS-247 (5.2)(a)	11 July 2022	Pass
8.0	Conducted Power (Fundamental)	ANSI C63.10-2013 KDB 558074 D01v05	§2.1046 §15.247(b)(3)	RSS-Gen RSS-247 (5.4)(d)	11 July 2022	Pass
9.0	Radiated TX Spurious Emissions	ANSI C63.10-2013 KDB 558074 D01v05	§15.205, 15.209 §15.247(d)	RSS-Gen	12 July 2022	Pass
10.0	Radiated RX Spurious Emissions	ANSI C63.4-2014 KDB 558074 D01v05	§15.109 §15.247(d)	ICES-003(6.2)	12 July 2022	Pass
11.0	Power Line Conducted Emissions	ANSI C63.4-2014 KDB 558074 D01v05	§15.107	ICES-003(6.1)	10 July 2022	Pass

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.
Technical Manager
Celltech Labs Inc.

21 July 2022

Date




5.0 NORMATIVE REFERENCES

Normative References	
ISO/IEC 17025:2017	General requirements for the competence of testing and calibration laboratories
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
CFR	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Sub Part C (15.247) Intentional Radiators
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Subpart B: Unintentional Radiators
ISED	Innovation, Science and Economic Development Canada RSS-Gen Issue 5: Spectrum Management and Telecommunications Radio Standards Specification Amendment 1 - Mar 2019 General Requirements and Information for the Certification of Radiocommunication Equipment
ISED	Innovation, Science and Economic Development Canada Spectrum Management and Telecommunications Radio Standards Specification RSS-247 Issue 2: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) Feb 2017 and Licensed-Exempt Local Area Network (LE_LAN) Devices
FCC KDB 558074 D01v05r02	OET Major Guidance Publications, Knowledge Data Base Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under Section 15.247

6.0 FACILITIES AND ACCREDITATIONS

Facility and Accreditation:

The facilities used to evaluate this device outlined in this report are located at 21-364 Loughheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site (OATS) conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC under Test Firm Registration Number CA3874 and Innovation, Science and Economic Development Canada under Test Site File Number ISED 3874A. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.

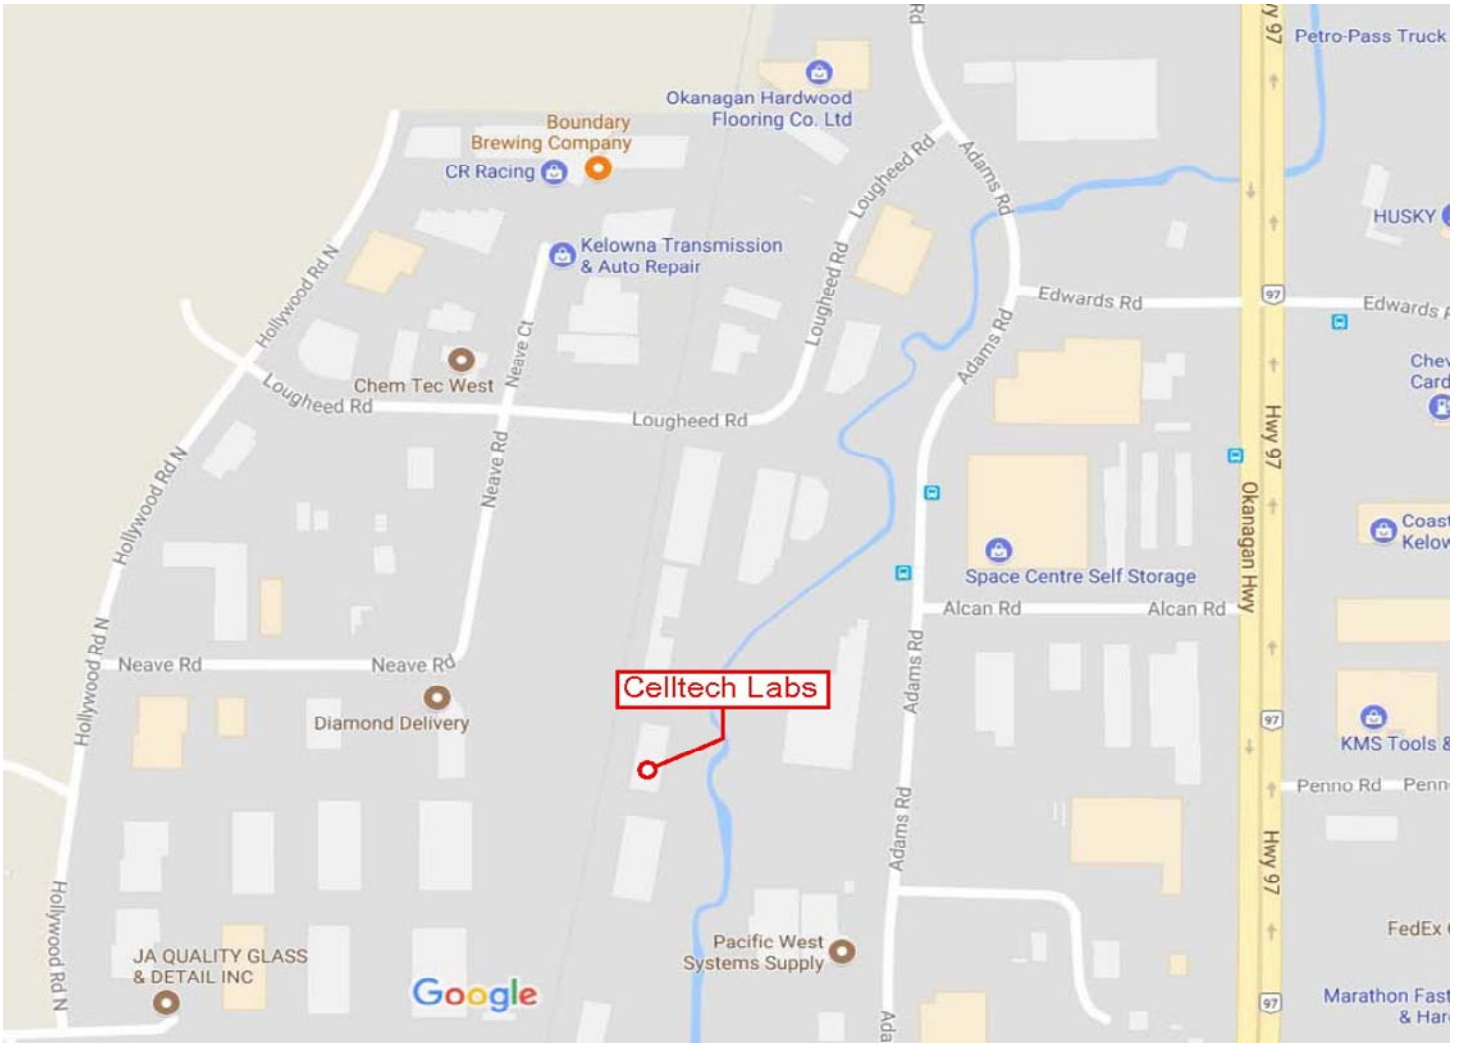

7.0 OCCUPIED BANDWIDTH

Test Procedure

Normative Reference	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d), KDB 558074 (8.3.2.1), ANSI C63.10 (6.9.3)
----------------------------	------------------------------------------------------------------------------------------------------------------------


General Procedure

KDB 558074 (8.3.2.1)	<p>8.3.2.1 General</p> <p>Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.</p>
C63.10 (6.9.3)	<p>6.9.3 Occupied bandwidth—power bandwidth (99%) measurement procedure</p> <p>The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:</p> <ol style="list-style-type: none"> The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2. Step a) through step c) might require iteration to adjust within the specified range. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.


Test Setup	Appendix A - Figure A.1
-------------------	--------------------------------

Measurement Procedure	<p>The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above using the 99% Occupied Bandwidth function. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at its maximum Duty Cycle. The 99% Occupied Bandwidth was measured and recorded and used for the basis for measuring the Conducted Output Power (See Section 10.0) and Power Spectral Density (See Section 11.0).</p>
------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Plot 7.1 – Occupied Bandwidth, 906MHz

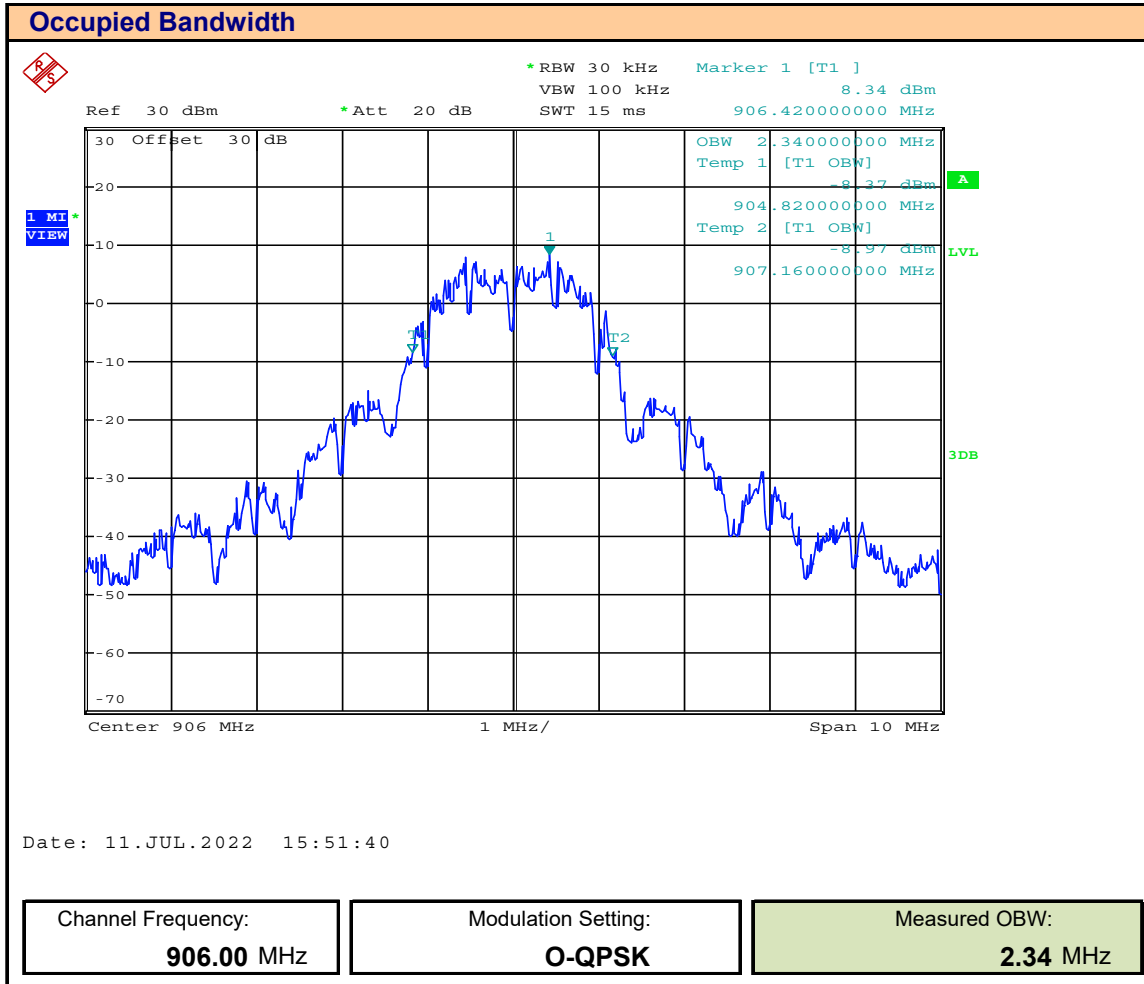

Plot 7.2 – Occupied Bandwidth, 916MHz

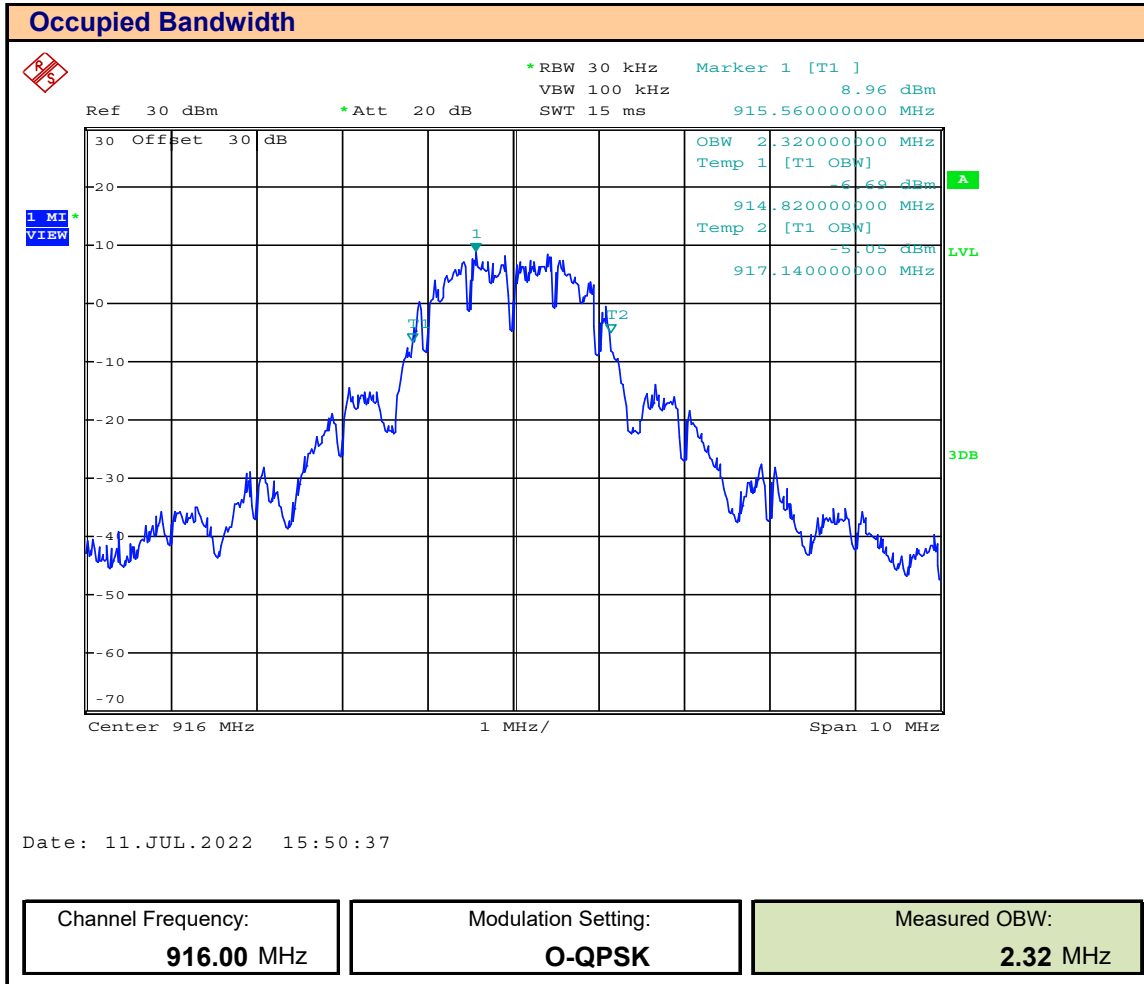

Plot 7.3 – Occupied Bandwidth, 924MHz

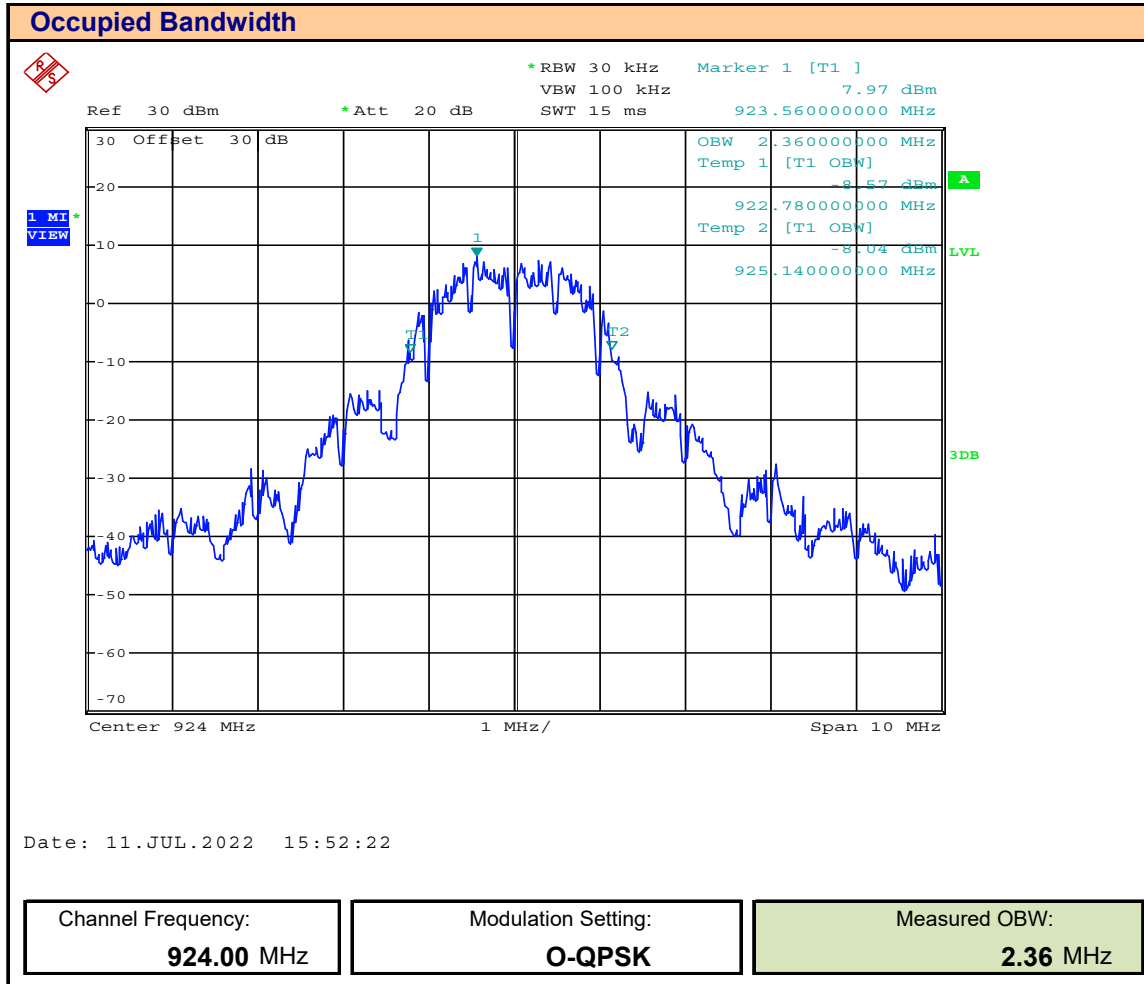


Table 7.1 – Summary of Occupied Bandwidth Measurements

Occupied Bandwidth Measurements			
Frequency (MHz)	Modulation	Measured OBW (MHz)	Emission Designator
906.00	O-QPSK	2.34	2M34G1D
916.00		2.32	2M32G1D
924.00		2.36	2M36G1D

8.0 CONDUCTED POWER

Test Procedure

Normative Reference	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d), KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.2)
----------------------------	---------------------------------------------------------------------------------------------------------------------------

Limits

47 CFR §15.247(b)(3)	(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
RSS-247 (5.4)(d)	5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.) Devices shall comply with the following requirements, where applicable: d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e). As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.

General Procedure


KDB 558074 (8.3.2.1)	8.3.2.1 General Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.
C63.10 (11.9.2.2.2)	Method AVGSA-1 (trace averaging with the EUT transmitting at full power throughout each a) Set span to at least 1.5 X OBW. b) Set RBW = 1 % to 5 % of the OBW, not to exceed 1 MHz. c) Set VBW ≥ 3 X RBW. d) Number of points in sweep ≥ 2 X span / RBW. e) Sweep time = auto. f) Detector = RMS g) If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”. h) Trace average at least 100 traces in power averaging i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges.

Test Setup	Appendix A - Figure A.1
-------------------	--------------------------------


Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT’s antenna port. The SA was configured as described above. Number of Sweep Points ≥ 2 X Span / RBW = 2 X (4MHz / 30kHz) = 267, the SA was configured for 501 Points. The output power of the DUT was set to the manufacturer’s highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at 100% Duty Cycle. The Channel Bandwidth was set to the measured 99% Occupied Bandwidth (See Section 9.0). The Band Channel Power was measured and recorded.

Plot 8.1 – Conducted Power, 906 MHz

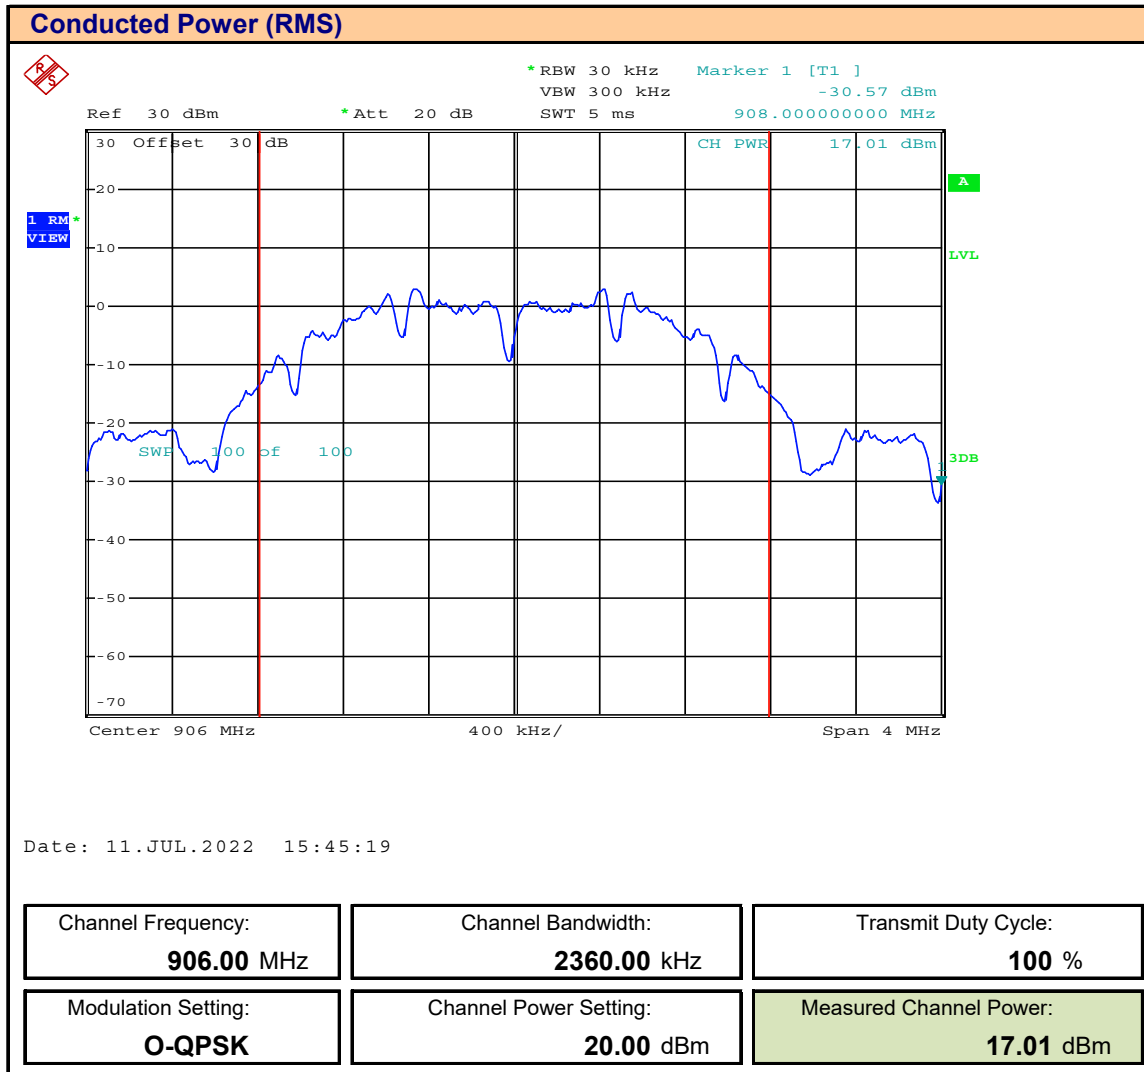

Plot 8.2 – Conducted Power, 916 MHz

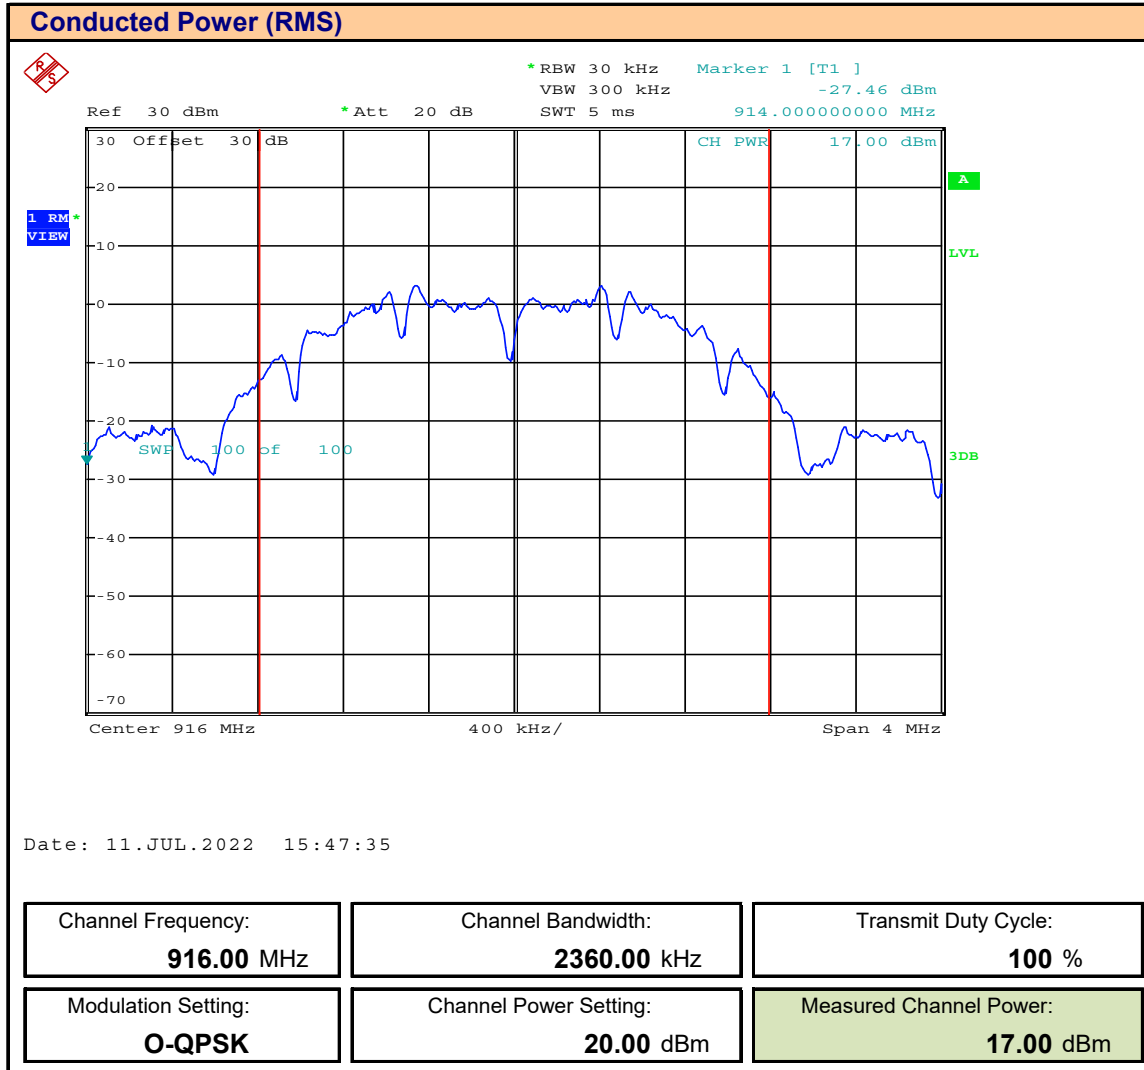

Plot 8.3 – Conducted Power, 924 MHz

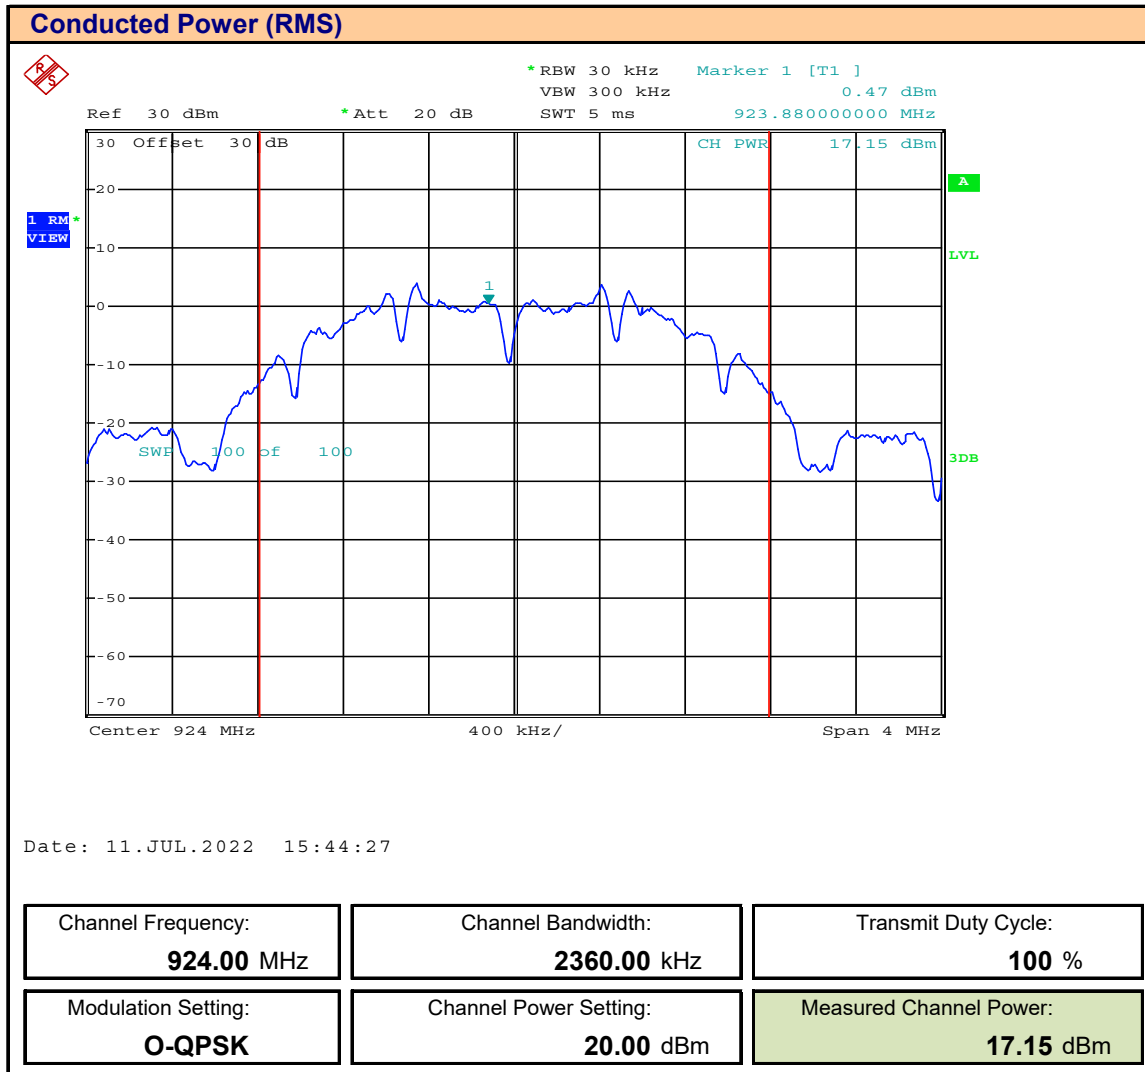


Table 10.1 – Summary of Conducted Power Measurements

§15.247(b)(3), RSS-247 (5.4)(d) Channel Output Power (RMS)							
Frequency (MHz)	BW (kHz)	Modulation	Power Setting ⁽¹⁾ (dBm)	Measured Power [E _{Meas}] (dBm)	Measured Power [E _{Meas}] (W)	Limit (W)	Margin (dB)
906.0	2360	O-QPSK	20	17.01	0.050	1.0	13.0
916.0				17.00	0.050		13.0
924.0				17.15	0.052		12.9
Results:						Complies	

(1) The output power is factory set to maximum
 Margin = 10*Log(Limit / E_{meas})

RSS-247 (5.4)(d) Channel EIRP (RMS)										
Frequency (MHz)	BW (kHz)	Modulation	Power Setting ⁽¹⁾ (dBm)	Measured Power [E _{Meas}] (dBm)	Antenna Gain ⁽²⁾ [G _T] (dBi)	Cable Loss [L _c] (dB)	EIRP (dBm)	EIRP (W)	Limit (W)	Margin (dB)
906.0	2360	O-QPSK	20	17.01	11	0.5	28.51	0.71	4.0	7.5
916.0				17.00			28.50	0.71		7.5
924.0				17.15			28.65	0.73		7.4
Results:									Complies	

EIRP (dBm) = E_{Meas} + G_T + L_C

Margin = Limit - EIRP in dB

- (1) The output power is factory set to maximum
- (2) Maximum permissible gain

Note: Information on antenna gain provided by applicant

9.0 RADIATED TX EMISSIONS – RESTRICTED BAND


Test Procedure

Normative Reference	FCC 47 CFR §2.1051, §15.247(d), §15.205(a), §15.205(c), §15.209(a)
	KDB 558074 (8.6), ANSI C63.10 (11.12)


Limits

47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																
47 CFR §15.209(a)	<p>§15.209 Radiated emission limits; general requirements.</p> <p>(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field Strength (microvolts/meter)</th> </tr> </thead> <tbody> <tr> <td>0.009 - 0.490</td> <td>2400/F (kHz) @300m</td> </tr> <tr> <td>0.490 - 1.705</td> <td>24000/F (kHz) @30m</td> </tr> <tr> <td>1.705 - 30</td> <td>30 @ 30m</td> </tr> <tr> <td>30 - 88</td> <td>100 @3m</td> </tr> <tr> <td>88 - 216</td> <td>150 @3m</td> </tr> <tr> <td>216 - 960</td> <td>200 @3m</td> </tr> <tr> <td>Above 960</td> <td>500 @3m</td> </tr> </tbody> </table>	Frequency (MHz)	Field Strength (microvolts/meter)	0.009 - 0.490	2400/F (kHz) @300m	0.490 - 1.705	24000/F (kHz) @30m	1.705 - 30	30 @ 30m	30 - 88	100 @3m	88 - 216	150 @3m	216 - 960	200 @3m	Above 960	500 @3m
Frequency (MHz)	Field Strength (microvolts/meter)																
0.009 - 0.490	2400/F (kHz) @300m																
0.490 - 1.705	24000/F (kHz) @30m																
1.705 - 30	30 @ 30m																
30 - 88	100 @3m																
88 - 216	150 @3m																
216 - 960	200 @3m																
Above 960	500 @3m																


Plot 9.1 – Radiated Tx Emissions, 30 – 1000MHz, EA000344, Horizontal

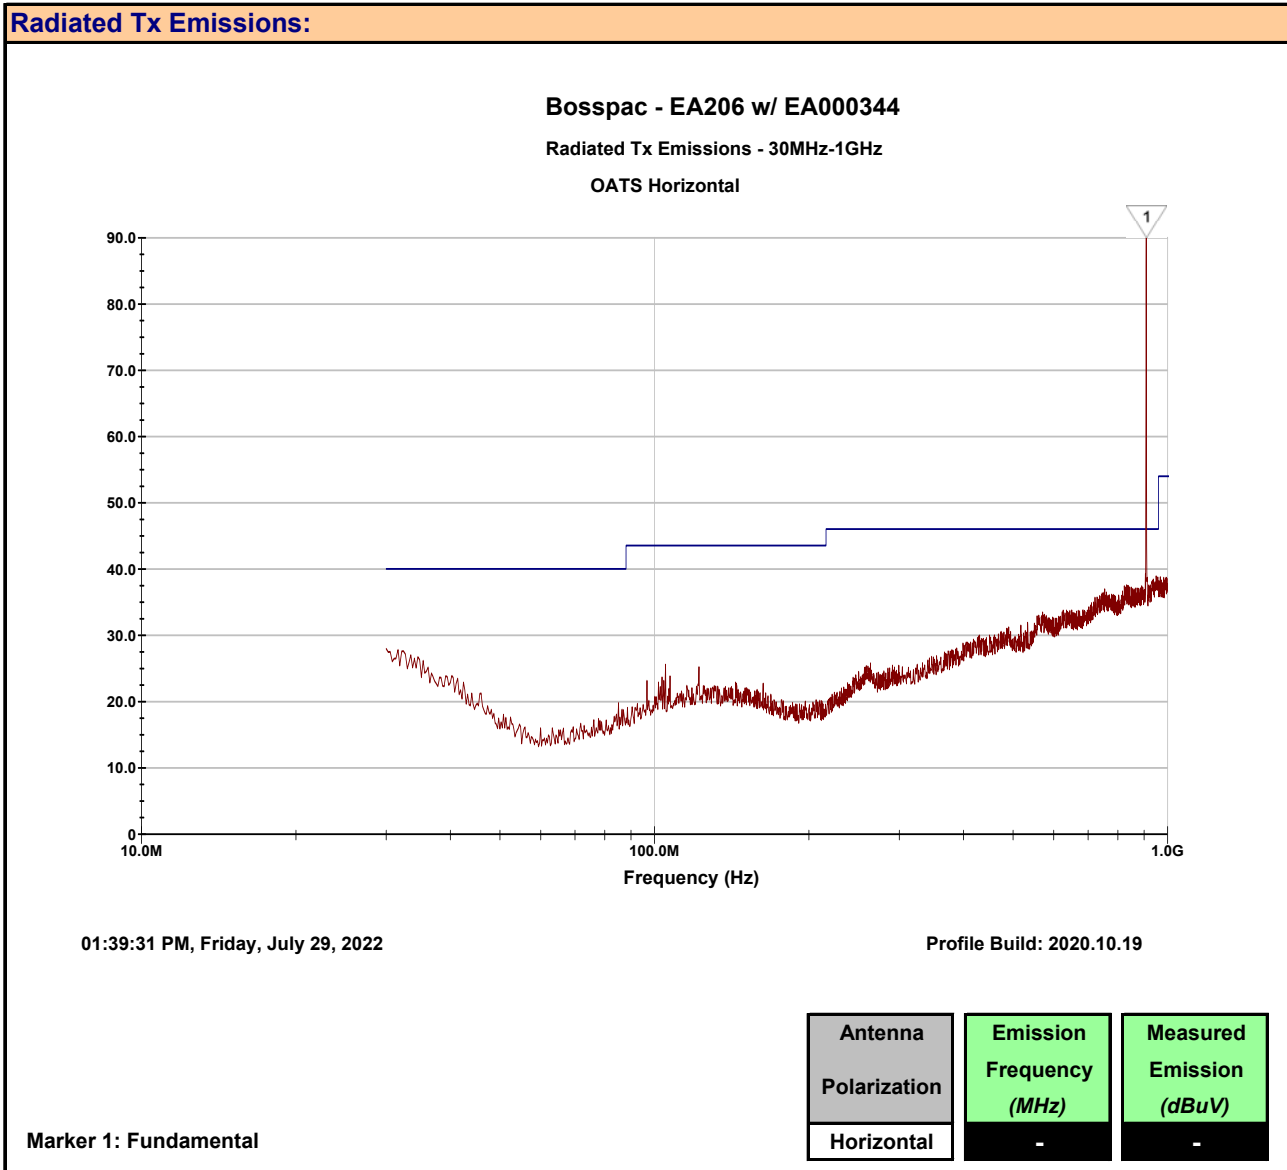


Plot 9.2 – Radiated Tx Emissions, 30 – 1000MHz, EA000344, Vertical

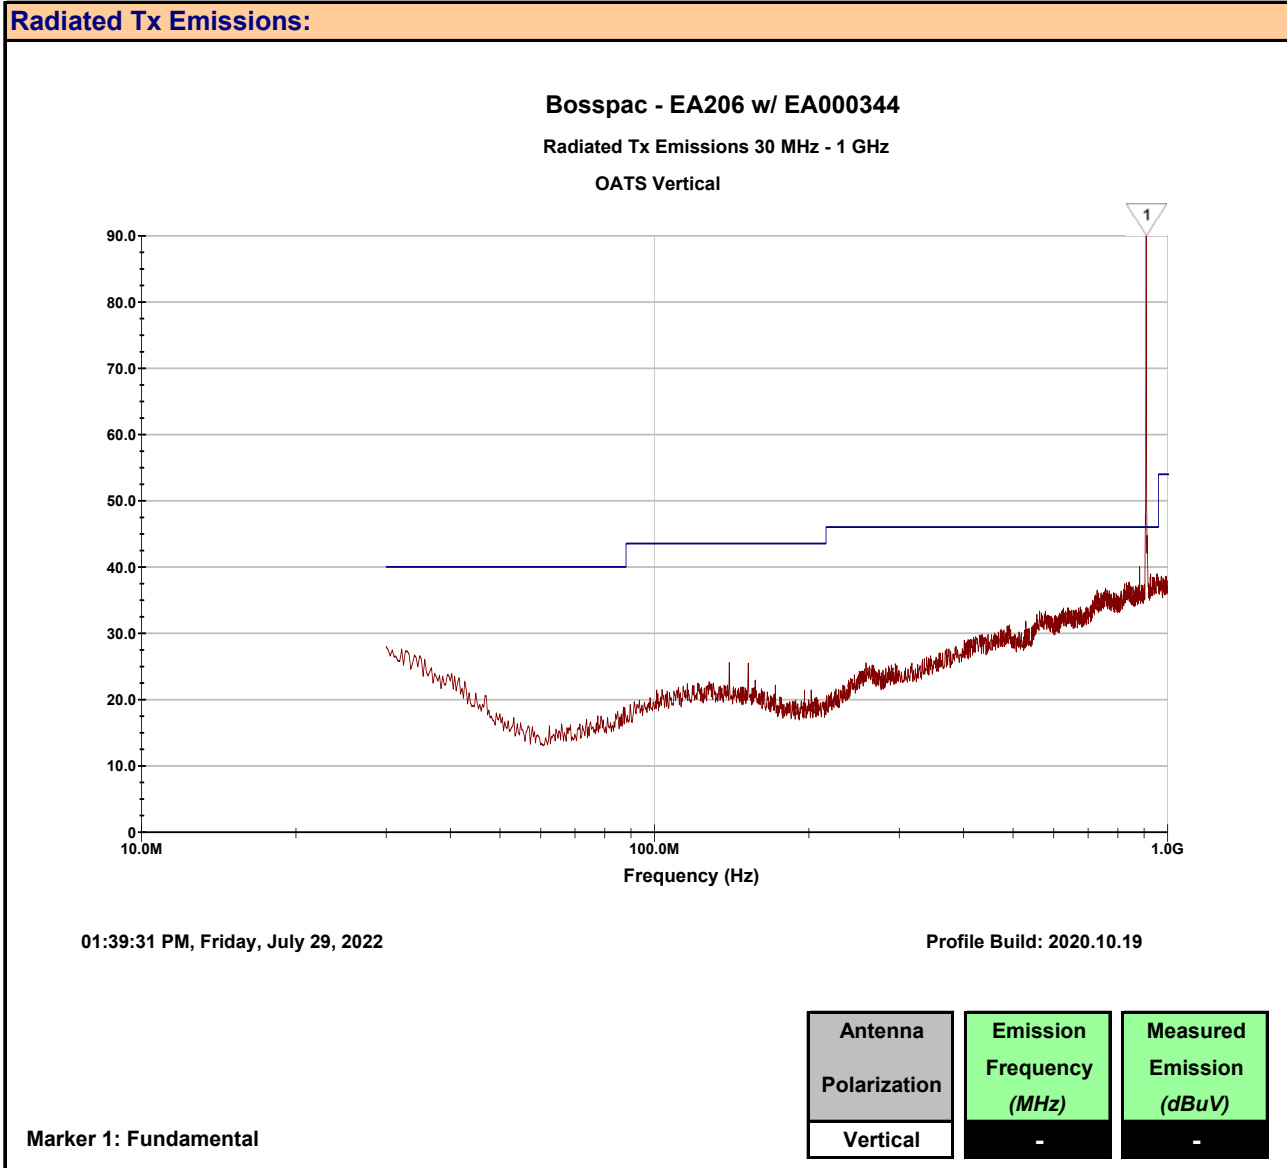


Plot 9.3 – Radiated Tx Emissions, 30 – 1000MHz, EA000406, Horizontal

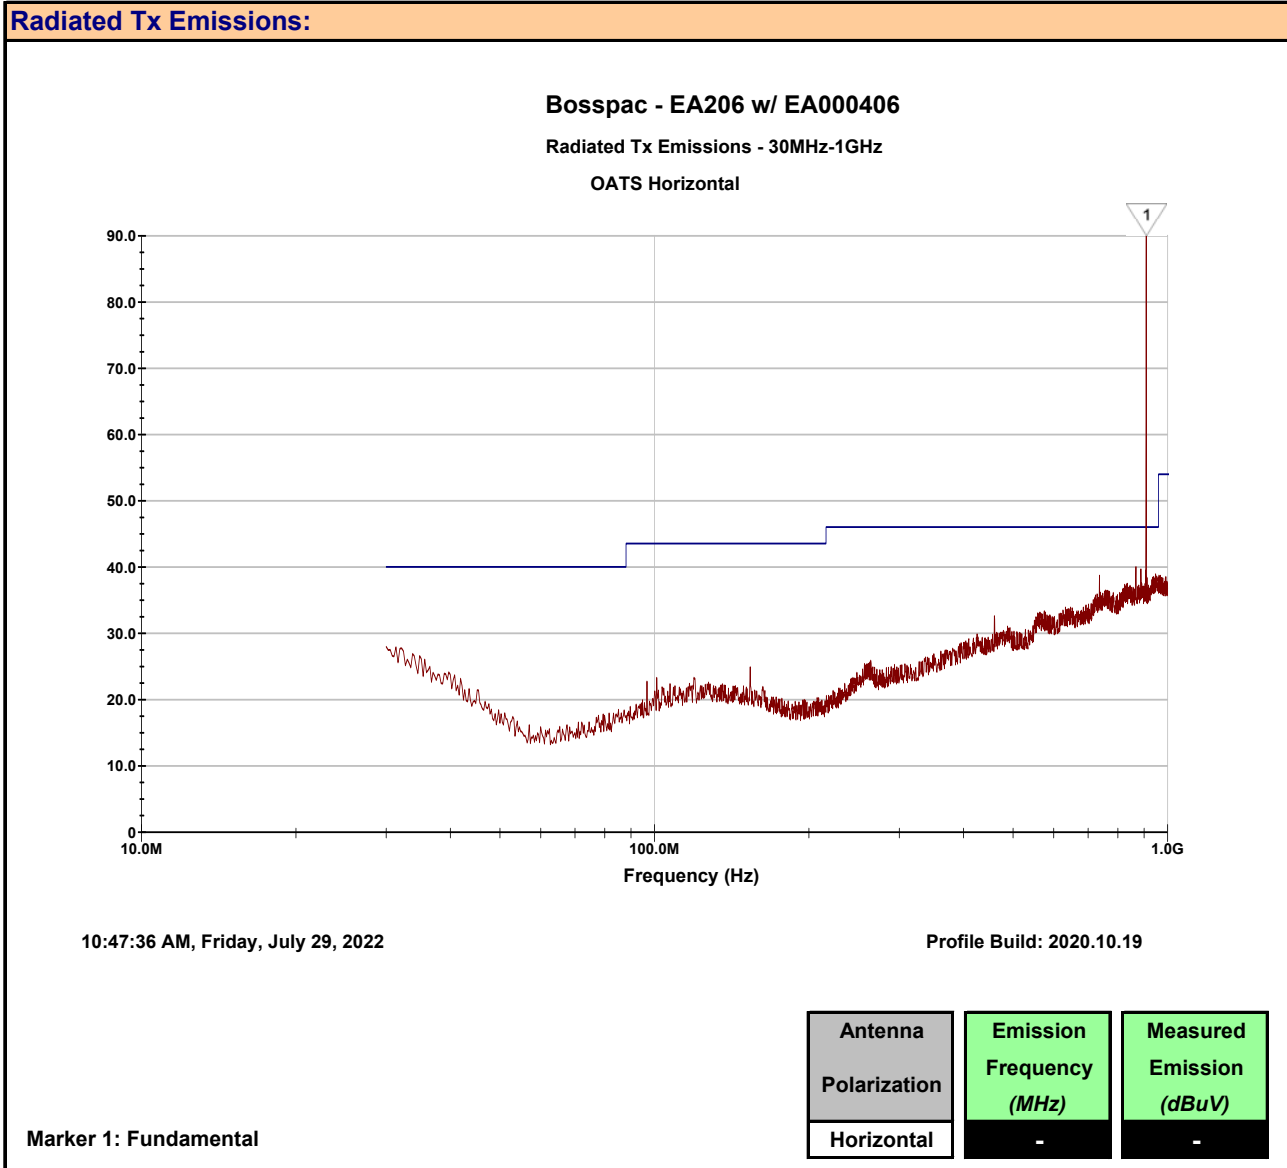


Plot 9.4 – Radiated Tx Emissions, 30 – 1000MHz, EA000406, Vertical

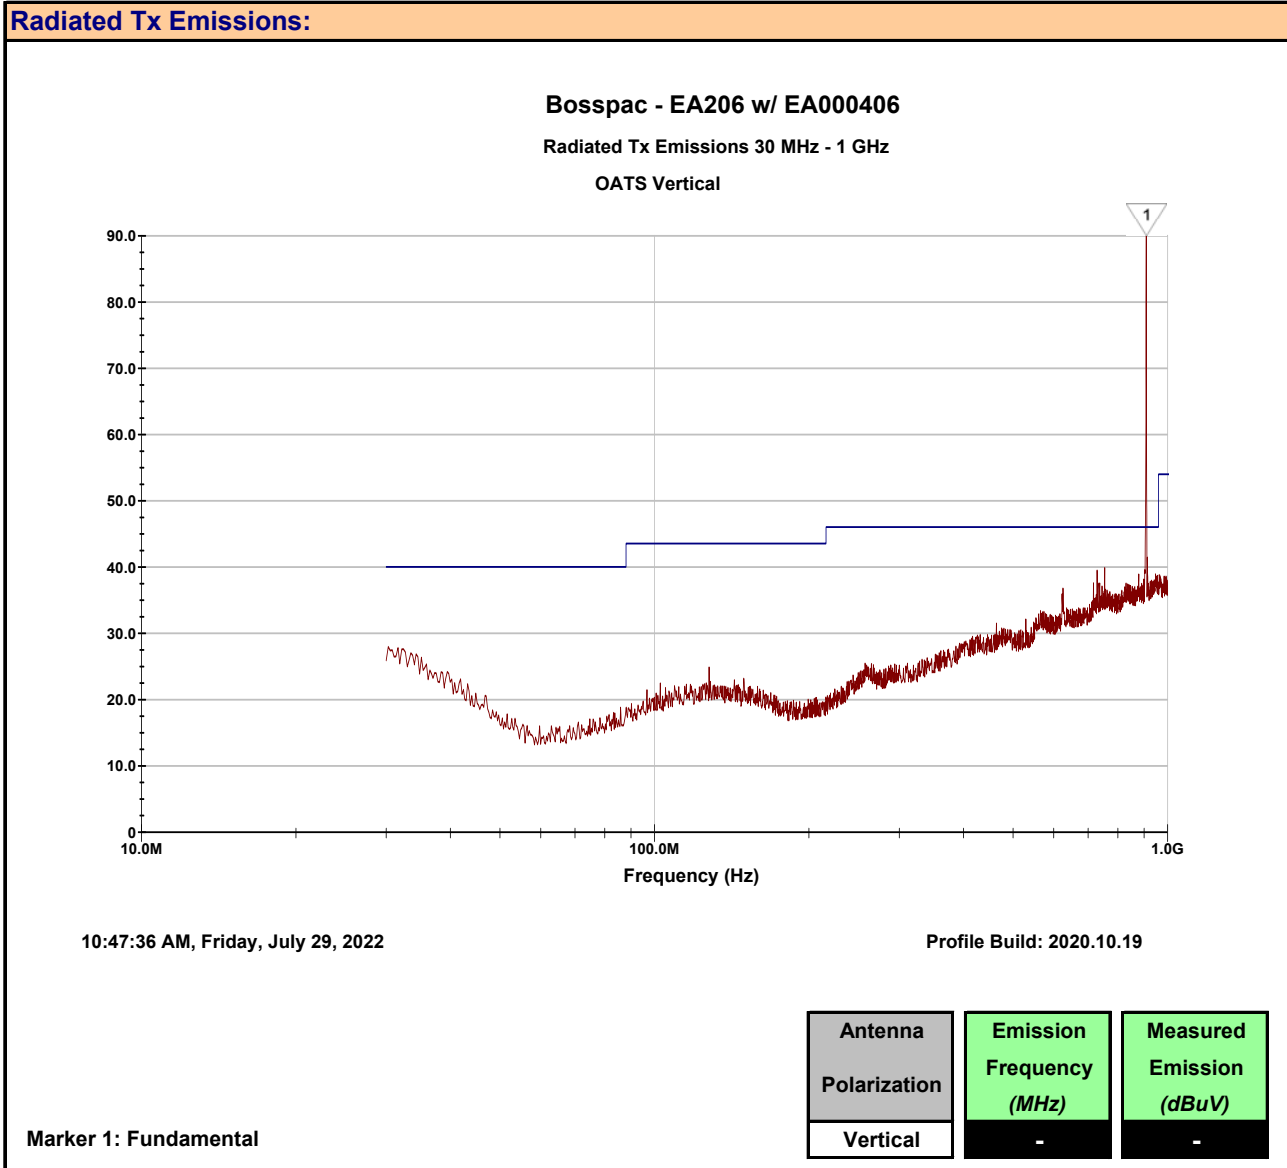


Plot 9.5 – Radiated Tx Emissions, 1 – 3GHz, EA000344, Horizontal

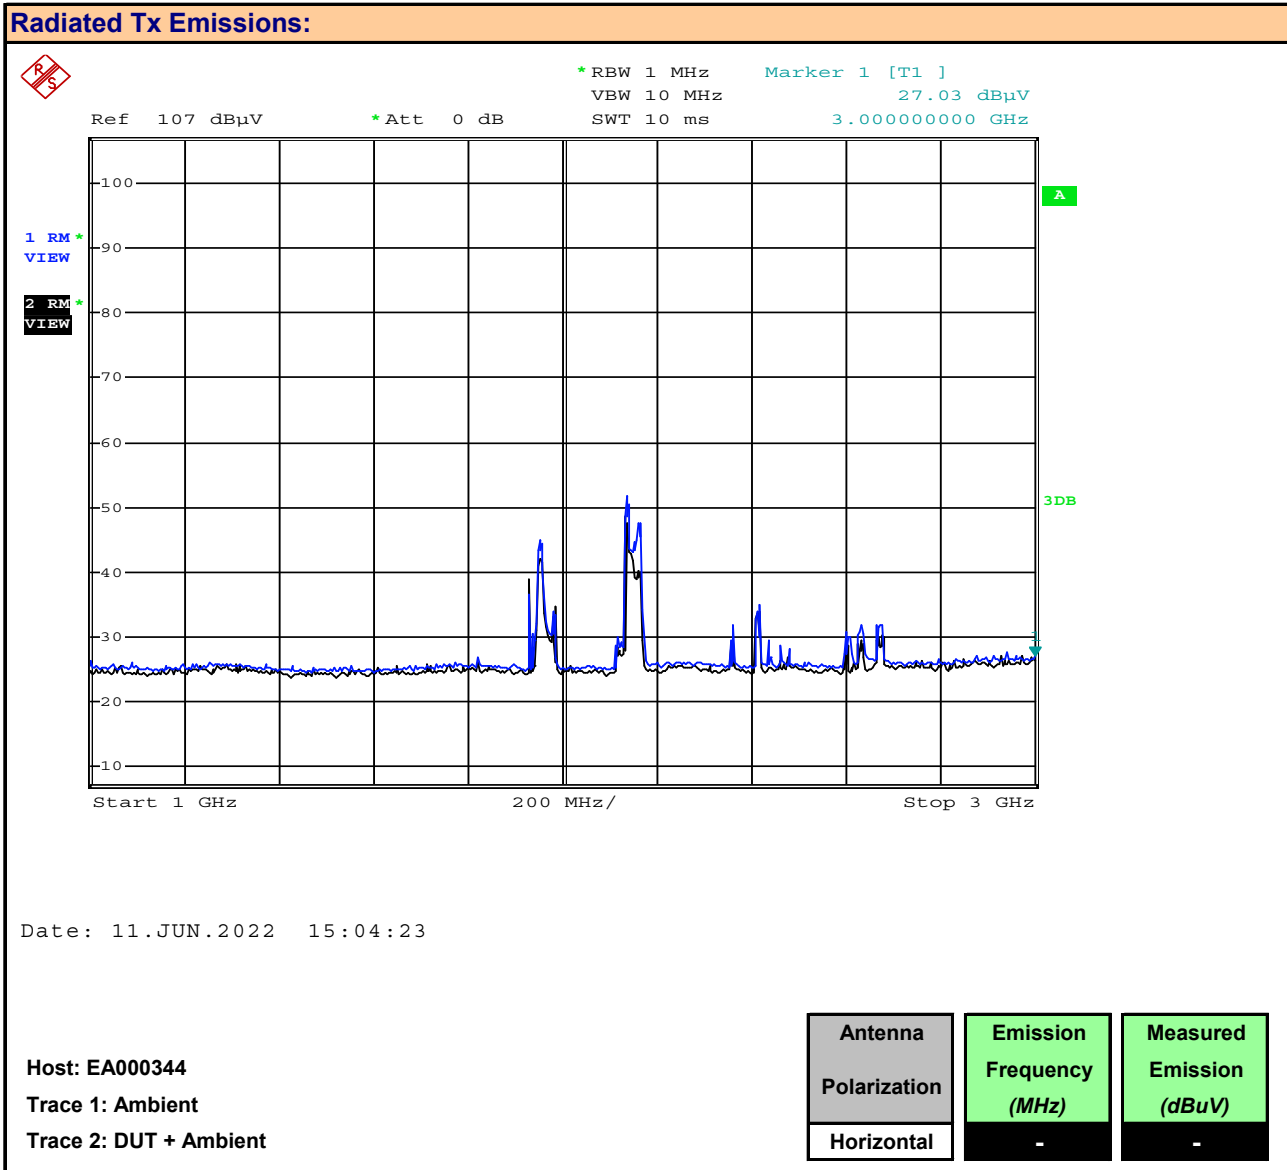


Plot 9.6 – Radiated Tx Emissions, 1 – 3GHz, EA000344, Vertical

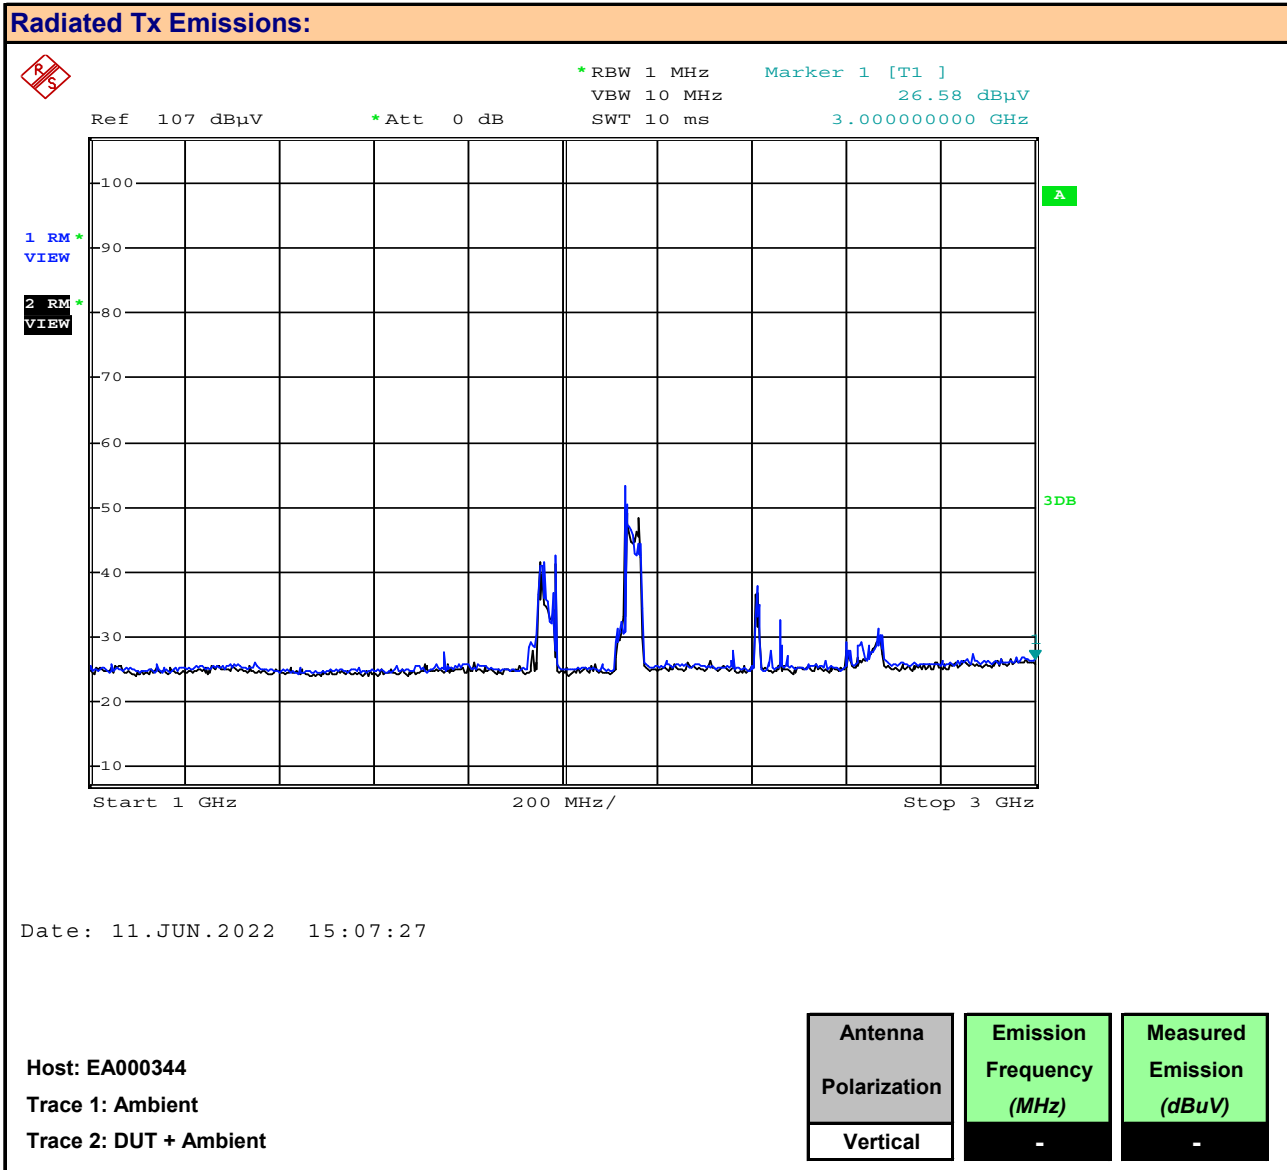


Plot 9.7 – Radiated Tx Emissions, 3 - 10GHz, EA000344, Horizontal

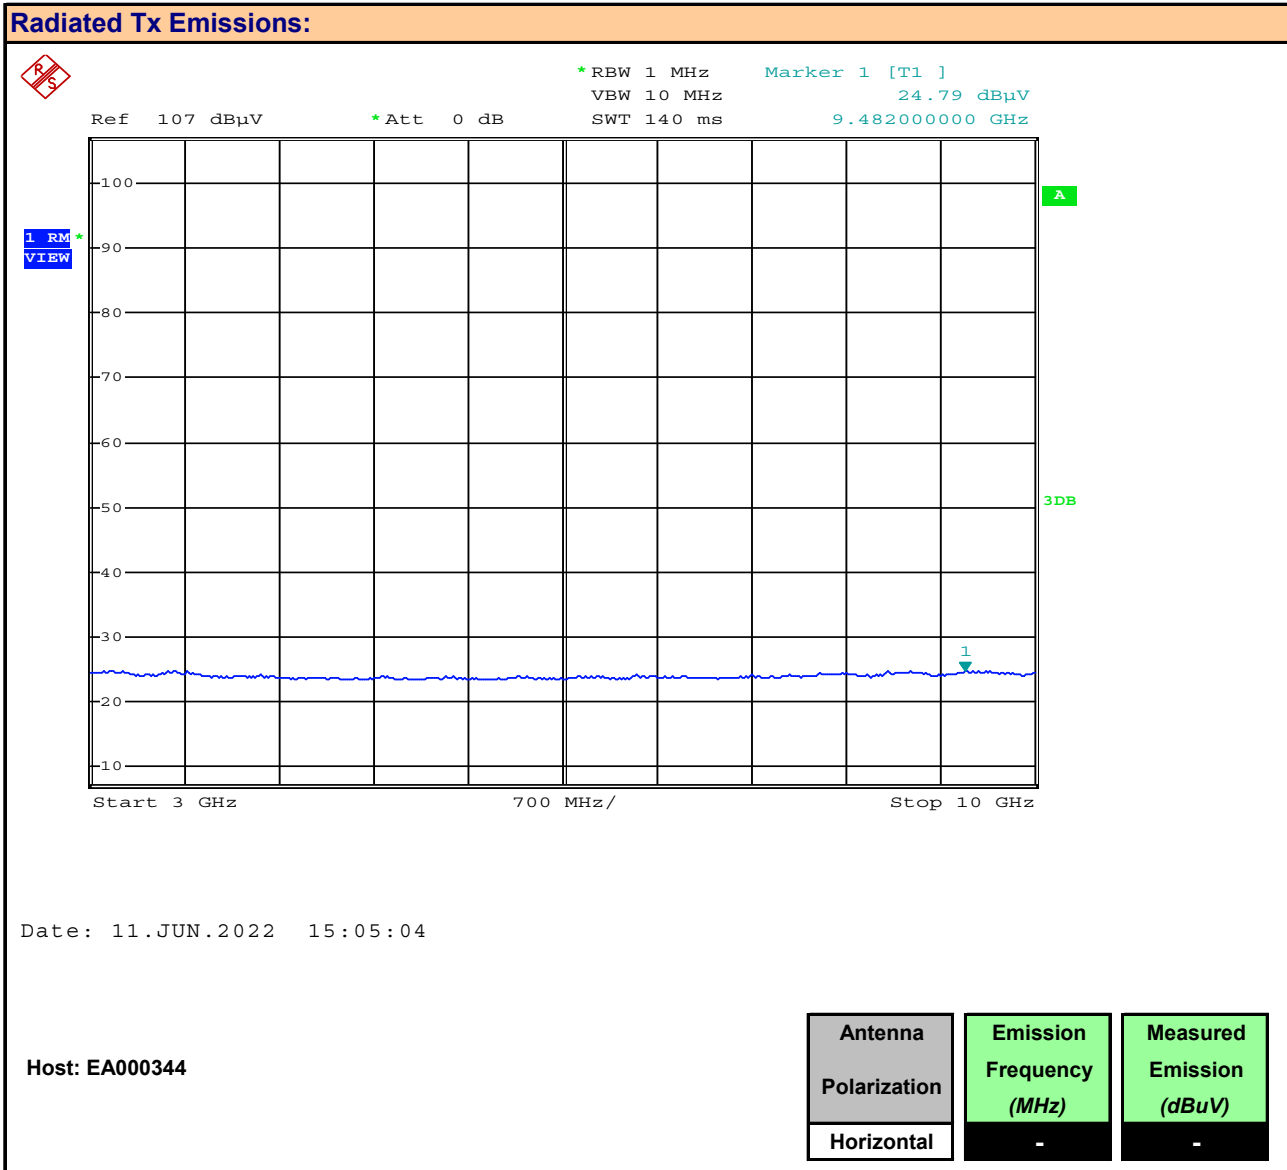


Plot 9.9 – Radiated Tx Emissions, 2nd Harmonic, EA000344, Horizontal

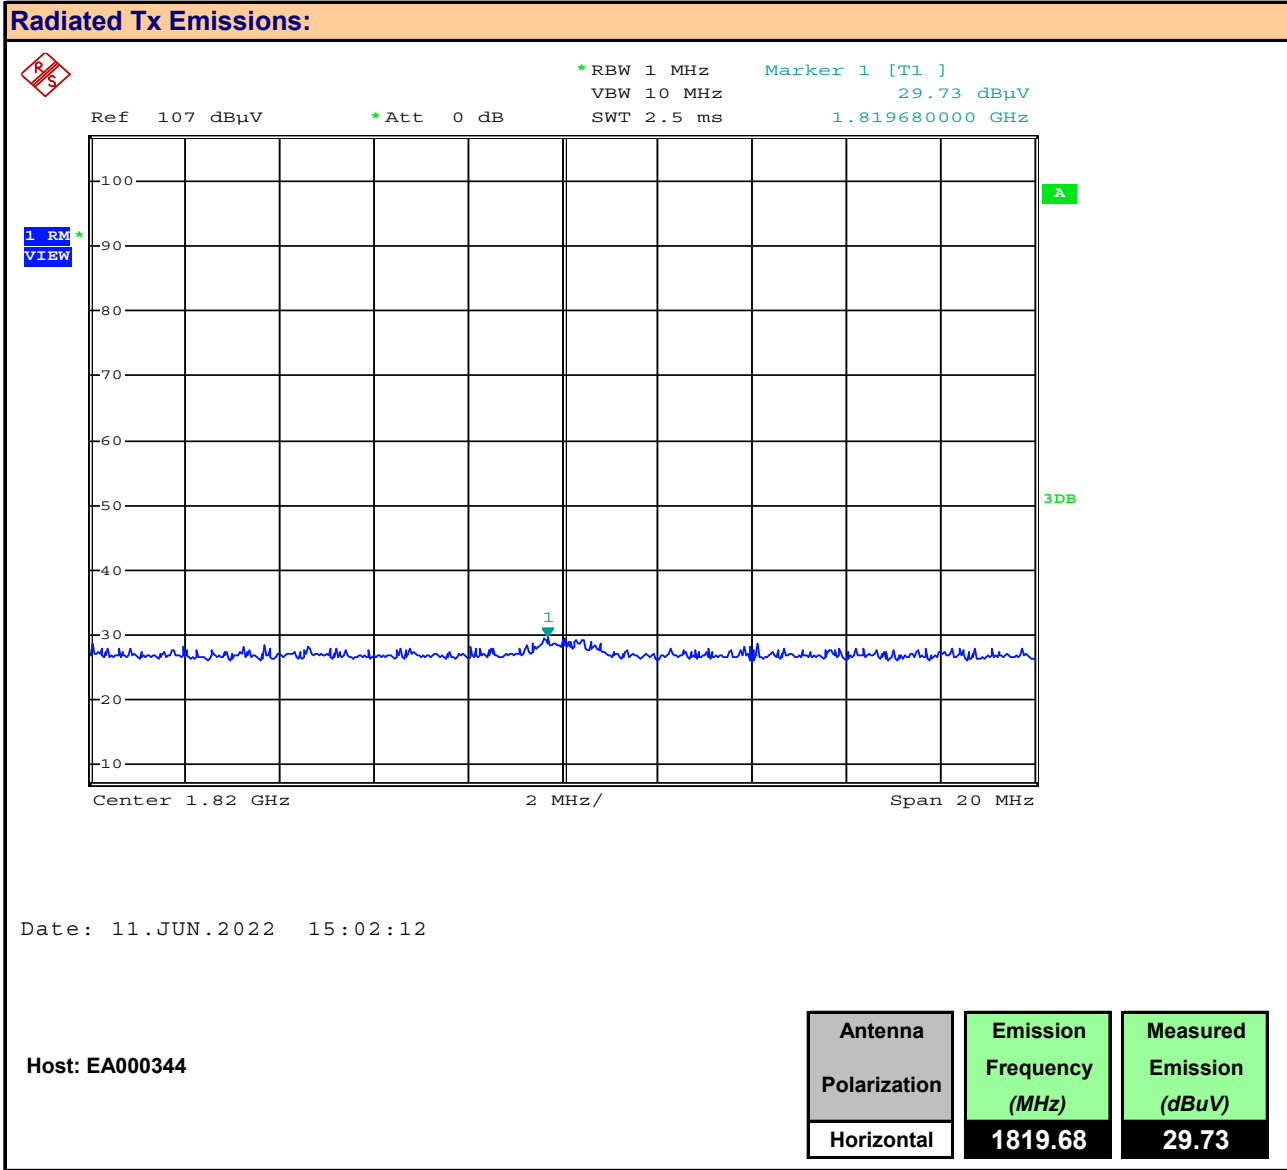


Plot 9.10 – Radiated Tx Emissions, 2nd Harmonic, EA000344, Vertical

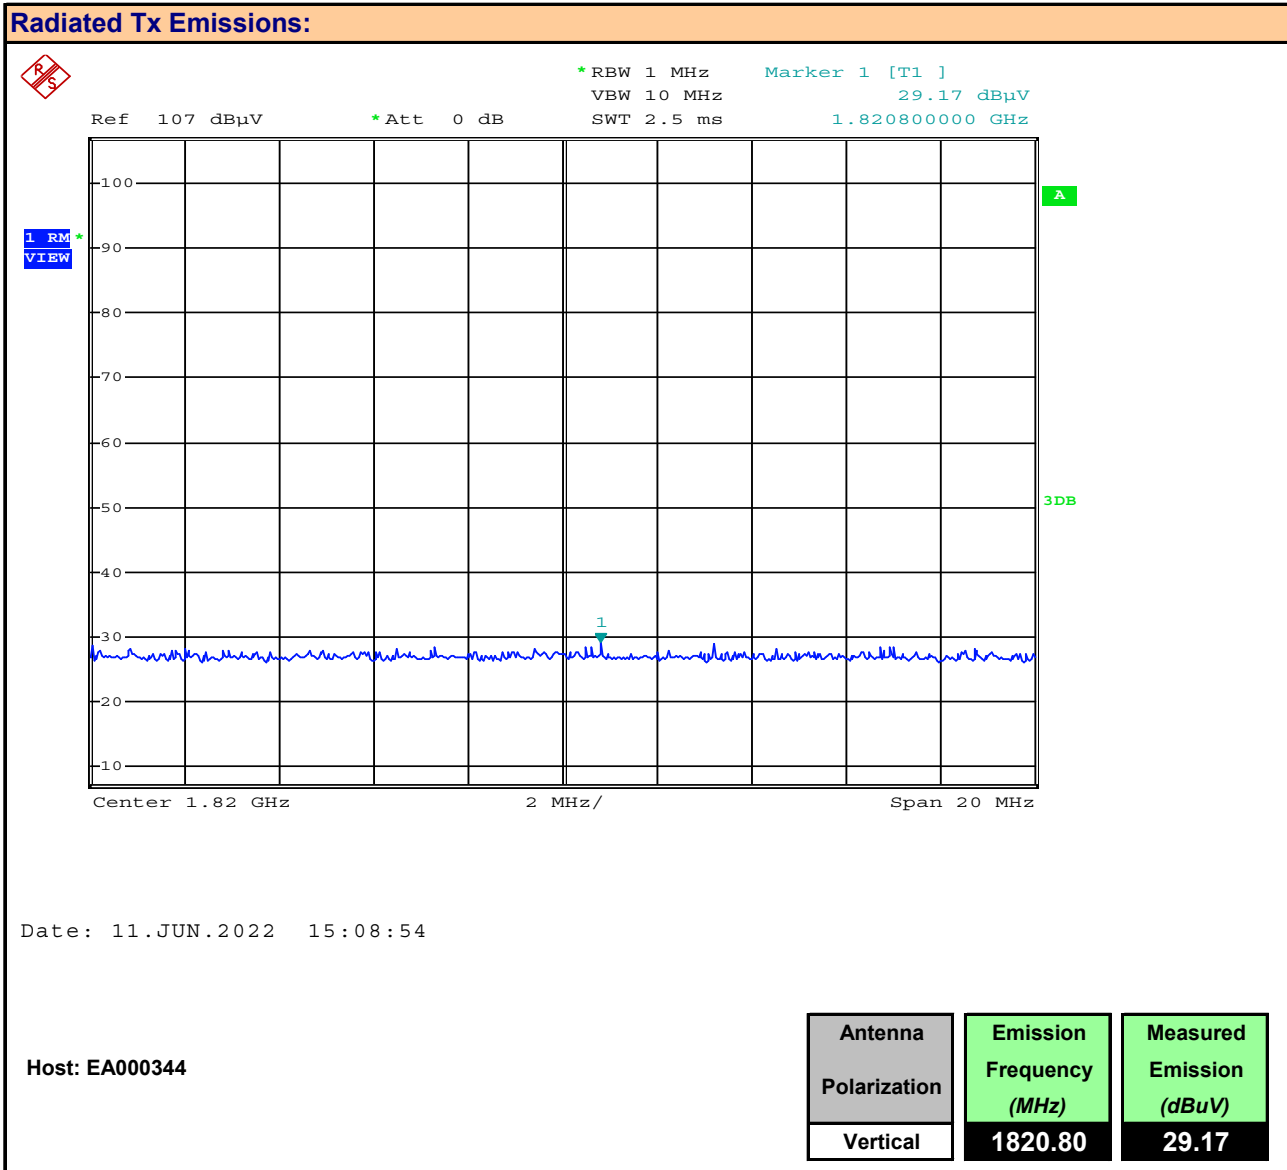


Plot 9.11 – Radiated Tx Emissions, 1 – 3GHz, EA000406, Horizontal

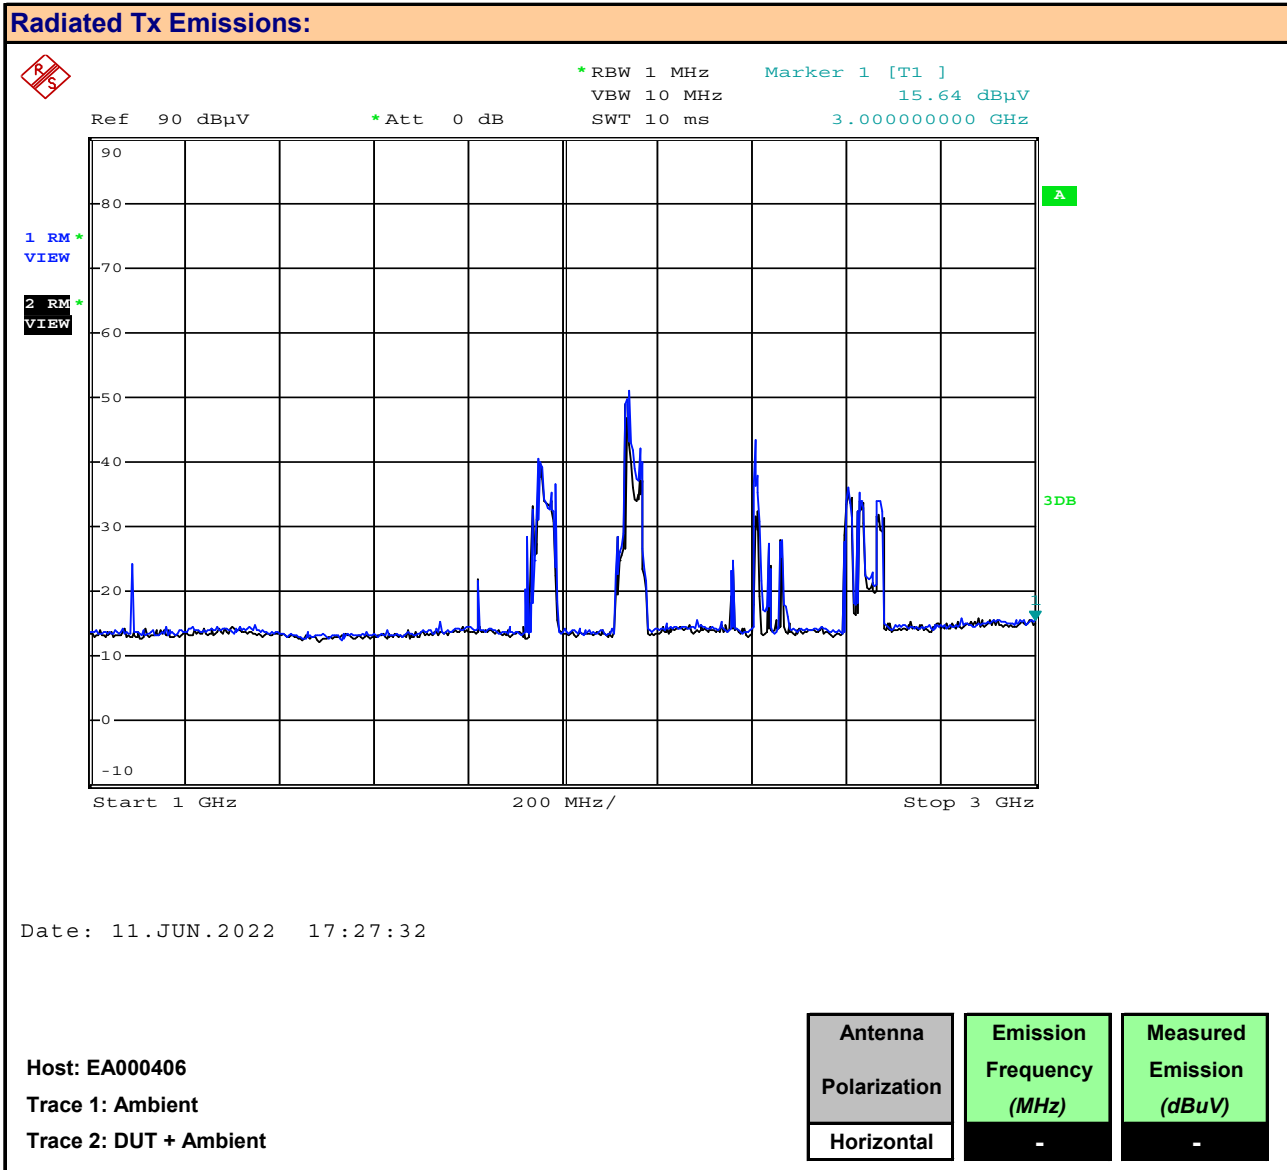


Plot 9.12 – Radiated Tx Emissions, 1 – 3GHz, EA000406, Vertical

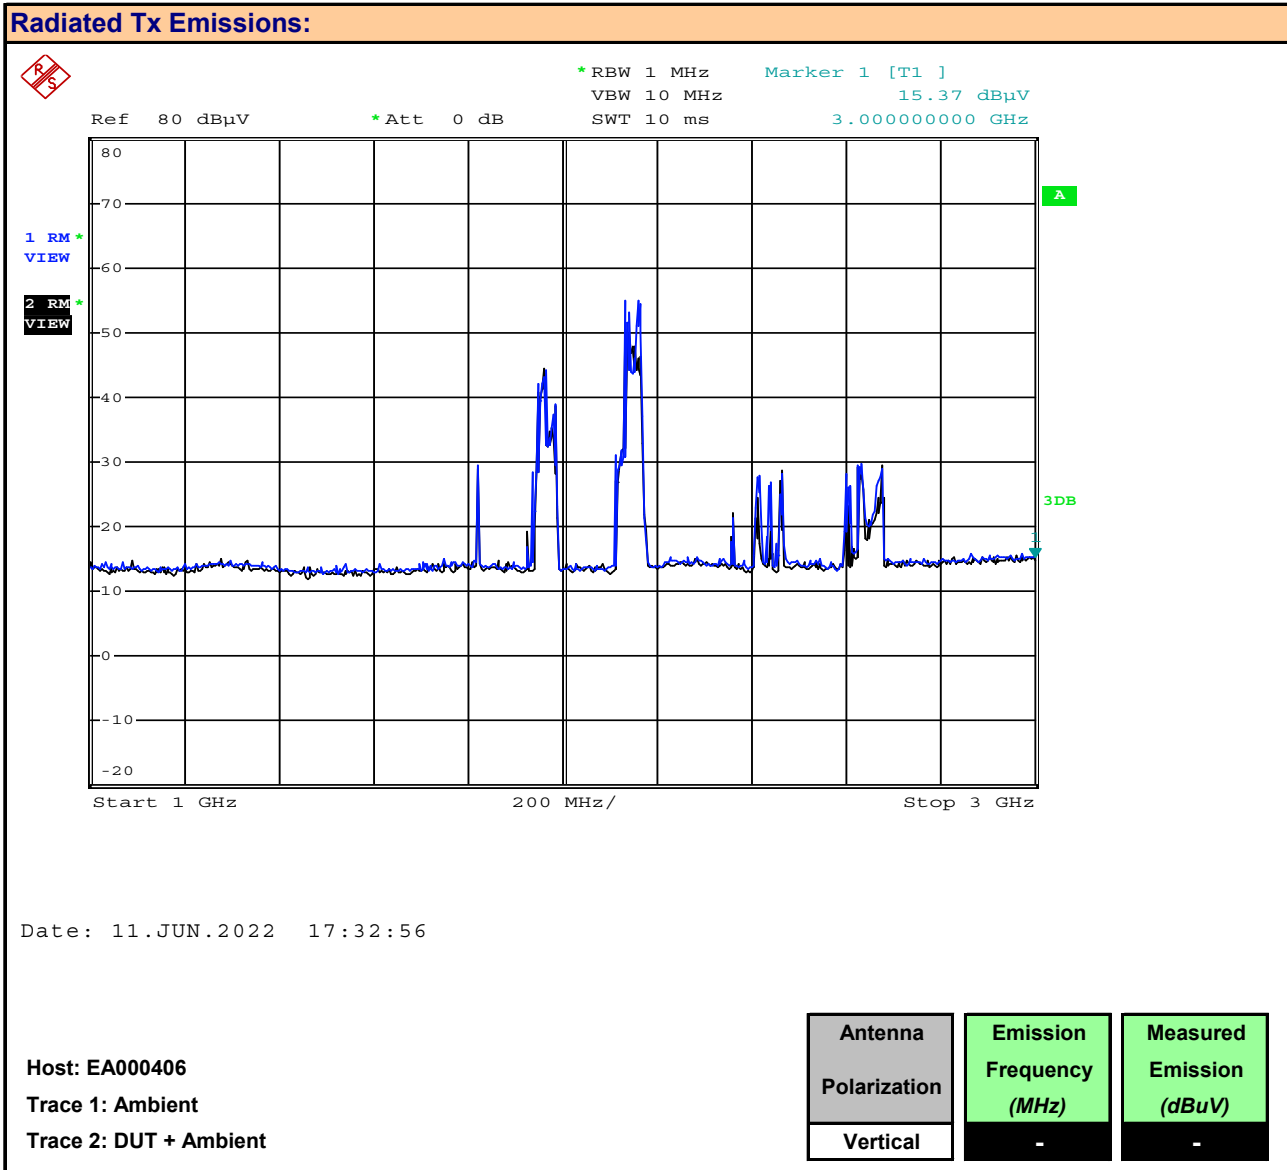


Plot 9.13 – Radiated Tx Emissions, 3 - 10GHz, EA000406, Horizontal

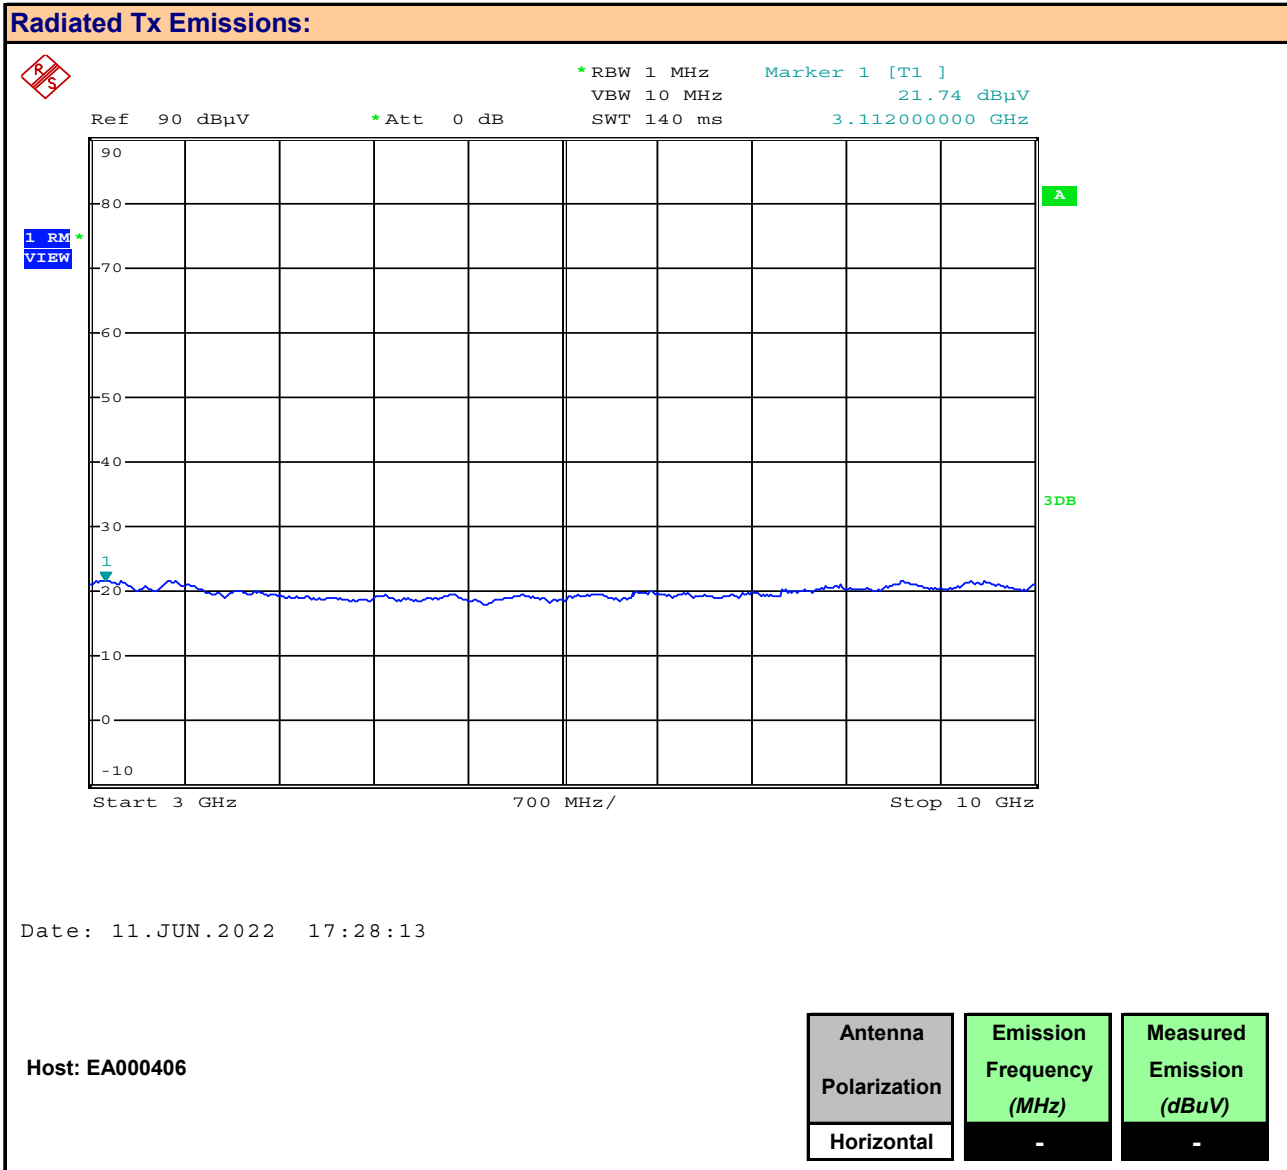

Plot 9.14 – Radiated Tx Emissions, 3 - 10GHz, EA000406, Vertical

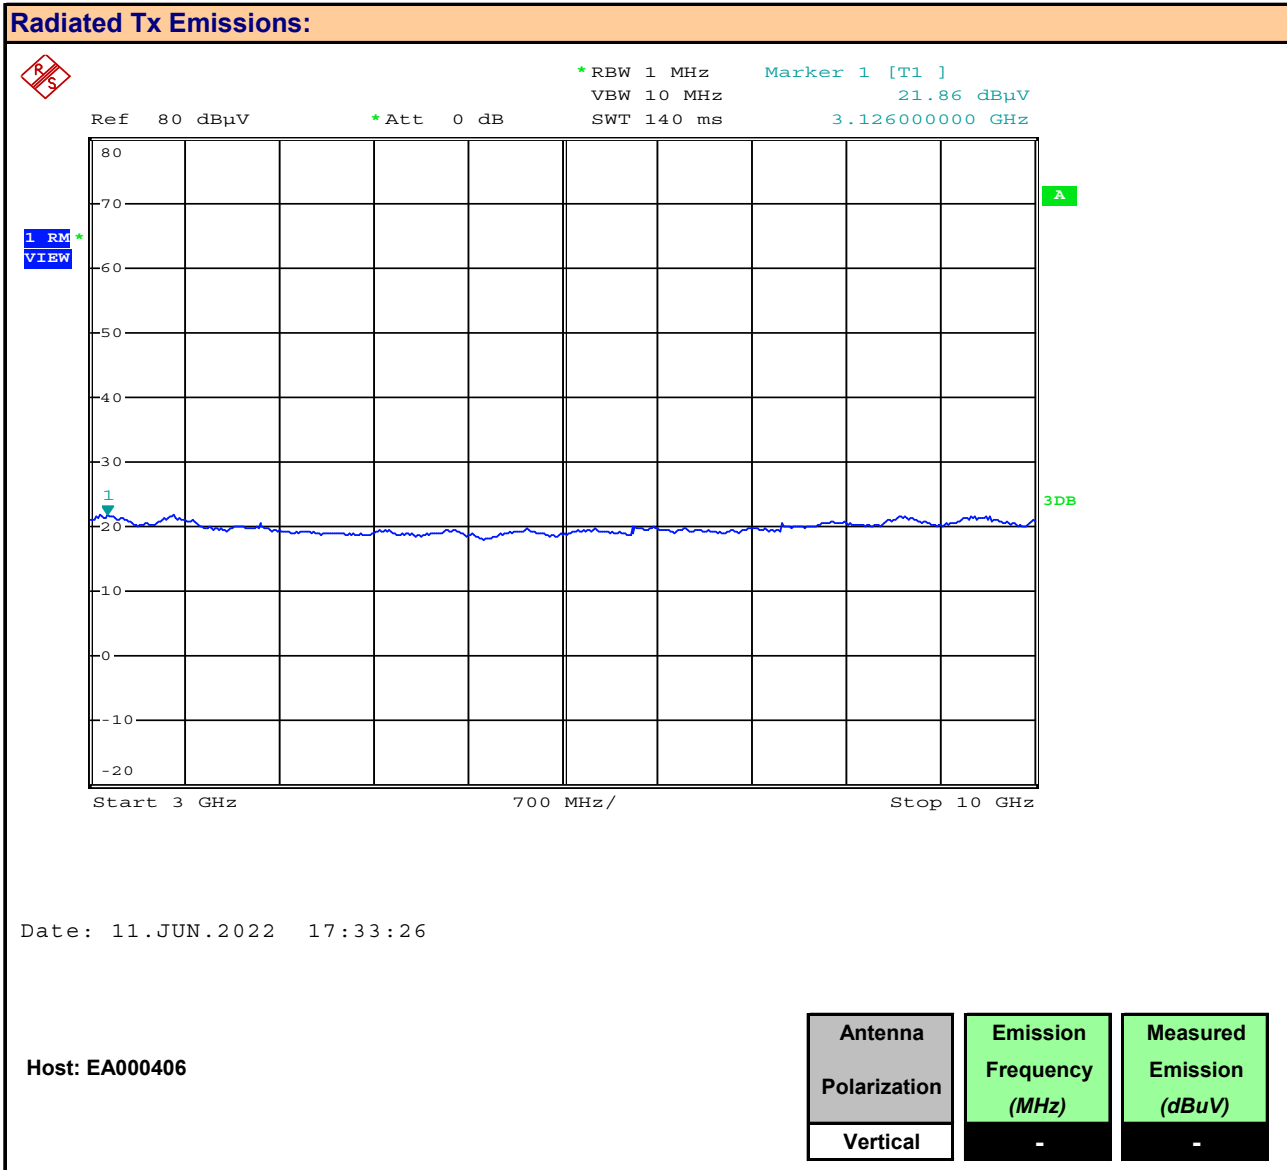

Plot 9.15 – Radiated Tx Emissions, 2nd Harmonic, EA000406, Horizontal

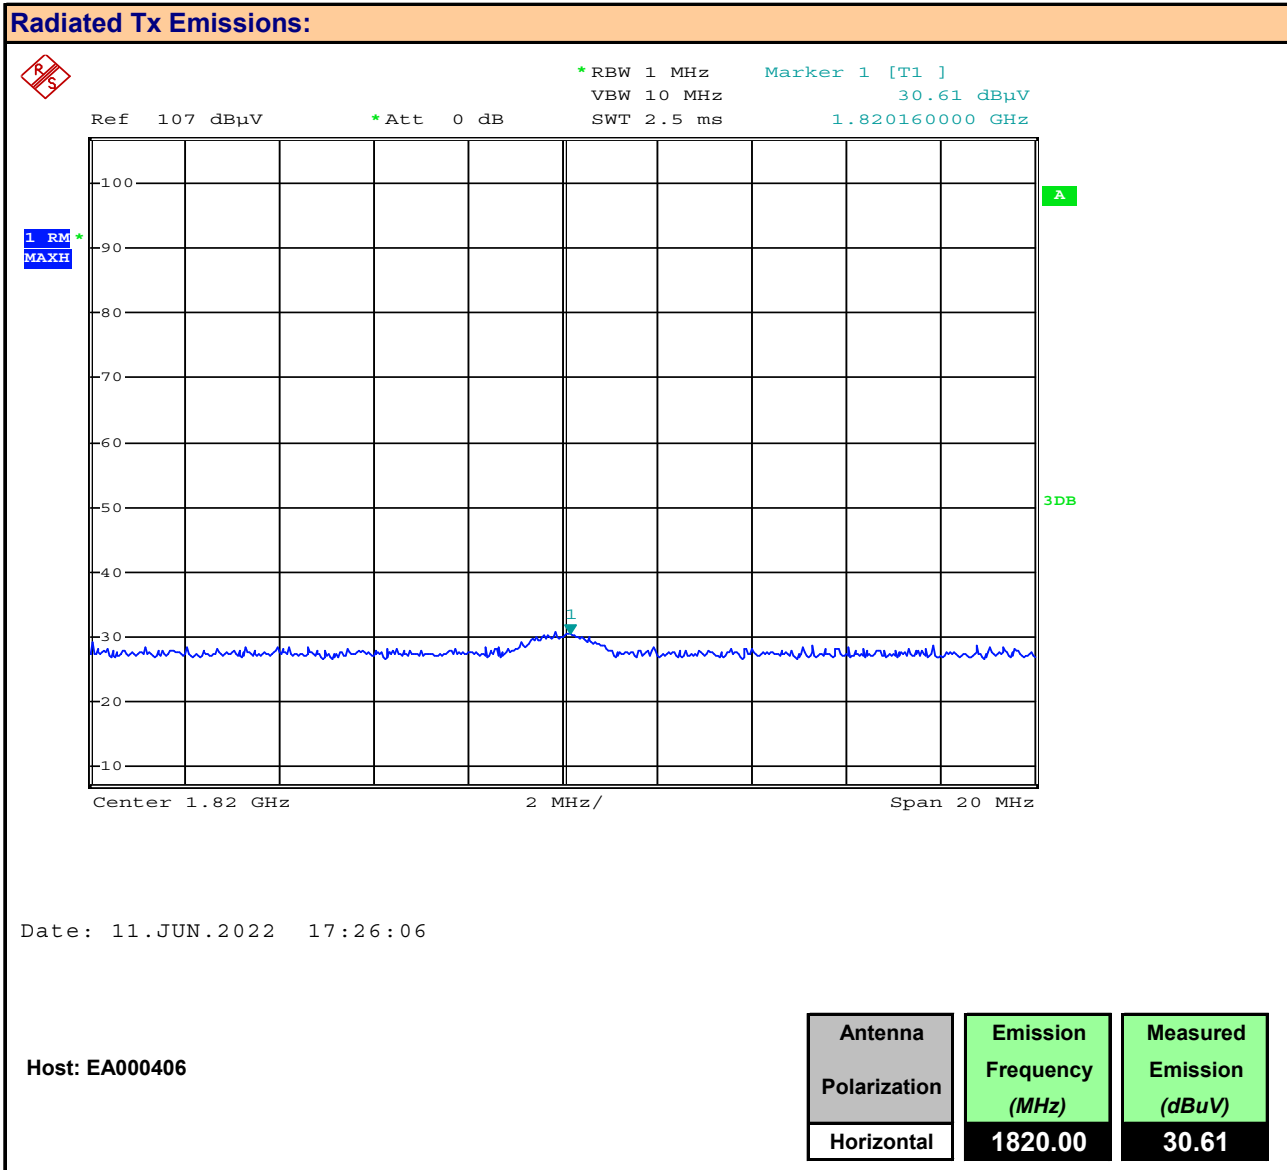

Plot 9.16 – Radiated Tx Emissions, 2nd Harmonic, EA000406, Vertical

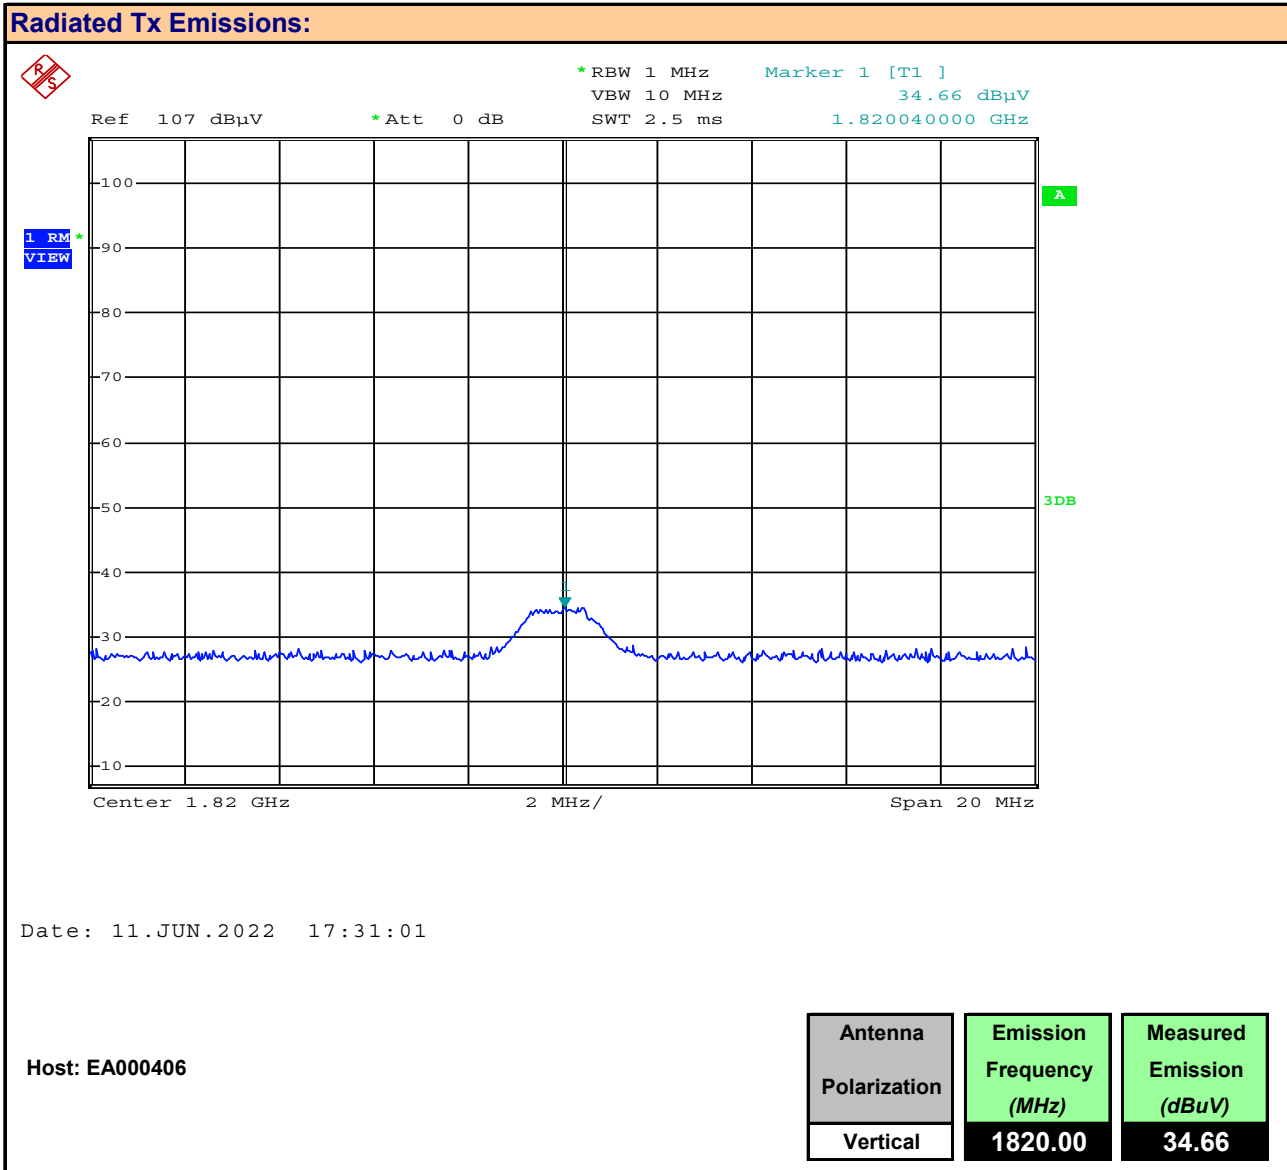


Table 9.1 – Summary of Radiated Tx Measurements

Summary of Radiated Tx Emissions												
Host HVIN	Measured Frequency Range (MHz)	Channel Frequency (MHz)	Antenna Polarization	Emission Frequency	Measured Emission [E _{Meas}] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L _C] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{Corr}] (dBuV/m)	Limit (dBuV)	Margin (dB)	
EA000344	30-1000MHz	910.000	Horizontal	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	94.0	n/a	
	30-1000MHz	910.000	Vertical	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	94.0	n/a	
	1 - 10GHz	910.000	Horizontal	1819.68 MHz	29.7	26.64	3.14	0.00 (3)	59.5 (2)	94.0	34.5	
	1 - 10GHz	910.000	Vertical	1820.80 MHz	29.2	26.64	3.14	0.00 (3)	58.9 (2)	94.0	35.1	
	1 - 10GHz	910.000	Horizontal	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	94.0	n/a	
	1 - 10GHz	910.000	Vertical	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	94.0	n/a	
EA000406	30-1000MHz	910.000	Horizontal	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	94.0	n/a	
	30-1000MHz	910.000	Vertical	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	94.0	n/a	
	1 - 10GHz	910.000	Horizontal	1820.00 MHz	30.6	26.64	3.14	0.00 (3)	60.4 (2)	94.0	33.6	
	1 - 10GHz	910.000	Vertical	1820.00 MHz	34.7	26.64	3.14	0.00 (3)	64.4 (2)	94.0	29.6	
	1 - 10GHz	910.000	Horizontal	ND MHz	ND	n/a	n/a	0.00 (3)	ND	94.0	n/a	
	1 - 10GHz	910.000	Vertical	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	94.0	n/a	
Results:										Complies		

- (1) No Emissions Detected (ND) above ambient or within 20dB of the limit
- (2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor
- (3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + ACF^E + L_C - G_A$$

Where ACF^E is the Electric Antenna Correction Factor

10.0 RADIATED RX EMISSIONS

Test Procedure

Normative Reference	FCC 47 CFR §15.109, ICES-003(6.2) ANSI C63.4-2014
----------------------------	------------------------------------------------------

Limits


47 CFR §15.109	(b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the following: 30-88MHz: 39.1dBuV/m 88-216MHz: 43.5dBuV/m 216-960MHz: 46.4dBuV/m > 960MHz: 49.5dBuV/m	30-88MHz: 49.6dBuV/m @ 3m 88-216MHz: 54.0dBuV/m @ 3m 216-960MHz: 56.9dBuV/m @ 3m > 960MHz: 60.0dBuV/m @ 3m
ICES-003(6.2.1)	6.2.1 - Radiated Emissions Limits Below 1 GHz Class A: ITE that meets the conditions for Class A operation defined in Section 2.2 shall comply with the Class A radiated limits set out in Table 4 determined at a distance of 10 metres. 30-88MHz: 39.1dBuV/m 88-216MHz: 43.5dBuV/m 216-960MHz: 46.4dBuV/m > 960MHz: 49.5dBuV/m	
		30-88MHz: 49.6dBuV/m @ 3m 88-216MHz: 54.0dBuV/m @ 3m 216-960MHz: 56.9dBuV/m @ 3m > 960MHz: 60.0dBuV/m @ 3m

Test Setup	Appendix A	Figure A.1
-------------------	-------------------	-------------------


Measurement Procedure

The DUT was set up as per ANSI C63.4:2014. Emissions were scanned between 30MHz and 1000MHz. The turntable was rotated 360 degrees and the antenna was elevated to 4m to optimize the measured emissions.


Plot 10.1 – Radiated Rx Emissions, 30 - 1000MHz, EA000344, Horizontal

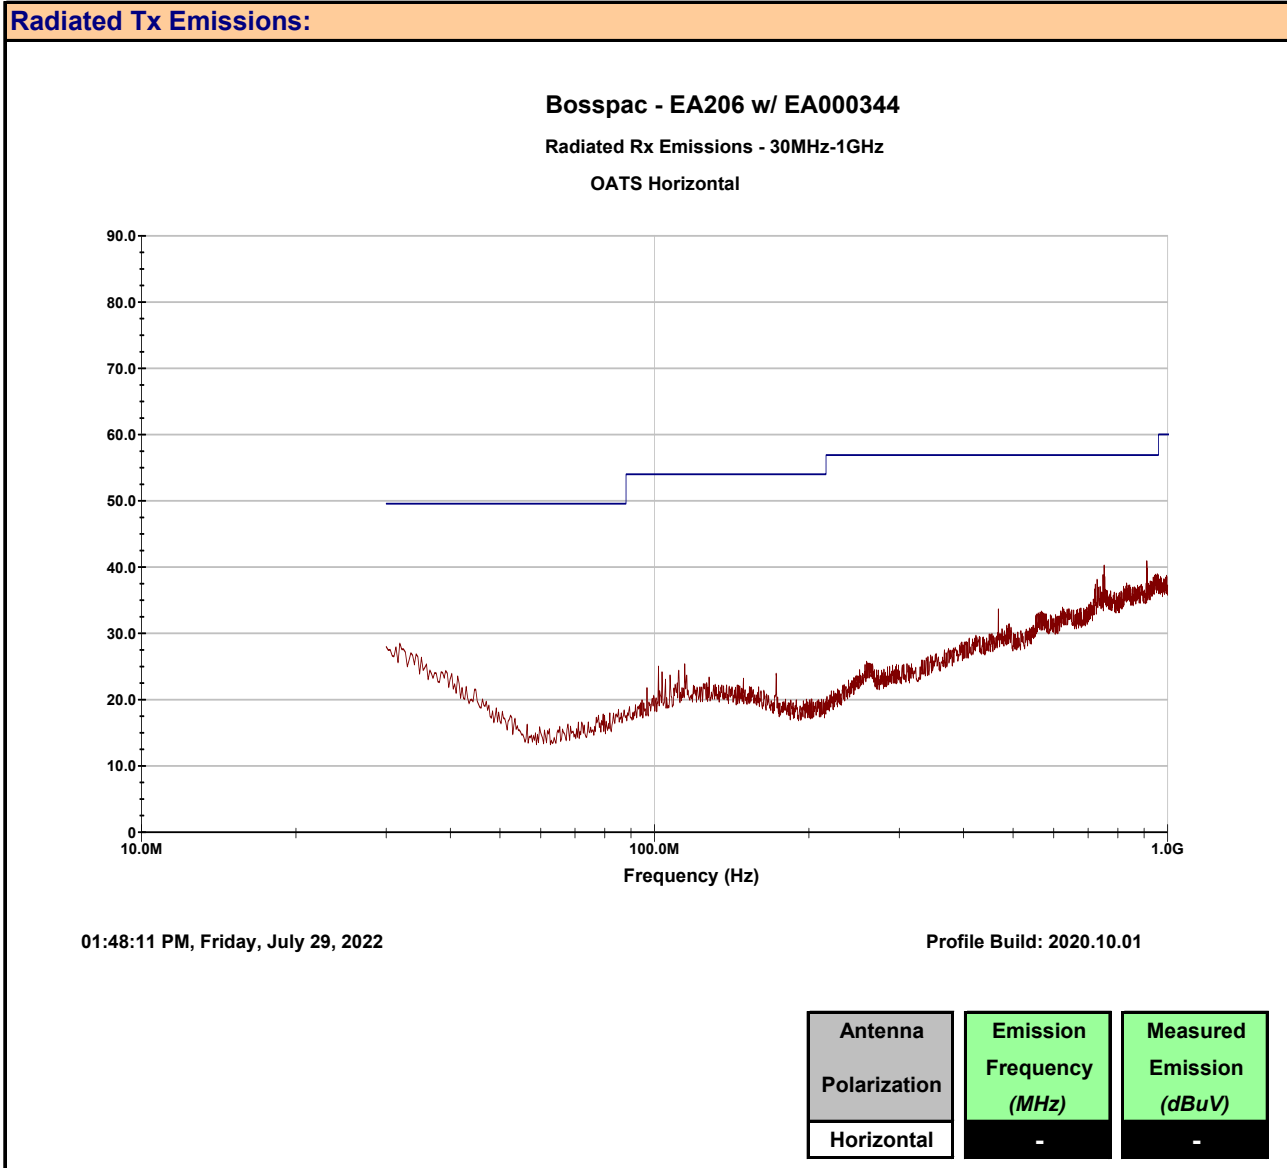


Plot 10.2 – Radiated Rx Emissions, 30 - 1000MHz, EA000344, Vertical

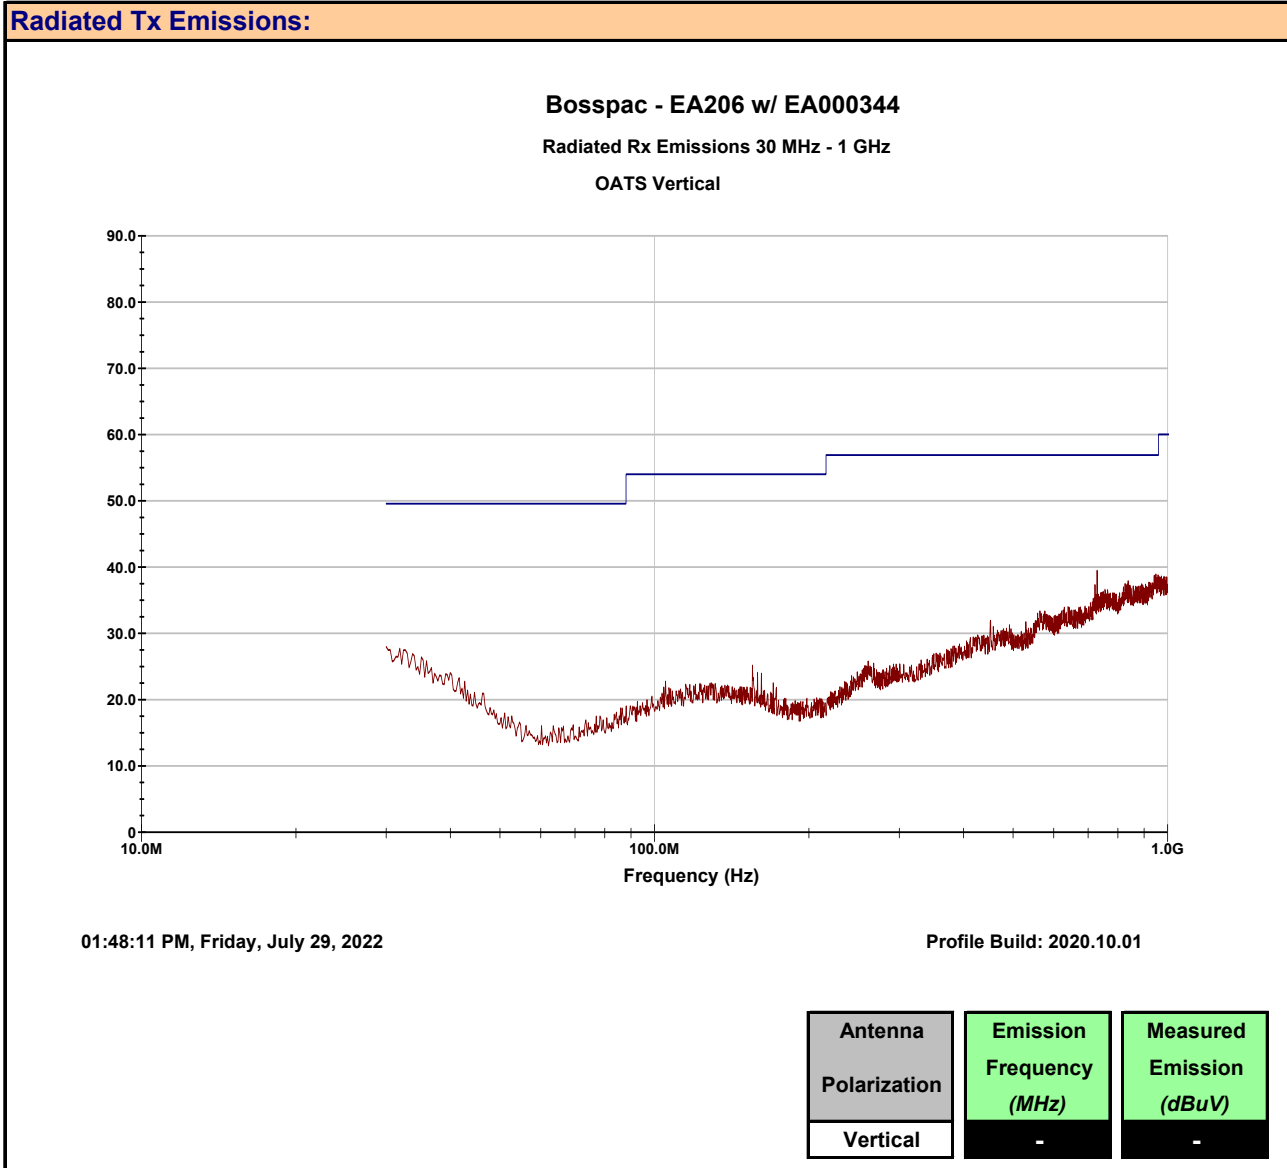


Plot 10.3 – Radiated Rx Emissions, 30 - 1000MHz, EA000406, Horizontal

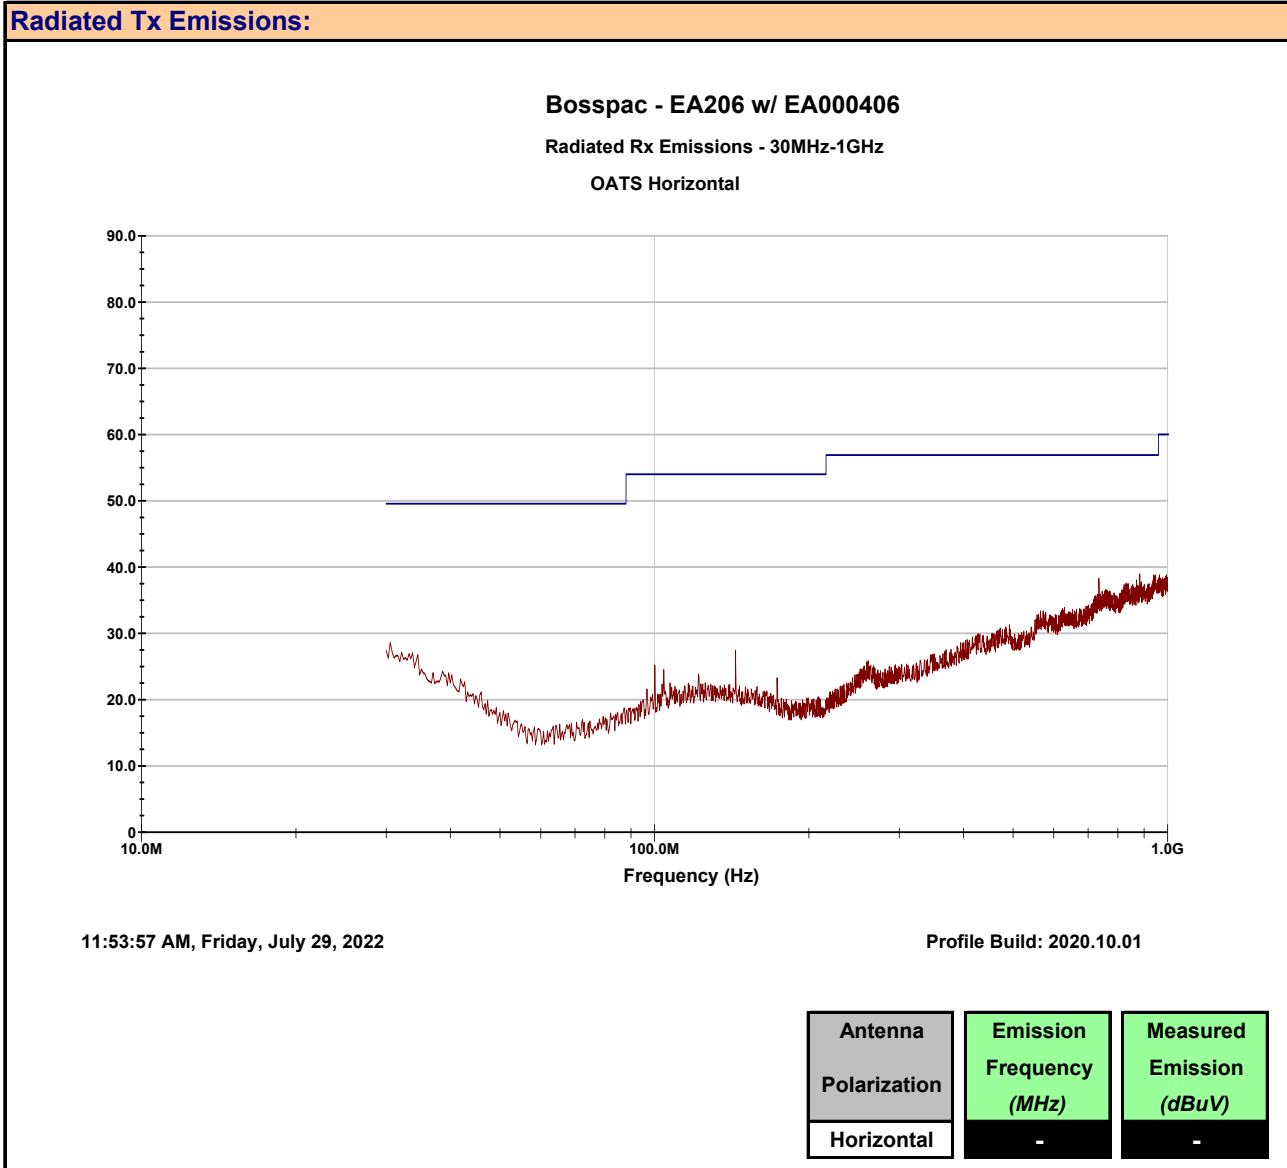


Plot 10.4 – Radiated Rx Emissions, 30 - 1000MHz, EA000406, Vertical

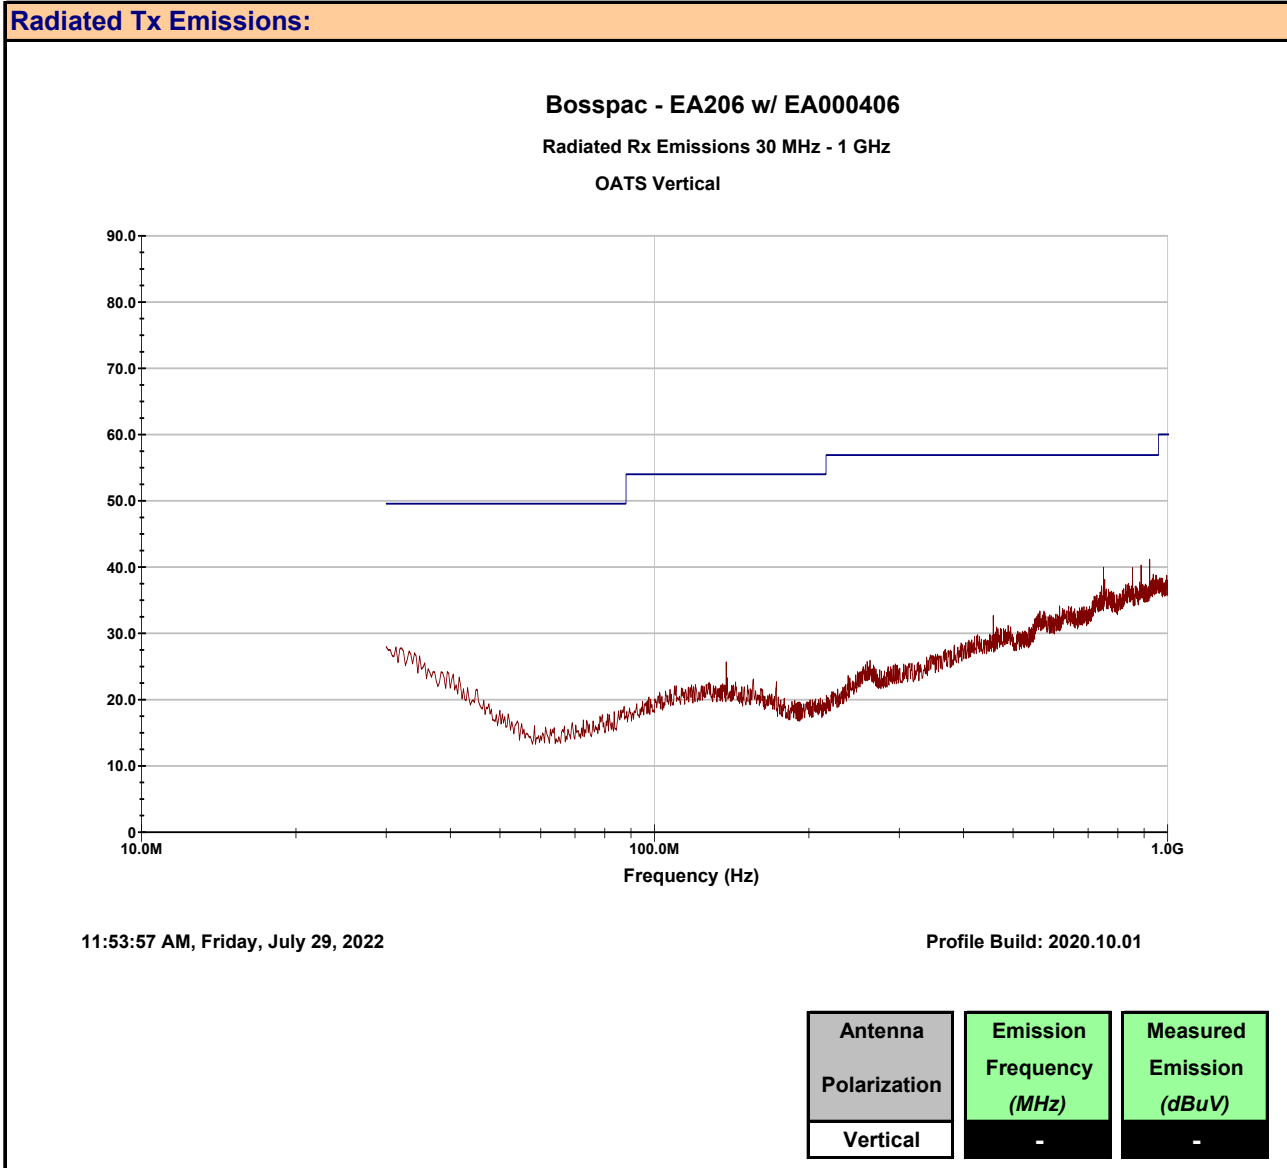


Plot 10.5 – Radiated Rx Emissions, 1 – 3GHz, EA000344, Horizontal

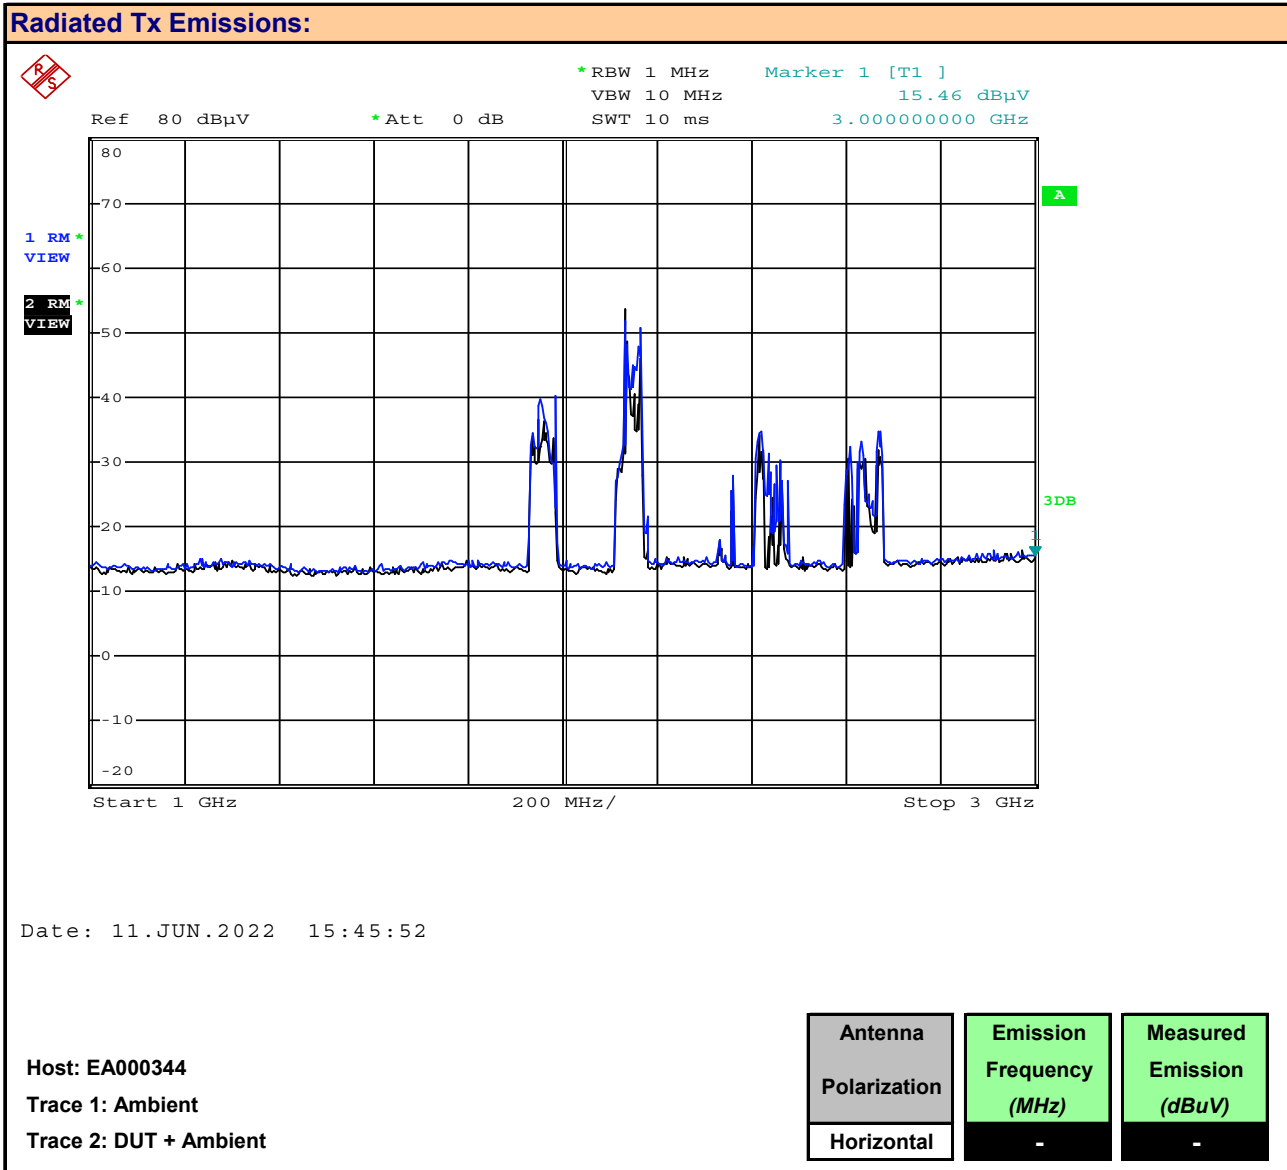


Plot 10.6 – Radiated Rx Emissions, 1 – 3GHz, EA000344, Vertical

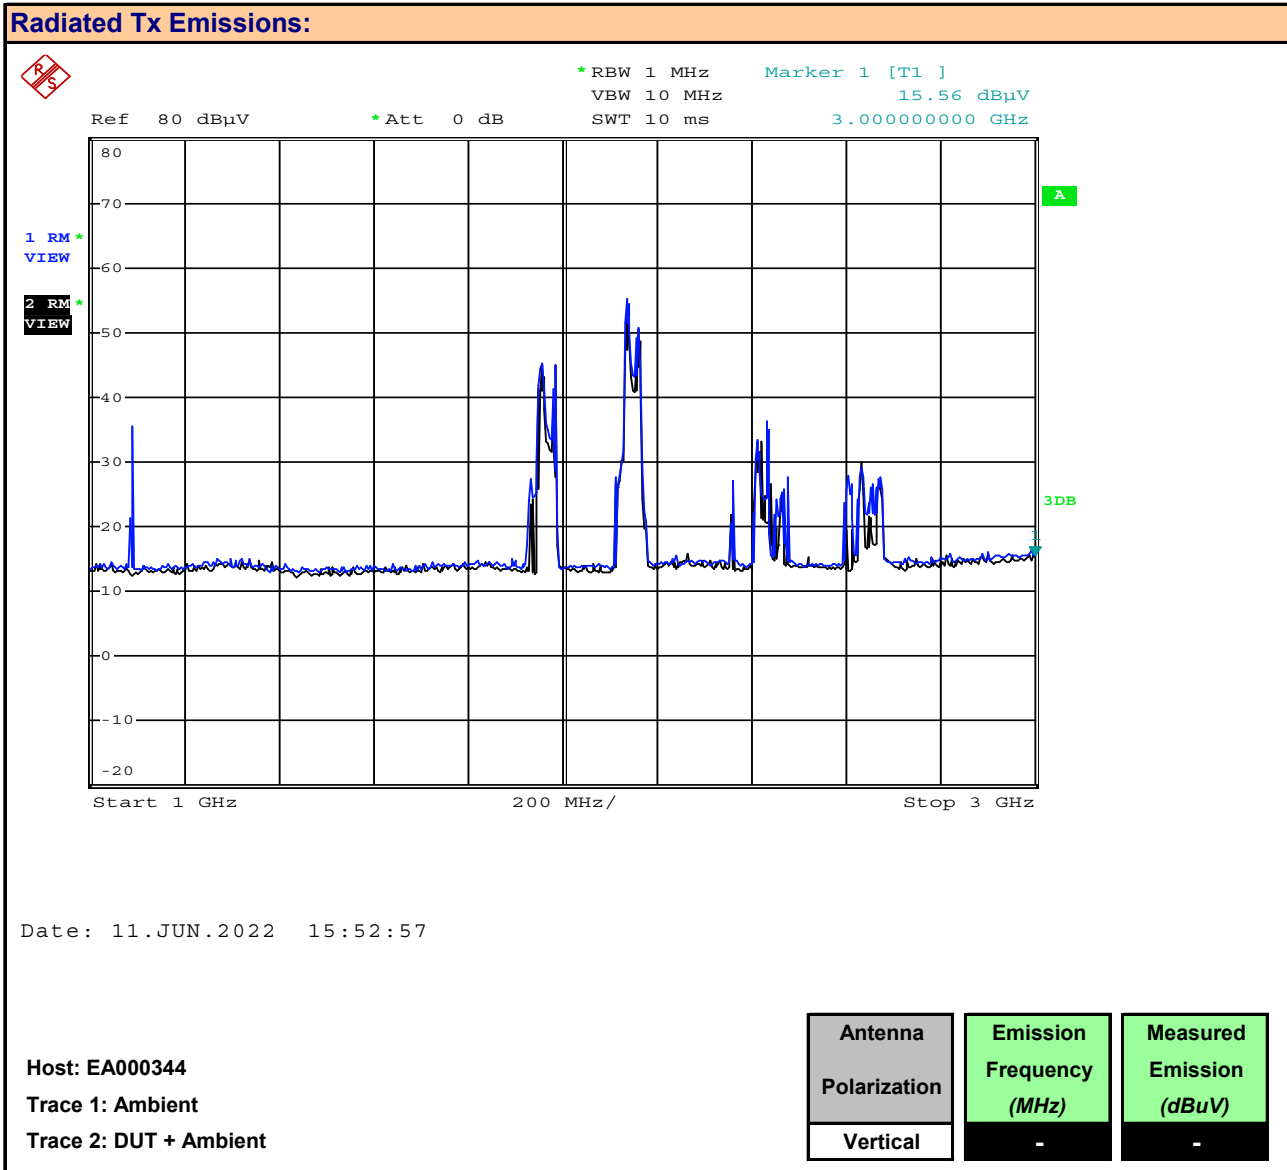


Plot 10.7 – Radiated Rx Emissions, 3 - 5GHz, EA000344, Horizontal

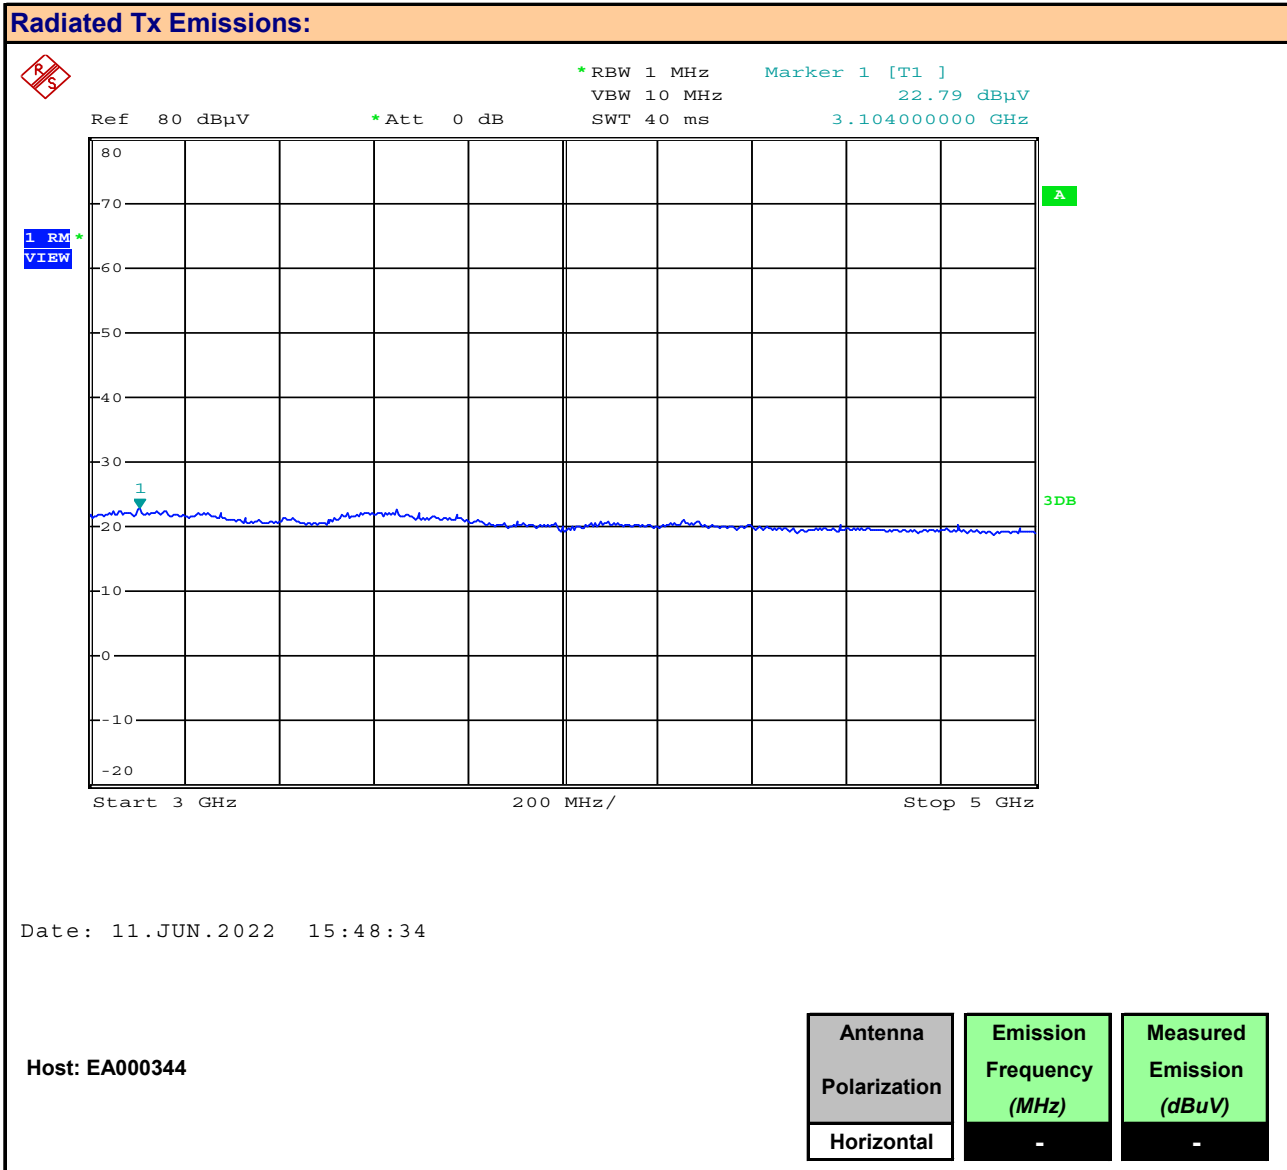


Plot 10.8 – Radiated Rx Emissions, 3 - 5GHz, EA000344, Vertical

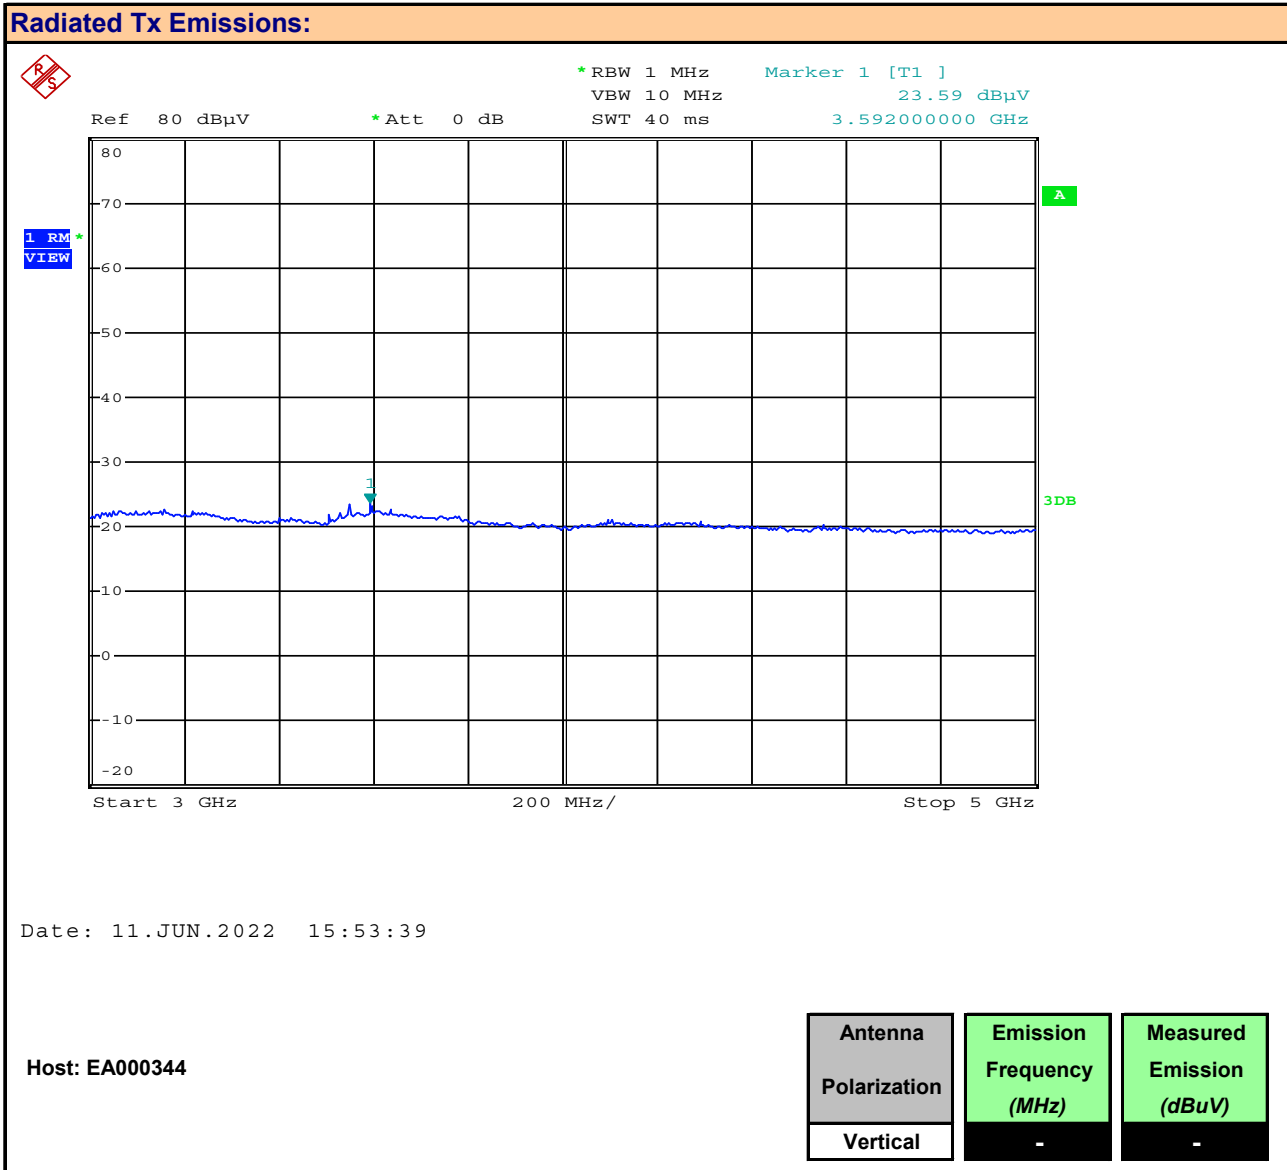


Plot 10.9 – Radiated Rx Emissions, 1 - 3GHz, EA000406, Horizontal

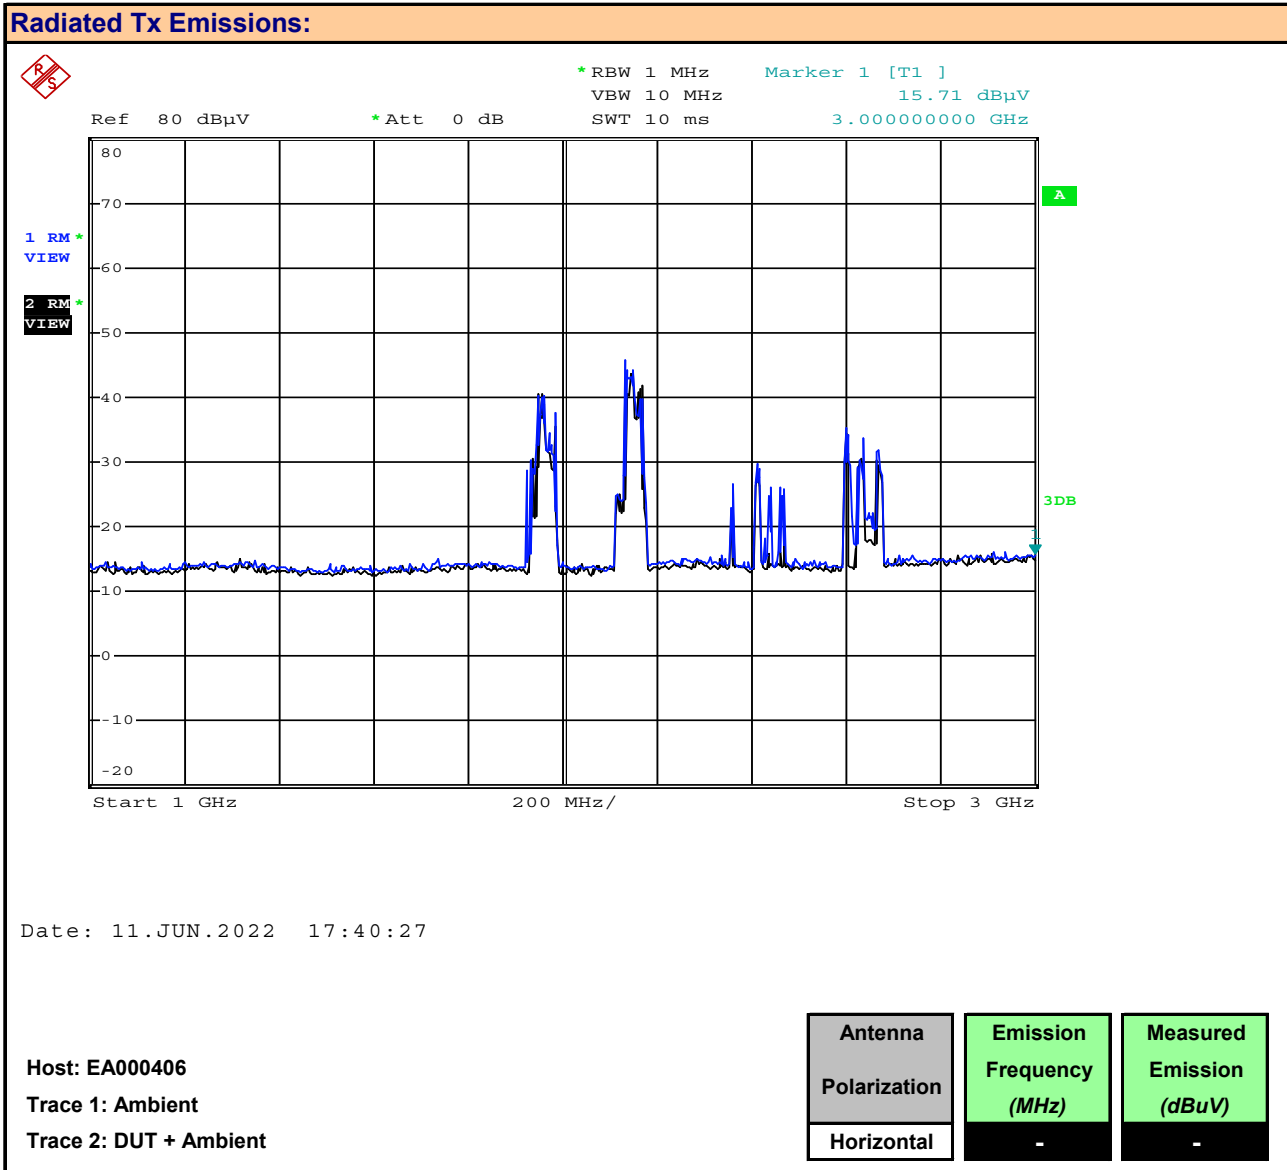

Plot 10.10 – Radiated Rx Emissions, 1 - 3GHz, EA000406, Vertical

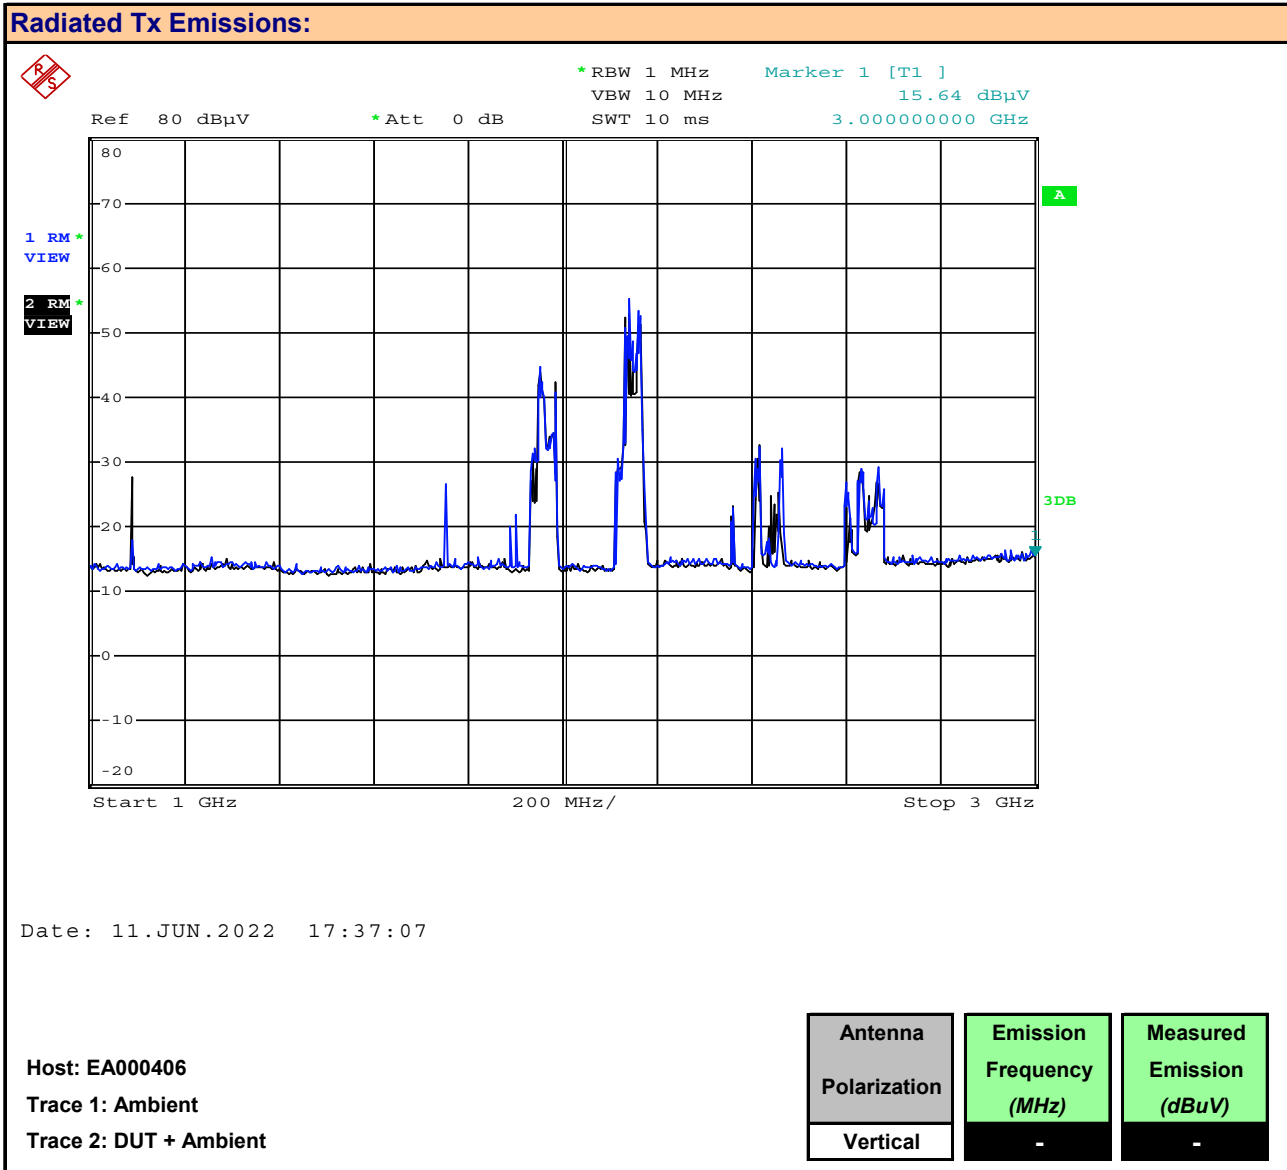

Plot 10.11 – Radiated Rx Emissions, 3 - 5GHz, EA000406, Horizontal

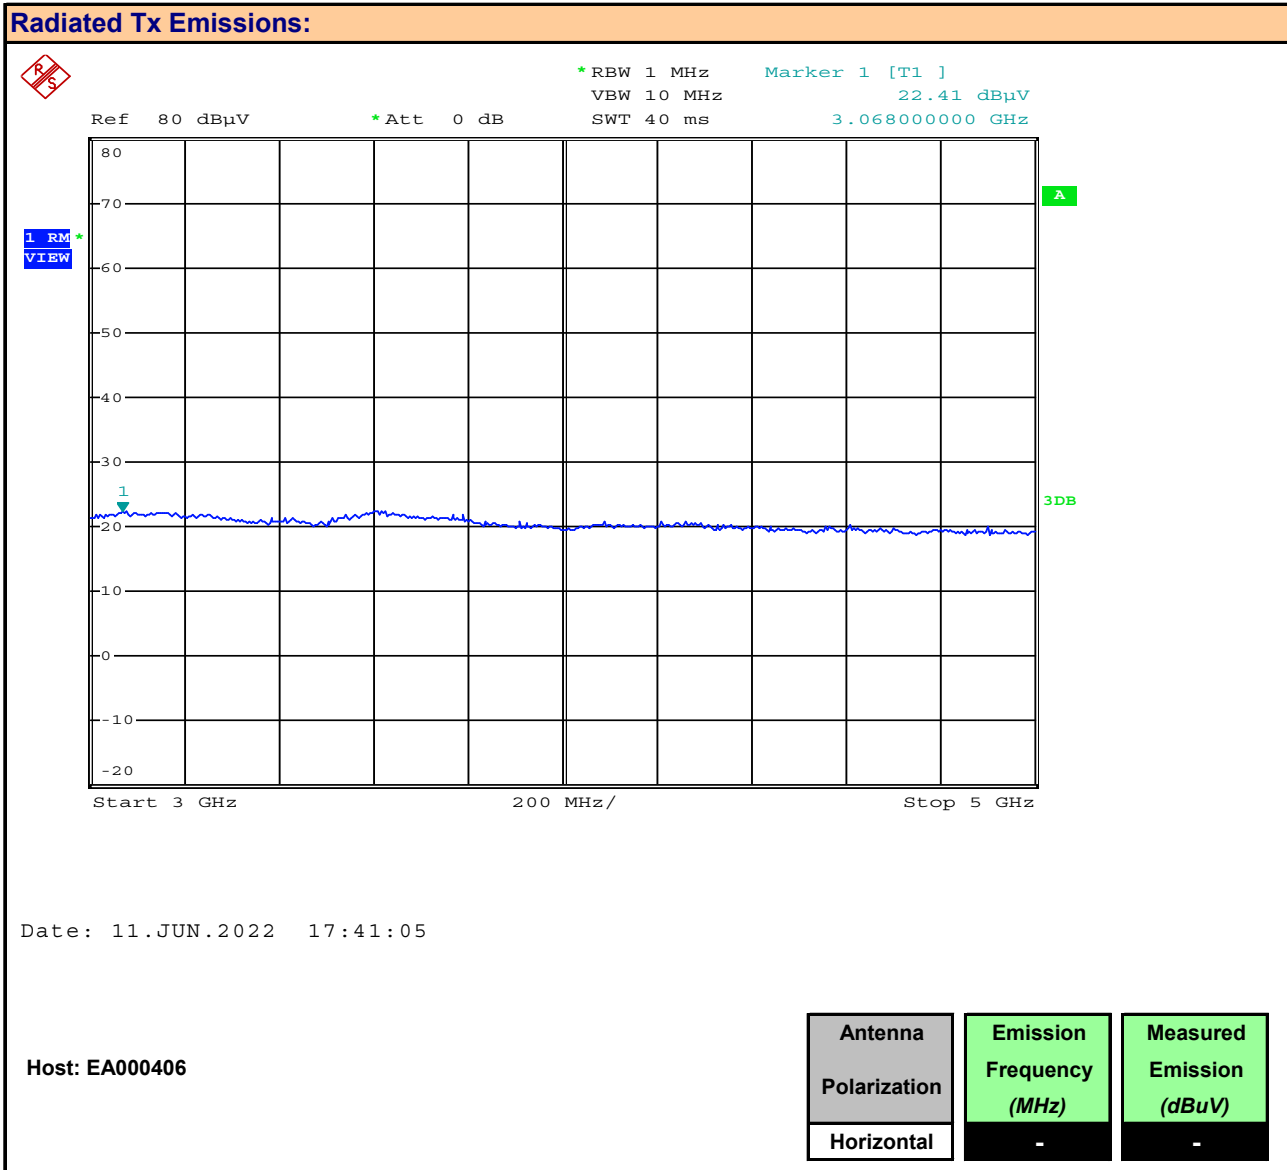

Plot 10.12 – Radiated Rx Emissions, 3 - 5GHz, EA000406, Vertical

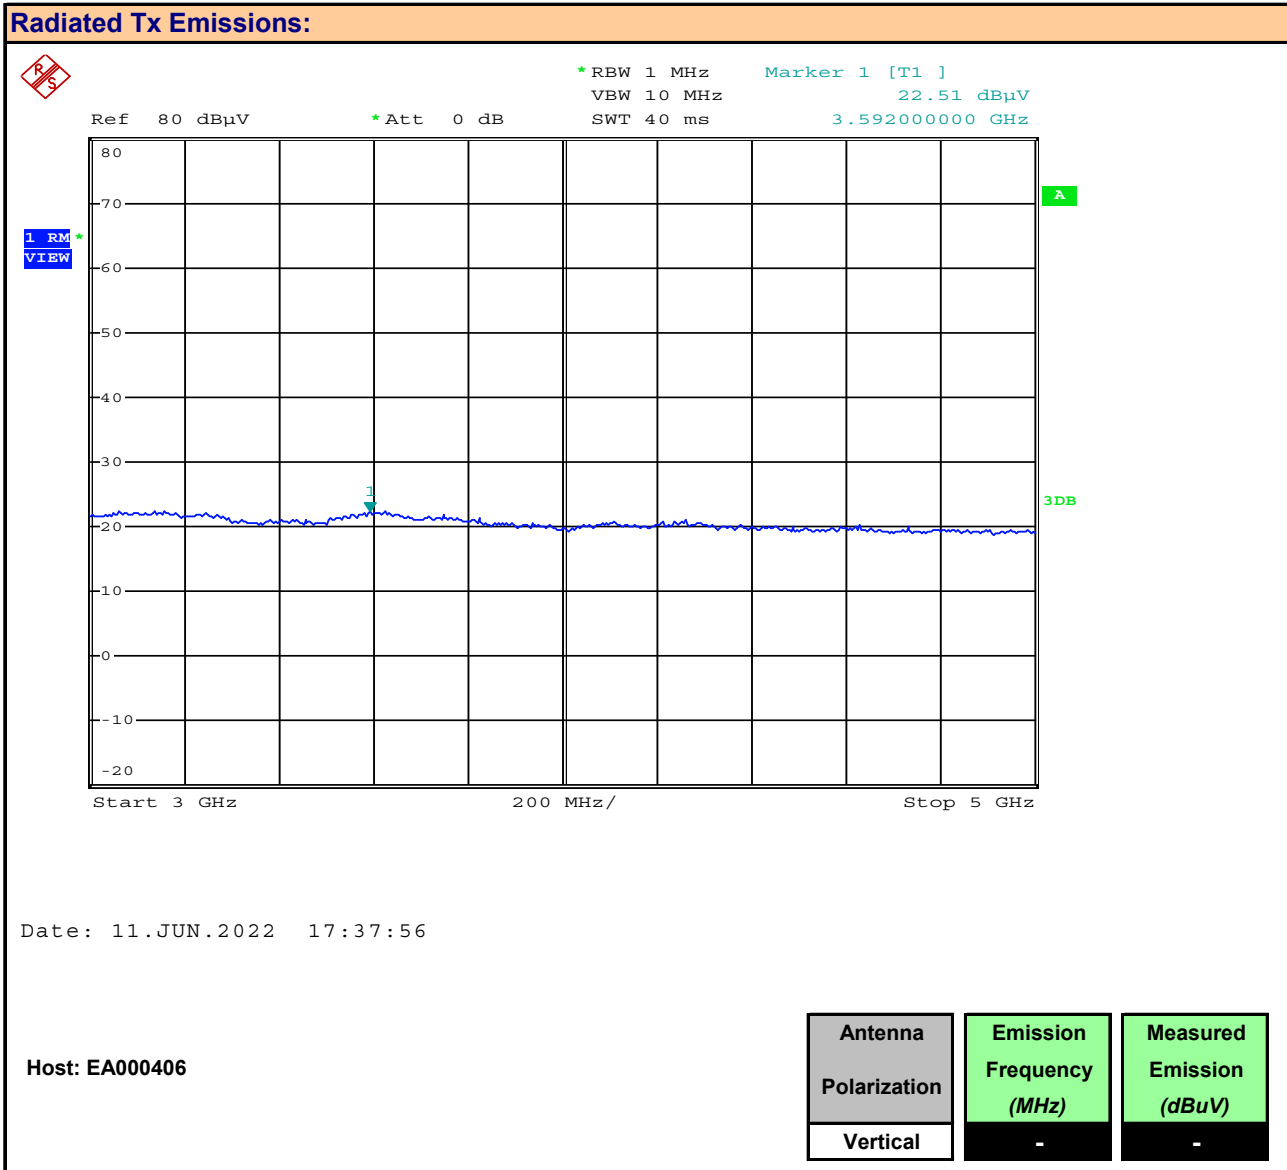


Table 15.1 – Summary of Radiated Rx Measurements

Summary of Radiated Rx Emissions												
Host HVIN	Measured Frequency Range (MHz)	Channel Frequency (MHz)	Antenna Polarization	Emission Frequency	Measured Emission [E _{Meas}] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L _C] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{Corr}] (dBuV/m)	Limit (dBuV)	Margin (dB)	
EA000344	30-1000MHz	-	Horizontal	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	-	n/a	
	30-1000MHz	-	Vertical	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	-	n/a	
	1 - 5GHz	-	Horizontal	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	-	n/a	
	1 - 5GHz	-	Vertical	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	-	n/a	
EA000406	30-1000MHz	-	Horizontal	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	-	n/a	
	30-1000MHz	-	Vertical	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	-	n/a	
	1 - 5GHz	-	Horizontal	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	-	n/a	
	1 - 5GHz	-	Vertical	ND MHz	ND	n/a	n/a	0.00 (3)	ND (2)	-	n/a	
Results:										Complies		

- (1) No Emissions Detected (ND) above ambient or within 20dB of the limit
- (2) Antenna ACF, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor
- (3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + ACF^E + L_C - G_A$$

Where ACF^E is the Electric Antenna Correction Factor

11.0 LINE CONDUCTED EMISSIONS

Test Procedure

Normative Reference	FCC 47 CFR §15.107, ICES-003(6.1) ANSI C63.4-2014
----------------------------	--------------------------------------------------------------------

Limits


47 CFR §15.107	(b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms LISN. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges. 0.15 - 0.5 MHz: 79 dBuV Quasi Peak, 66 dBuV Average 0.5 - 30.0 MHz: 73 dBuV Quasi Peak, 60 dBuV Average
ICES-003(6.1)	6.1 - AC Power Line Conducted Emissions Limits Class A: ITE that meets the conditions for Class A operation defined in Section 2.2 shall comply with the Class A conducted limits set out below in Table 1. 0.15 - 0.5 MHz: 79 dBuV Quasi Peak, 66 dBuV Average 0.5 - 30.0 MHz: 73 dBuV Quasi Peak, 60 dBuV Average

Test Setup	Appendix A	Figure A.1
-------------------	-------------------	-------------------


Measurement Procedure

The device was connected to the LISN as shown in Appendix A. The input power supply was connected to a 208VAC, 1PH power source. The AC Line Conducted emissions were measured from 150kHz to 30MHz on both Lines L1 and L2 while the DUT was set to maximum output power.


Plot 11.1 – Line Conducted Emissions, EA000344, L1

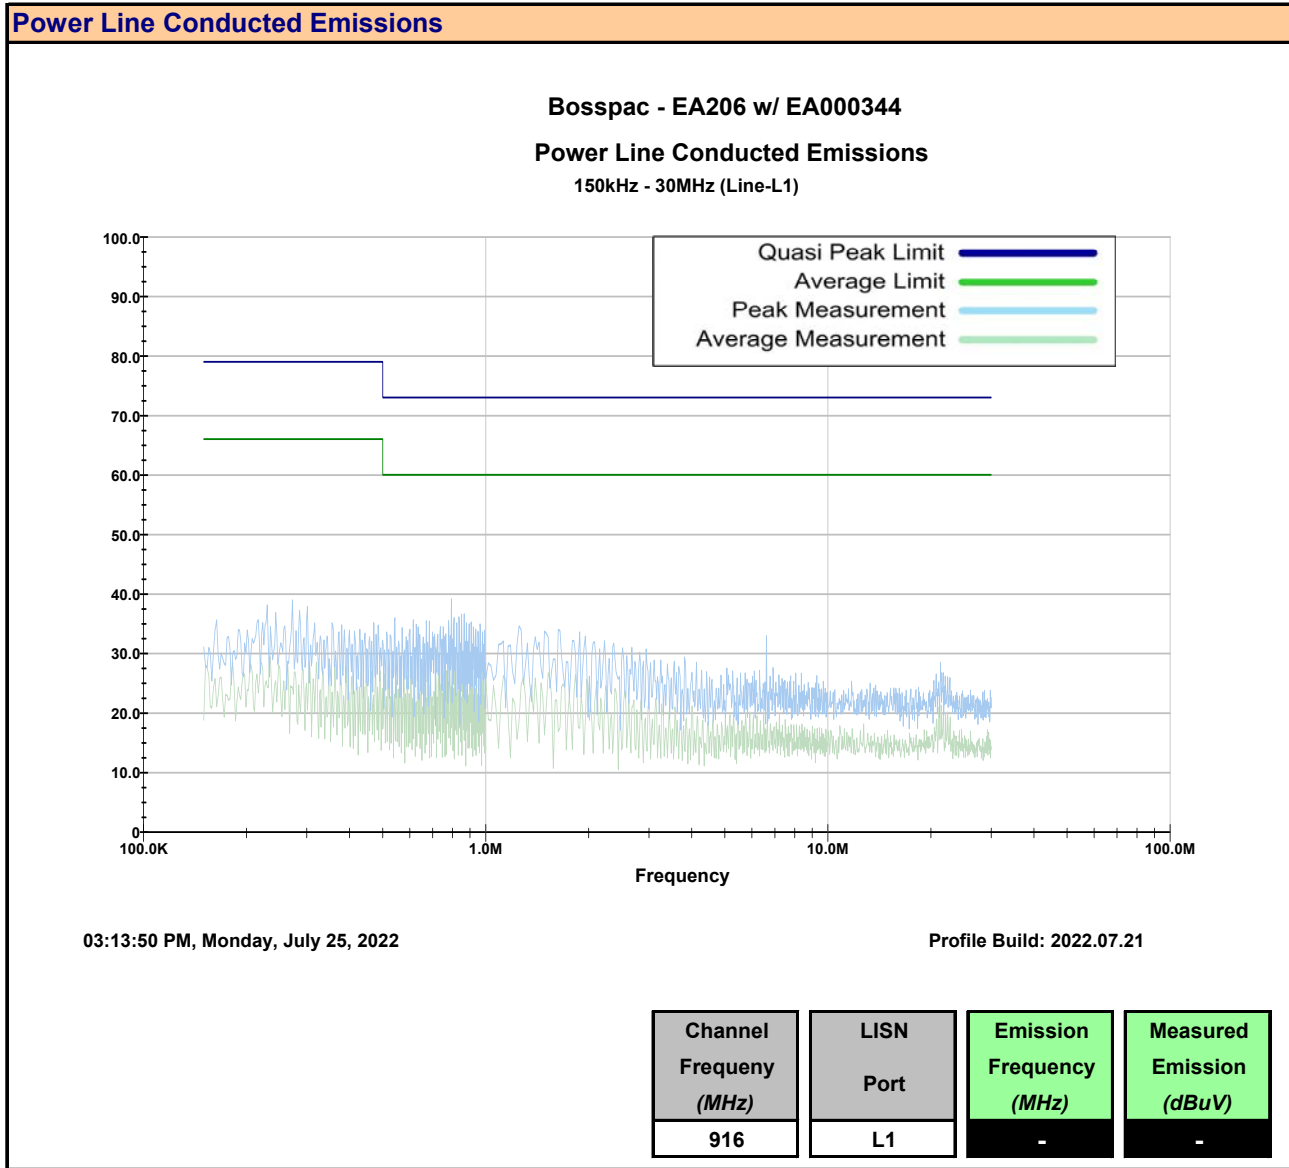

Plot 11.2 – Line Conducted Emissions, EA000344, L2

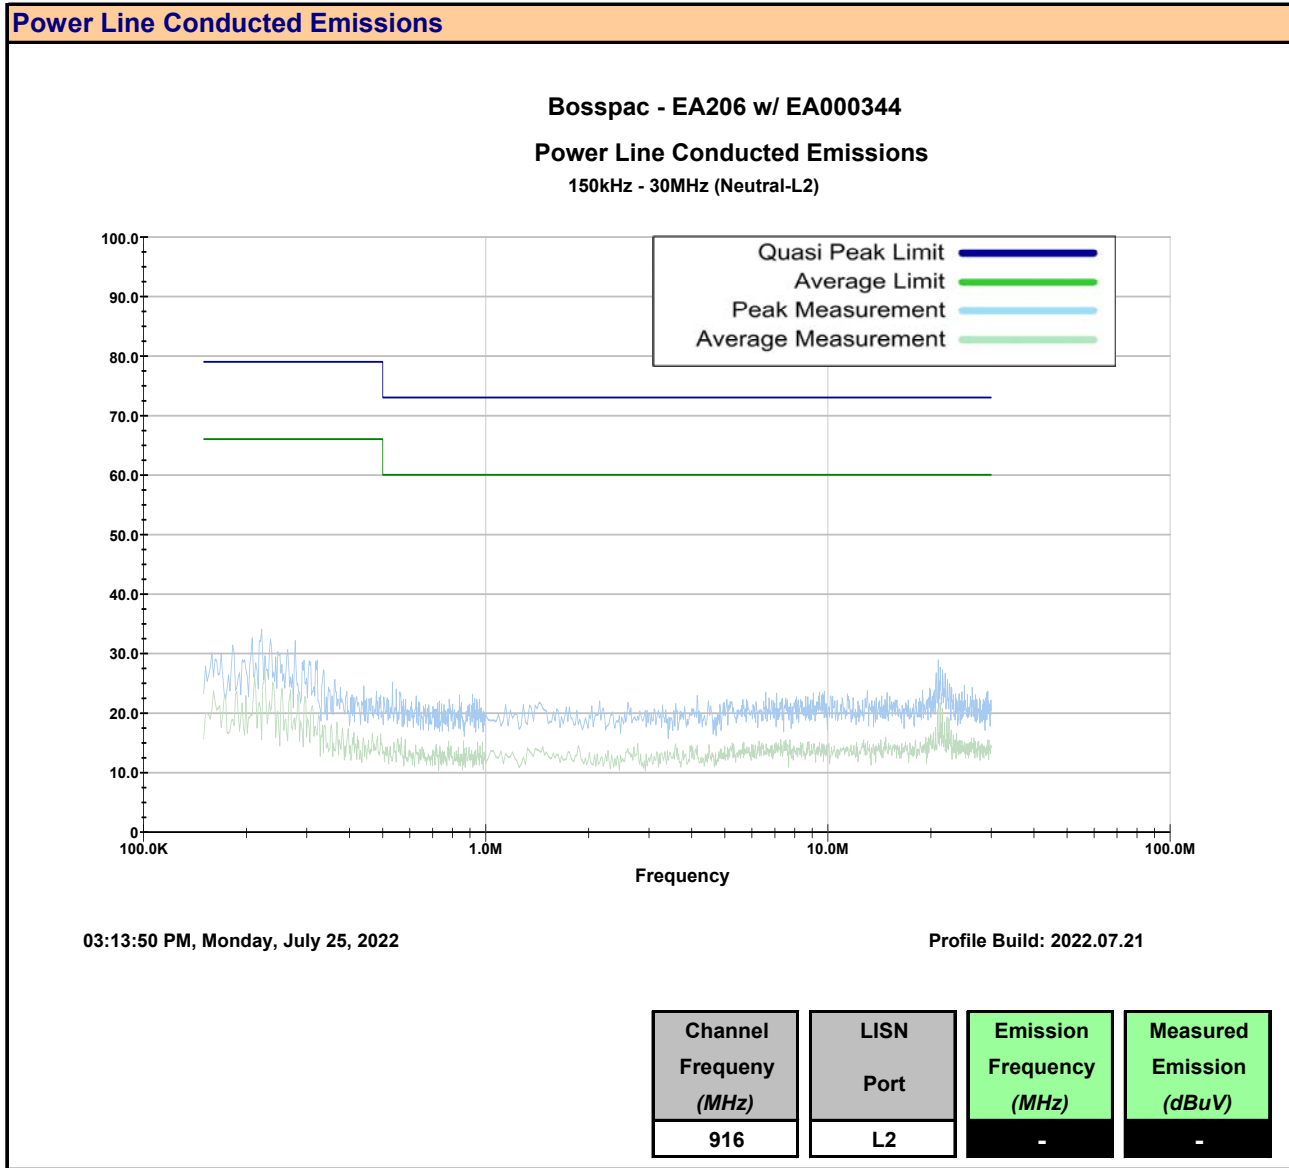

Plot 11.3 – Line Conducted Emissions, EA000406, L1

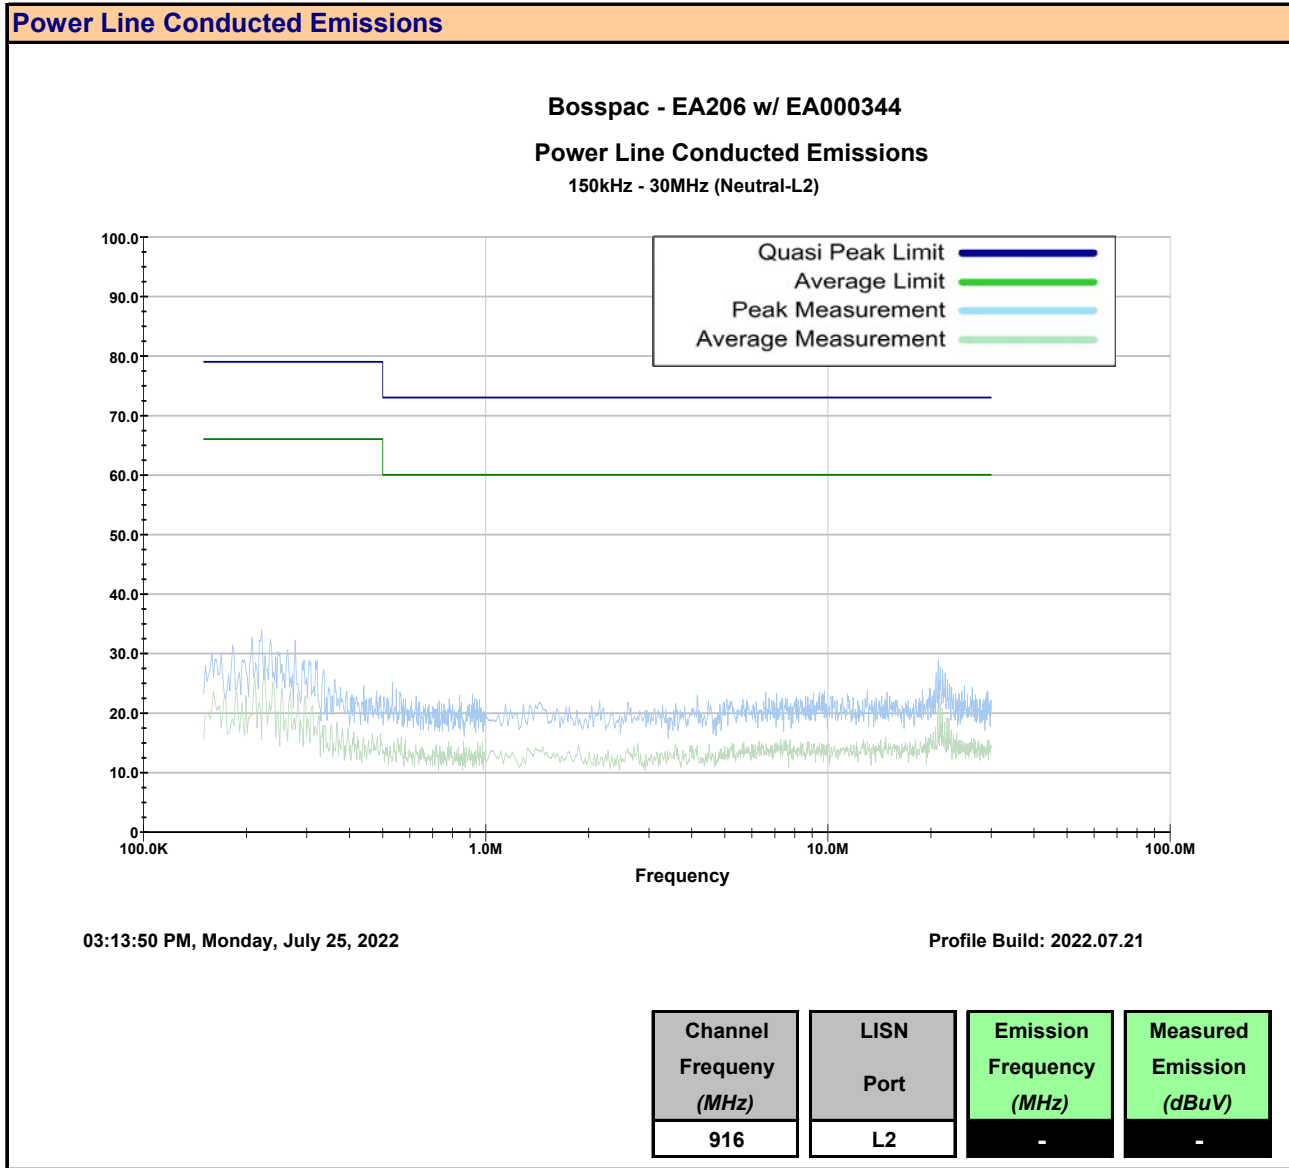

Plot 11.4 – Line Conducted Emissions, EA000406, L2

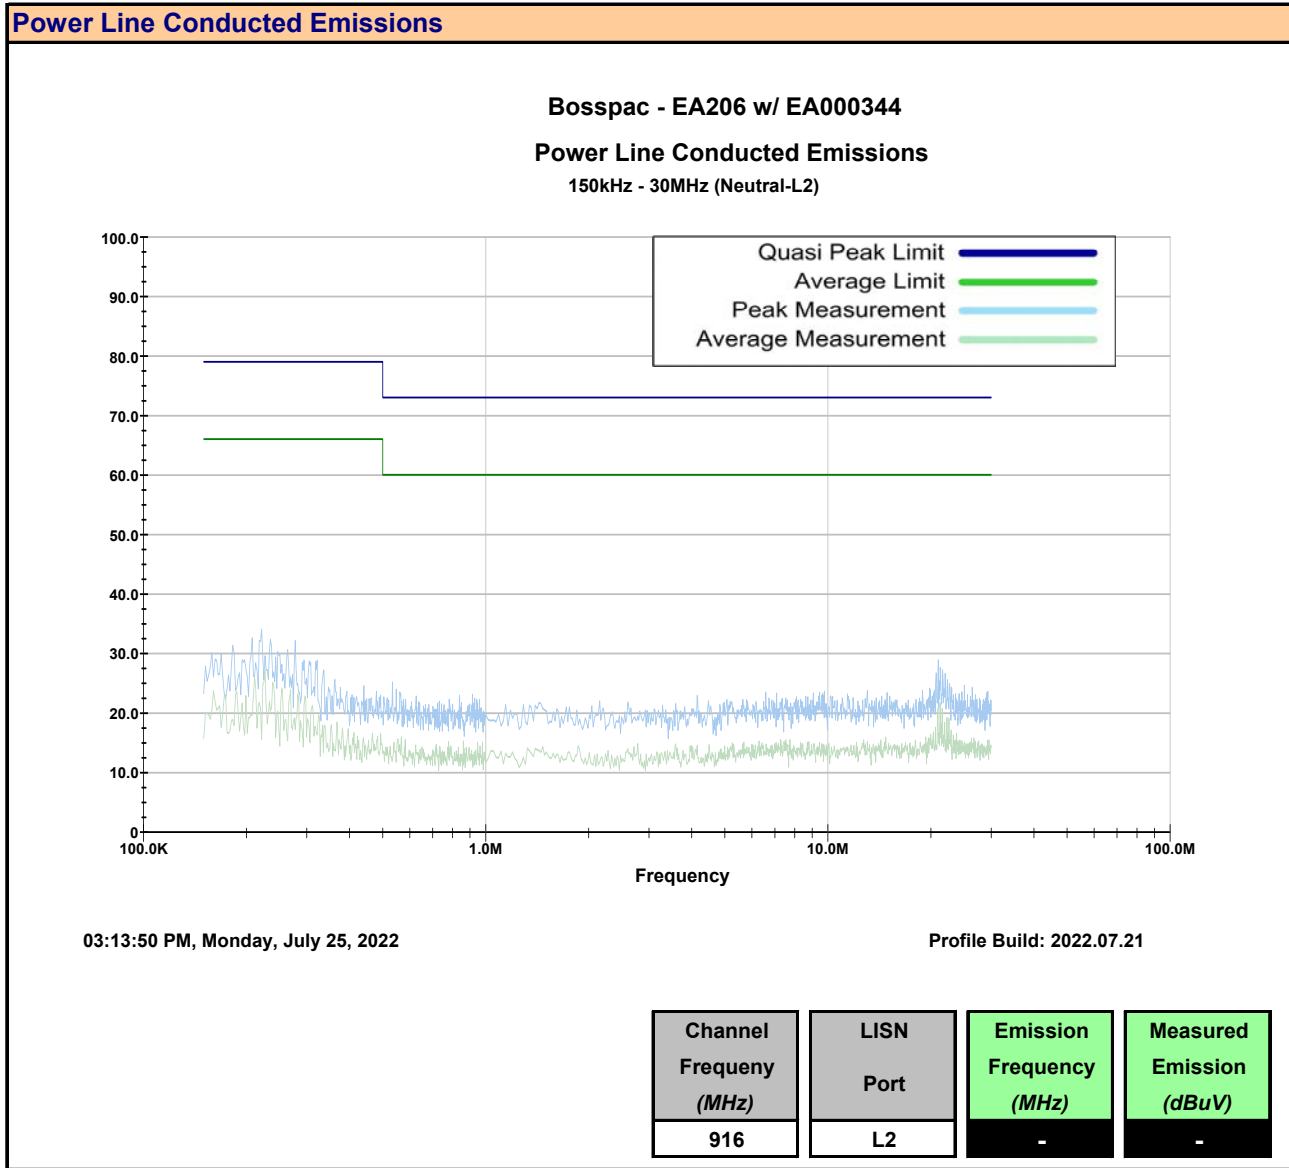


Table 11.1 – Summary of Line Conducted Measurements, L1

Summary of Power Line Conducted Tx Emissions												
Measured Frequency Range (MHz)	Host HVIN	Channel Frequency (MHz)	LISN Port	Emission Frequency [f _{Emm}]	Measured Emission [E _{Meas}] (dBuV)	Detector*	Insertion Loss [L _{LISN}] (dB)	Cable Loss [L _c] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{Corr}] (dBuV)	Limit (dBuV)	Margin (dB)
150kHz - 30MHz	EA000344	916.0	L1	ND	ND	Peak	0.40	0.25	0.00 (3)	ND (2)	n/a	-
				ND	ND	Average	0.40	0.25		ND (2)	n/a	-
	EA000406			ND	ND	Peak	0.40	0.25	0.00 (3)	ND (2)	n/a	-
				ND	ND	Average	0.40	0.25		ND (2)	n/a	-
Results:											Complies	

* In accordance with FCC §15.35 and ANSI C63.4, a Peak detector may be used to demonstrate compliance to Quasi-Peak limits provided the Resolution Bandwidth (RBW) is equal to or greater than Quasi-Peak bandwidth. The Detector RBW employed was ≥ 9kHz.

(2) LISN Insertion Loss, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{Corr} = E_{Meas} + L_{LISN} + L_c - G_A$$

Class B QP Limit = 56 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class B Avg Limit = 46 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class A QP Limit = 79dBuV for f_{Emm} = 150kHz to 500kHz

Class A Avg Limit = 66dBuV for f_{Emm} = 150kHz to 500kHz

Margin = Limit - E_{corr}

ND: No emissions Detected within 20dB of the Limit

Table 11.2 – Summary of Line Conducted Measurements, L2

Summary of Power Line Conducted Tx Emissions												
Measured Frequency Range (MHz)	Host HVIN	Channel Frequency (MHz)	LISN Port	Emission Frequency [f _{Emm}]	Measured Emission [E _{Meas}] (dBuV)	Detector*	Insertion Loss [L _{LISN}] (dB)	Cable Loss [L _c] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{Corr}] (dBuV)	Limit (dBuV)	Margin (dB)
150kHz - 30MHz	EA000344	916.0	L2	ND	ND	Peak	0.40	0.25	0.00 (3)	ND (2)	n/a	-
				ND	ND	Average	0.40	0.25		ND (2)	n/a	-
	EA000406			ND	ND	Peak	0.40	0.25	0.00 (3)	ND (2)	n/a	-
				ND	ND	Average	0.40	0.25		ND (2)	n/a	-
Results:											Complies	

* In accordance with FCC §15.35 and ANSI C63.4, a Peak detector may be used to demonstrate compliance to Quasi-Peak limits provided the Resolution Bandwidth (RBW) is equal to or greater than Quasi-Peak bandwidth. The Detector RBW employed was ≥ 9kHz.

(2) LISN Insertion Loss, Cable Loss and Amplifier Gain corrected in Spectrum Analyzer Transducer Factor

(3) External Amplifier not used

$$E_{Corr} = E_{Meas} + L_{LISN} + L_c - G_A$$

Class B QP Limit = 56 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class B Avg Limit = 46 - 20Log (f_{Emm}/500) for f_{Emm} = 150kHz to 500kHz

Class A QP Limit = 79dBuV for f_{Emm} = 150kHz to 500kHz

Class A Avg Limit = 66dBuV for f_{Emm} = 150kHz to 500kHz

Margin = Limit - E_{corr}

ND: No emissions Detected within 20dB of the Limit

APPENDIX A – TEST SETUP DRAWINGS AND CONDITIONS

Table A.1 – Conducted Measurement Setup and Environmental

Environmental Conditions (Typical)			
Temperature	25°C		
Humidity	<60%		
Barometric Pressure	101 +/- 3kPa		
Equipment List			
Asset Number	Manufacturer	Model Number	Description
00241	R&S	FSU40	Spectrum Analyzer

Figure A.1 – Test Setup – Conducted Measurements

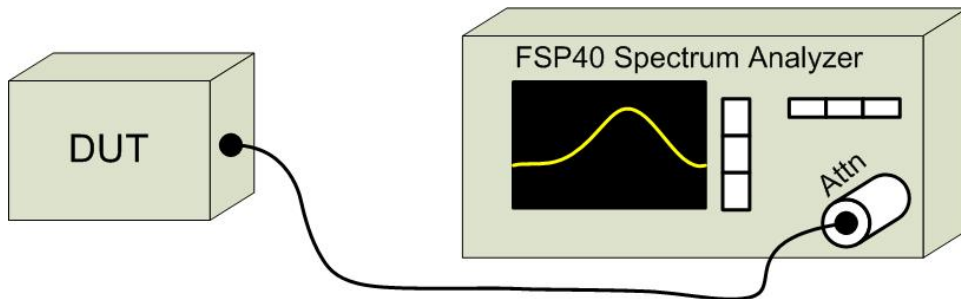


Table A.2 – Radiated Emissions Measurement Equipment

Environmental Conditions (Typical)			
Temperature	25°C		
Humidity	<60%		
Barometric Pressure	101 +/- 3kPa		
Equipment List			
Asset Number	Manufacturer	Model Number	Description
00051	HP	8566B	Spectrum Analyzer
00049	HP	85650A	Quasi-peak Adapter
00047	HP	85685A	RF Preselector
00072	EMCO	2075	Mini-mast
00073	EMCO	2080	Turn Table
00071	EMCO	2090	Multi-Device Controller
00265	Miteq	JS32-00104000-58-5P	Microwave L/N Amplifier
00241	R&S	FSU40	Spectrum Analyzer
00050	Chase	CBL-6111A	Bilog Antenna
00275	Coaxis	LMR400	25m Cable
00276	Coaxis	LMR400	4m Cable
00278	TILE	34G3	TILE Test Software
00034	ETS	3115	Double Ridged Guide Horn
00085	EMCO	6502	Loop Antenna

Figure A.2 – Test Setup Radiated Measurements 9kHzMHz – 30MHz

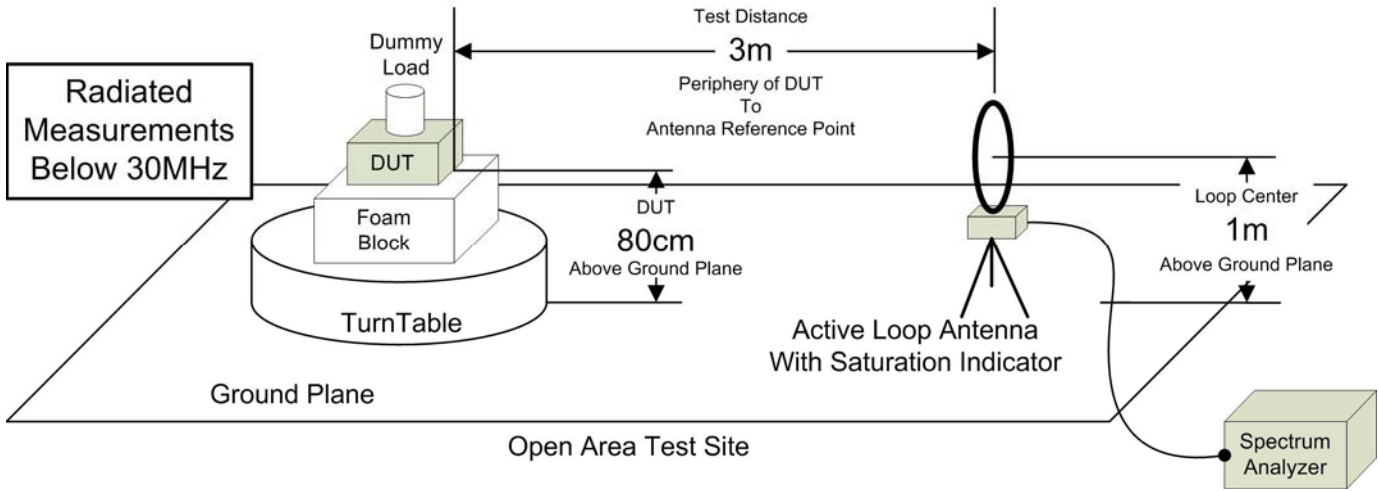


Figure A.3 – Test Setup Radiated Measurements 30MHz – 1GHz

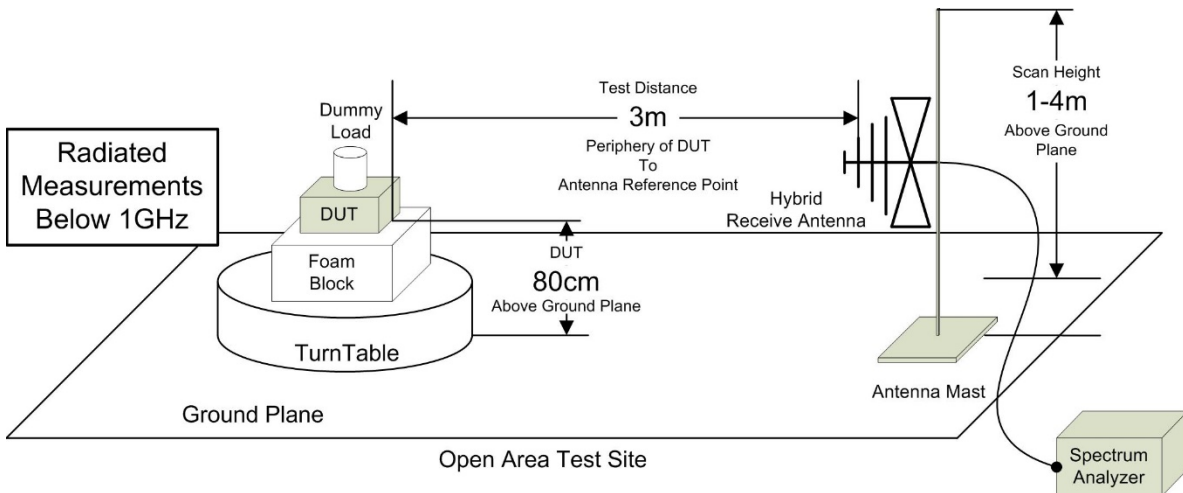


Figure A.4 – Test Setup Radiated Measurements 30MHz – 1GHz, Signal Substitution

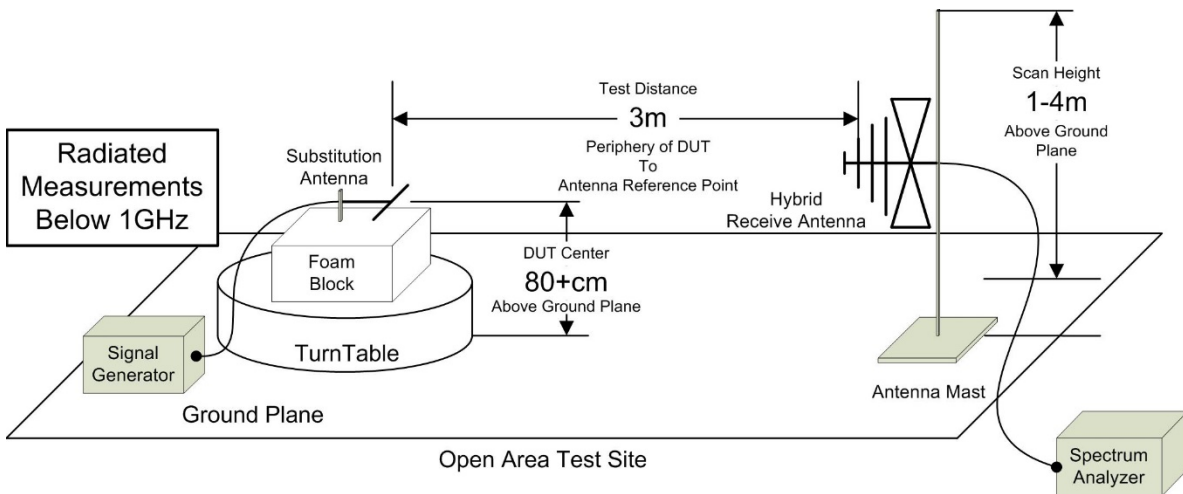


Figure A.5 – Test Setup Radiated Measurements 1 – 18GHz

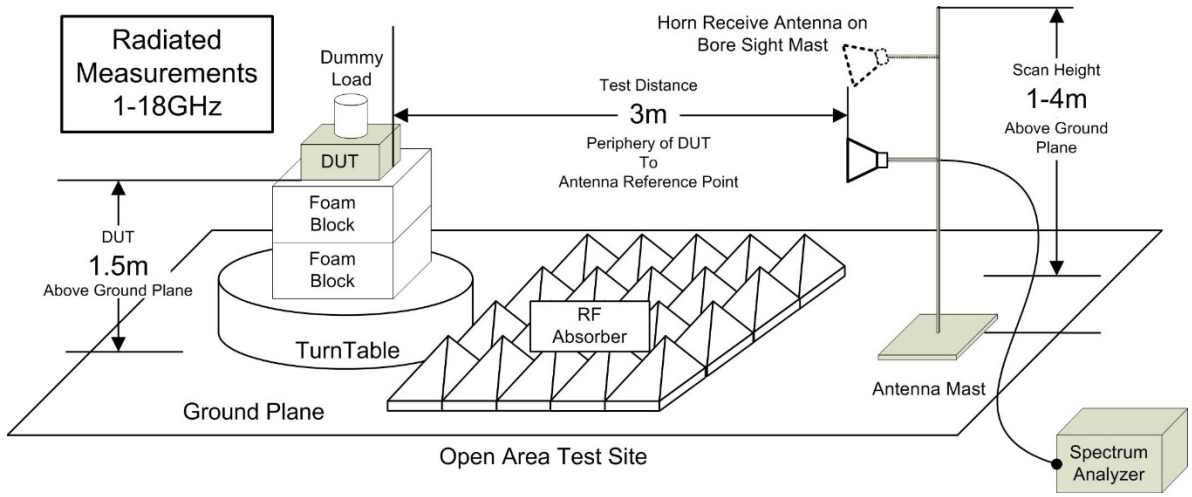


Table A.3 – Setup – Conducted Emissions Equipment List

Equipment List				
Asset Number	Manufacturer	Model Number	Serial Number	Description
00333	HP	85685A	3010A01095	RF Preselector
00049	HP	85650A	2043A00162	Quasi-peak Adapter
00051	HP	8566B	2747A05510	Spectrum Analyzer
00223	HP	8901A	3749A07154	Modulation Analyzer
00257	Com-Power	LI-215A	191934	LISN
00276	TMS	LMR400	n/a	4m Cable

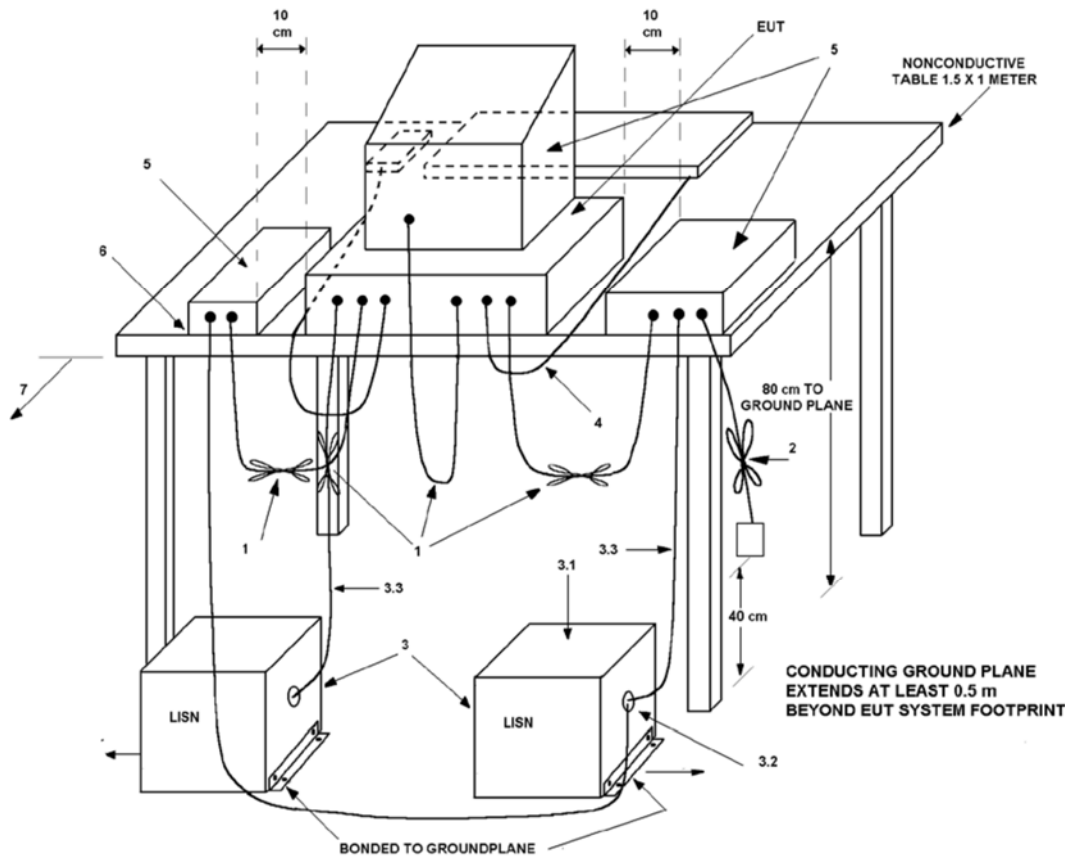


Figure A.6 – Test Setup Conducted Emissions Measurements

APPENDIX B – EQUIPMENT LIST AND CALIBRATION

Equipment List					Last	Calibration	Calibration
Asset Number	Manufacturer	Model Number	Serial Number	Description	Calibrated	Interval	Due
00050	Chase	CBL-6111A	1607	Bilog Antenna	16 Nov 2020	Triennial	16 Nov 2023
00035	ETS	3115	6276	Double Ridged Guide Horn	4 Mar 2022	Triennial	4 Mar 2025
00333	HP	85685A	3010A01095	RF Preselector	23 Jun 2020	Triennial	30 Jun 2023
00049	HP	85650A	2043A00162	Quasi-peak Adapter	23 Jun 2020	Triennial	23 Jun 2023
00051	HP	8566B	2747A05510	Spectrum Analyzer	23 Jun 2020	Triennial	23 Jun 2023
00241	R&S	FSU40	100500	Spectrum Analyzer	10 Aug 2021	Triennial	10 Aug 2024
00257	Com-Power	LI-215A	191934	LISN	27 Dec 2021	Triennial	27 Dec 2024
00071	EMCO	2090	9912-1484	Multi-Device Controller	n/a	n/a	n/a
00072	EMCO	2075	0001-2277	Mini-mast	n/a	n/a	n/a
00073	EMCO	2080	0002-1002	Turn Table	n/a	n/a	n/a
00081	ESPEC	ECT-2	0510154-B	Environmental Chamber	NCR	n/a	CNR
00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable	COU	n/a	COU
00275	TMS	LMR400	n/a	25m Cable	COU	n/a	COU
00278	TILE	34G3	n/a	TILE Test Software	NCR	n/a	NCR

NCR: No Calibration Required
 COU: Calibrate On Use

APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY

CISPR 16-4 Measurement Uncertainty (U_{LAB})

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of k=2

Radiated Emissions 30MHz - 200MHz

$U_{LAB} = 5.14dB$ $U_{CISPR} = 6.3dB$

Radiated Emissions 200MHz - 1000MHz

$U_{LAB} = 5.90dB$ $U_{CISPR} = 6.3dB$

Radiated Emissions 1GHz - 6GHz

$U_{LAB} = 4.80dB$ $U_{CISPR} = 5.2dB$

Radiated Emissions 6GHz - 18GHz

$U_{LAB} = 5.1dB$ $U_{CISPR} = 5.5dB$

Power Line Conducted Emissions 9kHz to 150kHz

$U_{LAB} = 2.96dB$ $U_{CISPR} = 3.8dB$

Power Line Conducted Emissions 150kHz to 30MHz

$U_{LAB} = 3.12dB$ $U_{CISPR} = 3.4dB$

If the calculated uncertainty U_{lab} is **less** than U_{CISPR} then:

- | | |
|---|-----------------------------------------------------------------------------------------------------------|
| 1 | Compliance is deemed to occur if NO measured disturbance exceeds the disturbance limit |
| 2 | Non-Compliance is deemed to occur if ANY measured disturbance EXCEEDS the disturbance limit |

If the calculated uncertainty U_{lab} is **greater** than U_{CISPR} then:

- | | |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------|
| 3 | Compliance is deemed to occur if NO measured disturbance, increased by ($U_{lab} - U_{CISPR}$), exceeds the disturbance limit |
| 4 | Non-Compliance is deemed to occur if ANY measured disturbance, increased by ($U_{lab} - U_{CISPR}$), EXCEEDS the disturbance limit |

Other Measurement Uncertainties (U_{LAB})

RF Conducted Emissions 9kHz - 40GHz

$U_{LAB} = 1.0dB$ $U_{CISPR} = n/a$

Frequency/Bandwidth 9kHz - 40GHz

$U_{LAB} = 0.1ppm$ $U_{CISPR} = n/a$

Temperature

$U_{LAB} = 1^{\circ}C$ $U_{CISPR} = n/a$

END OF REPORT