



Compliance Certification Services Inc.

| | |
|--|-----------|
| IEEE 802.11b-Body Up Low CH1 | 3 |
| IEEE 802.11b-Body Up Middle CH6 | 4 |
| IEEE 802.11b-Body Up High CH11 | 5 |
| IEEE 802.11b-Body Down Low CH1 | 6 |
| IEEE 802.11b-Body Down Middle CH6 | 7 |
| IEEE 802.11b-Body Down High CH11 | 8 |
| IEEE 802.11b-End Low CH1 | 9 |
| IEEE 802.11b-End Middle CH6 | 10 |
| IEEE 802.11b-End High CH11 | 11 |
| IEEE 802.11b-Right Low CH1 | 12 |
| IEEE 802.11b-Right Middle CH6 | 13 |
| IEEE 802.11b-Right High CH11 | 14 |
| IEEE 802.11g-Body Up Low CH1 | 15 |
| IEEE 802.11g-Body Middle CH6 | 16 |
| IEEE 802.11g-Body Up High CH11 | 17 |
| IEEE 802.11g-Body Down Low CH1 | 18 |
| IEEE 802.11g-Body Down Middle CH6 | 19 |
| IEEE 802.11g-Body Down High CH11 | 20 |
| IEEE 802.11g-End Low CH1 | 21 |
| IEEE 802.11g- End Middle CH6 | 22 |
| IEEE 802.11g- End High CH11 | 23 |
| IEEE 802.11g-Right Low CH1 | 24 |
| IEEE 802.11g- Right Middle CH6 | 25 |
| IEEE 802.11g- Right High CH11 | 26 |
| HSUPA Band II Up Low CH9262 | 27 |
| HSUPA Band II Up Middle CH9400 | 28 |
| HSUPA Band II Up High CH9888 | 29 |
| HSUPA Band II Down Low CH9262 | 30 |
| HSUPA Band II Down Middle CH9400 | 31 |
| HSUPA Band II Down High CH9538 | 32 |
| HSUPA Band II Left Low CH9262 | 33 |
| HSUPA Band II Left Middle CH9400 | 34 |
| HSUPA Band II Left High CH9538 | 35 |
| HSUPA Band II Top Low CH 9262 | 36 |
| HSUPA Band II Top Middle CH 9400 | 37 |
| HSUPA Band II Top High CH 9538 | 38 |
| GPRS 850-Body Up Middle CH190 | 39 |
| GPRS 850-Body Down Low CH128 | 40 |
| GPRS 850-Body Down Middle CH190 | 41 |
| GPRS 850-Body Down High CH251 | 42 |
| GPRS 850-Body Top Middle CH190 | 43 |
| GPRS 850-Body Left Middle CH190 | 44 |
| GPRS1900-Body Up Middle CH661 | 45 |
| GPRS1900-Body Down Low CH512 | 46 |



Compliance Certification Services Inc.

| | |
|--------------------------------------|----|
| GPRS1900-Body Down Middle CH661..... | 47 |
| GPRS1900-Body Down High CH810..... | 48 |
| GPRS1900-Body Top Middle CH661..... | 49 |
| GPRS1900-Body Left Middle CH661..... | 50 |



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-Body Up Low CH1

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band:

ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /802.11b Body Up Low CH1/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.125 mW/g

IEEE 802.11b /802.11b Body Up Low CH1/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.785 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.135 mW/g

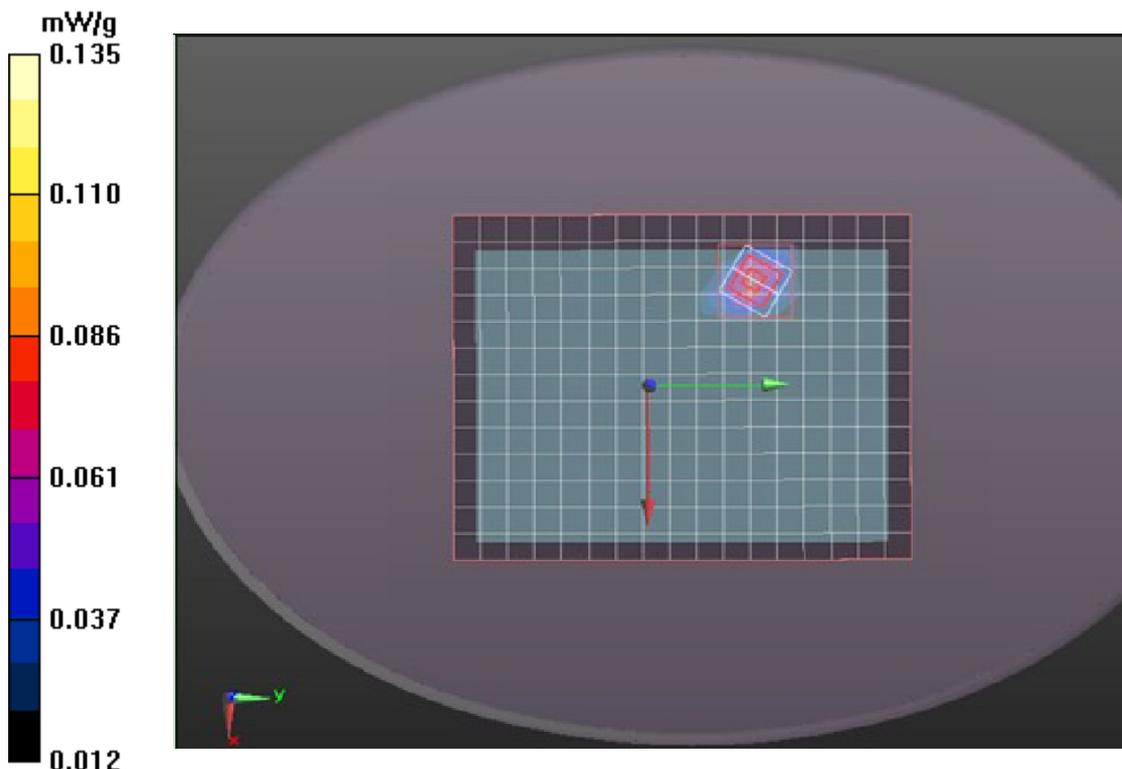



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-Body Up Middle CH6

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz
Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 52.70$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /802.11b Body Up Middle CH6/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.151 mW/g

IEEE 802.11b /802.11b Body Up Middle CH6/Zoom Scan (7x7x9)/Cube


0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.810 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.223 mW/g

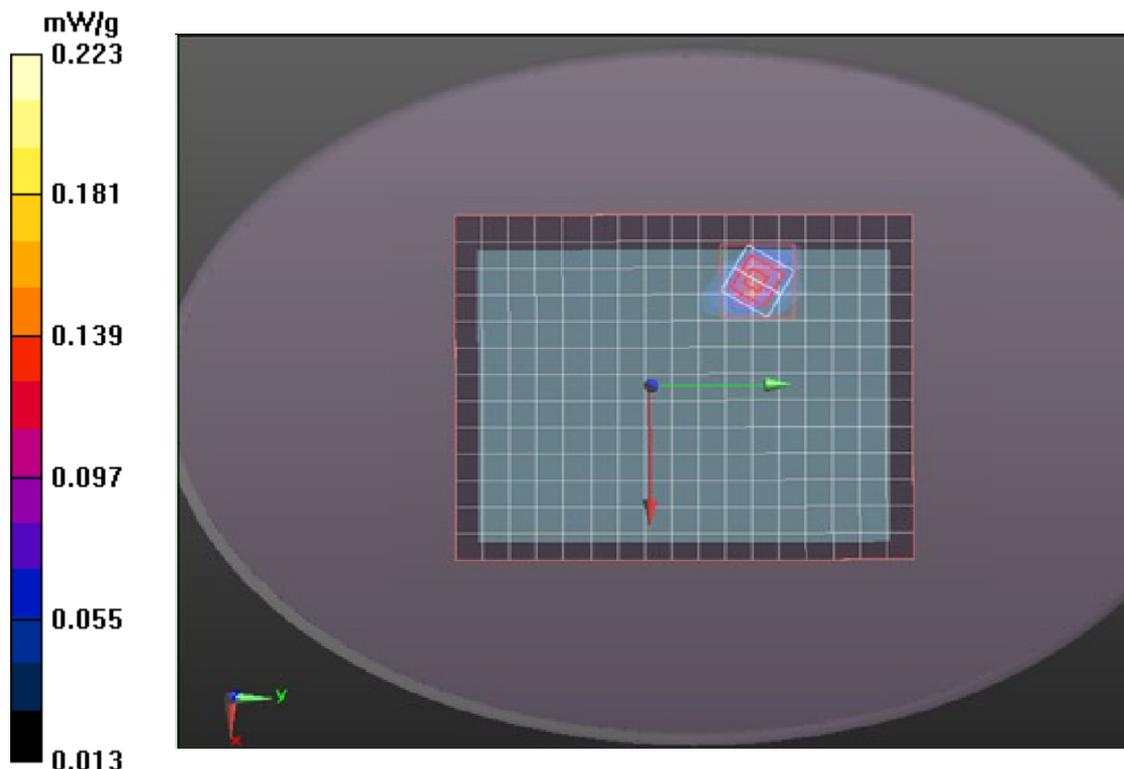



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-Body Up High CH11

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 53.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /802.11b Body Up High CH11/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.361 mW/g

IEEE 802.11b /802.11b Body Up High CH11/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.853 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.158mW/g

Maximum value of SAR (measured) = 0.358 mW/g

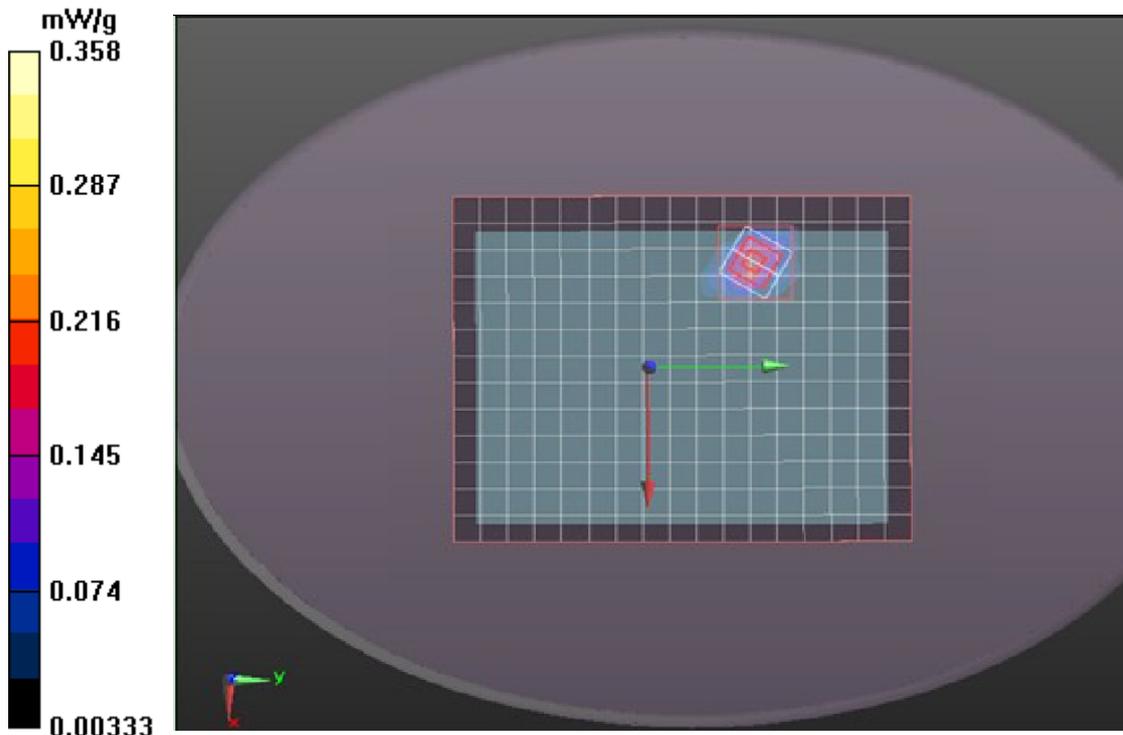



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-Body Down Low CH1

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz
Band; Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 51.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /802.11b Body Down Low CH1/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.423 mW/g

IEEE 802.11b /802.11b Body Down Low CH1/Zoom Scan (7x7x9)/Cube


0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.220 V/m; Power Drift = -0.0029 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 0.451 mW/g

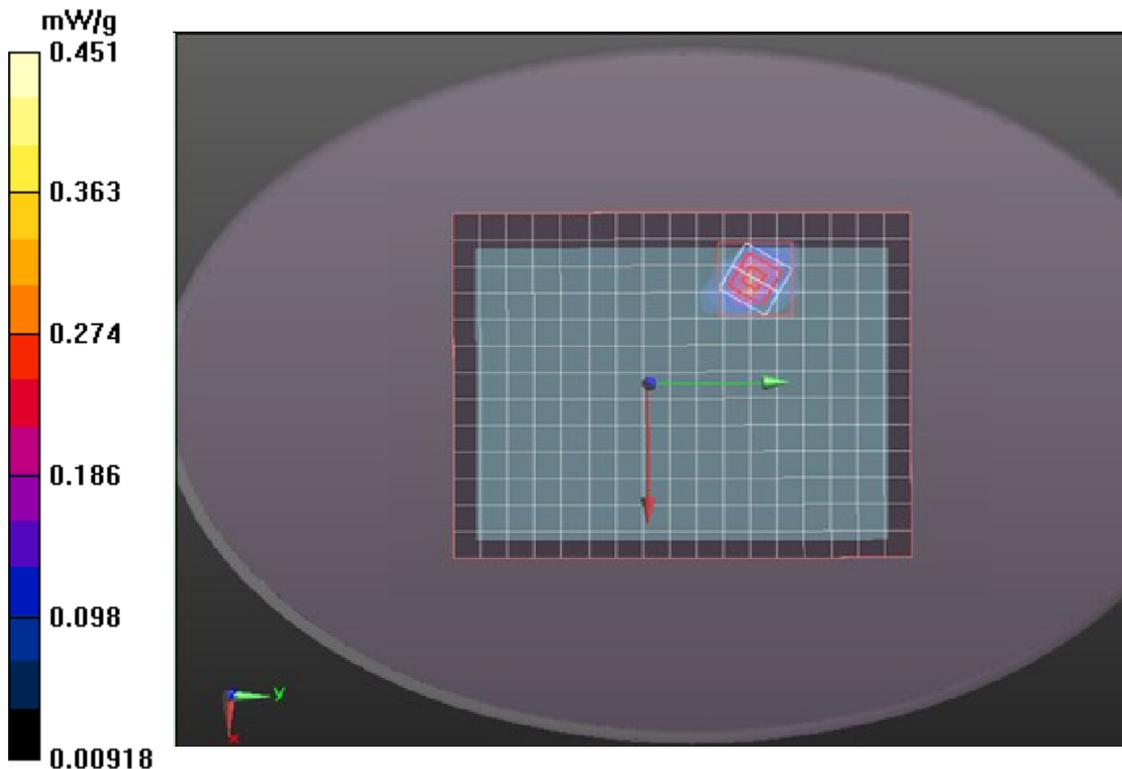



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-Body Down Middle CH6

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz
Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 52.70$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /802.11b Body Down Middle CH6/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.544 mW/g

IEEE 802.11b /802.11b Body Down Middle CH6/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.250 V/m; Power Drift = 0.0013 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.597 mW/g

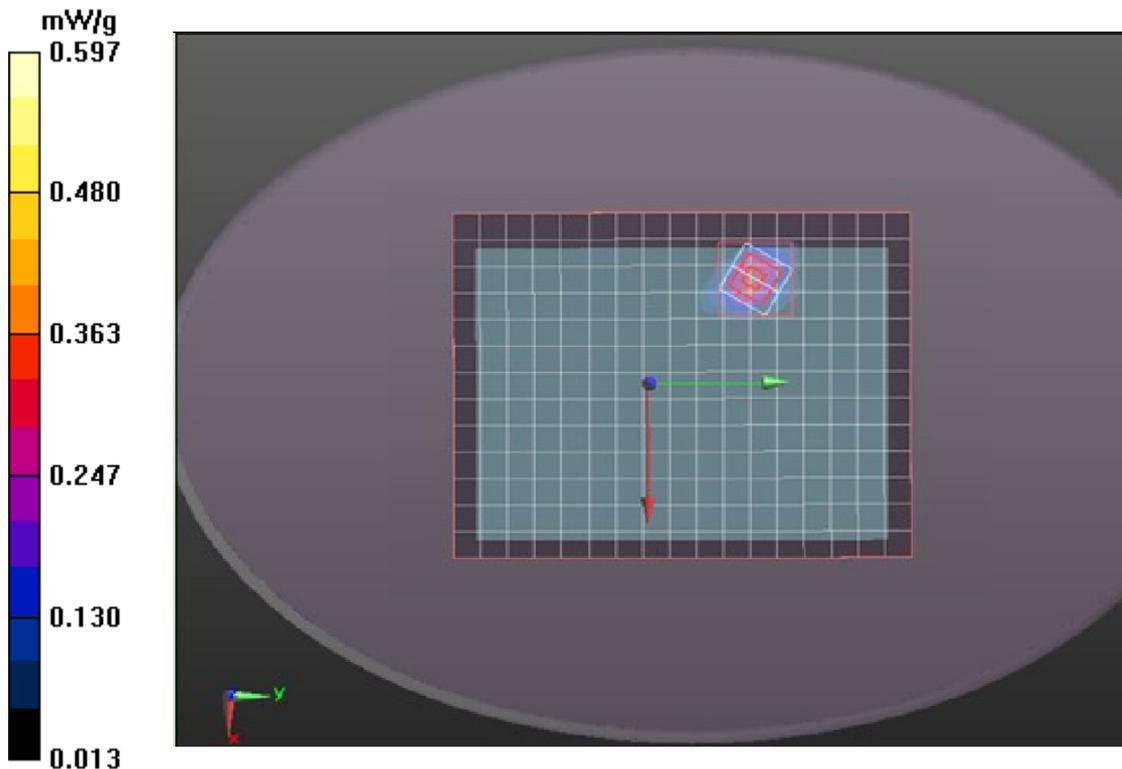



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-Body Down HighCH11

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 53.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /802.11b Body Down HighCH11/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.450 mW/g

IEEE 802.11b /802.11b Body Down HighCH11/Zoom Scan (7x7x9)/Cube


0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.317 V/m; Power Drift = -0.0085 dB

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.451 mW/g

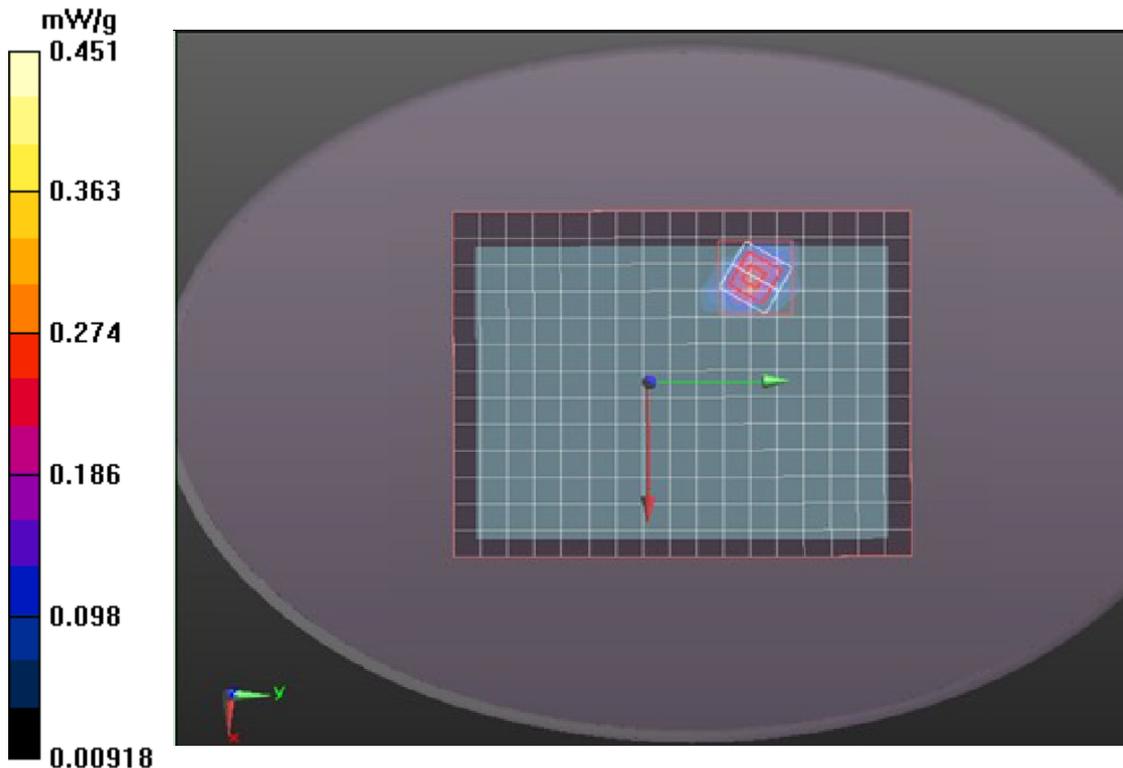



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-End Low CH1

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz
Band; Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.817$ mho/m; $\epsilon_r = 38.149$;
 $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b/ End Low CH1/Area Scan (10x5x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.219 mW/g

IEEE 802.11b/ End Low CH1/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.366 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.215mW/g; SAR(10 g) = 0.137mW/g

Maximum value of SAR (measured) = 0.316 mW/g

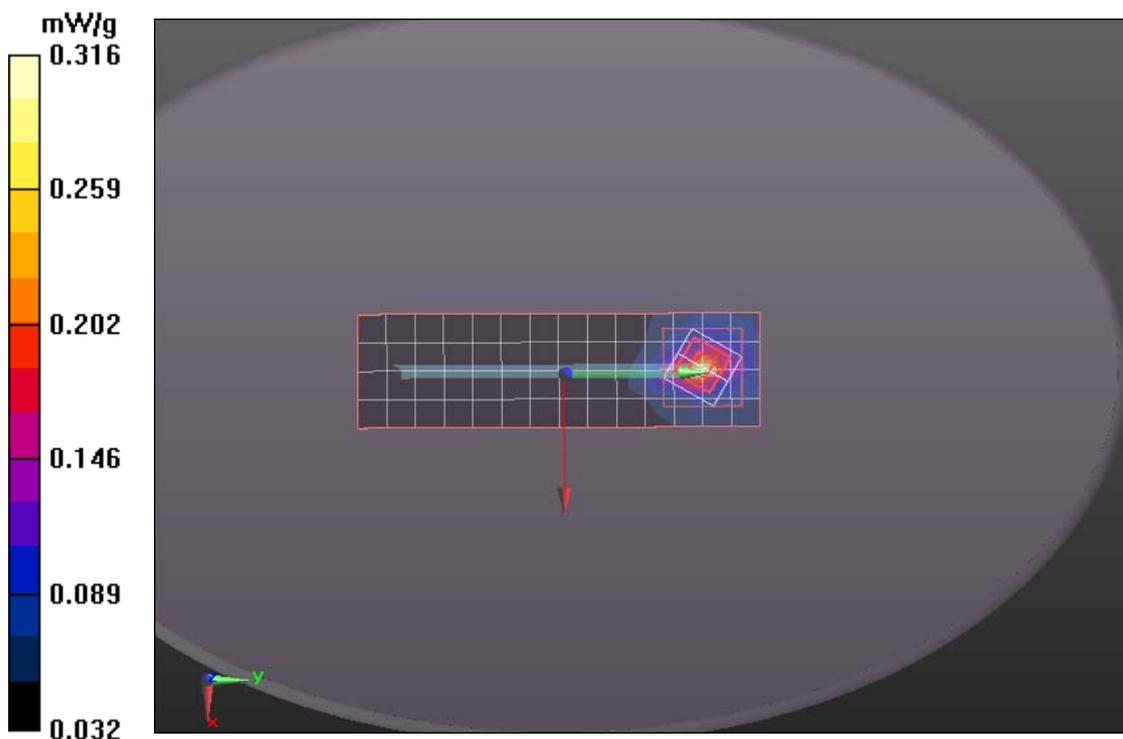



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-End Middle CH6

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz
Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.818$ mho/m; $\epsilon_r = 37.997$;
 $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b/ End Middle CH6/Area Scan (10x5x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.247 mW/g


IEEE 802.11b/ End Middle CH6/Zoom Scan (7x7x9)/Cube 0: Measurement
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.730 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.259 mW/g

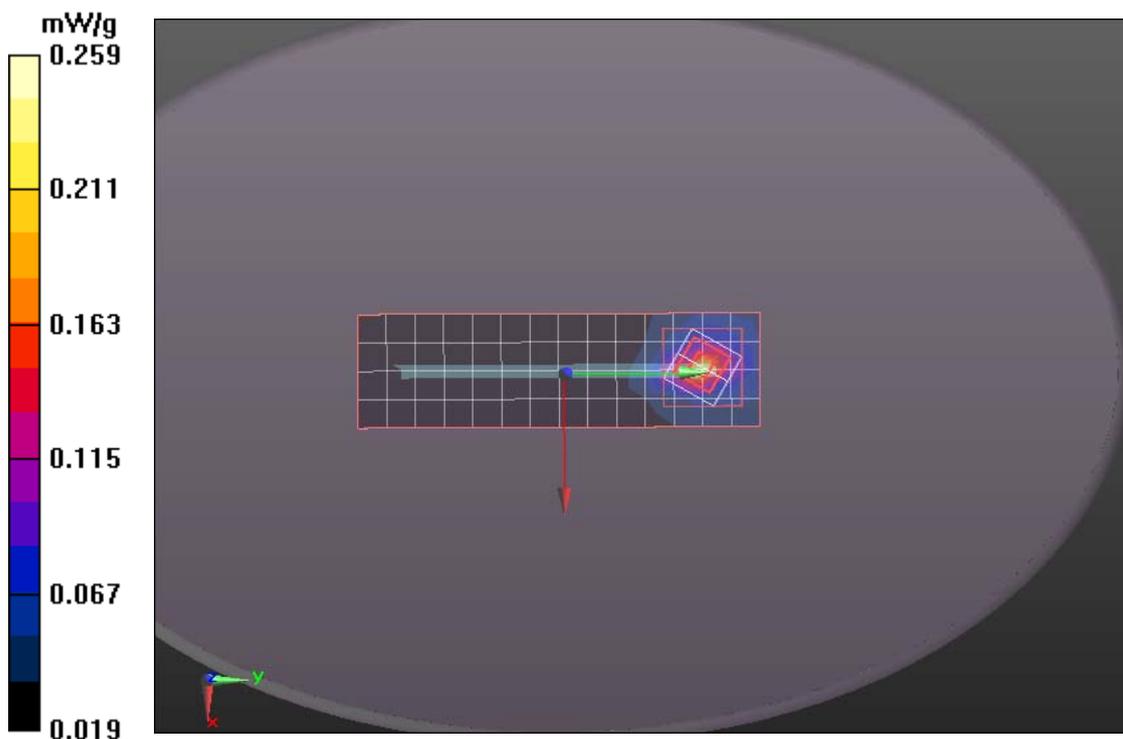



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-End High CH11

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz
Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 37.772$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b/ End High CH11/Area Scan (10x5x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.128 mW/g

IEEE 802.11b/ End High CH11/Zoom Scan (7x7x9)/Cube 0: Measurement


grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.756 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.157 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

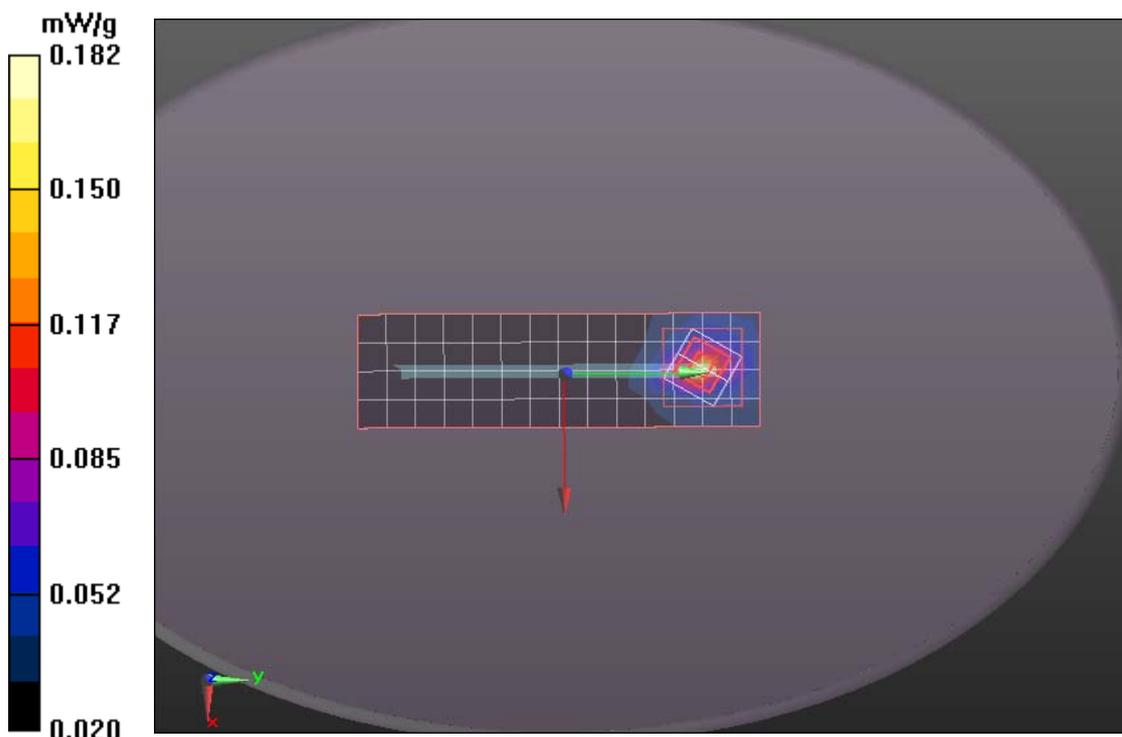



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-Right Low CH1

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz
Band; Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.823$ mho/m; $\epsilon_r = 38.149$;
 $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b /Right Low CH1/Area Scan (15x10x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.307 mW/g


IEEE 802.11b / Right Low CH1/Zoom Scan (7x7x9)/Cube 0: Measurement
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.497 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

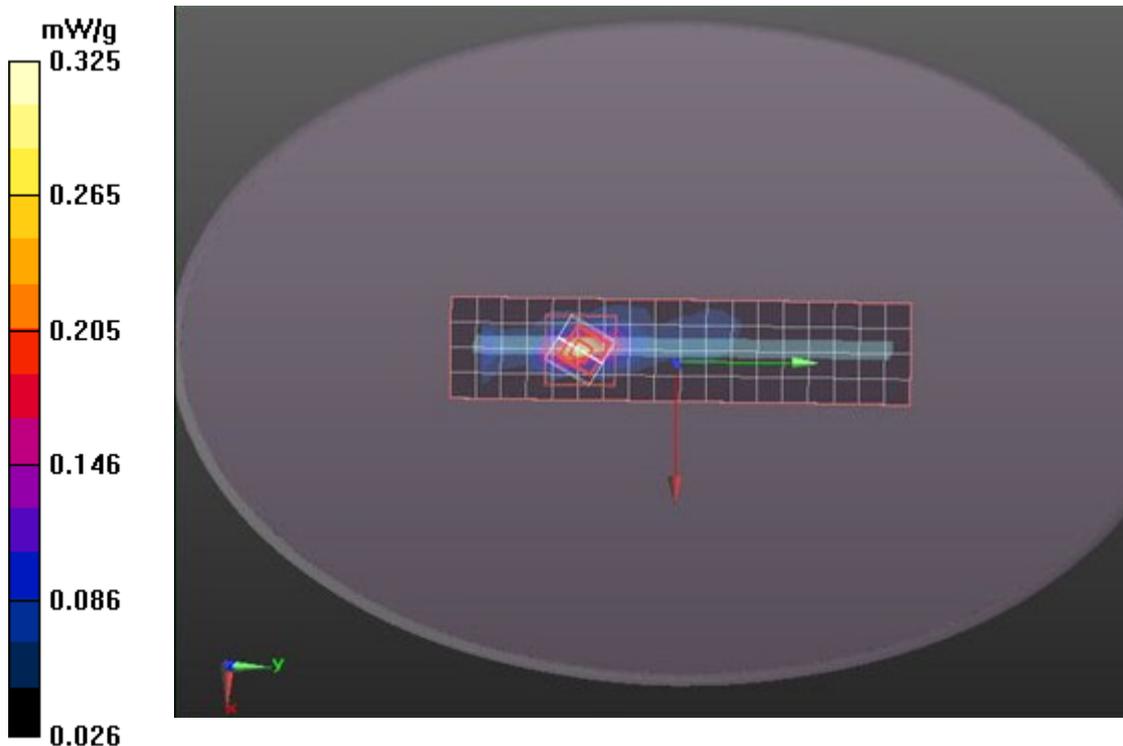



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-Right Middle CH6

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz
Band; Frequency: 2437 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.836$ mho/m; $\epsilon_r = 37.997$;
 $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b / Right Middle CH6/Area Scan (15x5x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.229 mW/g

IEEE 802.11b / Right Middle CH6/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.437 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.075 mW/g

Maximum value of SAR (measured) = 0.237mW/g

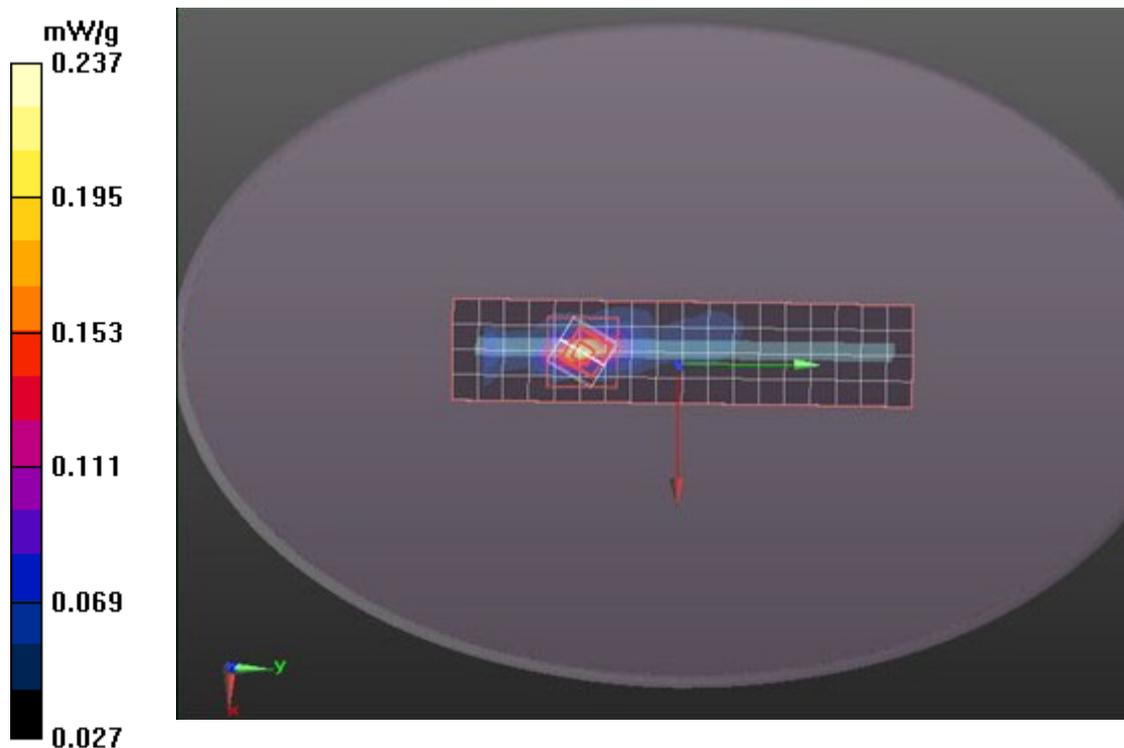



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11b-Right High CH11

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz
Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.874$ mho/m; $\epsilon_r = 37.772$;
 $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11b / Right High CH11/Area Scan (15x5x1): Measurement grid:
dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.128 mW/g

IEEE 802.11b / Right High CH11/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.577 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.105 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.132 mW/g

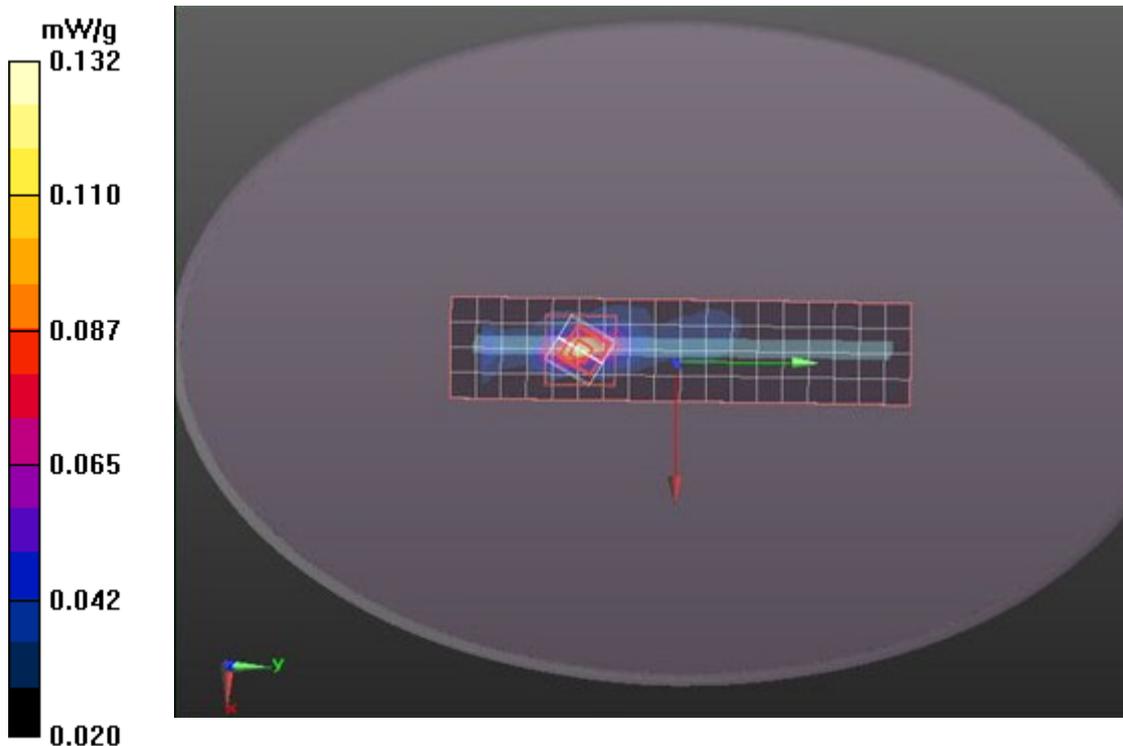



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g-Body Up Low CH1

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 51.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/IEEE 802.11g Body Up Low CH1/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.312 mW/g

IEEE 802.11g/IEEE 802.11g Body Up Low CH1/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.785 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.250 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.343 mW/g

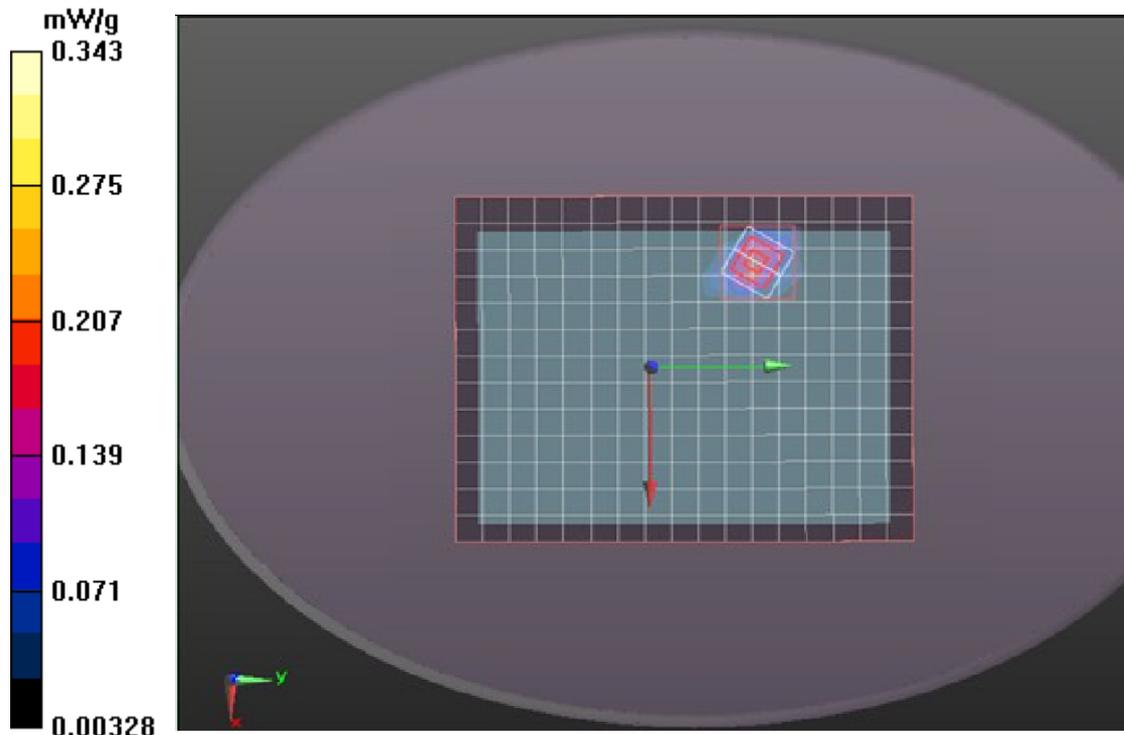



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g-Body Middle CH6

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 52.70$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/IEEE 802.11g Body Up Middle CH6/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.351 mW/g

IEEE 802.11g/IEEE 802.11g Body Up Middle CH6/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.810 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.107mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.127 mW/g

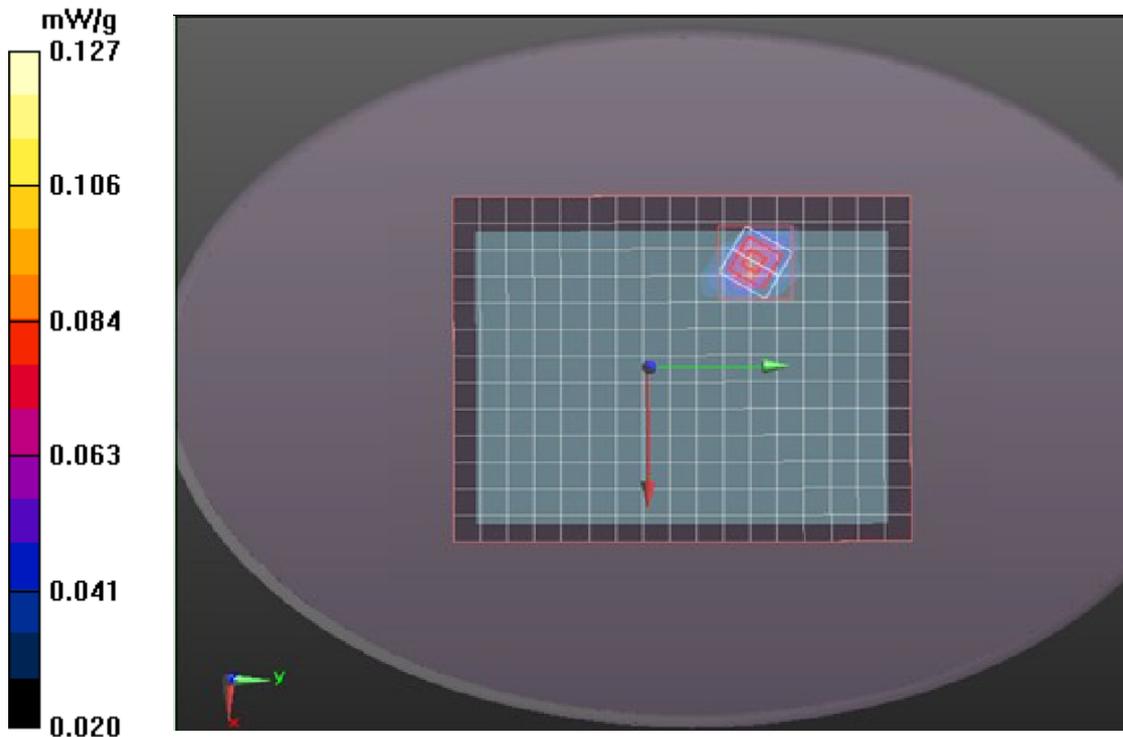



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g-Body Up High CH11

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 53.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/IEEE 802.11g Body Up High CH11/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.178 mW/g

IEEE 802.11g/IEEE 802.11g Body Up High CH11/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.853 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.187 mW/g

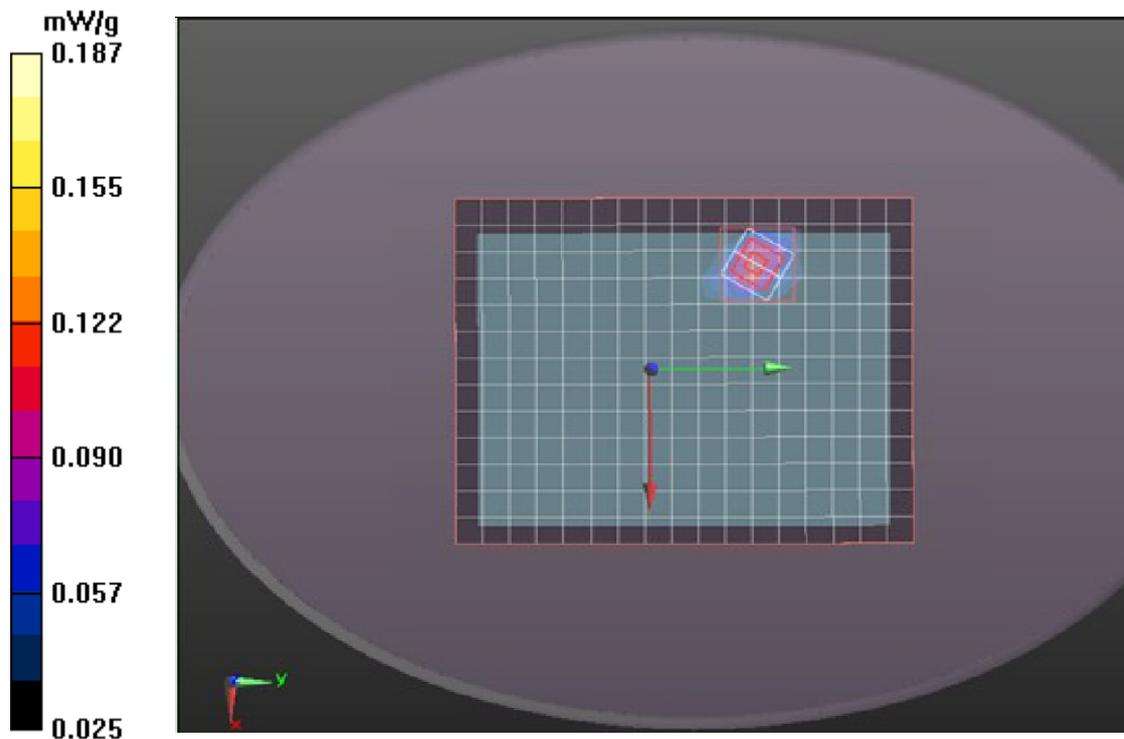



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g-Body Down Low CH1

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.94$ mho/m; $\epsilon_r = 51.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/IEEE 802.11g Body Down Low CH1/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.423 mW/g

IEEE 802.11g/IEEE 802.11g Body Down Low CH1/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.220 V/m; Power Drift = -0.0029 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.329 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.506 mW/g

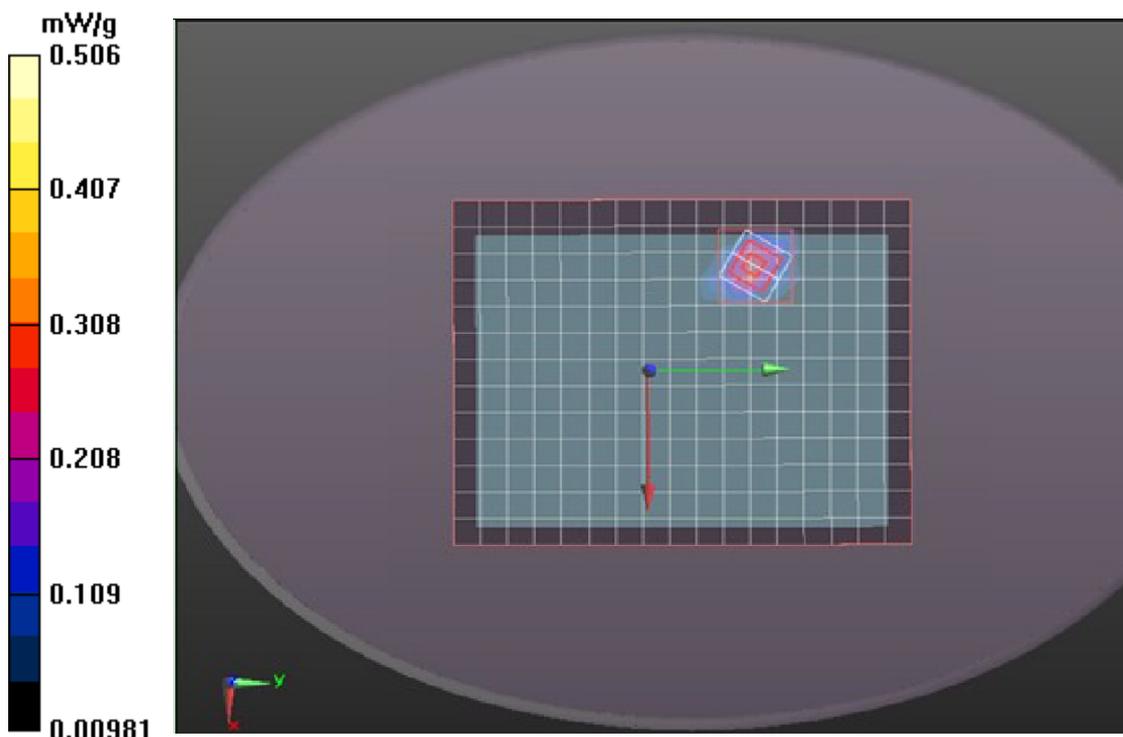



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g-Body Down Middle CH6

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 52.70$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/IEEE 802.11g Body Down Middle CH6/Area Scan

(15x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.444 mW/g

IEEE 802.11g/IEEE 802.11g Body Down Middle CH6/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.250 V/m; Power Drift = 0.0013 dB

Peak SAR (extrapolated) = 0.788 W/kg

SAR(1 g) = 0.320 mW/g; SAR(10 g) = 0.176mW/g

Maximum value of SAR (measured) = 0.505 mW/g

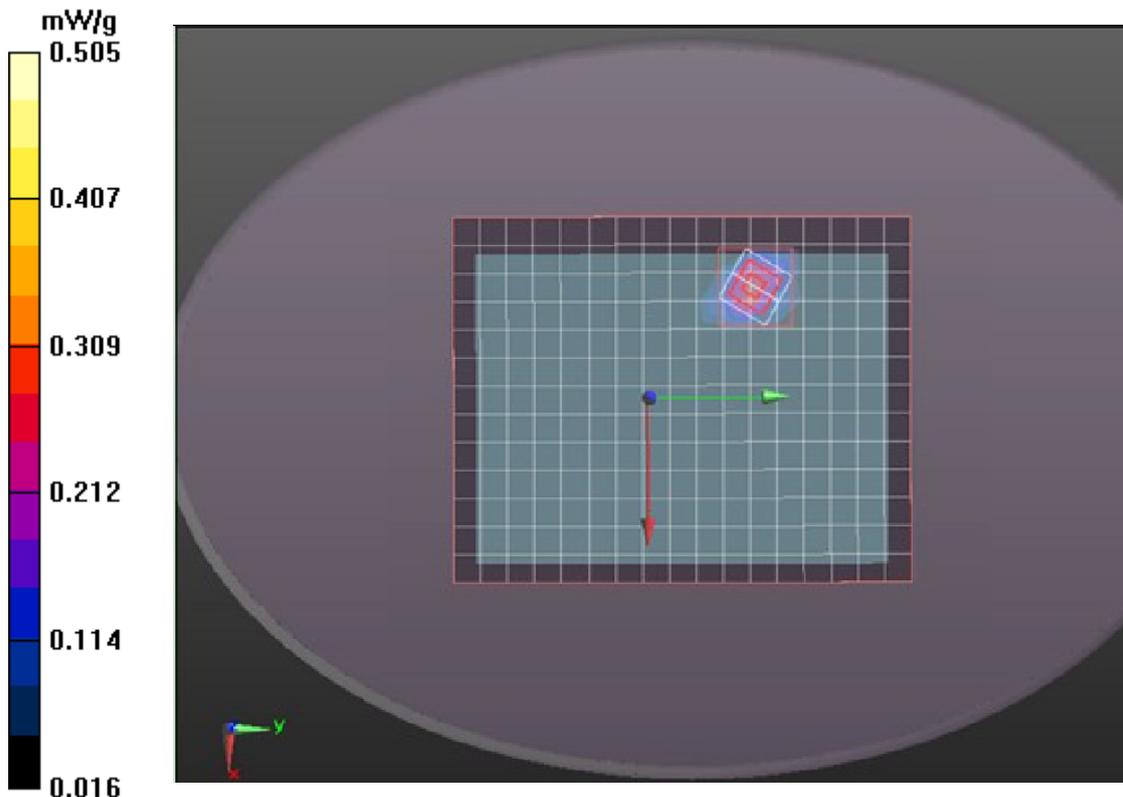



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g-Body Down HighCH11

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated):

$f = 2462 \text{ MHz}$; $\sigma = 1.96 \text{ mho/m}$; $\epsilon_r = 53.84$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/IEEE 802.11g Body Down HighCH11/Area Scan

(15x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.450 mW/g

IEEE 802.11g/IEEE 802.11g Body Down HighCH11/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.317 V/m; Power Drift = -0.0085 dB

Peak SAR (extrapolated) = 0.802 W/kg

SAR(1 g) = 0.356 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.534 mW/g

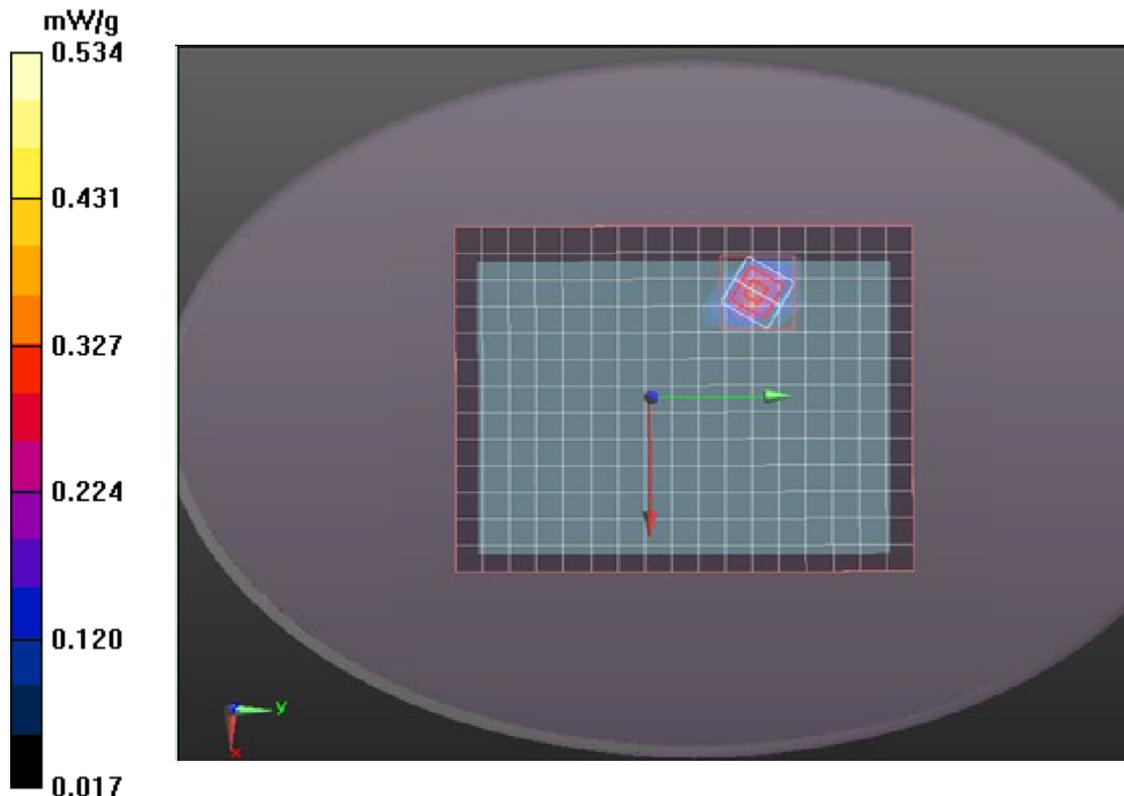



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g-End Low CH1

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.817$ mho/m; $\epsilon_r = 38.149$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/ End Cheek Low CH1/Area Scan (10x5x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.379 mW/g

IEEE 802.11g/ End Cheek Low CH1/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.366 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.116mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

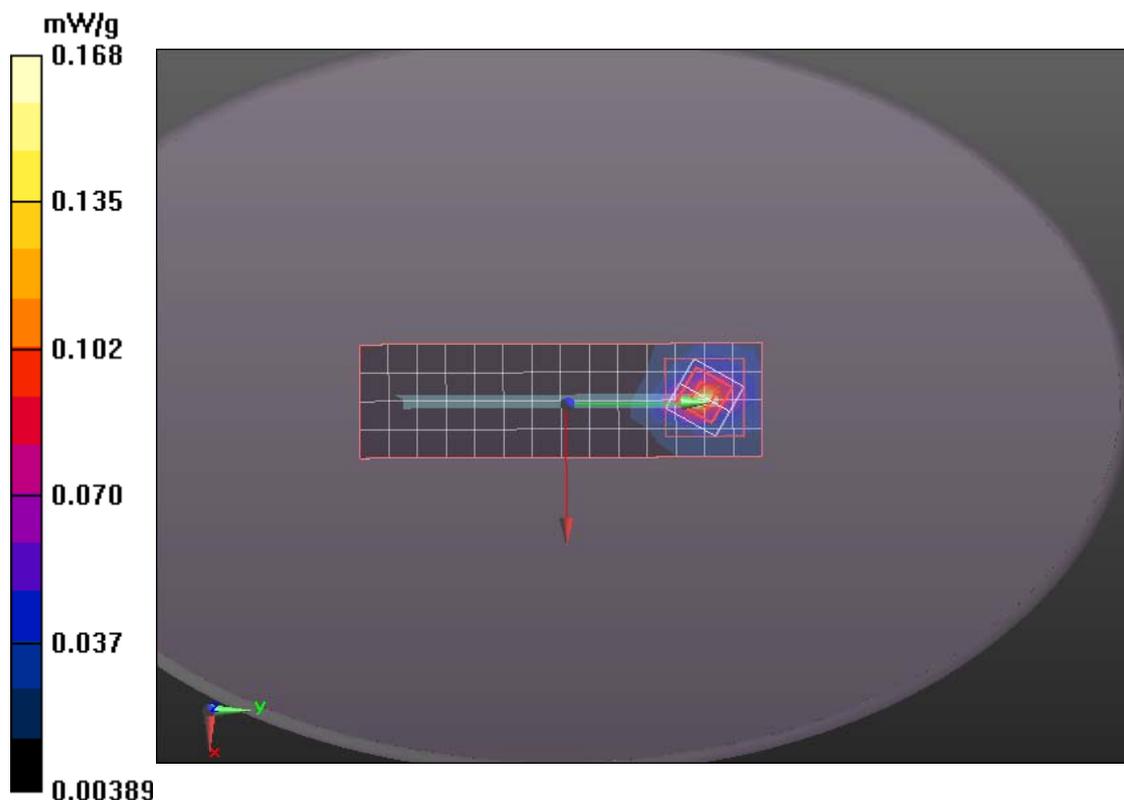



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g- End Middle CH6

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.818$ mho/m; $\epsilon_r = 37.997$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/ End Cheek Middle CH6/Area Scan (10x5x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.297 mW/g

IEEE 802.11g/ End Cheek Middle CH6/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.730 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.662 W/kg

SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (measured) = 0.383 mW/g

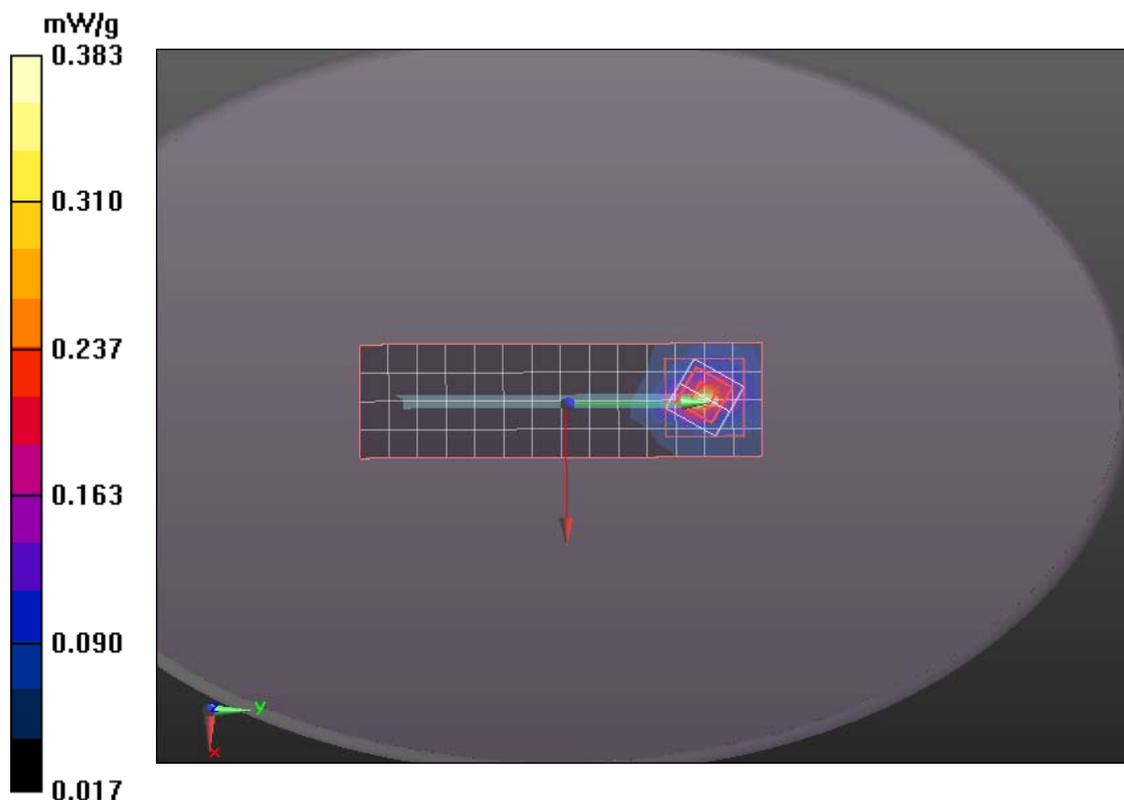



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g- End High CH11

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz
Band; Frequency: 2462 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.874$ mho/m; $\epsilon_r = 37.772$;
 $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/ End Cheek High CH11/Area Scan (10x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.552 mW/g

IEEE 802.11g/ End Cheek High CH11/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.756 V/m; Power Drift = -0.05dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.557 mW/g

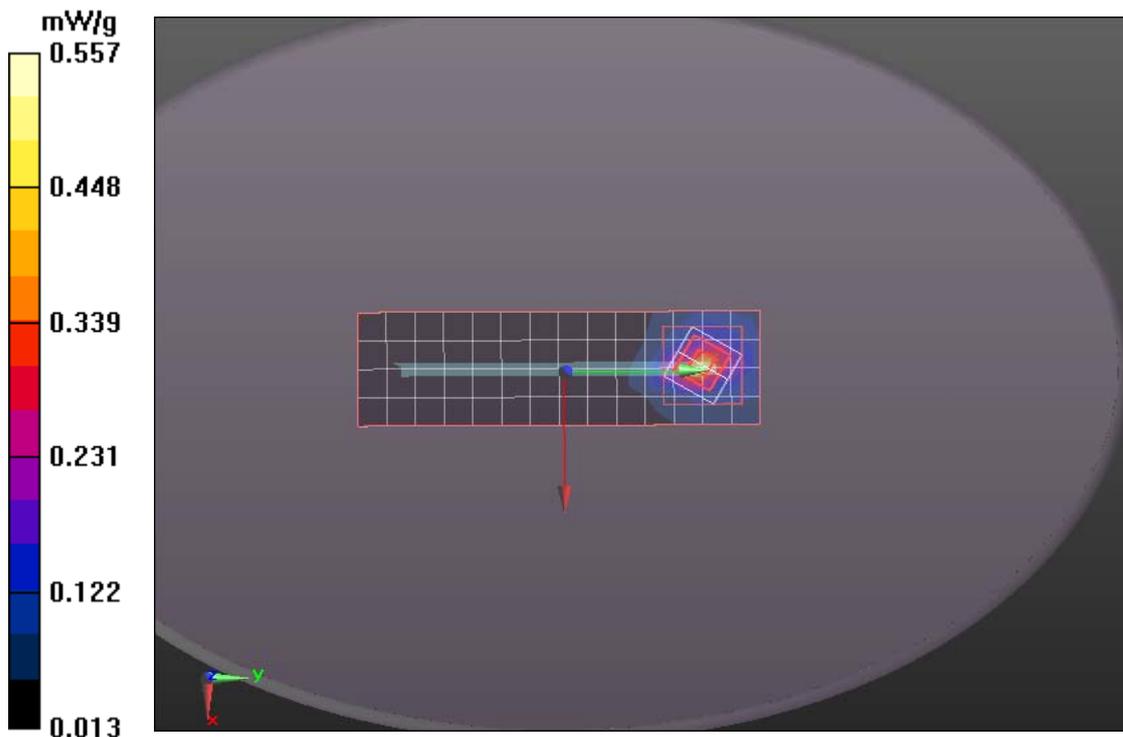



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g-Right Low CH1

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.823$ mho/m; $\epsilon_r = 38.149$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/ Right Cheek Low CH1/Area Scan (15x5x1): Measurement

grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.150 mW/g

IEEE 802.11g/ Right Cheek Low CH1/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.497 V/m; Power Drift = -0.11dB

Peak SAR (extrapolated) = 0.4736 W/kg

SAR(1 g) = 0.124mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.152 mW/g

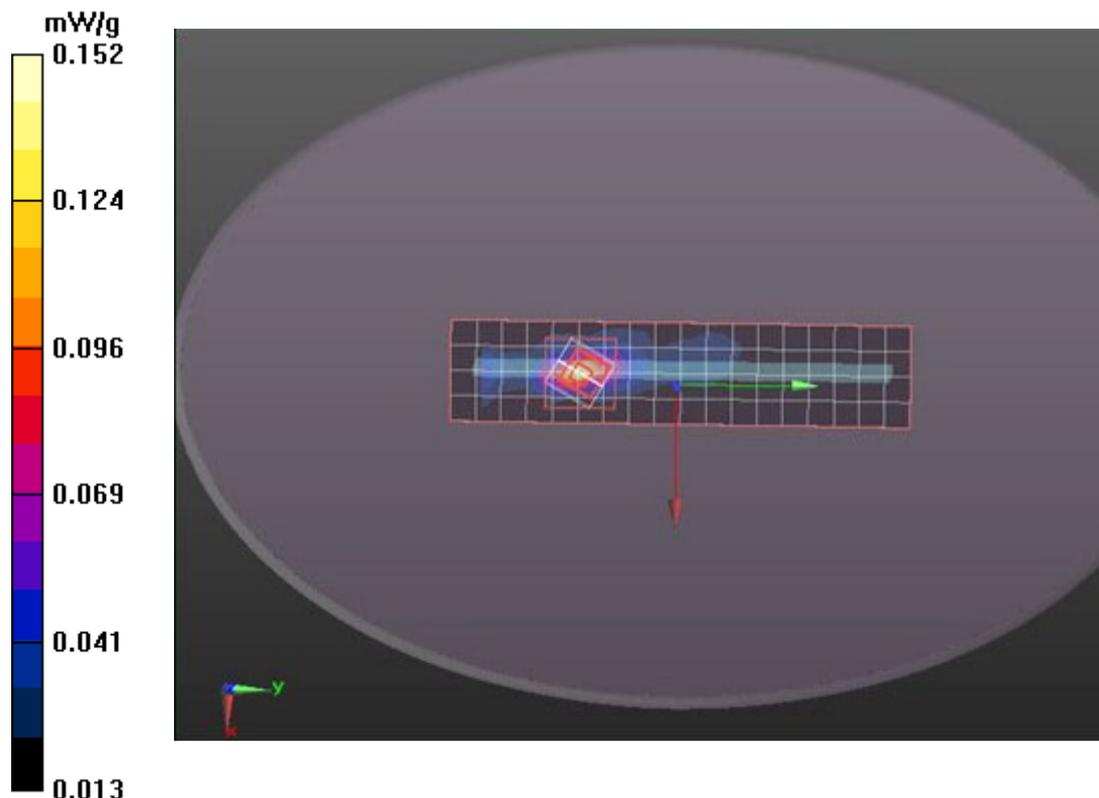



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g- Right Middle CH6

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.836$ mho/m; $\epsilon_r = 37.997$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/ Right Cheek Middle CH6/Area Scan (15x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.153 mW/g

IEEE 802.11g/ Right Cheek Middle CH6/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.437 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

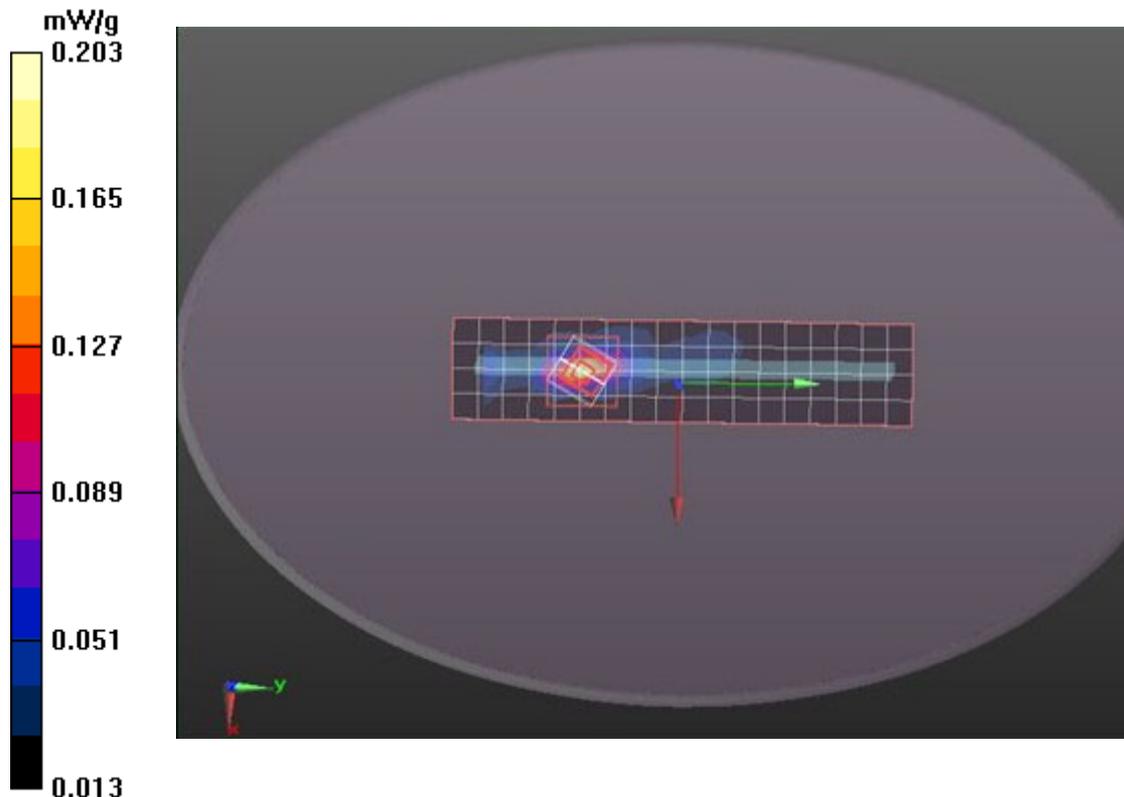



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

IEEE 802.11g- Right High CH11

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: IEEE 802.11g; Communication System Band: ISM 2.4GHz Band; Frequency: 2462 MHz; Communication System PAR: 0 dB Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.874$ mho/m; $\epsilon_r = 37.772$; $\rho = 1000$ kg/m³

Phantom section: Left Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

IEEE 802.11g/ Right Cheek High CH11/Area Scan (15x5x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.280 mW/g

IEEE 802.11g/ Right Cheek High CH11/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.577 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.211 mW/g; SAR(10 g) = 0.165 mW/g

Maximum value of SAR (measured) = 0.295 mW/g

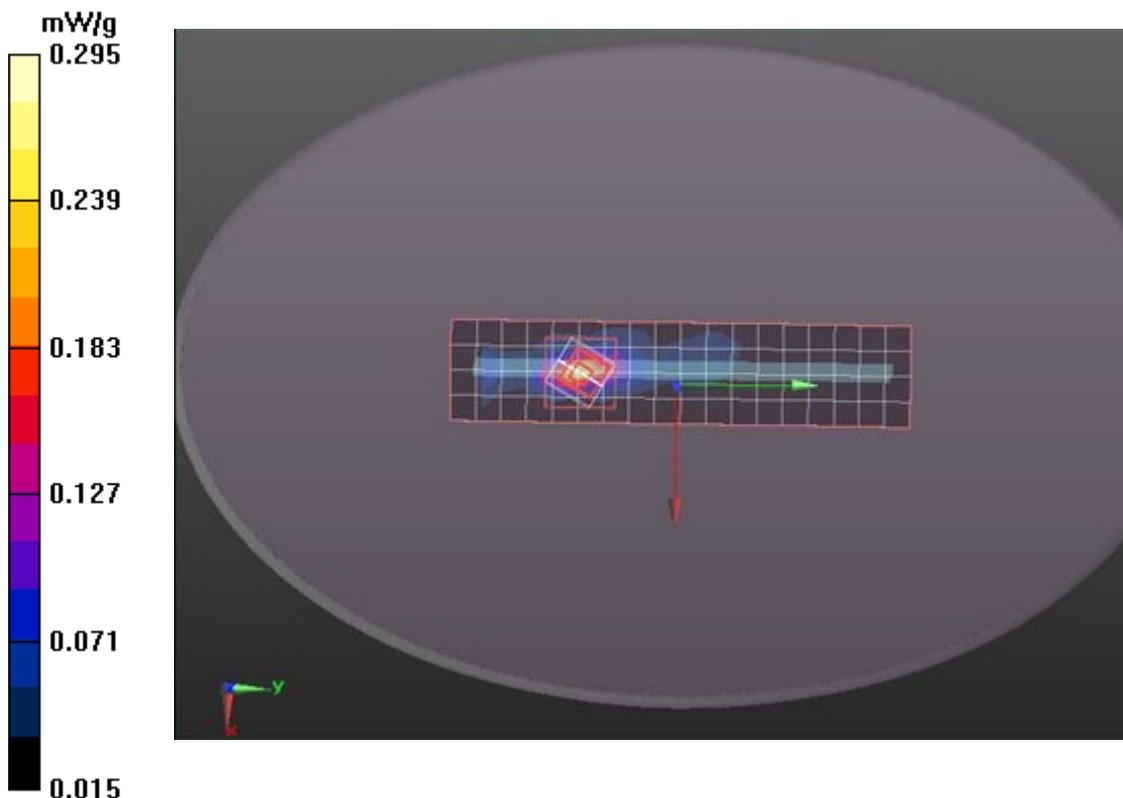



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Up Low CH9262

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1852.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 53.01$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II/Body Up Low CH9262/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.428 mW/g

HSUPA Band II/Body Up Low CH9262/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.136 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.824 W/kg

SAR(1 g) = 0.416 mW/g; SAR(10 g) = 0.187 mW/g

Maximum value of SAR (measured) = 0.521 mW/g

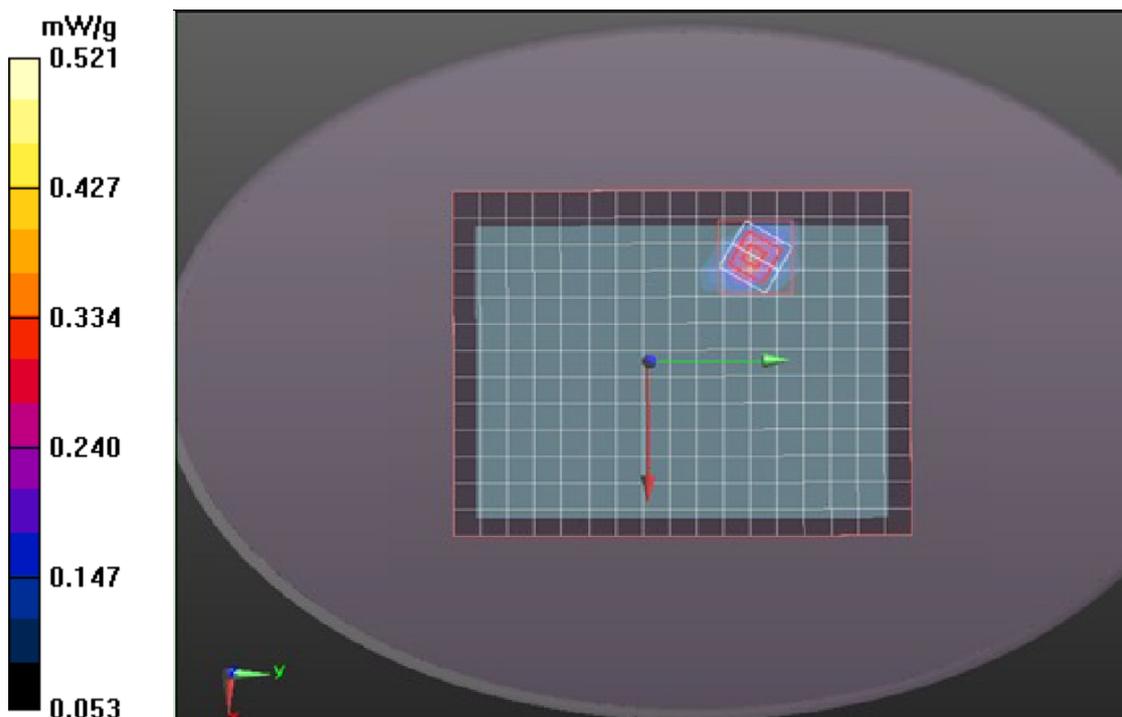



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Up Middle CH9400

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II/Body Up Middle CH9400/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.420 mW/g

HSUPA Band II/Body Up Middle CH9400/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.136 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.724 W/kg

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.615 mW/g

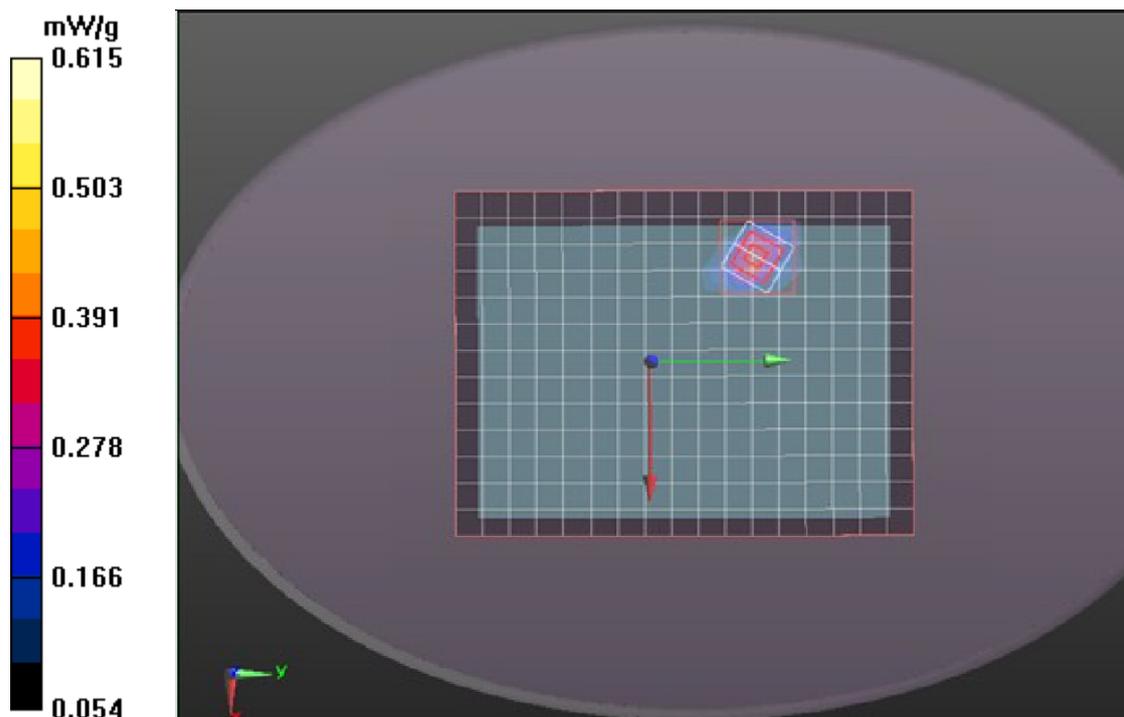



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Up High CH9888

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II/Body Up High CH9888/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.723 mW/g

HSUPA Band II/Body Up High CH9888/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.136 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.771 W/kg

SAR(1 g) = 0.424mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.820 mW/g

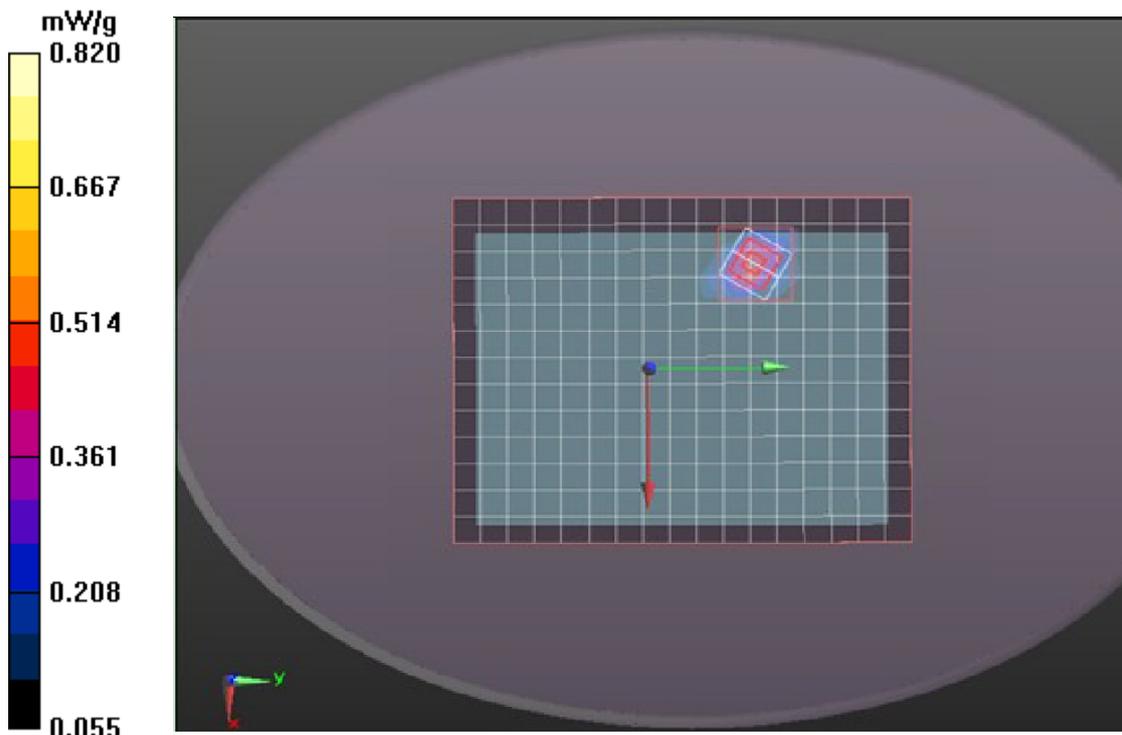



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Down Low CH9262

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1852.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 53.01$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II/Body Down Low CH92620/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.064 mW/g

HSUPA Band II/Body Down Low CH9262/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.894 V/m; Power Drift = -0.12dB

Peak SAR (extrapolated) = 3.248 W/kg

SAR(1 g) = 0.746 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 1.176 mW/g

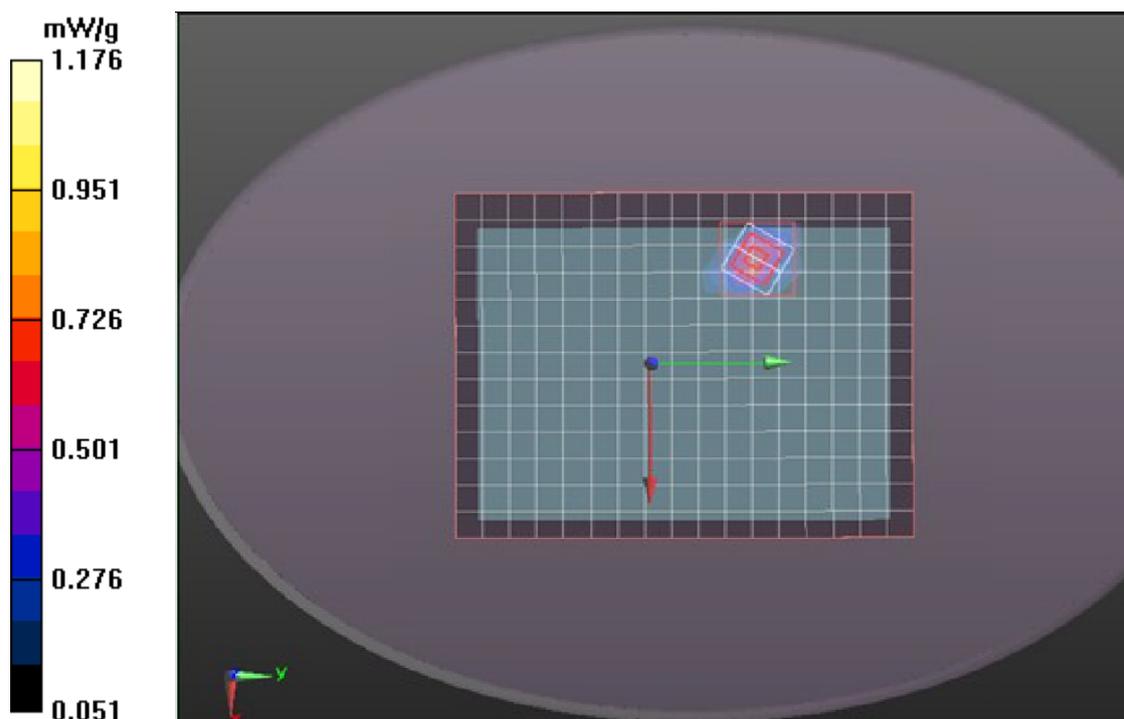



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Down Middle CH9400

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II/Body Down Middle CH 9400/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.001 mW/g

HSUPA Band II/Body Down Middle CH 9400/Zoom Scan (7x7x9)/Cube


0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.894 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.248 W/kg

SAR(1 g) = 0.727 mW/g; SAR(10 g) = 0.342 mW/g

Maximum value of SAR (measured) = 1.016 mW/g

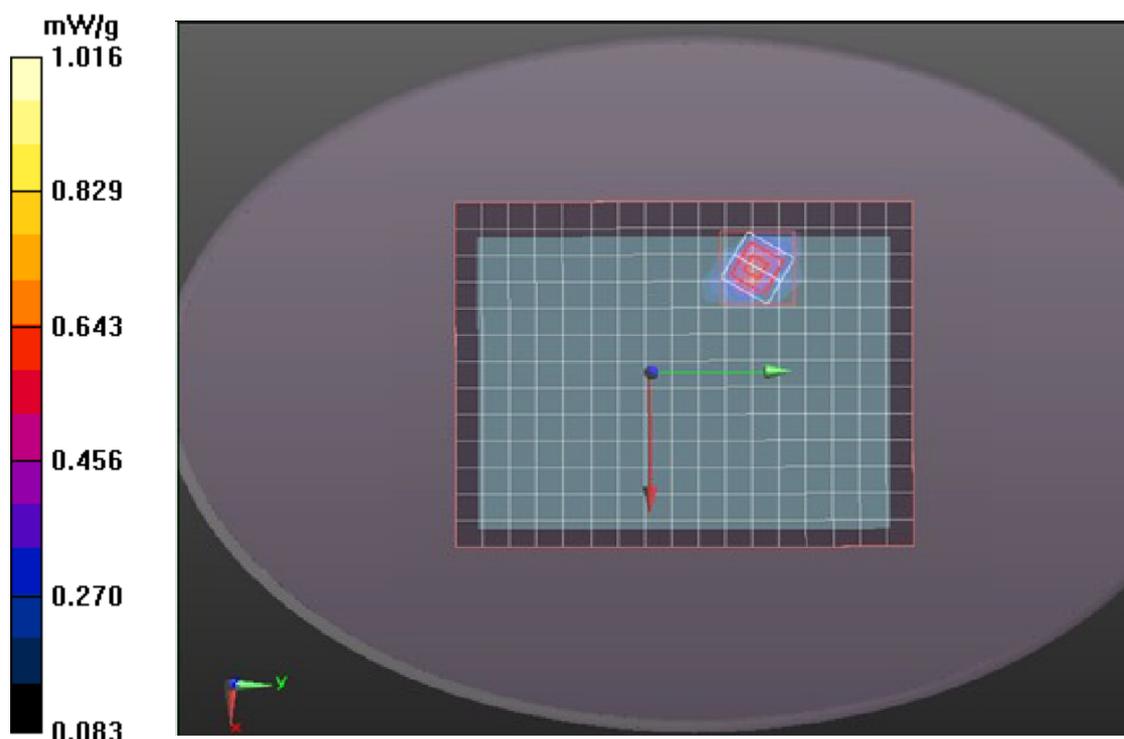



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Down High CH9538

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II/Body Down High CH9538/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.978 mW/g

HSUPA Band II/Body Down High CH9538/Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.894 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.248 W/kg

SAR(1 g) = 0.716 mW/g; SAR(10 g) = 0.352 mW/g

Maximum value of SAR (measured) = 1.002 mW/g

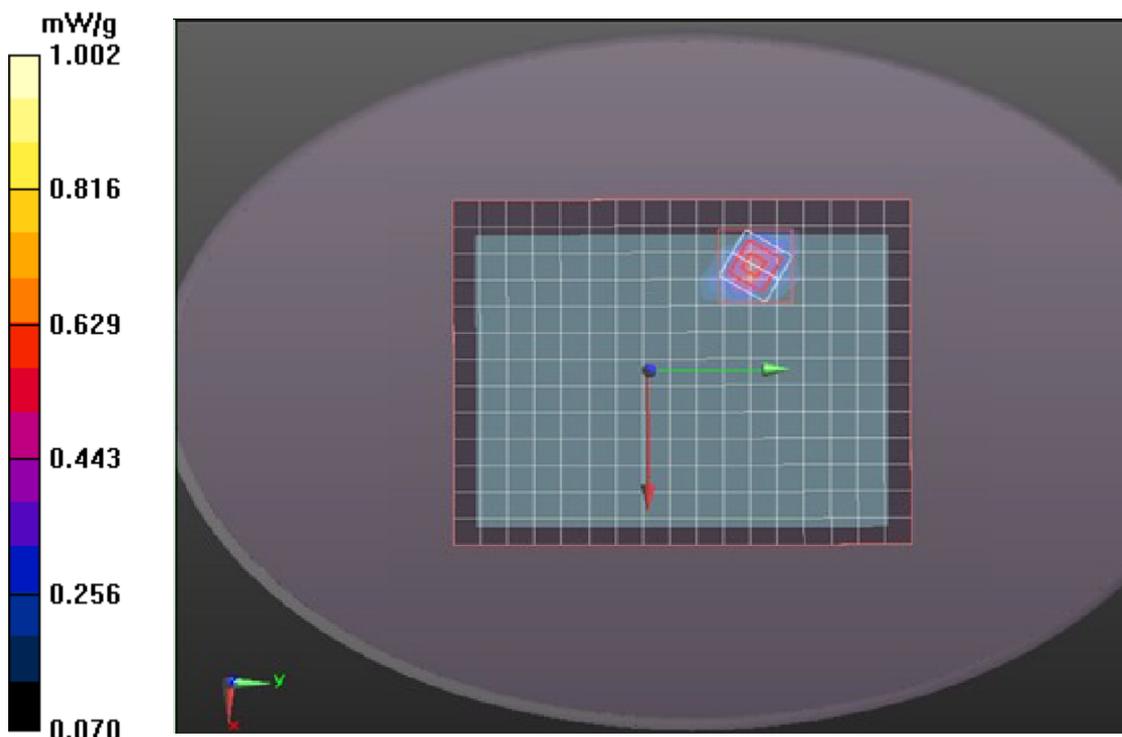



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Left Low CH9262

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1852.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 53.01$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II /Body Left Low CH9262 /Area Scan (15x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.360 mW/g

HSUPA Band II /Body Left Low CH9262 /Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.019 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.417 mW/g

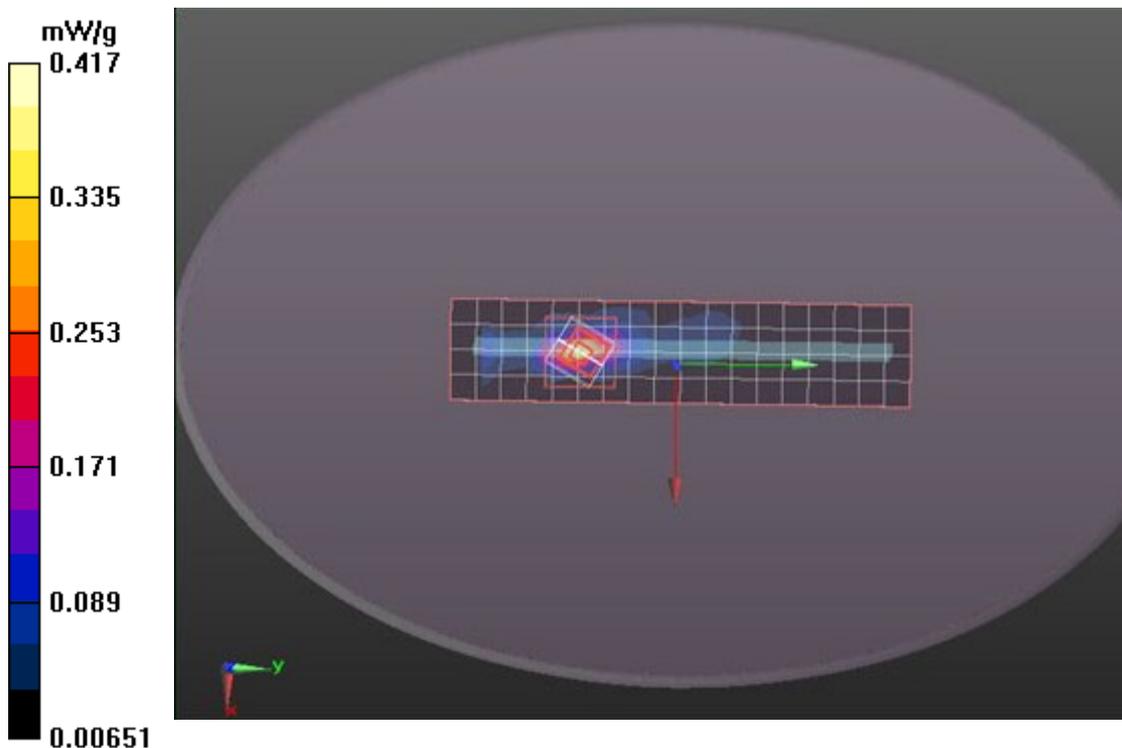



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Left Middle CH9400

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.30$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II /Body Left Low CH 9400 /Area Scan (15x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.360 mW/g

HSUPA Band II /Body Left Low CH 9400 /Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.019 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.843 W/kg

SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.099 mW/g

Maximum value of SAR (measured) = 0.363 mW/g

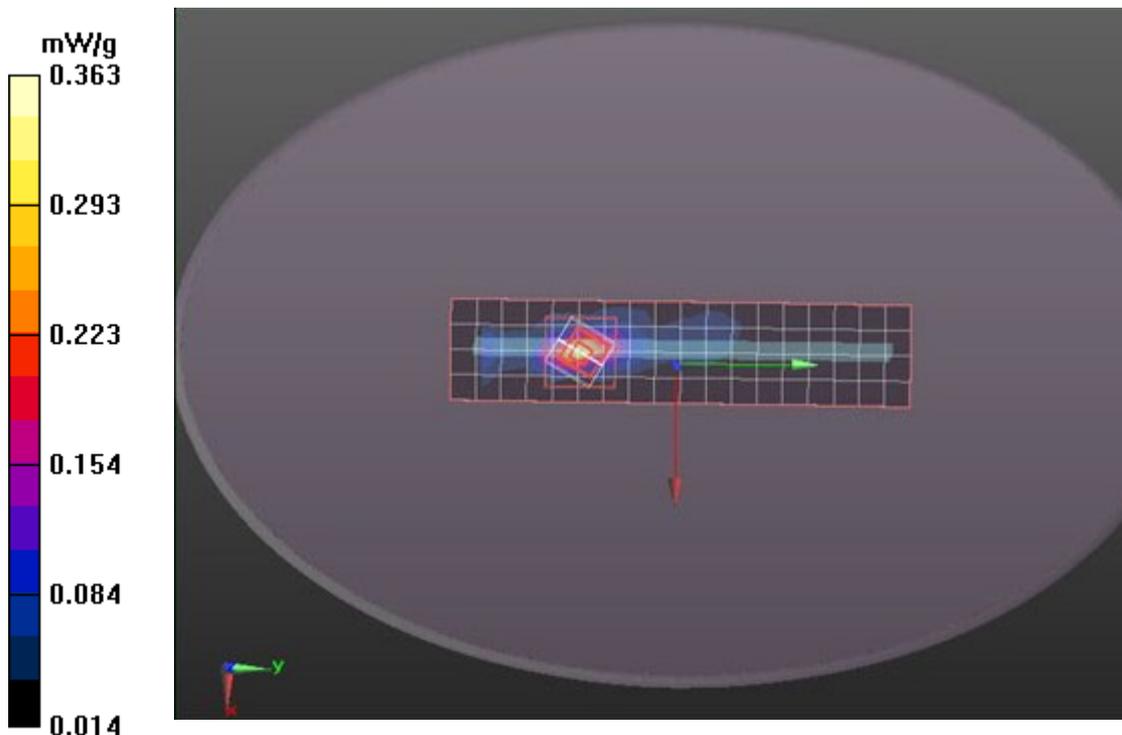



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Left High CH9538

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.50$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II /Body Left High CH9538 /Area Scan (15x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.360 mW/g

HSUPA Band II /Body Left High CH9538 /Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.019 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.743 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.191 mW/g

Maximum value of SAR (measured) = 0.412 mW/g

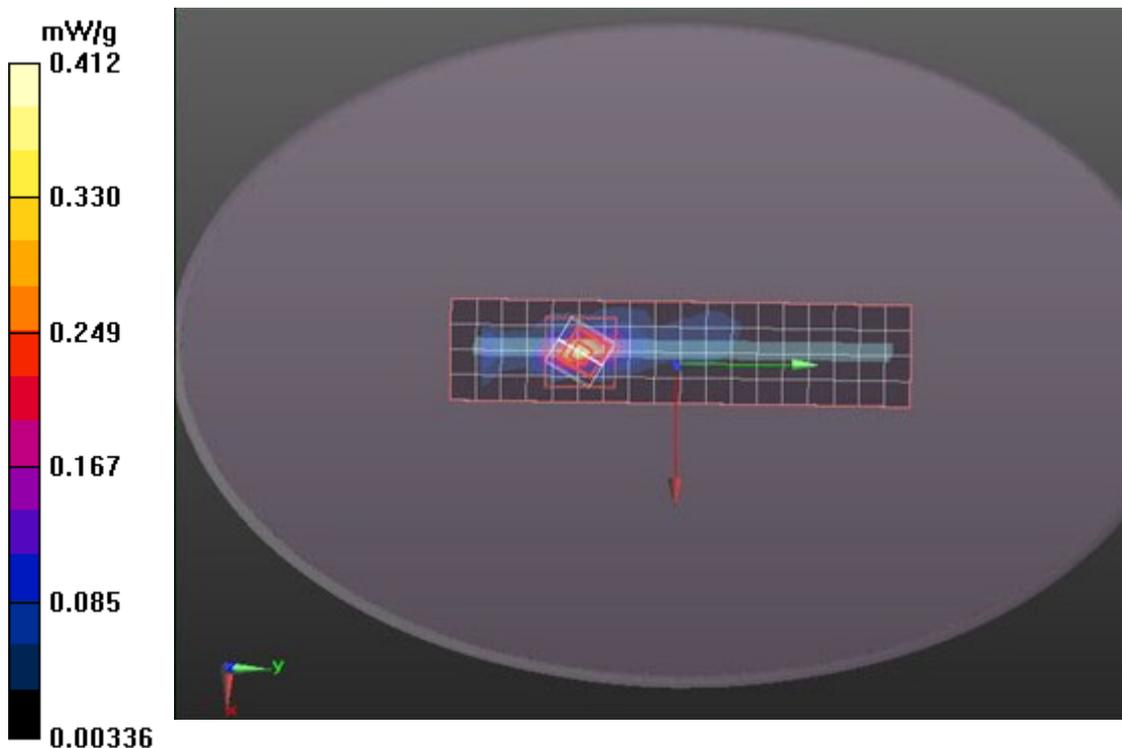



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Top Low CH 9262

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1852.4 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 53.01$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II /Body Top Low CH 9262 /Area Scan (10x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.053 mW/g

HSUPA Band II /Body Top Low CH 9262 /Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 0.291 W/kg

SAR(1 g) = 0.105 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.182 mW/g

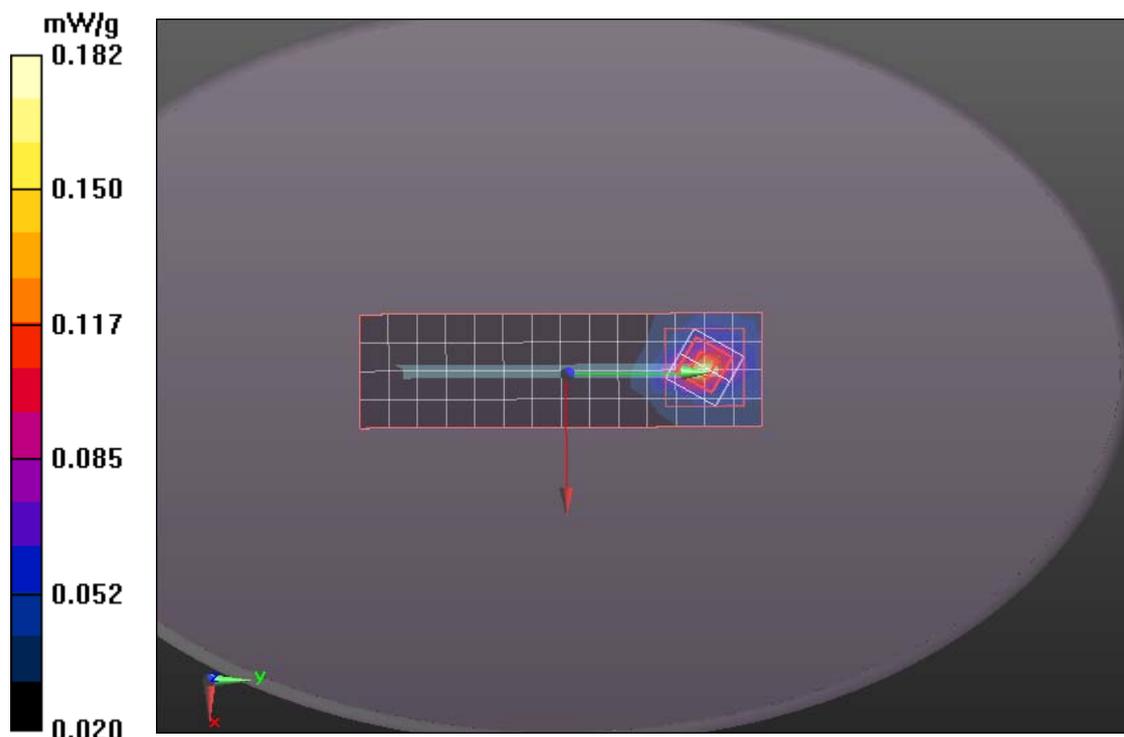



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Top Middle CH 9400

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1880 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II /Body Top Low CH 9400 /Area Scan (10x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.253 mW/g

HSUPA Band II /Body Top Low CH 9400 /Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.283 mW/g

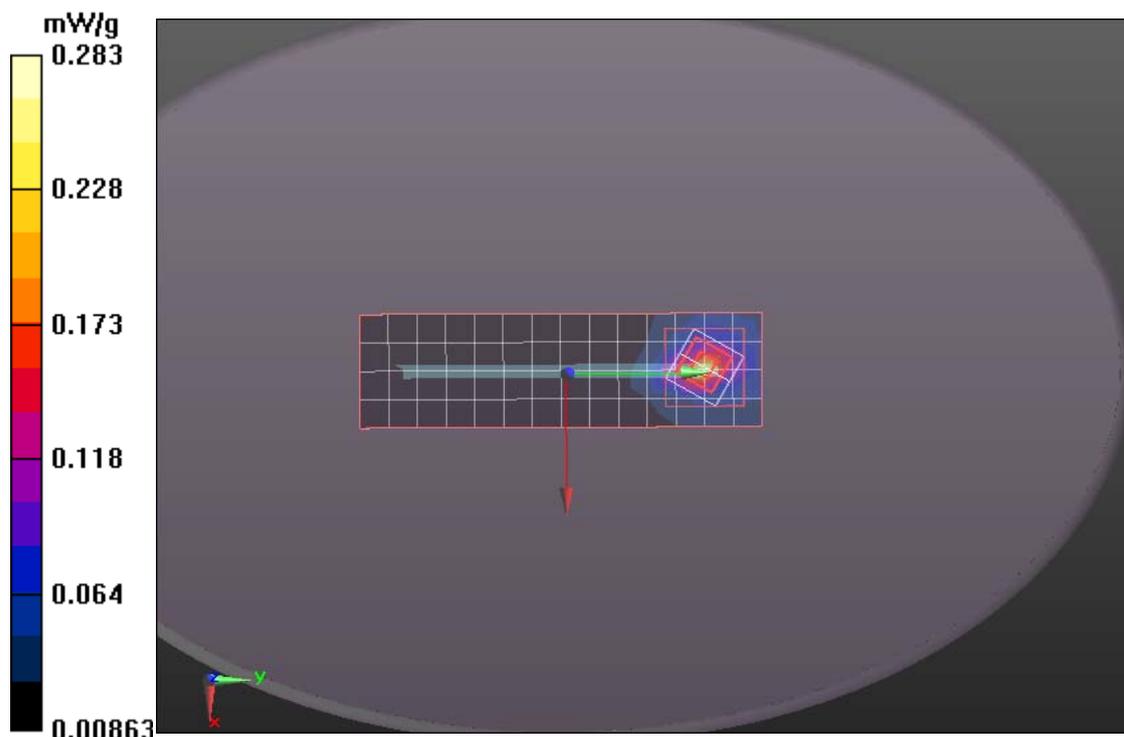



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

HSUPA Band II Top High CH 9538

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: HSUPA Band II; Communication System Band: Band II;

Frequency: 1907.6 MHz; Communication System PAR: 0 dB

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 53.50$; $\rho = 1000$ kg/m³ Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:xxxx
- Measurement SW: DASYS52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

HSUPA Band II /Body Top High CH 9538 /Area Scan (10x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.153 mW/g

HSUPA Band II /Body Top High CH 9538 /Zoom Scan (7x7x9)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.161 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.223 mW/g

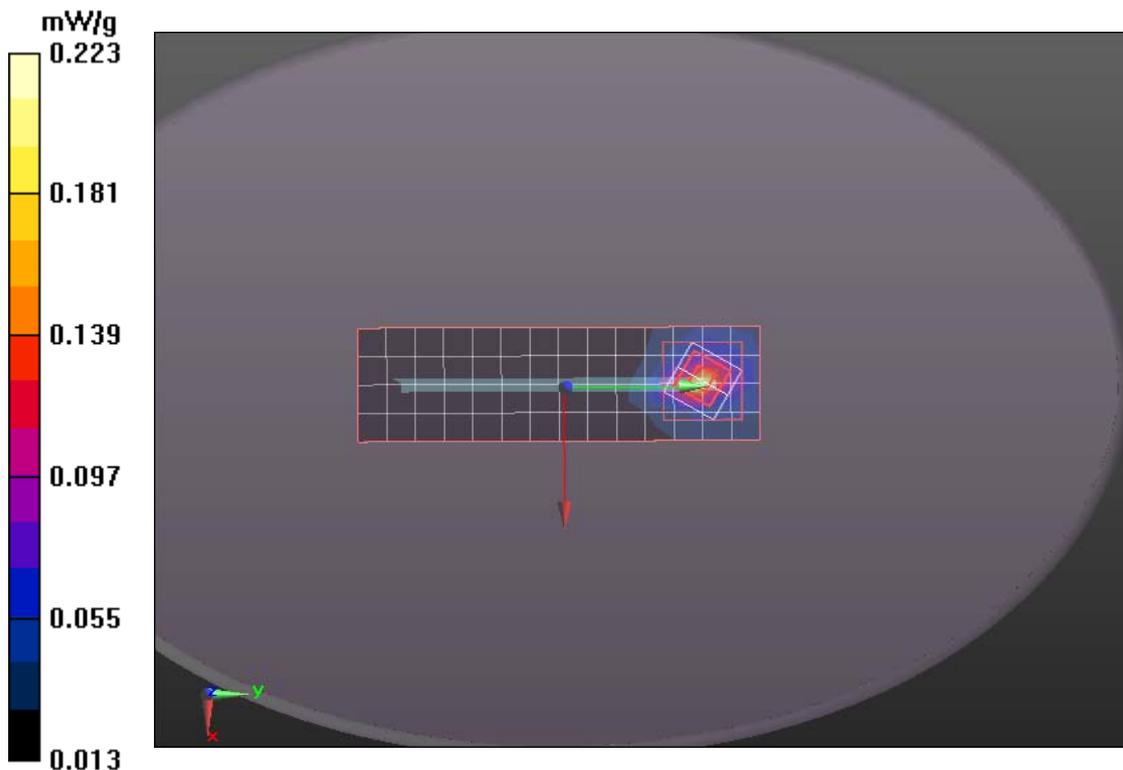



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS 850-Body Up Middle CH190

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 3.01 dB
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body Up Middle CH190/Area Scan (15x10x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.877 mW/g

GPRS 850/GPRS850 Body Up Middle CH190/Zoom Scan (7x7x9)/Cube


0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.143 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.594 W/kg

SAR(1 g) = 0.512 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.935 mW/g

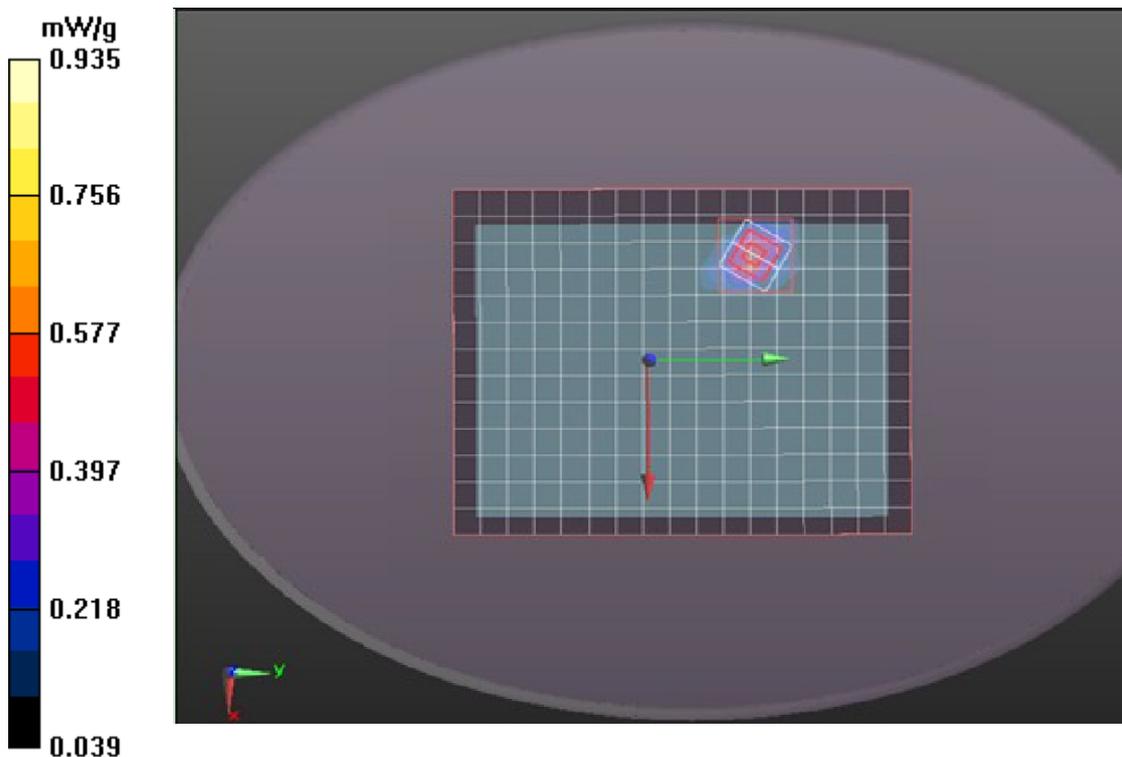



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS 850-Body Down Low CH128

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz); Frequency: 824.4 MHz; Communication System PAR: 3.01 dB
Medium parameters used (interpolated): $f = 824.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.01$; $\rho = 1000$ kg/m³ Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body Down Middle CH128/Area Scan (15x10x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.998 mW/g

GPRS 850/GPRS850 Body Down Middle CH128/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 30.902 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.208 W/kg

SAR(1 g) = 0.548 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 1.276 mW/g

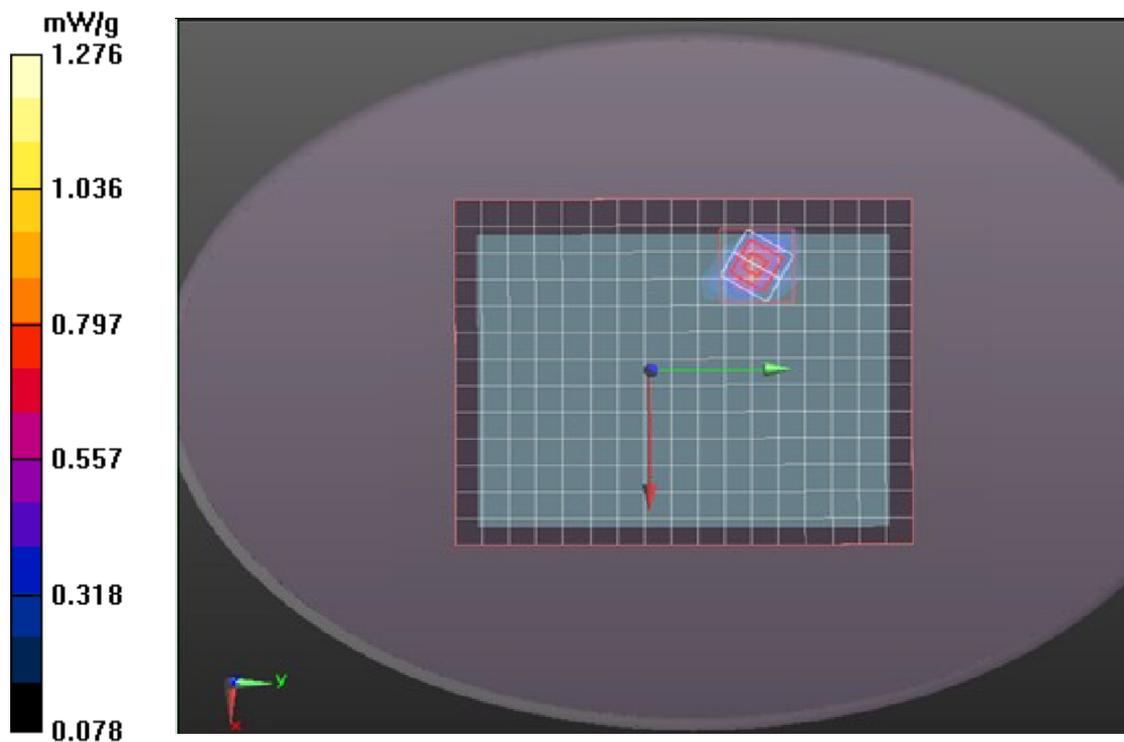



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS 850-Body Down Middle CH190

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 3.01 dB
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³ Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body Down Middle CH190/Area Scan (15x10x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.023 mW/g

GPRS 850/GPRS850 Body Down Middle CH190/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.902 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.208 W/kg

SAR(1 g) = 0.553 mW/g; SAR(10 g) = 0.392 mW/g

Maximum value of SAR (measured) = 1.155 mW/g

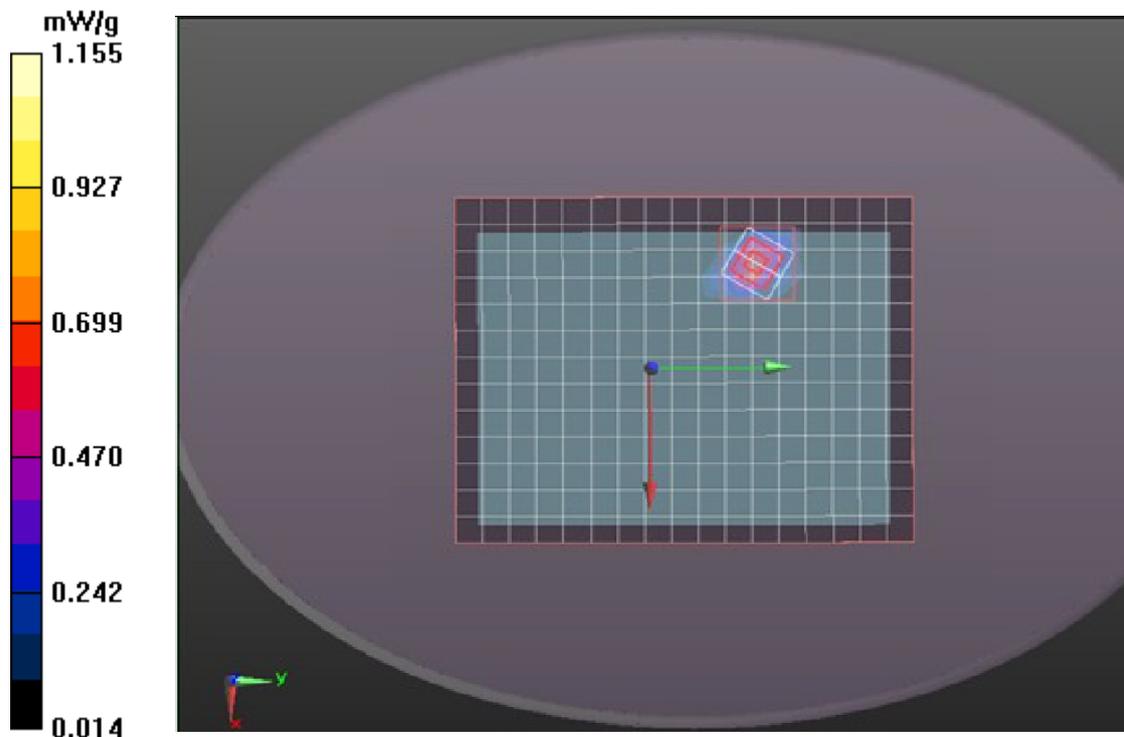



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS 850-Body Down High CH251

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz); Frequency: 848.8 MHz; Communication System PAR: 3.01 dB
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.4$; $\rho = 1000$ kg/m³ Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body Down High CH251/Area Scan (15x10x1):

Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.125 mW/g

GPRS 850/GPRS850 Body Down High CH251/Zoom Scan (7x7x9)/Cube


0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 30.902 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.208 W/kg

SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.333 mW/g

Maximum value of SAR (measured) = 1.276 mW/g

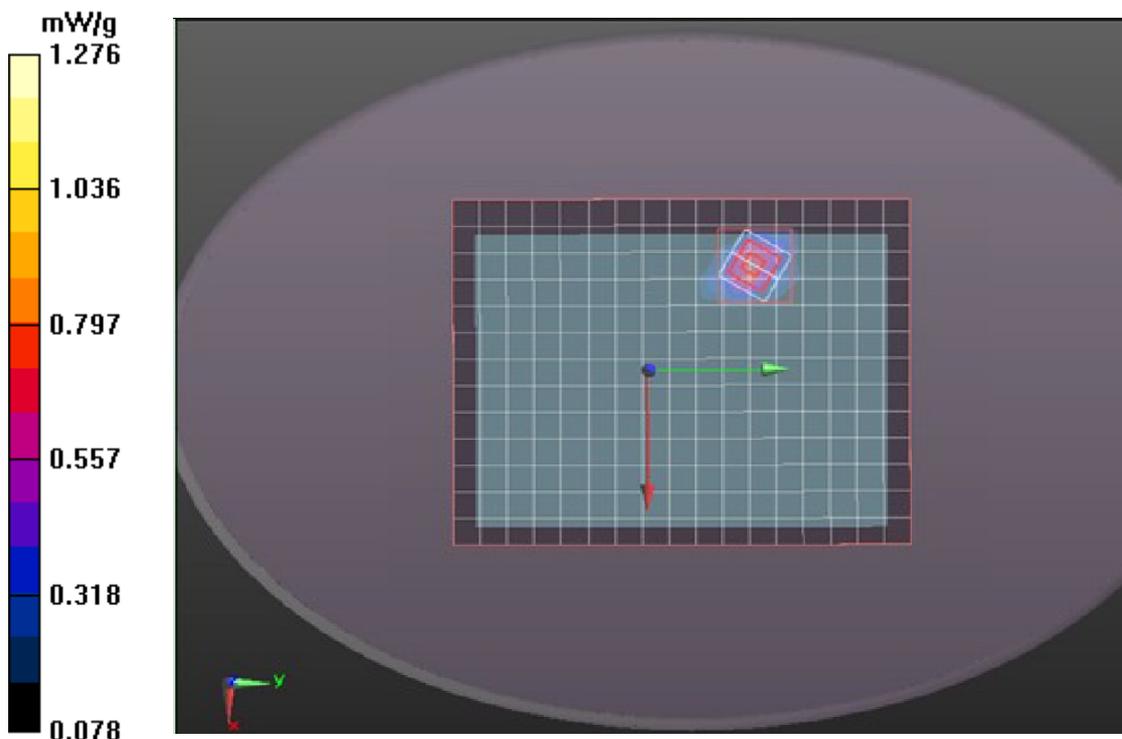



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS 850-Body Top Middle CH190

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 3.01 dB
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body Top Middle CH190/Area Scan (10x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.436 mW/g

GPRS 850/GPRS850 Body Top Middle CH190/Zoom Scan (7x7x9)/Cube


0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.143 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.987 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.505 mW/g

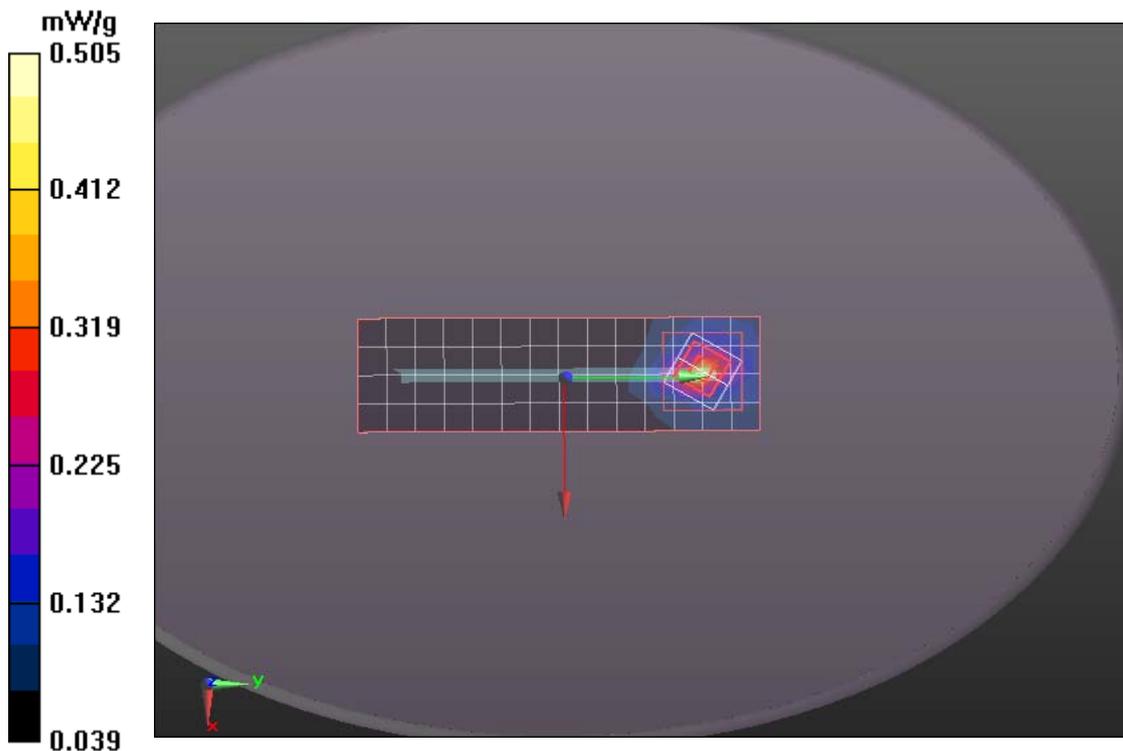



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS 850-Body Left Middle CH190

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 3.01 dB
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³ Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body Left Middle CH190/Area Scan (15x5x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.598 mW/g

GPRS 850/GPRS850 Body Left Middle CH190/Zoom Scan (7x7x9)/Cube


0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.902 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.208 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.187 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

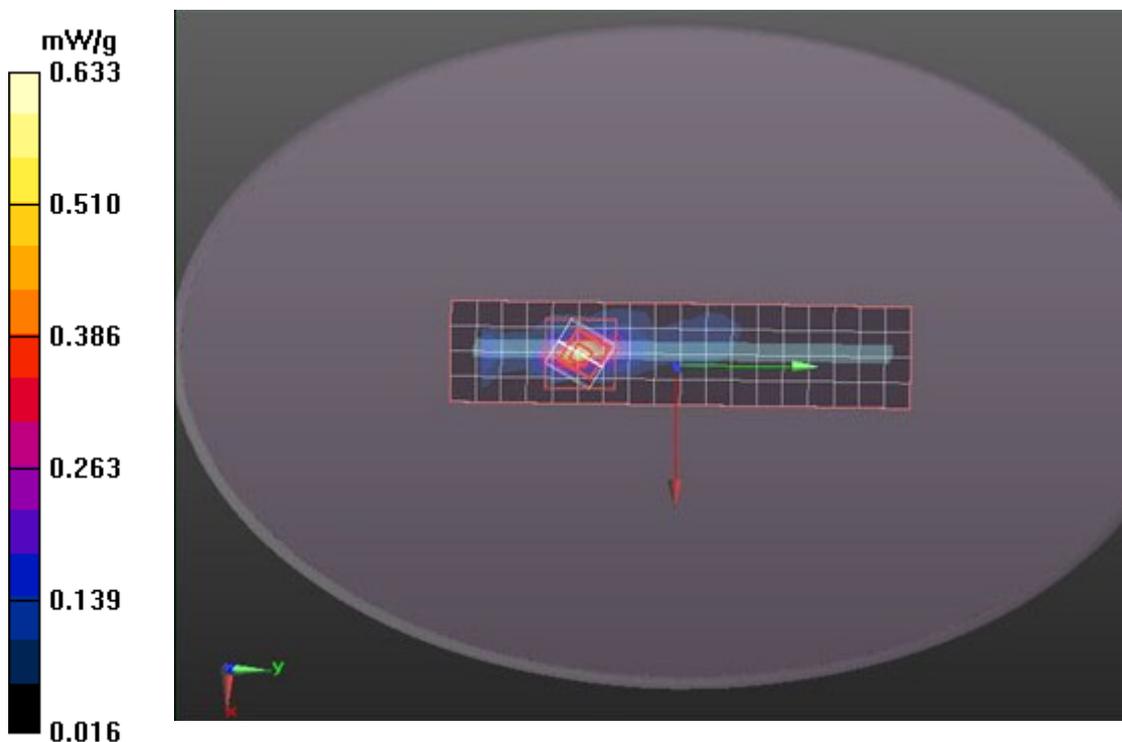



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS1900-Body Up Middle CH661

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880MHz; Communication System PAR: 3.01 dB
Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/ GPRS1900 Body Up Middle CH661/Area Scan (10x5x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.651 mW/g

GPRS1900/ GPRS1900 Body Up Middle CH661/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.177 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.496 mW/g; SAR(10 g) = 0.243 mW/g

Maximum value of SAR (measured) = 0.754 mW/g

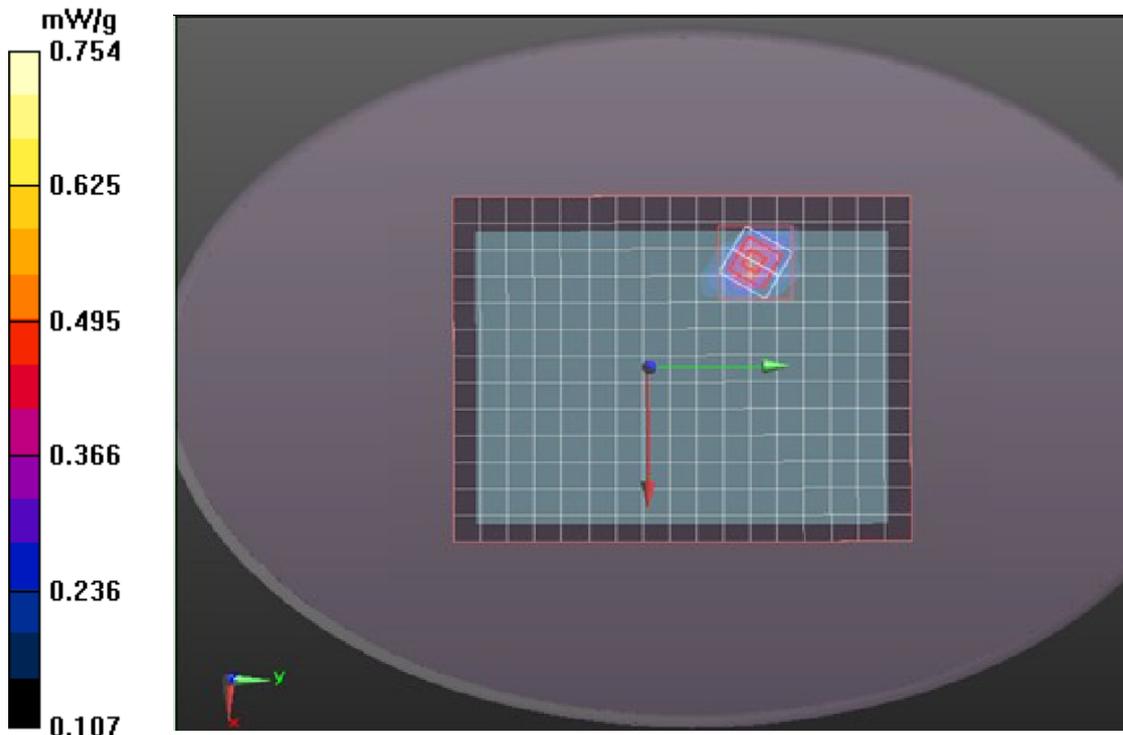



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS1900-Body Down Low CH512

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2MHz; Communication System PAR: 3.01 dB Medium parameters used: $f = 1850.2\text{MHz}$; $\sigma = 1.52\text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000\text{ kg/m}^3$ Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/ GPRS1900 Body Down Low CH512/Area Scan (10x5x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.763 mW/g

GPRS1900/ GPRS1900 Body Down Low CH512/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.972 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.417 W/kg

SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.375 mW/g

Maximum value of SAR (measured) = 0.812 mW/g

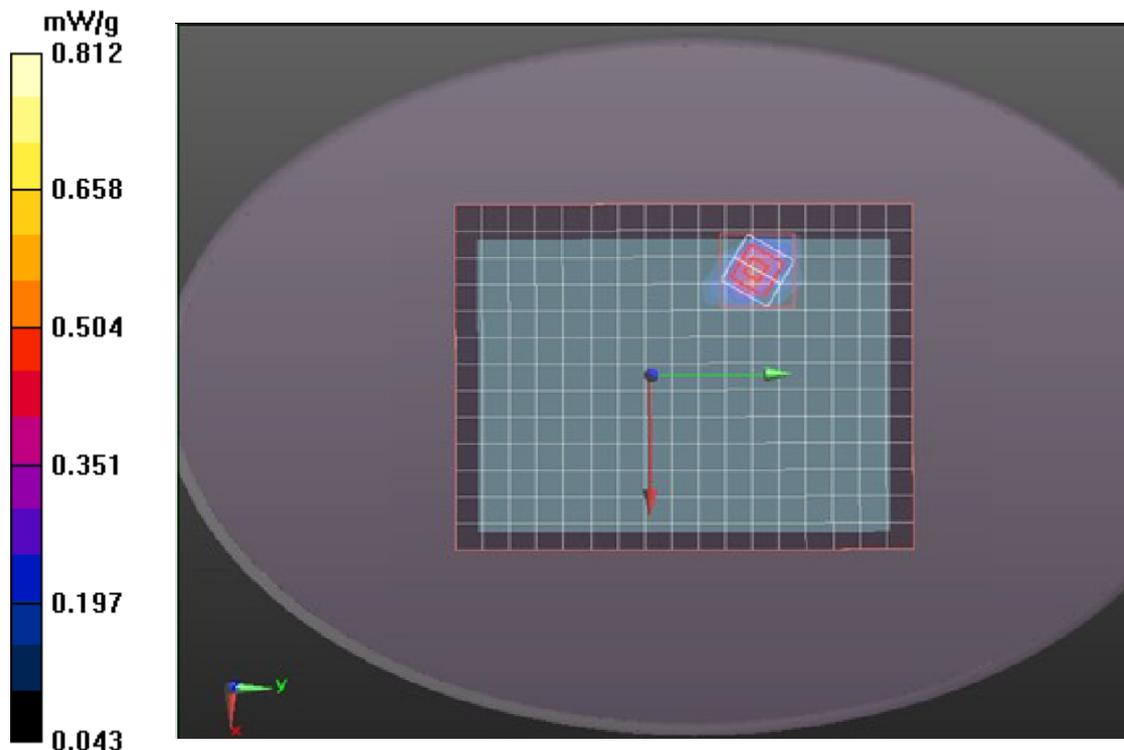



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS1900-Body Down Middle CH661

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880MHz; Communication System PAR: 3.01 dB
Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52\text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/ GPRS1900 Body Down Middle CH661/Area Scan (10x5x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.794 mW/g

GPRS1900/ GPRS1900 Body Down Middle CH661/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.972 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.417 W/kg

SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.383 mW/g

Maximum value of SAR (measured) = 0.812 mW/g

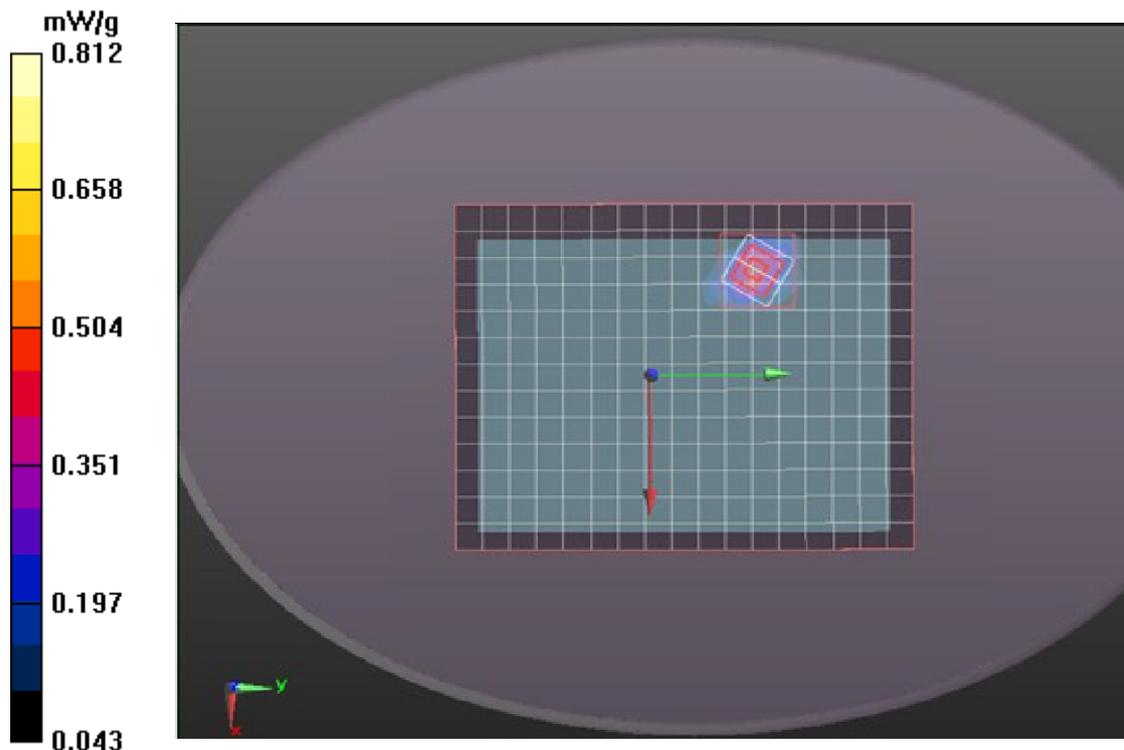



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS1900-Body Down High CH810

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz; Communication System PAR: 3.01 dB
Medium parameters used: $f = 1910\text{MHz}$; $\sigma = 1.52\text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/ GPRS1900 Body Down High CH810/Area Scan (10x5x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.563 mW/g

GPRS1900/ GPRS1900 Body Down High CH810/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.972 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.117 W/kg

SAR(1 g) = 0.498 mW/g; SAR(10 g) = 0.364 mW/g

Maximum value of SAR (measured) = 0.812 mW/g

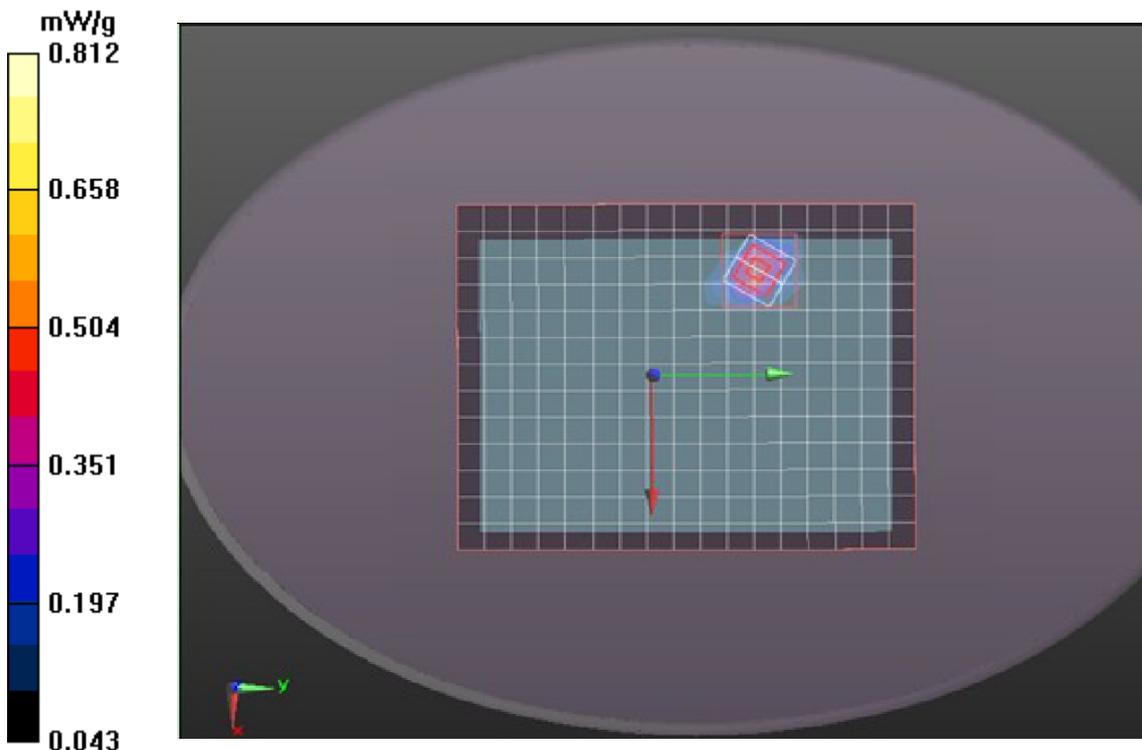



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS1900-Body Top Middle CH661

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880MHz; Communication System PAR: 3.01 dB
Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/ GPRS1900 Body Top Middle CH661/Area Scan (10x5x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.351 mW/g

GPRS1900/ GPRS1900 Body Top Middle CH661/Zoom Scan


(7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.177 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.220 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

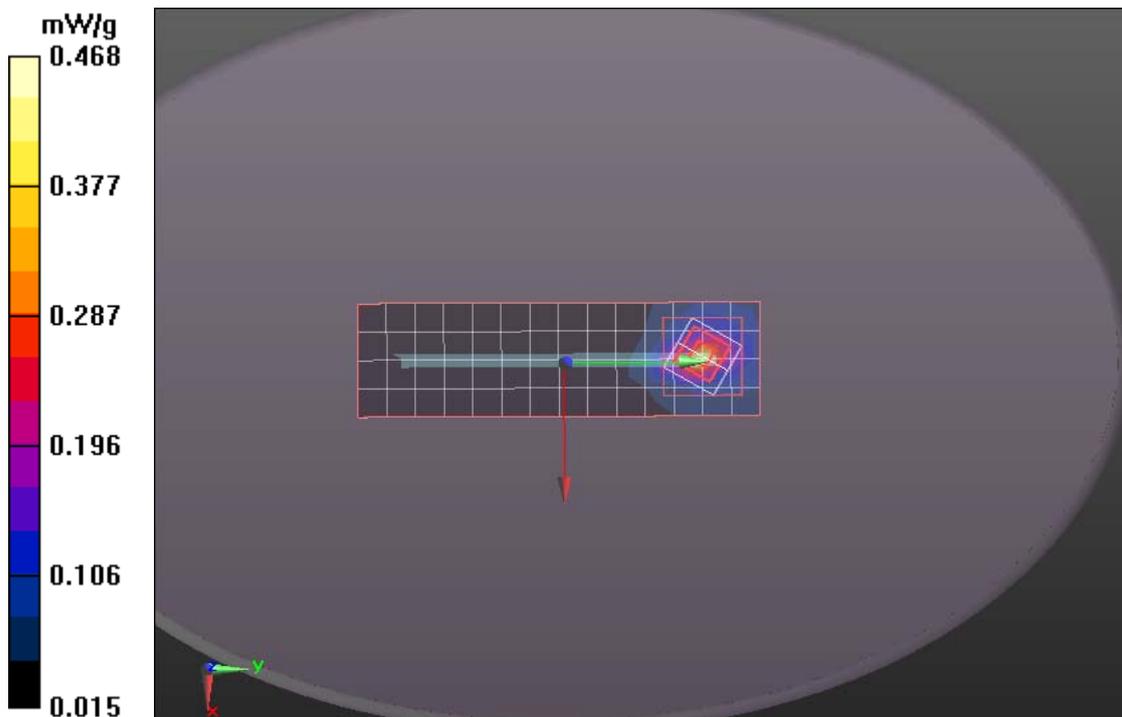



Test Laboratory: Compliance Certification Services Inc.

December 16, 2011

GPRS1900-Body Left Middle CH661

DUT: Tablet PC; Type: PT07101-46-XXX (X=a-z,0-9,A-Z); Seril: N/A

Communication System: Generic GPRS; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880MHz; Communication System PAR: 3.01 dB
Medium parameters used: $f = 1880\text{MHz}$; $\sigma = 1.52 \text{ mho/m}$; $\epsilon_r = 53.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/ GPRS1900 Body Left Middle CH661/Area Scan (15x5x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.363 mW/g

GPRS1900/ GPRS1900 Body Left Middle CH661/Zoom

Scan(7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.972 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.717 W/kg

SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.403 mW/g

