



Report No.: FCC2004248 File reference No.: 2020-04-26

Applicant: Shenzhen Star Sources Electronic Technology Co., Ltd.

Product: Bluetooth Keyboard

Model No.: ST-BK112, IMAC-K112S, ST-BK113, ST-BK06, ST-BK07,

ST-BK08, ST-BK09, IMAC-K112PAU, IMAC-K112PAE,

IMAC-K112PAP

Brand Name: N/A

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: April 26, 2020

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC2004248 Page 2 of 46

Date: 2020-04-26



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Report No.: FCC2004248

Date: 2020-04-26



Test Report Conclusion Content

Content	
Canaral	

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
5.5	Test Result.	14
7.0	Band Edge	22
7.1	Test Method and Test Procedure.	22
7.2	Radiated Test Setup.	22
7.3	Configuration of the EUT	22
7.4	EUT Operating Condition.	22
7.5	Band Edge Limit.	22
7.6	Band Edge Test Result.	23
8.0	Antenna Requirement.	27
9.0	20dB bandwidth measurement.	28
10.0	FCC ID Label	37
11.0	Photo of Test Setup and EUT View.	38

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2004248 Page 4 of 46

Date: 2020-04-26



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Star Sources Electronic Technology Co., Ltd.

Address: Room1102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District, Shenzhen,

China

Telephone: +86-755-86397260 Fax: +86-755-26609516

1.3 Description of EUT

Product: Bluetooth Keyboard

Manufacturer: Shenzhen Star Sources Electronic Technology Co., Ltd.

Address: Room1102, Block 1st, Yi Luan Building, Xixiang Road 230, BaoAn District,

Shenzhen, China

Brand Name: N/A

Model Number: ST-BK112

Additional Model Name IMAC-K112S, ST-BK113, ST-BK06, ST-BK07, ST-BK08, ST-BK09,

IMAC-K112PAU, IMAC-K112PAE, IMAC-K112PAP

Input Voltage: DC5V or Built-in 3.7V, 150mAh Li-ion Battery

Modulation Type: GFSK, Pi/4D-QPSK, 8DPSK (Bluetooth)

Operation Frequency: 2402-2480MHz

Channel Separate: 1MHz
Channel Number: 79

Antenna Designation PCB antenna with gain 0.55dBi Max

1.4 Submitted Sample: 2 Sample

1.5 Test Duration

2020-04-22 to 2020-04-26

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2004248 Page 5 of 46

Date: 2020-04-26



1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB
Radiated Emissions below 1GHz Uncertainty =4.7dB
Radiated Emissions above 1GHz Uncertainty =6.0dB
Conducted Power Uncertainty =6.0dB
Occupied Channel Bandwidth Uncertainty =5%
Conducted Emissions Uncertainty =3.6dB

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Terry lang

Page 6 of 46 Report No.: FCC2004248



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2019-06-21	2020-06-20
LISN	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
LISN	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Ultra Broadband ANT	R&S	HL562	100157	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2018-06-25	2021-06-24
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2021-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2019-08-22	2020-08-21
Power sensor	Anritsu	MA2491A	32263	2019-08-22	2020-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2020-01-18	2021-01-17
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

Report No.: FCC2004248 Page 7 of 46

Date: 2020-04-26



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209 and RSS-210	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No.: FCC2004248

Date: 2020-04-26



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4-2014.

Block diagram of Test setup

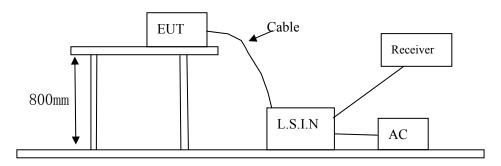

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
		ST-BK112, IMAC-K112S,	
		ST-BK113,ST-BK06, ST-BK07,	
Bluetooth Keyboard	Shenzhen Star Sources Electronic Technology Co., Ltd.	ST-BK08, ST-BK09,	ZJEST-BK112
		IMAC-K112PAU,	ZJEST-DK112
		IMAC-K112PAE,	
		IMAC-K112PAP	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2004248 Page 9 of 46

Date: 2020-04-26



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107 and 15.207

Eraguanay(MHz)	Class A Lir	nits (dB µ V)	Class B Limits (dB µ V)	
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0

Notes: 1. *Decrea

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Pass

Date: 2020-04-26

Report No.: FCC2004248



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by Bluetooth

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

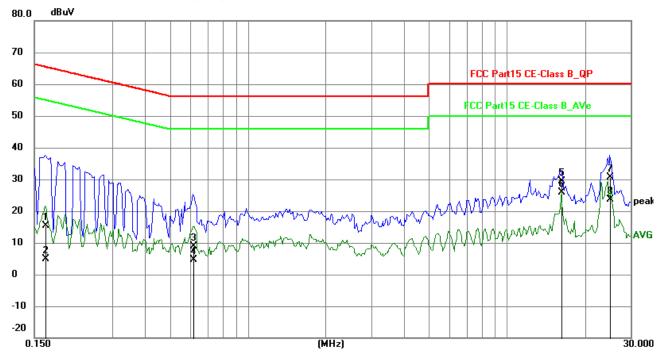

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1655	5.73	9.77	15.50	65.18	-49.68	QP	Р
2	0.1655	-4.78	9.77	4.99	55.18	-50.19	AVG	Р
3	0.6141	-0.95	9.78	8.83	56.00	-47.17	QP	Р
4	0.6141	-5.27	9.78	4.51	46.00	-41.49	AVG	Р
5	16.2288	19.01	10.45	29.46	60.00	-30.54	QP	Р
6	16.2288	15.49	10.45	25.94	50.00	-24.06	AVG	Р
7	24.9570	19.74	10.99	30.73	60.00	-29.27	QP	Р
8	24.9570	12.53	10.99	23.52	50.00	-26.48	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2004248

Date: 2020-04-26



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by Bluetooth

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

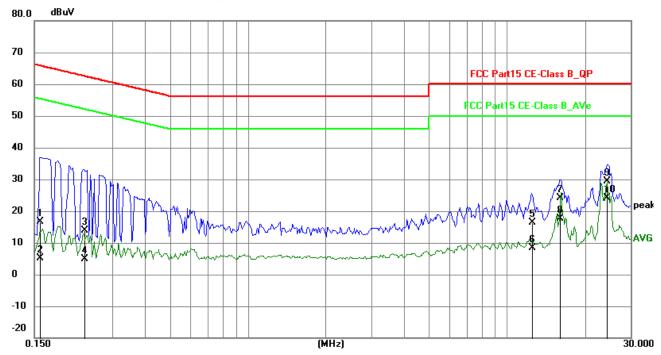

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1578	6.86	9.78	16.64	65.58	-48.94	QP	Р
2	0.1578	-4.58	9.78	5.20	55.58	-50.38	AVG	Р
3	0.2329	4.09	9.75	13.84	62.35	-48.51	QP	Р
4	0.2329	-4.96	9.75	4.79	52.35	-47.56	AVG	Р
5	12.4692	5.99	10.27	16.26	60.00	-43.74	QP	Р
6	12.4692	-1.99	10.27	8.28	50.00	-41.72	AVG	Р
7	15.9831	13.78	10.44	24.22	60.00	-35.78	QP	Р
8	15.9831	7.20	10.44	17.64	50.00	-32.36	AVG	Р
9	24.2862	18.32	10.95	29.27	60.00	-30.73	QP	Р
10	24.2862	13.10	10.95	24.05	50.00	-25.95	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2004248 Page 12 of 46


Date: 2020-04-26



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

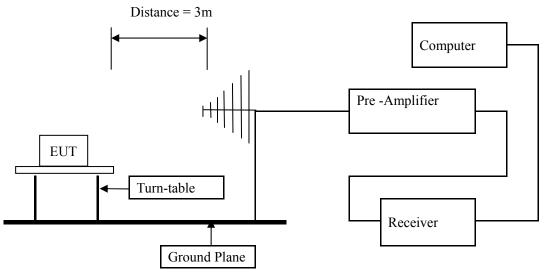

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No.: FCC2004248 Page 13 of 46

Date: 2020-04-26



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)			Field S	trength of Harmo	onics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note: 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)

- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 6. Battery full charged during tests.
- 7. The three modulation modes of GFSK, Pi/4D-QPSK, and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: FCC2004248 Page 14 of 46

Date: 2020-04-26




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

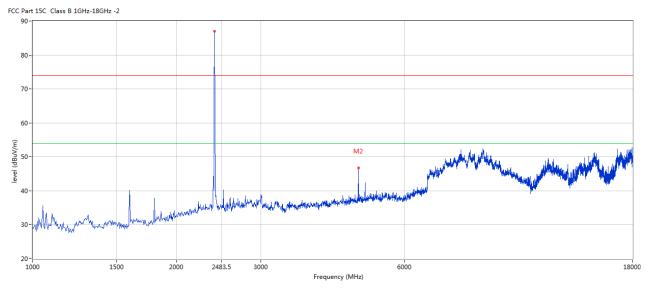


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402.149	87.05	-3.57	94.0	-6.95	Peak	106.00	100	Н	Pass
2	4802.799	46.75	3.12	54.0	-7.25	Peak	110.00	100	Н	Pass

Report No.: FCC2004248 Page 15 of 46

Date: 2020-04-26



Vertical

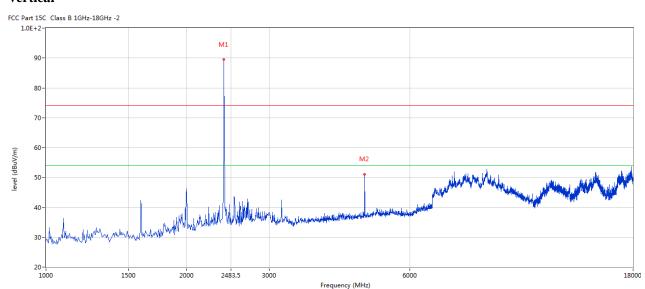

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402.149	89.49	-3.57	94.0	-4.51	Peak	87.00	100	V	Pass
2	4802.799	51.15	3.12	54.0	-2.85	Peak	277.00	100	V	Pass


Report No.: FCC2004248 Page 16 of 46

Date: 2020-04-26



Please refer to the following test plots for details: Middle Channel-2441MHz

Horizontal

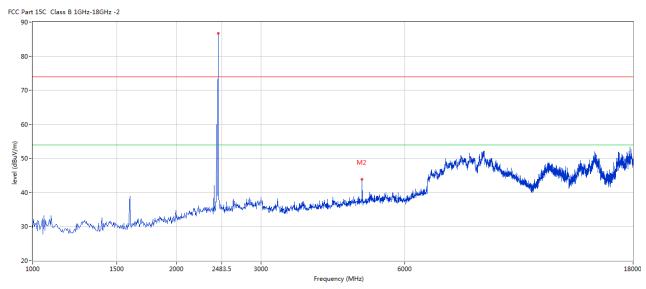


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2440.390	86.76	-3.57	94.0	-7.24	Peak	36.00	100	Н	Pass
2	4883.529	43.83	3.20	54.0	-10.17	Peak	68.00	100	Н	Pass

Report No.: FCC2004248 Page 17 of 46

Date: 2020-04-26



Vertical

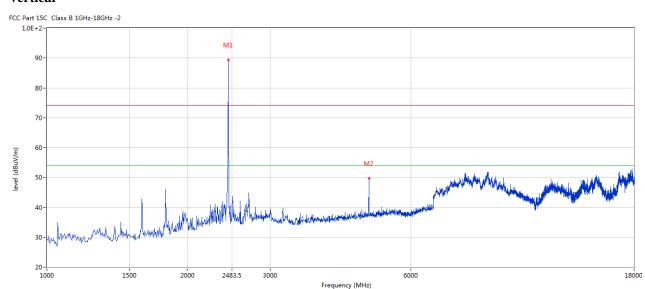

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2440.390	89.42	-3.57	94.0	-4.58	Peak	85.00	100	V	Pass
2	4883.529	49.65	3.20	54.0	-4.35	Peak	0.00	100	V	Pass


Report No.: FCC2004248 Page 18 of 46

Date: 2020-04-26



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

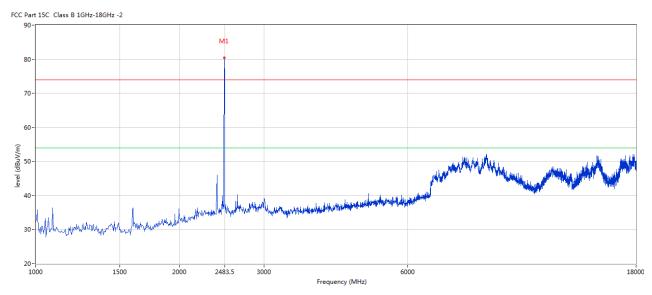

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2479.630	80.35	-3.57	94.0	-13.65	Peak	40.00	100	Н	Pass


Page 19 of 46

Date: 2020-04-26

Report No.: FCC2004248



Vertical

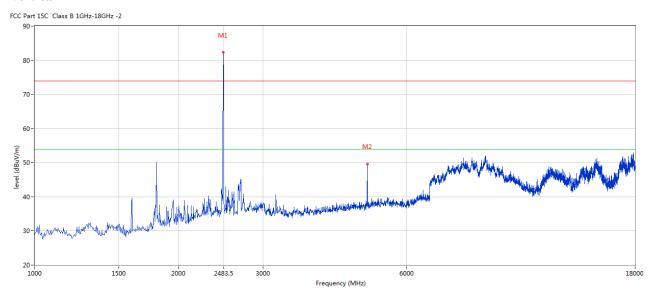

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2479.630	82.27	-3.57	94.0	11.73	Peak	86.00	100	V	Pass
2	4960.010	49.63	3.36	54.0	-4.37	Peak	360.00	100	V	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3)Margin=Emission-Limits
- (4)According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: FCC2004248 Page 20 of 46

Date: 2020-04-26




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

FCC_FCC Part 15B Class B 30MHz-1GHz

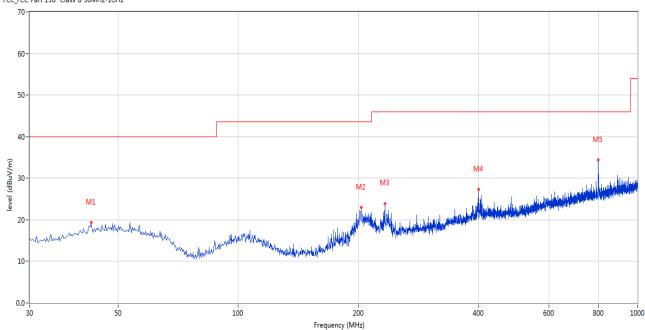

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	42.849	19.35	-11.52	40.0	-20.65	Peak	1.00	100	Н	Pass
2	203.344	23.00	-13.46	43.5	-20.50	Peak	269.00	100	Н	Pass
3	233.164	23.96	-12.53	46.0	-22.04	Peak	65.00	100	Н	Pass
4	399.963	27.27	-8.57	46.0	-18.73	Peak	23.00	100	Н	Pass
5	796.351	34.37	-3.09	46.0	-11.63	Peak	47.00	100	Н	Pass

Report No.: FCC2004248 Page 21 of 46

Date: 2020-04-26




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

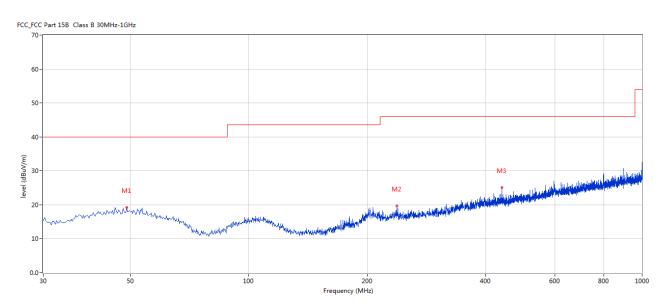

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	48.910	19.19	-11.21	40.0	-20.81	Peak	283.00	100	V	Pass
2	238.013	19.62	-12.46	46.0	-26.38	Peak	360.00	200	V	Pass
3	439.723	25.03	-8.07	46.0	-20.97	Peak	360.00	200	V	Pass

Page 22 of 46

Date: 2020-04-26

Report No.: FCC2004248




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz,VBW=3MHz and Peak detector used
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

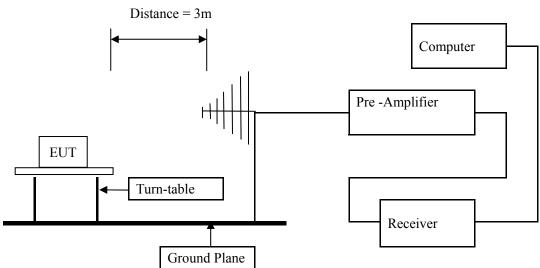

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: FCC2004248 Page 23 of 46

Date: 2020-04-26



7.6 Test Result

Product:	Blueto	oth Keyboard	Polarity	Horizontal
Mode	Keepin	g Transmitting	Test Voltage	DC3.7V
Temperature	2	4 deg. C,	Humidity	56% RH
Test Result:		Pass		
2390 MHz	PK (dBμV/m)	40.37	Limit	74 dBμV/m
2390 MHz	2390 MHz AV (dBμV/m)		Limit	54 dBμV/m

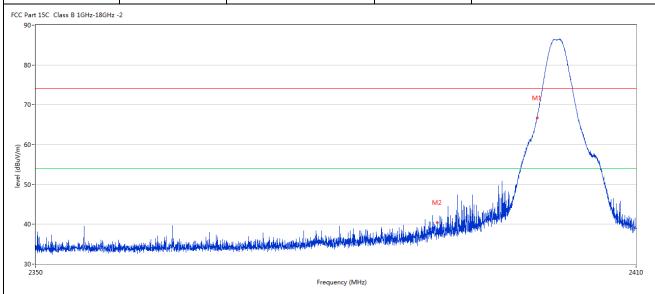


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2399.998	66.63	-3.57	74.0	-7.37	Peak	107.00	100	Н	Pass
1*	2399.998	45.51	-3.57	54.0	-8.48	AV	107.00	100	Н	Pass
2	2389.980	40.37	-3.53	74.0	-33.63	Peak	38.00	100	Н	Pass

Report No.: FCC2004248 Page 24 of 46



Product:	Blueto	oth Keyboard	Detector	Vertical
Mode	Keeping	g Transmitting	Test Voltage	DC3.7V
Temperature	24	4 deg. C,	Humidity	56% RH
Test Result:		Pass		
2390 MHz	PK (dBμV/m)	50.34	Limit	$74~\text{dB}\mu\text{V/m}$
2390 MHz	AV (dBμV/m)	AV (dBμV/m)		$54 \; dB \mu V/m$

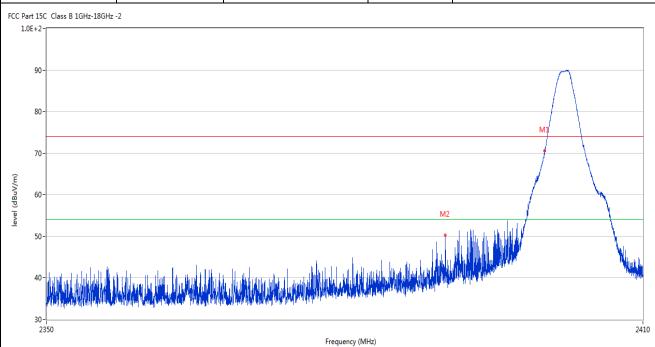

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	2400.012	70.50	-3.57	74.0	-3.50	Peak	84.00	100	V	Pass
1*	2400.012	49.67	-3.57	54.0	-4.33	AV	84.00	100	V	Pass
2	2389.950	50.34	-3.53	54.0	-3.66	Peak	36.00	100	V	Pass

Page 25 of 46 Report No.: FCC2004248



P	roduct:		Blueto	oth Keyboar	rd	Polar	ity	Н	Iorizontal	
	Mode		Keeping	g Transmitti	ng	Test Vo	tage		DC3.7V	
Ten	nperature		24	l deg. C,		Humic	lity		56% RH	
Tes	st Result:			Pass						
248	83.3MHz	PK (dBµ	V/m)	49	9.54	Lim	it	74	4 dBμV/m	1
248	83.3MHz	AV (dBμ	.V/m)			Lim	it	54	4 dBμV/m	l
70 - (W/ADR) 50 - 40 -										بالرش المرش الماران
30- 2470					2483.5 Frequency (MHz	z)				25
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdic
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2483.617	49.54	-3.57	54.0	-4.46	Peak	107.00	100	Н	Pass

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2483.617	49.54	-3.57	54.0	-4.46	Peak	107.00	100	Н	Pass

Report No.: FCC2004248 Page 26 of 46

Date: 2020-04-26



P	Product:	Blue	tooth Keyboa	rd	Detecto	or		Vertical	
	Mode	Keep	ng Transmitti	ing	Test Volt	age		DC3.7V	
Ten	mperature		24 deg. C,		Humidi	ty		56% RH	
Tes	st Result:		Pass						
248	83.0MHz	PK (dBμV/m)	5	1.74	Limit	;	74	4 dBμV/n	1
248	83.0MHz	AV (dBμV/m)			Limit	;	54	4 dBμV/n	1
Part 15	5C Class B 1GHz-18GH:	z -2	'						
70-									
60-									
40 -		Wall by Market bearing the second		2483.5					25(
30- 2470	1	William Haber de Constitution		Frequency (MH					250
50- 40- 30- 2470	Frequency (MHz)	Results Factor (dBuV/m) (dB)	Limit (dBuV/m)		z) Detector	Table (o)	Height (cm)	ANT	Verdict

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 3. The three modulation modes of GFSK, Pi/4D-QPSK, and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: FCC2004248 Page 27 of 46

Date: 2020-04-26



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna. The antenna gain is 0.55dBi Max. It fulfills the requirement of this section. Test Result: Pass

Page 28 of 46

Report No.: FCC2004248



Product:	Rhietooth	Keyboard		Test Mode:		Keep tran	emitting	
Mode Mode		ransmitting	+	Test Voltage		DC3		
Temperature		eg. C,	+	Humidity 1		56%		
Test Result:		ass		Detector		PI		
0dB Bandwidth		77kHz						
Ref Lvl 10 dBm	Marker 1 [ndB BW 883.76	T1 ndB] 20.00 dB 753507 kHz	RBI VBI SW	W 100 k	Hz	? Att	20 dB	ı
0		1		▼1	[T1]	-2 2.40180	.30 dBm 461 GHz	A
-10			Щ	BW ∇ _{T1}	88 . [T1]	3.76753 -21		l
-20	Ţ			√ √ 1 √ 1 √ 1 √ 1 √ 1 √ 1 √ 1 1 √ 1 1 1 1 1 1 1 1 1 1	[T1]	-22	603 GHz	
1MAX	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\			Wy.		2.40239	980 GHz	1M
-40					لر			
-50	my					ν		
-60					V	Jan.	Maria Istali ali	
-70								
-80								
-90 Center 2.40	-	300 kH					n 3 MHz	Į

Page 29 of 46 Report No.: FCC2004248



GFSK Modula	ation									
Product:		Blueto	ooth Keyb	oard	,	Test Mode:		Keep tra	nsmitting	
Mode		Keepir	ng Transmi	itting	7	est Voltage		DC:	3.7V	
Temperature		2	24 deg. C,			Humidity		56%	6 RH	
Test Result:			Pass			Detector		P	K	
20dB Bandwidth		8	65.73kHz							
		Marker	1 [T1 r		RBW	30 k	Hz R	F Att	20 dB	
Ref Lvl		ndB		.00 dB	VBW	100 k				
10 dBm		BW 865	5.731462	293 kHz	SWT	8.5 m	s U	nit	dBn	n _
						V 1	[T1]	-:	2.90 dBm	A
								2.44080	461 GHz	
0				Ž,		ndE	8	20	0.00 dB	
					$\mathcal{N}_{\mathcal{N}}$	BW		5.73146		
-10				/	7	∇_{T}	[T1]	-2:	2.59 dBm	
			\ ^{\/}	J	\	V _T :	2 [T1]	2.44051		
-20			- 7			12	. [11]	2.44138	3176 GHz	
1MAX						1				1MA
-30						\	٧,			
- 40							\ \	N		
-60 Mande	j						3	Y	Kundy	
									•	
-70										
-80										
-90					_					<u>J</u>
Center 2	.441 G	Hz		300	kHz/			Spa	an 3 MHz	
Date: 26	5.APR.2	020 11	:12:56							

Page 30 of 46 Report No.: FCC2004248



Product: Bluetooth Keyboard Mode Keeping Transmitting		Jaru	1	est Mode:	Keep transmitting					
Mode					Те	est Voltage		DC3	3.7V	•
Temperature			4 deg. C,	-		Humidity		56%	RH	
Test Result:			Pass			Detector		P	K	
dB Bandwidth		80	65.73kHz					-	_	
]	Marker	1 [T1 r	ndB]	RBW	30 k	Hz R	F Att	20	dв
Ref Lvl	1	ndB	20.	00 dB	VBW	100 k	Hz			
10 dBm		BW 865	.731462	293 kHz	SWT	8.5 m	ıs U:	nit		dBm
10						v ₁	[T1]	- 3	. 25	dBm
								2.47980	461	GHz
0				1		ndI	8	20	.00	dВ
				M	Ma	BW	86	5.73146	293	kHz
-10					V V	∇_{T}	[T1]	-22	.87	dBm
			4	V	٦,	-		2.47951		GHz
-20			/		ν \	∇ _T :	2 [T1]	-23	.43	dBm
1MAX						Wy M		2.48038	176	GHz
-30							L _y			
-40	/~ч _,							m		
-50							W	M	ym	~ . Ju
										-VIII-
70										
-80										
-90										

Page 31 of 46

Report No.: FCC2004248



Pi/4D-QPSK M	Iodulati	on										
Product:		Blueto	ooth Keybo	oard		Te	est Mode:		Keep trai	nsmitting		
Mode		Keepir	ng Transmi	tting		Te	st Voltage		DC3	5.7V		
Temperature		2	24 deg. C,			I	Humidity		56%	RH		
Test Result:			Pass			J	Detector		PK			
20dB Bandwidth		1	.238MHz									
<u>k</u>		Marker	1 [T1 r	ndB]	F	RBW	30 k	Hz R	F Att	20 dE	3	
Ref Lvl		ndB	20.	00 dB	7	/BW	100 k	Hz				
10 dBm		BW 1	L.238476	95 MHz	S	TWE	8.5 m	s Ui	nit	dE	3m	
10							v ₁	[T1]	-2	.33 dE	sm	
									2.40181	062 GH	Z	
0				7			ndB	1	20	.00 dB		
				$ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \$			BW		1.23847	695 MH	z	
-10			000		\sim	~	∇_{T}	[T1]	-22	.54 dE	m	
			100	ľ	Ì				2.40132	365 GH	Z	
-20		<u></u>	/				T2	[T1]	-21	.88 dE	sm.	
1MAX							کر	٦	2.40256	212 GH	1MA	
-30												
-40	\\\\	7						4	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	~~~		
-50												
-60												
-70												
-80											_	
-90												
Center 2.	.402 GI	Hz		300	kHz/				Spa	n 3 MH	z	
Date: 26	.APR.2	020 10	:48:17									

Page 32 of 46 Report No.: FCC2004248



Product:	Blue	tooth Keybo	oard	Т	est Mode:		Keep trai	nsmitting	
Mode		ing Transmi		Те	est Voltage		DC3	3.7V	
Temperature		24 deg. C,			Humidity		56%	RH	
Test Result:		Pass			Detector		P	K	
0dB Bandwidth		1.238MHz					-	-	
	Marker	1 [T1 n	dB]	RBW	30 k	Hz R	F Att	20 di	3
Nef Lvl	ndB	20.		VBW	100 k	Hz			
10 dBm	BW	1.238476	95 MHz	SWT	8.5 m	s U:	nit	dI	3m
10					v ₁	[T1]	-2	.89 dE	3m
							2.44080	461 GH	[z
0			- <u>1</u>		ndE	3	20	.00 dE	3
			\wedge		BW		1.23847	695 MH	Z
-10		000		~~\ ~~	∇_{T}	[T1]	-22	.84 dE	
			,		. \		2.44032		
-20	T1	<u></u>				? [T1]	-22	.49 dE	3mi
1MAX	7				ζ,	un.	2.44156	0212 GF.	1
3.0						1			
-30									
	الم ا					\			
-40	~~\					hh	m /	~~~,	~
V							\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		
-50									
-60									4
-70									
, 5									
-80									
-90							_		
Center 2.44	⊥ GHz		300	kHz/			Spa	n 3 MH	lz

Page 33 of 46 Report No.: FCC2004248



Pi/4D-QPSK N	Aodulati	on										
Product:		Blueto	ooth Keybo	oard		T	est Mode:		Keep trai	nsmitting	;	
Mode		Keepir	ng Transmi	tting		Te	est Voltage		DC3	5.7V		
Temperature		2	24 deg. C,			I	Humidity		56%	RH		
Test Result:			Pass			-	Detector		PK			
20dB Bandwidth		1	.238MHz									
		Marker	1 [T1 r			RBW 30 k			F Att	20 d	В	
Ref Lvl		ndB				VBW 100 k						
10 dBm		BW 1	L.238476	595 MHz		SWT	8.5 m	s U:	nit	d.	Bm	
							v ₁	[T1]	-3	.25 di	Bm A	
									2.47980	461 GI		
0				<u> </u>			ndE	3	20	.00 di	3	
				$ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \$			BW ▼ _{Tj}		1.23847	695 ME		
-10			200		<u>,∤\r_/ \</u>	M	W TI	[T1]	-23	.34 di		
			/ 000				V _T	2 [T1]	2.47932	365 GI .99 di		
-20		T	/				12	. [11]	2.48056	212 GH	Hz.	
1MAX		7					Ϋ́,	M			1MA	
-30												
-40	V~~	V						Min	w	~~~		
-50												
-60												
-70												
, ŏ												
-80												
-90 Contor 2	10 011	-		300	1=TT	/			C~ -	n 2 1/1		
Center 2.				300	ĸнZ	/			spa	n 3 ME	12	
Date: 26	.APR.2	020 11	:03:17									

Page 34 of 46

Report No.: FCC2004248



8QPSK Modulation		tooth Keybo	oard	Т	est Mode:		Keep tra	nsmitting	
Mode		ing Transmi		Te	est Voltage			3.7V	
Temperature		24 deg. C,	-	-	Humidity		56%	RH	
Test Result:		Pass			Detector		P	K	
0dB Bandwidth		1.238MHz					-	-	
	Marker	1 [T1 n	ndB]	RBW	30 k	Hz R	F Att	20 dB	
Nef Lvl	ndB		00 dB	VBW	100 k				
10 dBm	BW	1.238476	95 MHz	SWT	8.5 m	s U	nit	dB	m
10					v ₁	[T1]	-2	2.28 dB	m
							2.40181	062 GH	z
0			X		ndE	1	20	.00 dB	1
			/\	. ^	BW		1.23847	695 МН	z
-10		MM	W W	~~\ \	V _T	[T1]	-22	.43 dB	
			Y		V	. [m1]	2.40132		
-20	<u> </u>	ſ			T2	[T1]	-21 2.40256	.78 dB	m
1MAX					ζ,	η	2.40250	ZIZ GH	1
-30									
						\			
-40	~~~					Vw	V., /	~~~~	~
V							(, 0	Ů	
-50									
-60									-
-70									
9.0									
-80									
-90 Center 2.40) CHE	<u> </u>	200	kHz/			Cra	an 3 MH	<u>_</u>
CC11CC1 2.40	-2 0112		300	1 1 1 1 2 /			5126	5 14111	_

Page 35 of 46

Report No.: FCC2004248



Product:	Bluet	tooth Keyboard	Т	Test Mode:	Keep t	ransmitting
Mode	Keepi	ng Transmitting	Т	est Voltage	D	C3.7V
emperature		24 deg. C,		Humidity	56	5% RH
Test Result:		Pass		Detector		PK
B Bandwidth		1.238MHz				
>		1 [T1 ndB]	RBW	30 kH		20 dB
Ref Lvl 10 dBm	ndB BW	20.00 dB 1.23847695 MHz	VBW SWT	100 kF 8.5 ms		dBm
10				v ₁	[T1]	-2.89 dBm
0					2.440	
				ndB BW ∇ _{T1}	1.238	
10		M	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	Wy.		22.93 dBm 32365 GHz
20	7	/		T2	[T1] -	22.38 dBm
1MAX				7	2.441	56212 GHz
30						
40	wV				Mon	~~~~
50						
60						
70						
80						
90						
Center 2.44	LGHz	300	kHz/		S	pan 3 MHz

Page 36 of 46

Report No.: FCC2004248



Product:	Blu	etooth Keyboard		Test Mode:	Keep tr	ansmitting
Mode	Kee	oing Transmitting		Test Voltage	DO	C3.7V
Temperature		24 deg. C,		Humidity	56	% RH
Test Result:		Pass		Detector		PK
dB Bandwidth		1.238MHz				
<u> </u>	Marke	r 1 [T1 ndB]	RBW	30 kH:	z RF Att	20 dB
Ref Lvl	ndB	20.00				
10 dBm	BW	1.23847695	MHz SWT	8.5 ms	Unit	dBm
10				▼ 1 [T1] -	-3.14 dBm
					2.4798	
0				ndB	2	20.00 dB
		/\	\wedge	BW	1.2384	17695 MHz
-10			W W	∇ _T 1	[T1] -2	23.29 dBm
			• 0		2.4793	
-20		N I		V172	[T1] -2	
1MAX				Ty.	2.4805	66212 GHz 1
-30						
40	ww				www	
-50						
-60						
-70						
-80						
- 0 0						
-90 L Center 2.48	CII-	ı	300 kHz/			oan 3 MHz

Report No.: FCC2004248 Page 37 of 46

Date: 2020-04-26




10.0 FCC ID Label

FCC ID: ZJEST-BK112

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

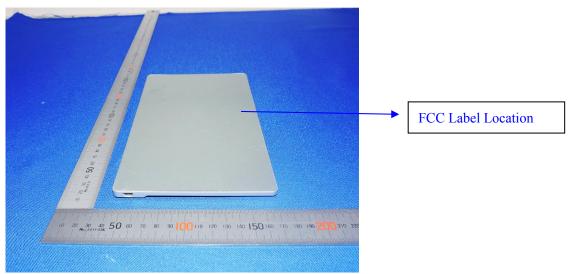

Page 38 of 46


Report No.: FCC2004248

Date: 2020-04-26



11.0 Photo of testing

11.1 Conducted test View--

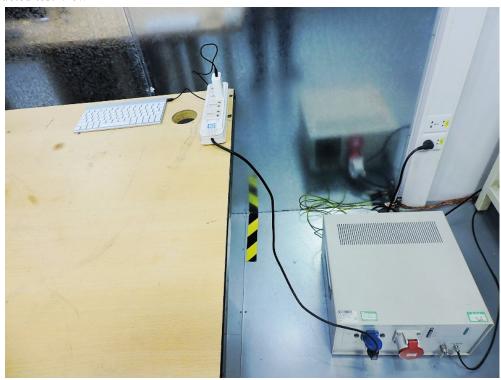


Page 39 of 46

Report No.: FCC2004248

Date: 2020-04-26



Radiated emission test view

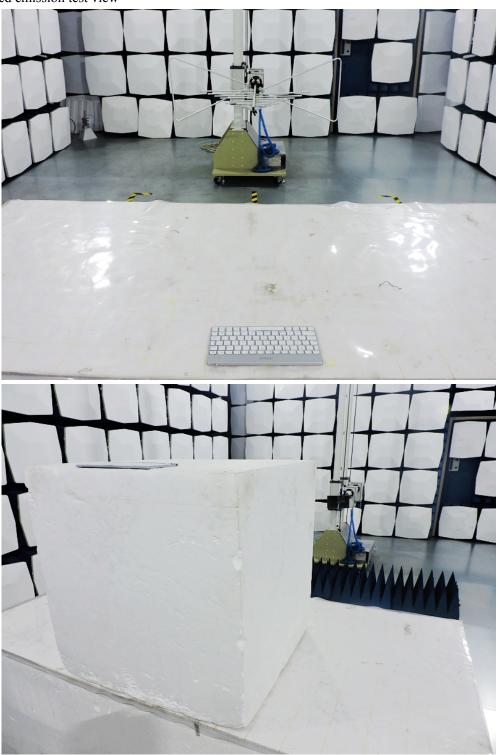

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC2004248

Date: 2020-04-26



11.2 Photographs – EUT

Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 41 of 46

Report No.: FCC2004248

Date: 2020-04-26



Outside View

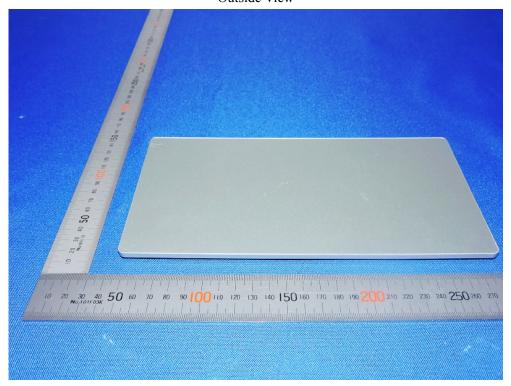



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 42 of 46

Report No.: FCC2004248

Date: 2020-04-26



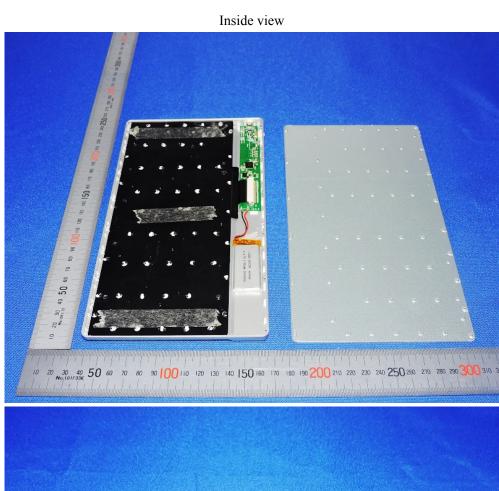



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2004248

Date: 2020-04-26



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 44 of 46


Report No.: FCC2004248

Date: 2020-04-26



Inside view

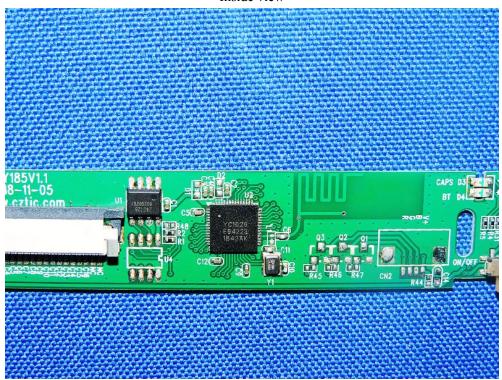

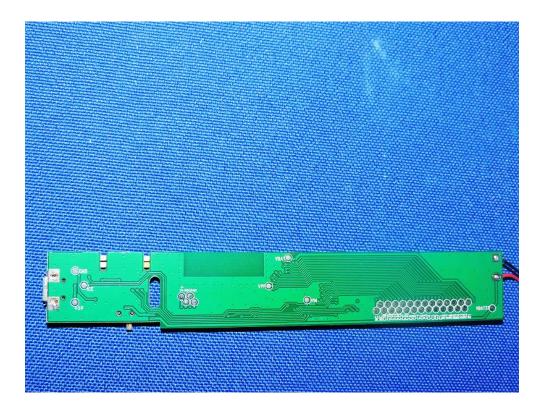

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 45 of 46


Report No.: FCC2004248

Date: 2020-04-26



Inside view

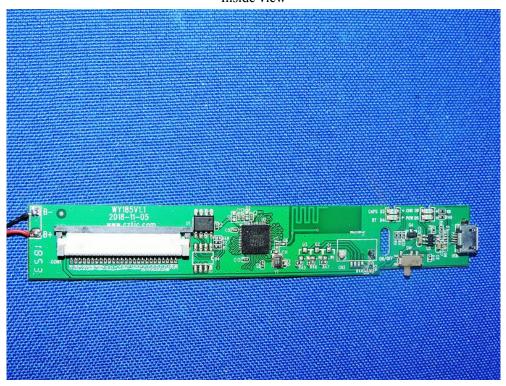

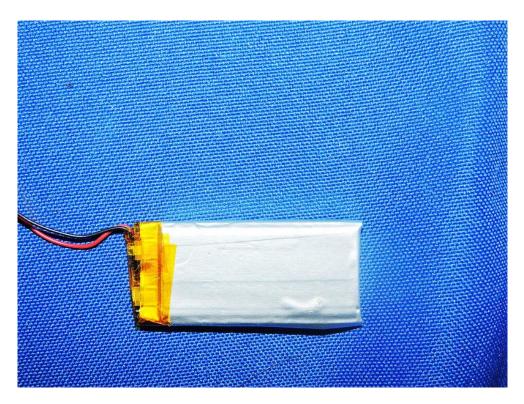

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 46 of 46 Report No.: FCC2004248



Inside view



-- End of the report--