

# FCC TEST REPORT

Client Name : Shenzhen SKY DRAGON Audio-video Technology Co.LTD

Address : B16, Laneway 3, Liuxian 2RD, District71, Baoan, Shenzhen, China

Product Name : Bluetooth Speaker

Date : Jun. 21, 2021

**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	5
1.6. Description of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	11
4. Radiated Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	17
4.3. Test Procedure.....	18
4.4. Test Data.....	18
5. 20dB Bandwidth Test.....	23
5.1. Test Standard and Limit.....	23
5.2. Test Setup.....	23
5.3. Test Procedure.....	23
5.4. Test Data.....	23
6. Antenna Requirement.....	25
6.1. Test Standard and Requirement.....	25
6.2. Antenna Connected Construction.....	25
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	26
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	28
APPENDIX III -- INTERNAL PHOTOGRAPH.....	28



# TEST REPORT

Applicant : Shenzhen SKY DRAGON Audio-video Technology Co.LTD  
Manufacturer : Shenzhen SKY DRAGON Audio-video Technology Co.LTD  
Product Name : Bluetooth Speaker  
Model No. : SR418, ITBSW421  
Trade Mark : CKY, SAMESAY  
Rating(s) : Input: DC 5V, 1A (via adapter input: 100-240V~50/60Hz, 0.75A, Max; Ouput:  
18.0V=1.0A 18W)

**Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249**

**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Receipt

May 28, 2021

Date of Test

May 28~Jun. 10, 2021

Prepared by



(Ella Liang)

Approved & Authorized Signer



(Kingkong Jin)

## 1. General Information

### 1.1. Client Information

Applicant	:	Shenzhen SKY DRAGON Audio-video Technology Co.LTD
Address	:	B16, Laneway 3, Liuxian 2RD, District71, Baoan, Shenzhen, China
Manufacturer	:	Shenzhen SKY DRAGON Audio-video Technology Co.LTD
Address	:	B16, Laneway 3, Liuxian 2RD, District71, Baoan, Shenzhen, China
Factory	:	Huizhou Clinav Industrial Development Co.,LTD
Address	:	Shangnan Village Committee, Yuanzhou Town BoLuo County, Huizhou City, Guangdong, China

### 1.2. Description of Device (EUT)

Product Name	:	Bluetooth Speaker
Model No.	:	SR418, ITBSW421 (Note: All samples are the same except the model number, so we prepare "SR418" for test only.)
Trade Mark	:	CKY, SAMESAY
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	BDR+EDR/BLE: 2402-2480MHz SRD: 906~915MHz
	Number of Channel:	BDR+EDR: 79 Channels BLE: 40 Channels SRD: 10 Channels
	Antenna Type:	BDR+EDR: GFSK, $\pi/4$ -DQPSK, 8-DPSK BLE: GFSK SRD: GFSK
	Modulation Type:	BDR+EDR&BLE: PCB Antenna SRD: Spring antenna
	Antenna Gain(Peak):	BDR+EDR/ BLE: -0.68 dBi SRD: -0.68 dBi
<p><b>Remark:</b> 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for SRD only.</p>		

### 1.3. Auxiliary Equipment Used During Test

N/A
-----

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH10

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH10



Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

### 1.5. List of Channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
1	906	10	915	/	/	/	/
2	907	/	/	/	/	/	/
3	908	/	/	/	/	/	/
4	909	/	/	/	/	/	/
5	910	/	/	/	/	/	/
6	911	/	/	/	/	/	/
7	912	/	/	/	/	/	/
8	913	/	/	/	/	/	/
9	914	/	/	/	/	/	/

## 1.6. Description of Test Setup

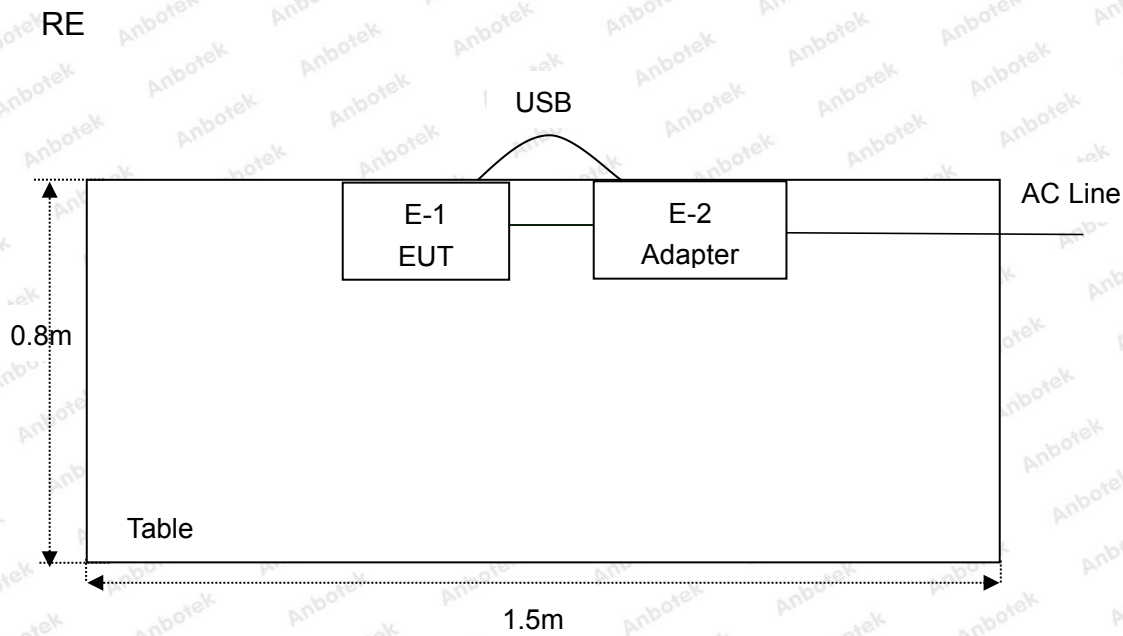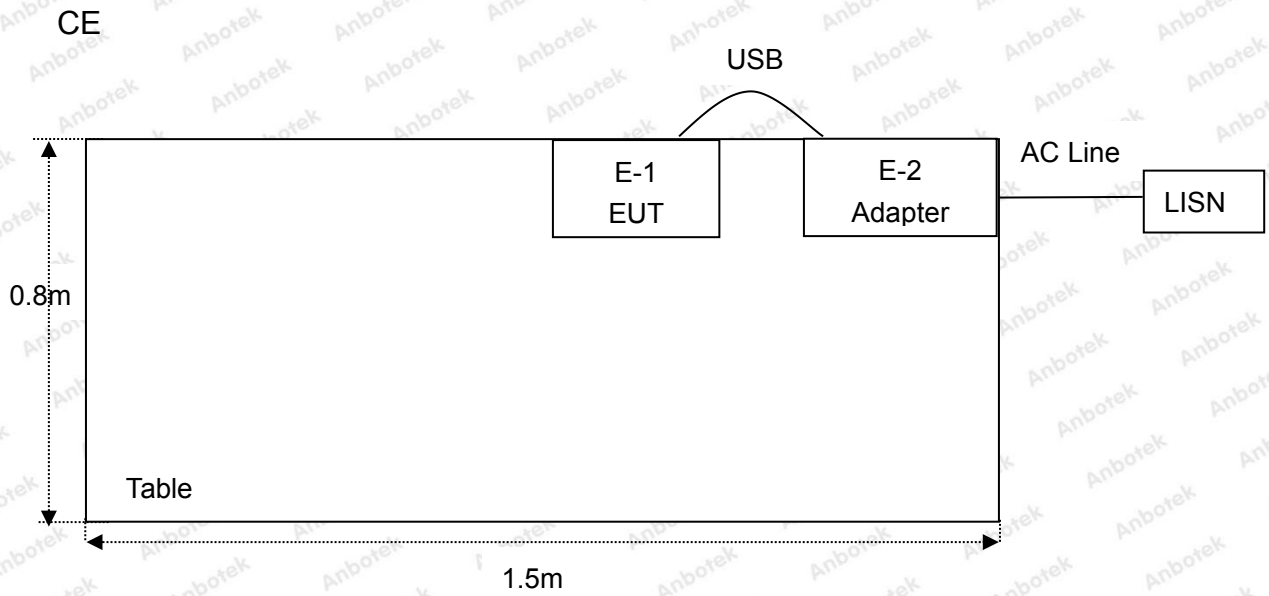

## 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

### 1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

### 1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS
<b>Remark:</b> "N/A" is an abbreviation for Not Applicable.		




## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

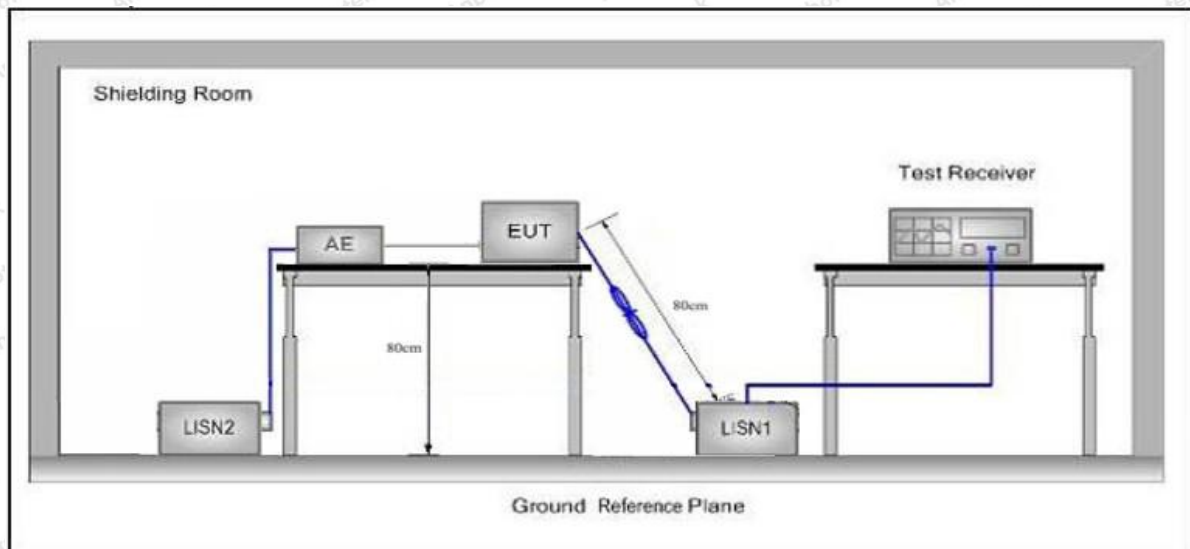

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

### 3.4. Test Data

During the test, pre-scan all modes, and found the CH01 of which is the worst case, only the worst case is recorded in the report.

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 23.6°C Hum.: 48%

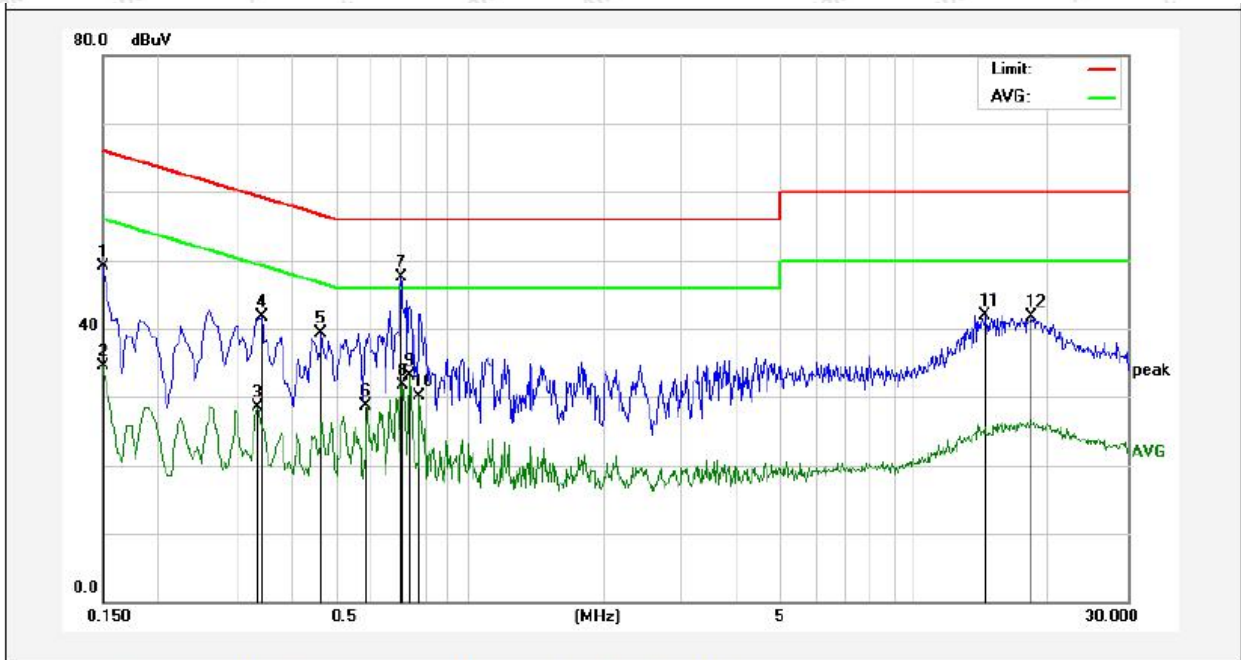

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	29.29	19.90	49.19	65.99	-16.80	QP	
2	0.1500	14.53	19.90	34.43	55.99	-21.56	AVG	
3	0.3339	8.61	19.91	28.52	49.35	-20.83	AVG	
4	0.3420	21.71	19.91	41.62	59.15	-17.53	QP	
5	0.4660	19.38	19.96	39.34	56.58	-17.24	QP	
6	0.5899	8.73	20.01	28.74	46.00	-17.26	AVG	
7	0.7019	27.47	20.04	47.51	56.00	-8.49	QP	
8	0.7060	11.72	20.04	31.76	46.00	-14.24	AVG	
9	0.7340	13.03	20.05	33.08	46.00	-12.92	AVG	
10	0.7740	9.97	20.06	30.03	46.00	-15.97	AVG	
11	14.3980	21.71	20.27	41.98	60.00	-18.02	QP	
12	18.3260	21.42	20.31	41.73	60.00	-18.27	QP	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 23.6°C Hum.: 48%

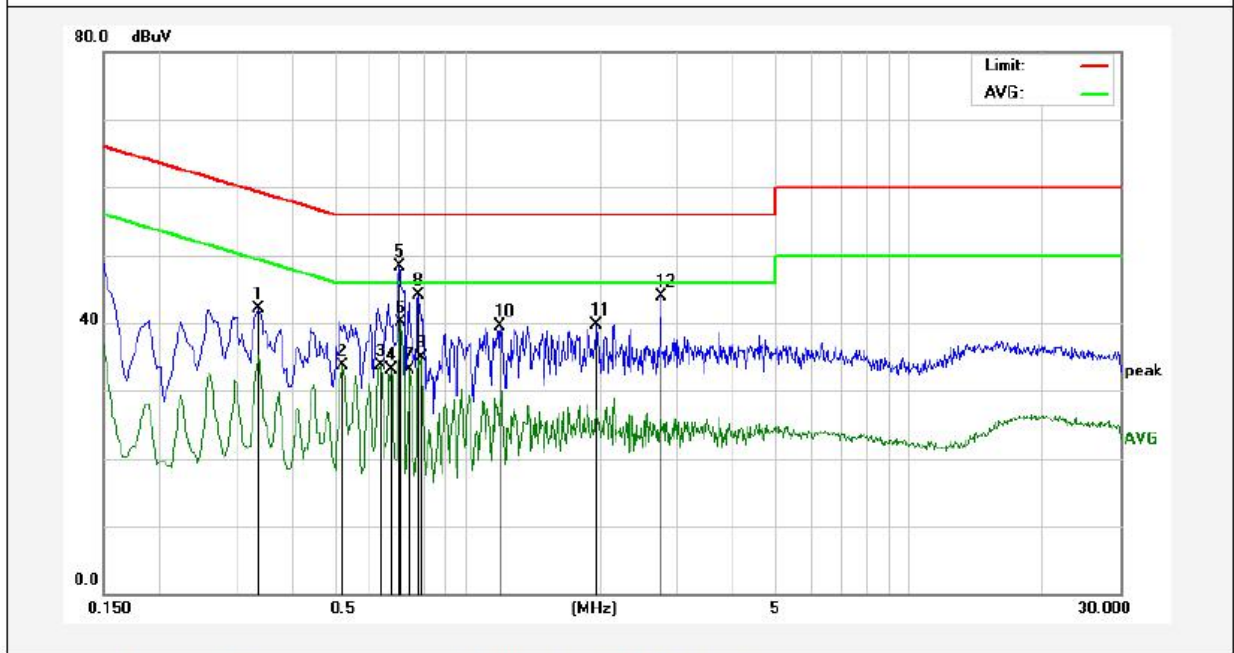

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.3379	22.27	19.91	42.18	59.25	-17.07	QP	
2	0.5220	13.67	19.99	33.66	46.00	-12.34	AVG	
3	0.6340	13.70	20.02	33.72	46.00	-12.28	AVG	
4	0.6740	13.08	20.03	33.11	46.00	-12.89	AVG	
5	0.7019	28.35	20.04	48.39	56.00	-7.61	QP	
6	0.7100	20.00	20.04	40.04	46.00	-5.96	AVG	
7	0.7420	13.08	20.05	33.13	46.00	-12.87	AVG	
8	0.7780	24.11	20.06	44.17	56.00	-11.83	QP	
9	0.7860	14.81	20.06	34.87	46.00	-11.13	AVG	
10	1.1900	19.37	20.12	39.49	56.00	-16.51	QP	
11	1.9620	19.62	20.14	39.76	56.00	-16.24	QP	
12	2.7420	23.82	20.15	43.97	56.00	-12.03	QP	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 23.6°C Hum.: 48%

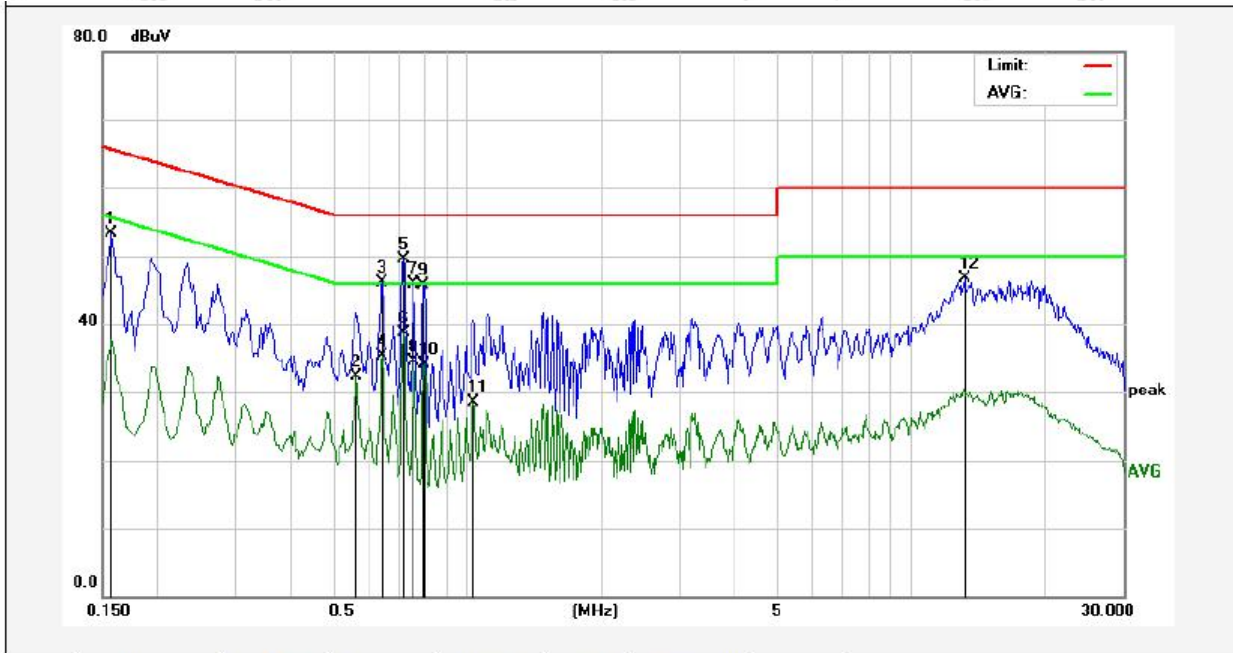

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1580	33.38	19.90	53.28	65.56	-12.28	QP	
2	0.5620	12.38	20.00	32.38	46.00	-13.62	AVG	
3	0.6419	26.11	20.02	46.13	56.00	-9.87	QP	
4	0.6419	15.25	20.02	35.27	46.00	-10.73	AVG	
5	0.7180	29.46	20.04	49.50	56.00	-6.50	QP	
6	0.7180	18.67	20.04	38.71	46.00	-7.29	AVG	
7	0.7580	25.76	20.06	45.82	56.00	-10.18	QP	
8	0.7580	14.35	20.06	34.41	46.00	-11.59	AVG	
9	0.7940	25.61	20.07	45.68	56.00	-10.32	QP	
10	0.7980	13.95	20.07	34.02	46.00	-11.98	AVG	
11	1.0300	8.47	20.12	28.59	46.00	-17.41	AVG	
12	13.1420	26.33	20.29	46.62	60.00	-13.38	QP	

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 23.6°C Hum.: 48%

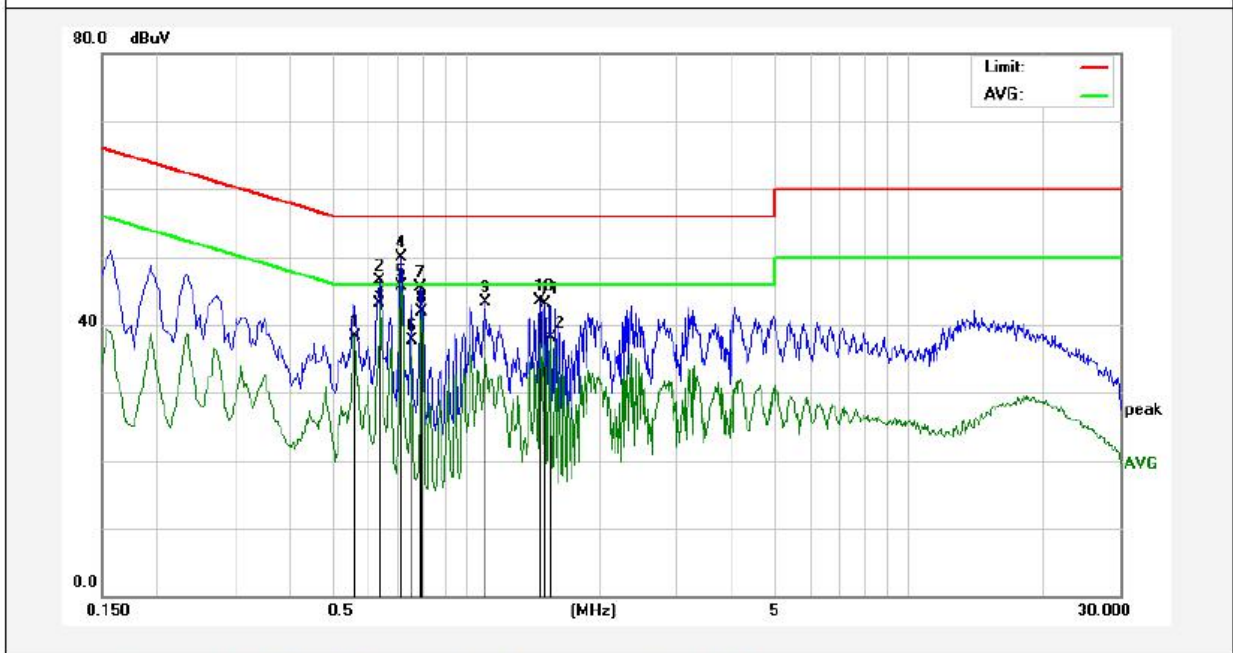

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.5620	18.37	20.00	38.37	46.00	-7.63	AVG	
2	0.6380	26.53	20.02	46.55	56.00	-9.45	QP	
3	0.6380	23.05	20.02	43.07	46.00	-2.93	AVG	
4	0.7140	29.92	20.04	49.96	56.00	-6.04	QP	
5	0.7140	23.62	20.04	43.66	46.00	-2.34	AVG	
6	0.7539	17.70	20.05	37.75	46.00	-8.25	AVG	
7	0.7900	25.48	20.06	45.54	56.00	-10.46	QP	
8	0.7940	21.93	20.06	41.99	46.00	-4.01	AVG	
9	1.1019	23.16	20.12	43.28	56.00	-12.72	QP	
10	1.4700	23.33	20.13	43.46	56.00	-12.54	QP	
11	1.5060	23.00	20.13	43.13	56.00	-12.87	QP	
12	1.5460	17.90	20.13	38.03	46.00	-7.97	AVG	

## 4. Radiated Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

- (1) The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

**Remark:**

- (1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



## 4.2. Test Setup

Figure 1. Below 30MHz

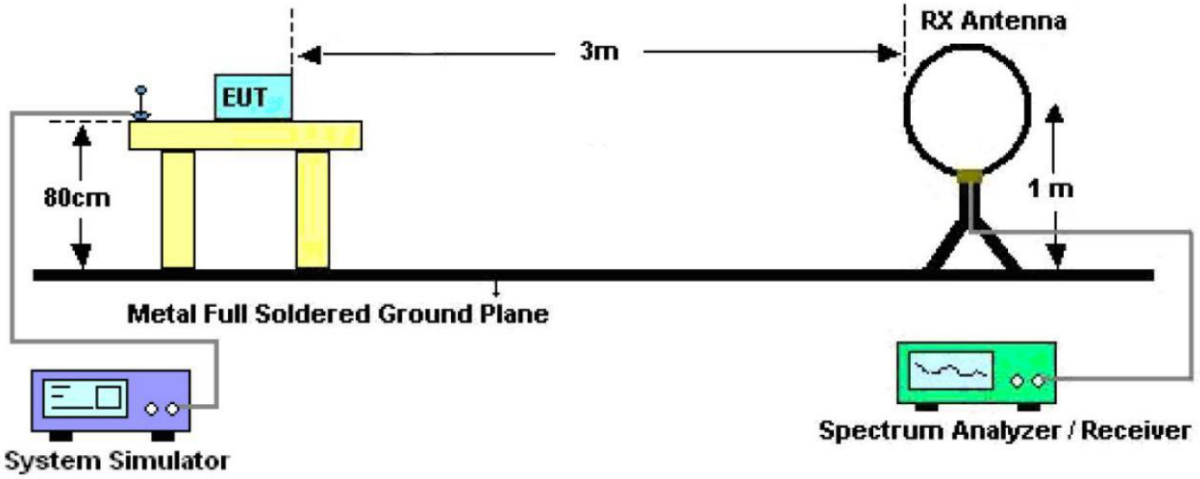


Figure 2. 30MHz to 1GHz


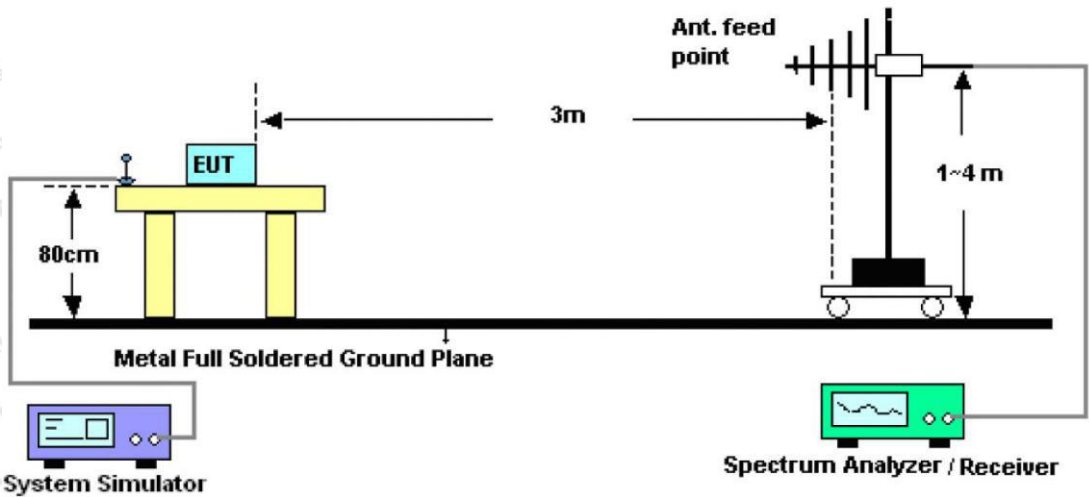


Figure 3. Above 1 GHz

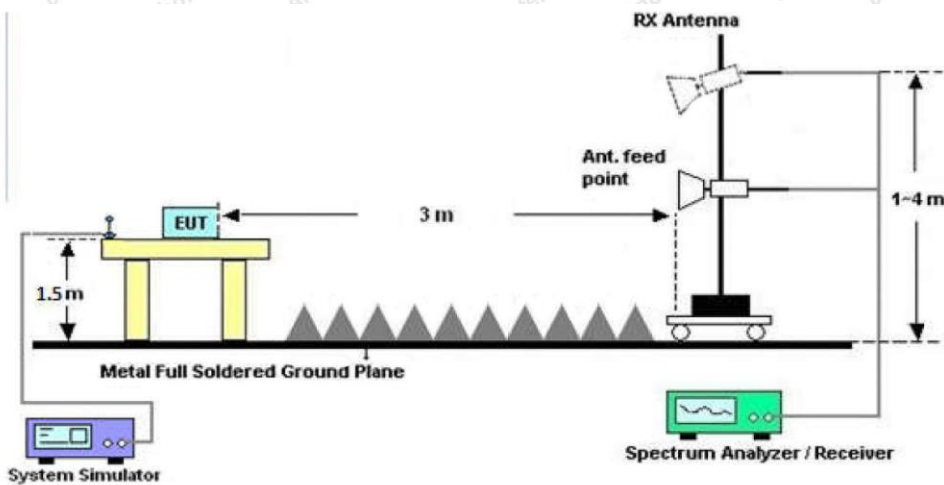

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

### 4.4. Test Data

#### PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

### Test Results (30~1000MHz)


Test Mode: CH01  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 24.3°C/46%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	35.9972	51.86	-15.54	36.32	40.00	-3.68	QP	300	0	
2	40.1347	48.37	-13.41	34.96	40.00	-5.04	QP	300	49	
3	49.0145	46.61	-16.22	30.39	40.00	-9.61	QP	300	124	
4	71.8320	51.57	-21.11	30.46	40.00	-9.54	QP	300	196	
5	168.4138	43.12	-17.62	25.50	43.50	-18.00	QP	300	246	
6	211.5265	41.76	-15.55	26.21	43.50	-17.29	QP	300	360	

### Test Results (30~1000MHz)

Test Mode: CH01  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 24.3°C/46%RH

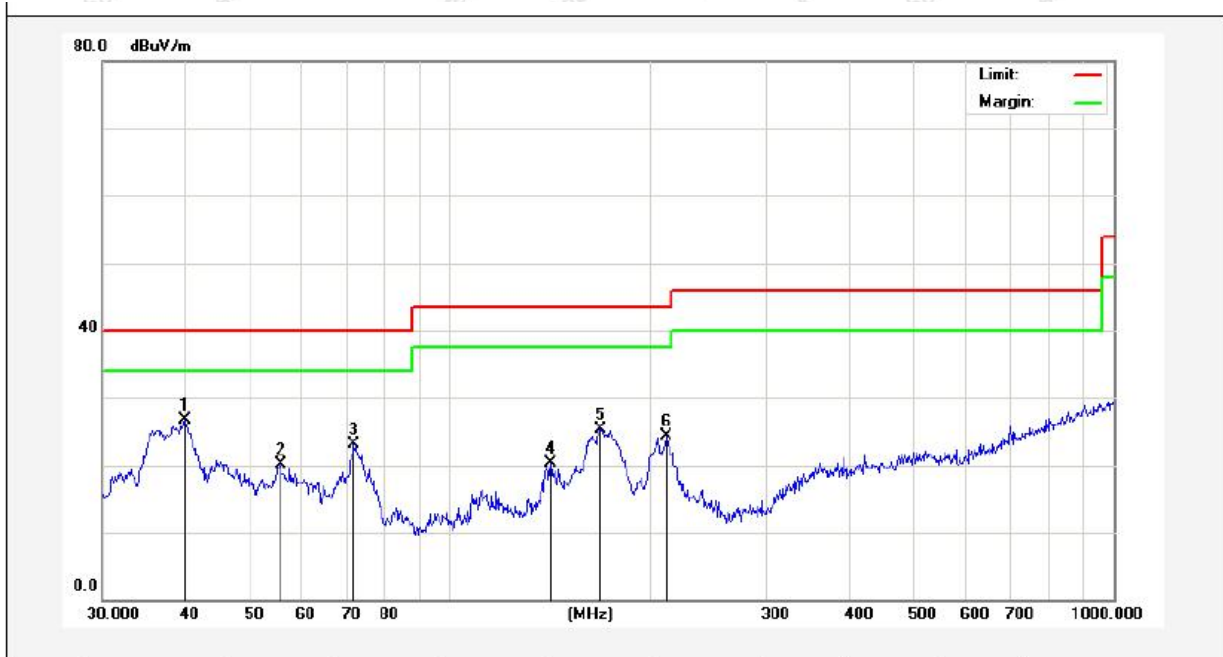

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	39.9942	41.02	-14.37	26.65	40.00	-13.35	QP	300	0	
2	55.6094	37.81	-17.76	20.05	40.00	-19.95	QP	300	71	
3	71.8320	45.16	-22.11	23.05	40.00	-16.95	QP	300	167	
4	141.8262	42.80	-22.47	20.33	43.50	-23.17	QP	300	204	
5	168.4138	46.16	-20.78	25.38	43.50	-18.12	QP	300	255	
6	212.2695	44.38	-20.14	24.24	43.50	-19.26	QP	300	360	

**Fundamental**

Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Factor (dB)	Results (dBuV/m)	Limits (dBuV/m)	Det. Mode
906	H	93.83	-3.71	90.76	94	QP
906	V	94.97	-3.71	91.09	94	QP
915	H	93.83	-3.71	90.32	94	QP
915	V	94.97	-3.71	91.41	94	QP

**Test Results (1GHz-25GHz)**

Test Mode: Low CH 906MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
1812.0000	50.42	7.39	28.73	26.31	60.23	74	-13.77	H	Peak
1812.0000	40.36	7.39	28.73	26.31	50.17	54	-3.83	H	AVG
2718.0000	48.14	8.10	29.71	27.01	58.94	74	-15.06	H	Peak
2718.0000	37.90	8.10	29.71	27.01	48.70	54	-5.30	H	AVG
3624.0000	--	--	--	--	--	--	--	H	Peak
3624.0000	--	--	--	--	--	--	--	H	AVG
1812.0000	45.82	7.39	28.73	26.31	55.63	74	-18.37	V	Peak
1812.0000	38.09	7.39	28.73	26.31	47.90	54	-6.10	V	AVG
2718.0000	46.67	8.10	29.71	27.01	57.47	74	-16.53	V	Peak
2718.0000	38.73	8.10	29.71	27.01	49.53	54	-4.47	V	AVG
3624.0000	--	--	--	--	--	--	--	V	Peak
3624.0000	--	--	--	--	--	--	--	V	AVG

Test Mode: High CH 915MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
1830.0000	50.38	7.39	28.73	26.31	60.19	74	-13.81	H	Peak
1830.0000	39.95	7.39	28.73	26.31	49.76	54	-4.24	H	AVG
2745.0000	47.98	8.10	29.71	27.01	58.78	74	-15.22	H	Peak
2745.0000	37.69	8.10	29.71	27.01	48.49	54	-5.51	H	AVG
3660.0000	--	--	--	--	--	--	--	H	Peak
3660.0000	--	--	--	--	--	--	--	H	AVG
1830.0000	45.79	7.39	28.73	26.31	55.60	74	-18.40	V	Peak
1830.0000	38.09	7.39	28.73	26.31	47.90	54	-6.10	V	AVG
2745.0000	46.05	8.10	29.71	27.01	56.85	74	-17.15	V	Peak
2745.0000	38.99	8.10	29.71	27.01	49.79	54	-4.21	V	AVG
3660.0000	--	--	--	--	--	--	--	V	Peak
3660.0000	--	--	--	--	--	--	--	V	AVG

**Note:**


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

## 5. 20dB Bandwidth Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

### 5.2. Test Setup



### 5.3. Test Procedure


1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
 RBW = 30kHz, VBW $\geq$ 3\*RBW =100kHz,  
 Detector= Average  
 Trace mode= Max hold.  
 Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### 5.4. Test Data


Test Item	:	20dB Bandwidth
Test Voltage	:	AC 120V/60Hz
Test Result	:	PASS

Temperature	:	22.4℃
Humidity	:	55%RH

Frequency (MHz)	Bandwidth (kHz)	Result
906	280.6	PASS
915	281.5	

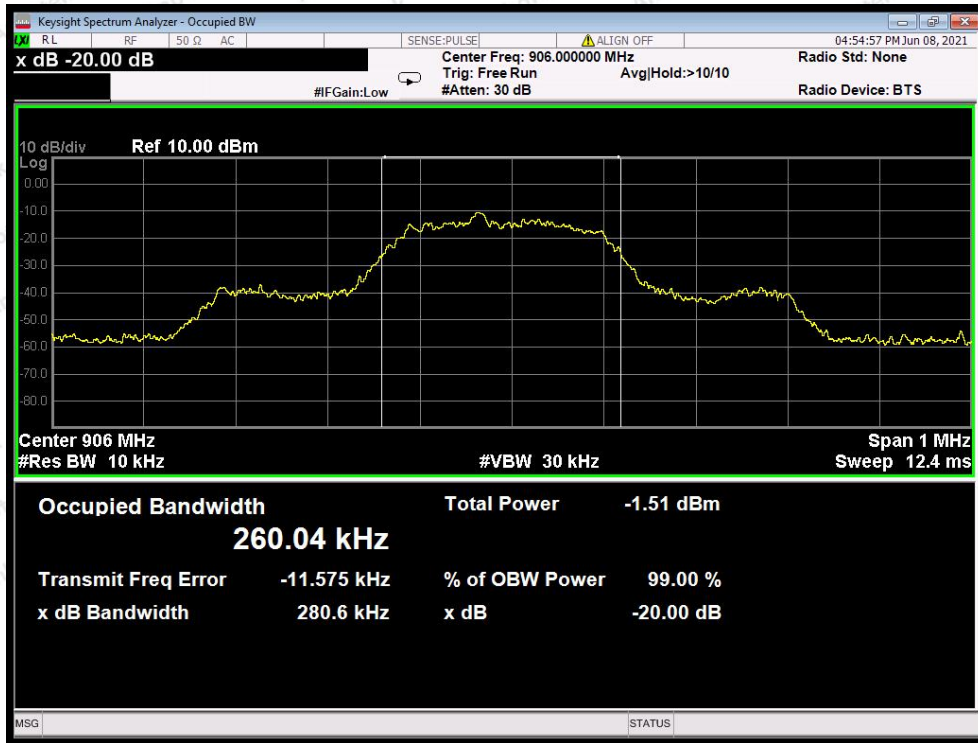

906MHz

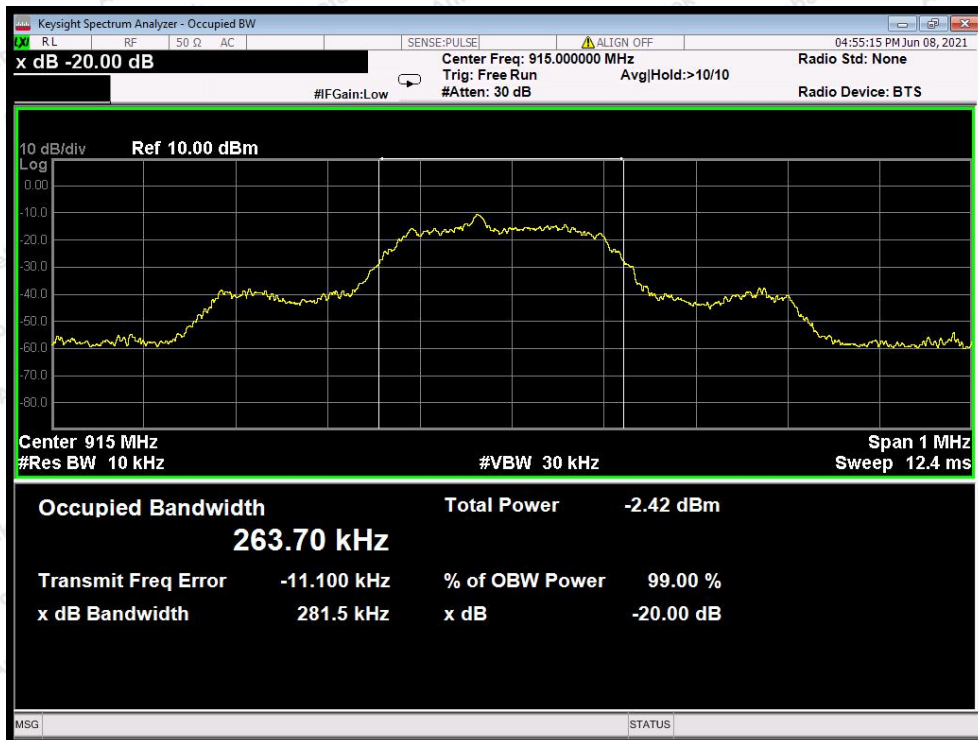

915MHz



## 6. Antenna Requirement

### 6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 6.2. Antenna Connected Construction

The antenna is a Spring antenna which permanently attached, and the best case gain of the antenna is -0.68 dBi. It complies with the standard requirement.

## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Power Line Conducted Emission Test

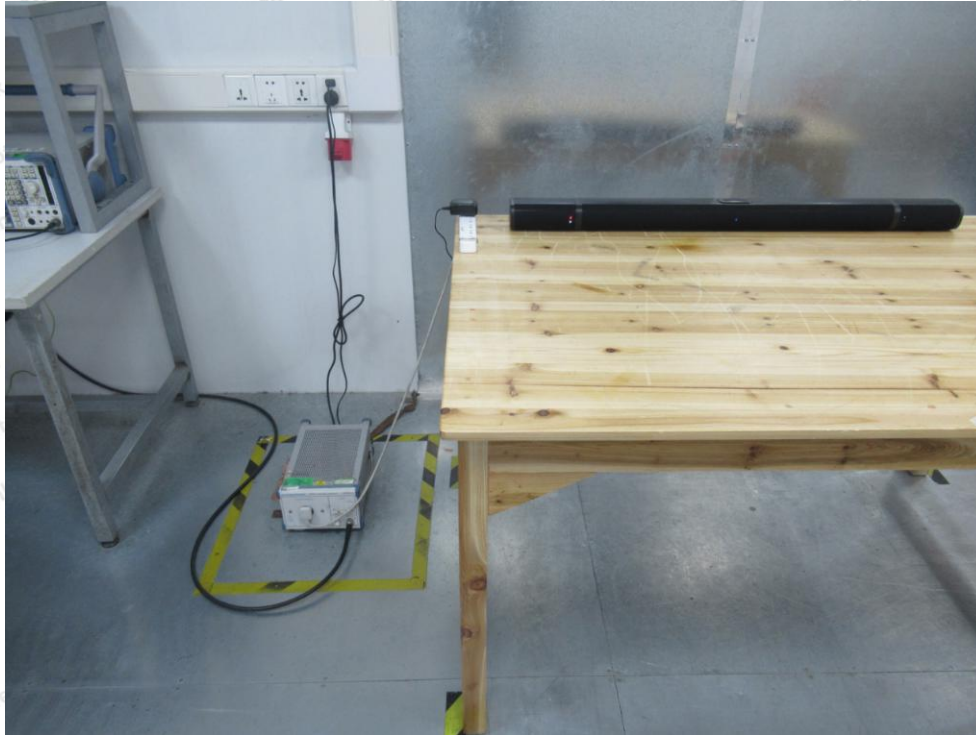


Photo of Radiation Emission Test





**APPENDIX II -- EXTERNAL PHOTOGRAPH**

Reference to the test report 18220WC10108001.

**APPENDIX III -- INTERNAL PHOTOGRAPH**

Reference to the test report 18220WC10108001.

----- End of Report -----

