



Report No.: FCC 1903224-01 File reference No.: 2019-04-10

Applicant: Shenzhen Geniatech Inc., Ltd.

Product: Developer Board

Model No.: DB8,DB8WL,DB9,DB7,DB5,DB4,XPI,XPI-S905X,GTW390R,

GTW350,GTW410,GTW389,GTW360

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: April 10, 2019

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1903224-01 Page 2 of 94

Date: 2019-04-10



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Page 3 of 94

Report No.: FCC1903224-01

Date: 2019-04-10



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test	13
6.1	Test Method and Test Procedure	13
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement	23
8.0	Maximum Output Power	43
9.0	Power Spectral Density Measurement	46
10.0	Out of Band Measurement.	65
11.0	Antenna Requirement.	83
12.0	FCC ID Label.	84
13.0	Photo of Test Setup and EUT View.	85

Date: 2019-04-10



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Geniatech Inc., Ltd.

Address: 18F, GDC Building, No 9th, Gaoxin Middle 3rd Road, Nanshan, Shenzhen, China

Telephone: -Fax: --

1.3 Description of EUT

Product: Developer Board

Manufacturer: Shenzhen Geniatech Inc., Ltd.

Address: 18F, GDC Building, No 9th, Gaoxin Middle 3rd Road, Nanshan, Shenzhen, China

Brand Name: N/A
Model Number: DB8

Additional Model Number: DB8WL,DB9,DB7,DB5,DB4,XPI,XPI-905X,GTW390R,GTW350,

GTW410,GTW389,GTW360

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n HT20,HT40

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/HT40: mcs0-mcs9

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20) : 11 Channels; IEEE 802.11n (HT40) : 7 Channels; Antenna: 2 pcs External antenna with reversed polarity non standard unique antenna port.

Antenna gain: 2.0dBi

Directional gain =2+10log2=5.01dBi

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1903224-01 Page 5 of 94

Date: 2019-04-10



Input Voltage: DC12V, 1.5A

Power Adapter Model: FJ-SW1201500E; Input: 100-240V,50/60HZ,0.6A Max;

Output: DC12V, 1500mA

Submitted Sample: 1 Samples

1.5 Test Duration

2019-03-25 to 2019-04-09

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

1.7 Test Engineer Terry (ang

The sample tested by

Print Name: Terry Tang

Page 6 of 94

Report No.: FCC1903224-01

Date: 2019-04-10



Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2018-06-22	2019-06-21
Ultra Broadband ANT	R&S	HL562	100157	2018-06-18	2019-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2018-06-22	2019-06-21
Loop Antenna	EMCO	6507	00078608	2018-06-25	2019-06-24
Spectrum	R&S	FSIQ26	100292	2018-06-22	2019-06-21
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2019-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Power meter	Anritsu	ML2487A	6K00003613	2018-08-22	2019-08-21
Power sensor	Anritsu	MA2491A	32263	2018-08-22	2019-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2018-06-22	2019-06-21
EMI Test Receiver	RS	ESH3	860904/006	2018-06-22	2019-06-21
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2018-06-22	2019-06-21
Spectrum	HP/Agilent	E4407B	MY50441392	2018-03-27	2019-03-26
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2018-05-24	2019-05-23
RF Cable	Zhengdi	7m		2018-03-17	2019-03-16
RF Switch	EM	EMSW18	060391	2018-06-22	2019-06-21
Pre-Amplifier	Schwarebeck	BBV9743	#218	2018-06-22	2019-06-21
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Report No.: FCC1903224-01 Page 7 of 94

Date: 2019-04-10



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing (Dutycycle>98%)

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing (Dutycycle>98%)

Page 8 of 94

Report No.: FCC1903224-01

Date: 2019-04-10



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: FCC1903224-01

Date: 2019-04-10



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

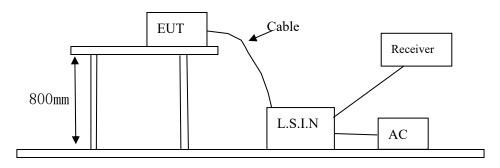

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID	
		DB8,DB8WL,DB9,DB7,DB5,		
Developer Board	Shenzhen Geniatech Inc., Ltd.	DB4,XPI,XPI-S905X,GTW390R,	ZJU-D19EC5	
Developer Board		GTW350,GTW410,GTW389,	Z30-D19EC3	
		GTW360		

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1903224-01 Page 10 of 94

Date: 2019-04-10



- 1			

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB μ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5 00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.



Date: 2019-04-10



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

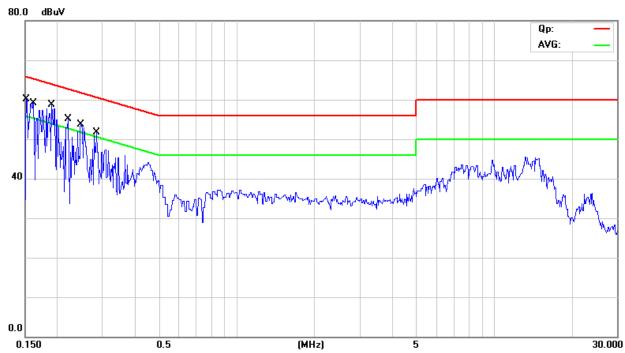

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1517	38.30	9.78	48.08	65.91	-17.83	QP	
2	0.1517	11.49	9.78	21.27	55.91	-34.64	AVG	
3	0.1614	33.39	9.78	43.17	65.39	-22.22	QP	
4	0.1614	8.46	9.78	18.24	55.39	-37.15	AVG	
5	0.1901	35.98	9.76	45.74	64.03	-18.29	QP	
6	0.1901	10.23	9.76	19.99	54.03	-34.04	AVG	
7	0.2200	33.34	9.75	43.09	62.82	-19.73	QP	
8	0.2200	5.62	9.75	15.37	52.82	-37.45	AVG	
9	0.2471	31.96	9.75	41.71	61.85	-20.14	QP	
10	0.2471	3.56	9.75	13.31	51.85	-38.54	AVG	
11	0.2840	30.94	9.76	40.70	60.70	-20.00	QP	
12	0.2840	2.32	9.76	12.08	50.70	-38.62	AVG	

Date: 2019-04-10

Report No.: FCC1903224-01



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual



No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1631	39.15	9.78	48.93	65.30	-16.37	QP	
2	0.1631	12.72	9.78	22.50	55.30	-32.80	AVG	
3	0.1876	35.91	9.76	45.67	64.14	-18.47	QP	
4	0.1876	8.25	9.76	18.01	54.14	-36.13	AVG	
5	0.2164	33.43	9.75	43.18	62.96	-19.78	QP	
6	0.2164	4.16	9.75	13.91	52.96	-39.05	AVG	
7	0.4370	26.77	9.77	36.54	57.12	-20.58	QP	
8	0.4370	2.43	9.77	12.20	47.12	-34.92	AVG	

Report No.: FCC1903224-01 Page 13 of 94

Date: 2019-04-10



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**OP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre –Amplifier Furn-table Receiver

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1903224-01 Page 14 of 94

Date: 2019-04-10



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11g MIMO mode was the worst case.

Page 15 of 94

Report No.: FCC1903224-01

Date: 2019-04-10




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass



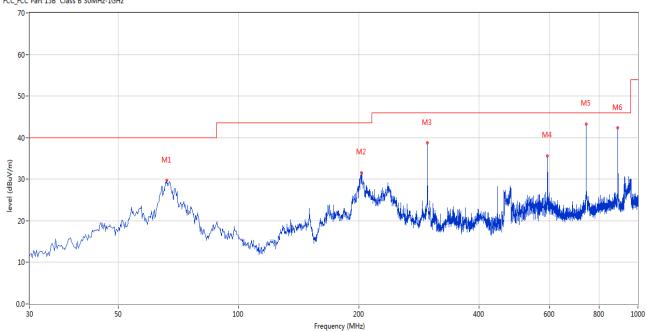

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	66.123	29.72	-13.97	40.0	-10.28	Peak	83.00	100	Н	Pass
2	203.102	31.58	-13.44	40.0	-8.42	Peak	29.00	100	Н	Pass
3	296.926	38.73	-11.07	46.0	-7.27	Peak	173.00	100	Н	Pass
4	593.914	35.63	-5.25	46.0	-10.37	Peak	178.00	100	Н	Pass
5	742.529	42.30	-3.47	46.0	-3.70	Peak	215.00	100	Н	Pass
6	890.902	42.42	-1.91	46.0	-3.58	Peak	317.00	100	Н	Pass

Page 16 of 94

Report No.: FCC1903224-01

Date: 2019-04-10




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

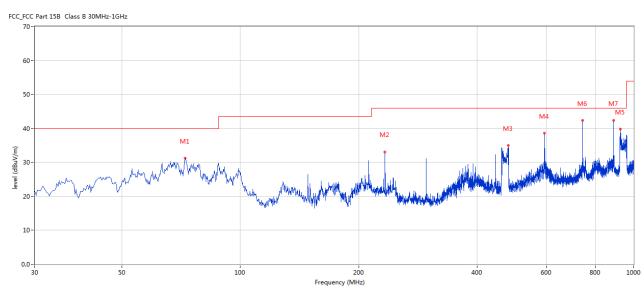

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	72.427	31.23	-16.69	40.0	-8.77	Peak	0.00	100	V	Pass
2	233.407	33.11	-12.53	46.0	-12.89	Peak	208.00	100	V	Pass
3	479.483	34.95	-7.43	46.0	-11.05	Peak	135.00	100	V	Pass
4	593.914	38.60	-5.25	46.0	-7.40	Peak	21.00	100	V	Pass
5	924.359	39.84	-1.76	46.0	-6.16	Peak	203.00	100	V	Pass
6	742.529	42.42	-3.47	46.0	-3.58	Peak	219.00	100	V	Pass
7	890.902	42.30	-1.91	46.0	-3.70	Peak	334.00	100	V	Pass

Page 17 of 94 Report No.: FCC1903224-01


Date: 2019-04-10



Please refer to the following test plots for details:

CH01 for 11g at 6Mbps: Horizontal

FCC Part 15B Class B 1GHz-18GHz - 2

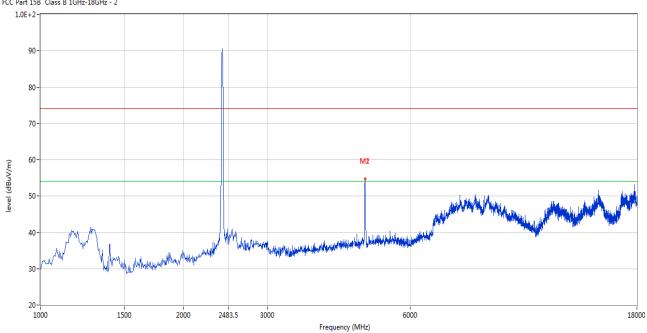


N	lo.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1		4819.795	54.70	3.14	74.0	-19.30	Peak	60.00	100	Н	Pass
2		4819.795	36.21	3.14	54.0	-17.79	AV	60.00	100	Н	Pass

Page 18 of 94 Report No.: FCC1903224-01

Date: 2019-04-10



CH01 for 11g at 6Mbps: Vertical

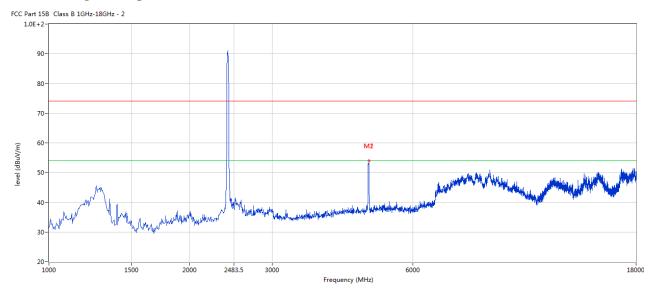


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4832.542	53.91	3.15	74.0	-20.09	Peak	286.00	100	V	Pass
2	4832.542	35.62	3.15	54.0	-18.38	AV	286.00	100	V	Pass

Report No.: FCC1903224-01 Page 19 of 94

Date: 2019-04-10



CH06 for 11g at 6Mbps: Vertical

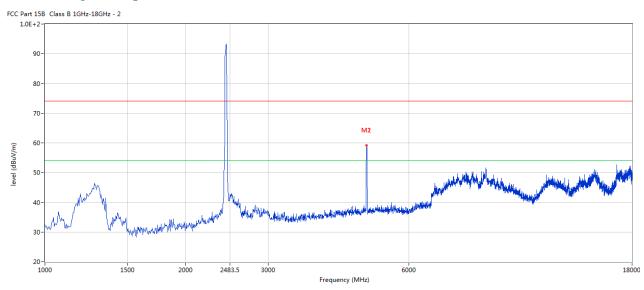


No.	Frequenc	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	y (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4875.031	59.23	3.19	74.0	-14.77	Peak	346.00	100	V	Pass
2	4875.031	38.09	3.19	54.0	-15.91	AV	346.00	100	V	Pass

Page 20 of 94 Report No.: FCC1903224-01

Date: 2019-04-10



CH06 for 11g at 6Mbps: Horizontal

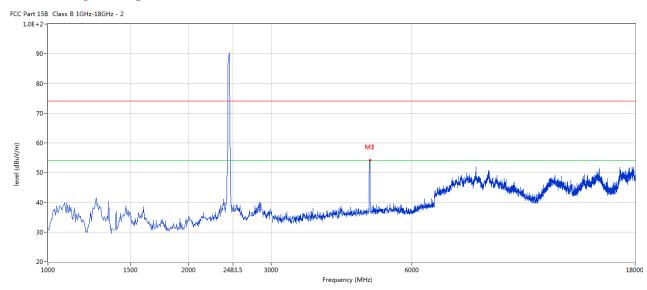


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4879.280	54.12	3.20	74.0	-19.88	Peak	28.00	100	Н	Pass
2	4879.280	35.83	3.20	54.0	-18.17	AV	28.00	100	Н	Pass

Page 21 of 94 Report No.: FCC1903224-01

Date: 2019-04-10



CH11 for 11g at 6Mbps: Vertical

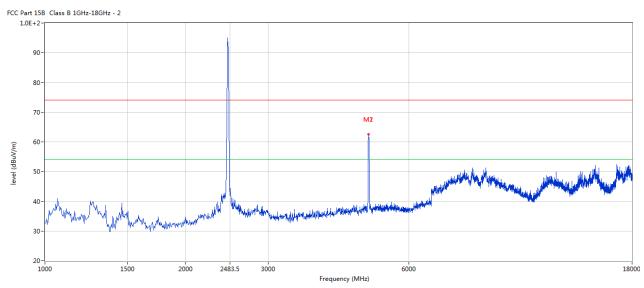


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4921.770	62.53	3.27	74.0	-11.47	Peak	296.00	100	Н	Pass
2	4921.770	43.65	3.27	54.0	-10.35	AV	296.00	100	Н	Pass

Page 22 of 94 Report No.: FCC1903224-01

Date: 2019-04-10



CH11 for 11g at 6Mbps: Horizontal

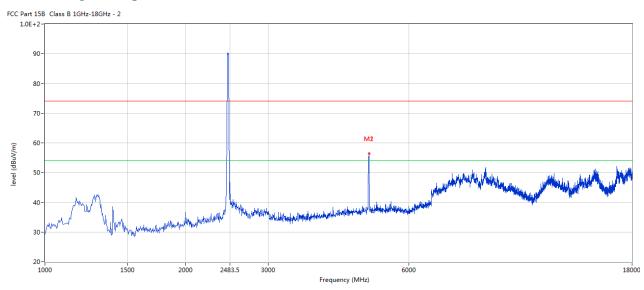

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4926.018	56.34	3.28	74.0	-17.66	Peak	1.00	100	V	Pass
2	4926.018	37.51	3.28	54.0	-16.49	AV	1.00	100	V	Pass

Note: 1. Result Level = Reading + Factor

2. Factor= AF + Cable Loss- Preamp

3. Margin = Result– Limit

4. For radiated Emissions from 18-25GHz, it is only the floor noise.


Report No.: FCC1903224-01 Page 23 of 94

Date: 2019-04-10



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No.: FCC1903224-01 Page 24 of 94

Date: 2019-04-10



6dB Occupied Bandwidth

EUT		Deve	loper Board	d	Model		D	B8
Mode		8	302.11b		Input Vol	tage	120	0V~
Temperat	ure	24	4 deg. C,		Humidity		56%	6 RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)			mum Limit MHz)	Pass/ Fail
1		2412	1	10.04			0.5	Pass
6		2437	1	10	.04		0.5	Pass
11		2462	1	10	.04		0.5	Pass
1		2412	11	10	.04		0.5	Pass
6		2437	11	10	.04		0.5	Pass
11	2462		11	10	.04		0.5	Pass


Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.

Report No.: FCC1903224-01 Page 25 of 94

Date: 2019-04-10



1. 802.11b at 1Mbps of CH01

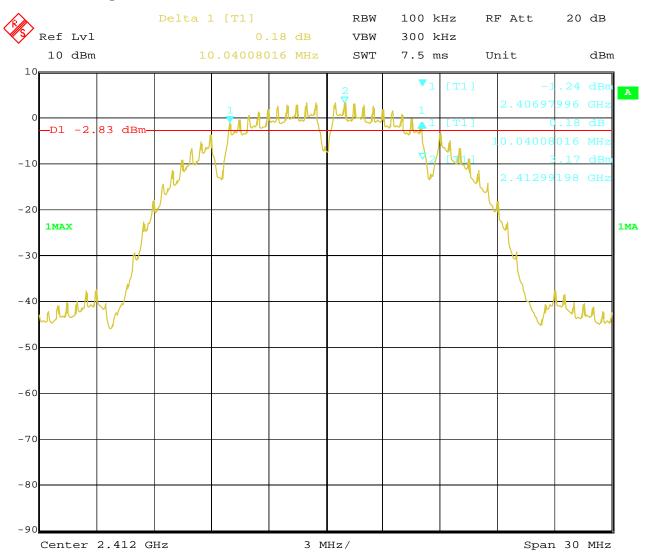


25.MAR.2019 13:34:12 Date:

Report No.: FCC1903224-01 Page 26 of 94

Date: 2019-04-10



2. 802.11b at 1Mbps of CH06

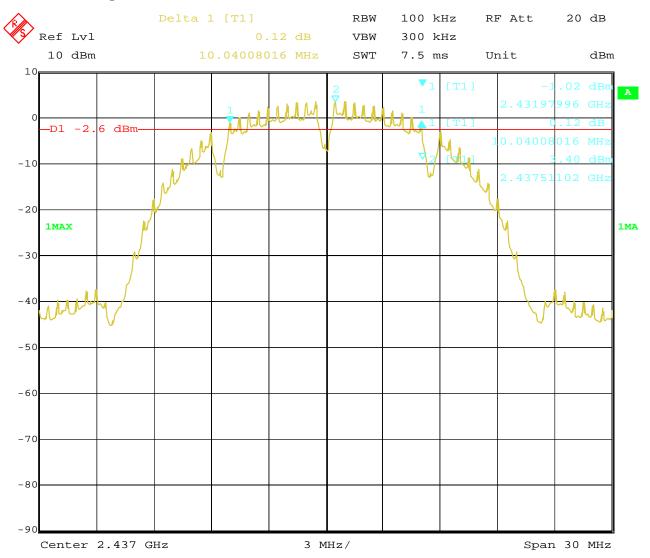


25.MAR.2019 13:54:53 Date:

Report No.: FCC1903224-01 Page 27 of 94

Date: 2019-04-10



3. 802.11b at 1Mbps of CH11

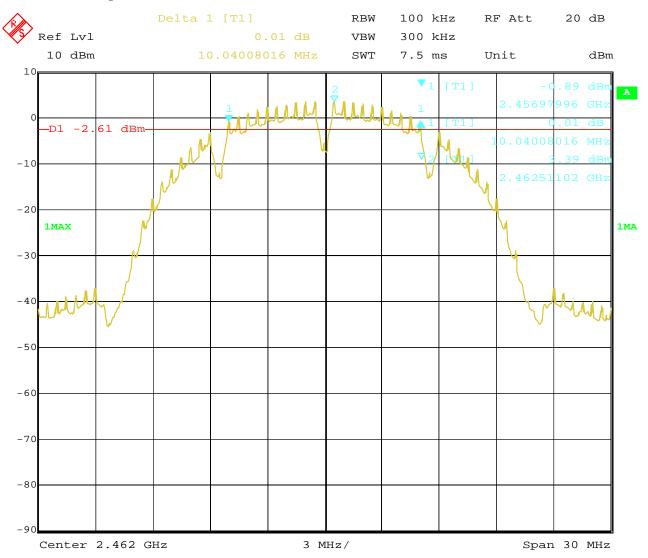


25.MAR.2019 13:57:24 Date:

Report No.: FCC1903224-01 Page 28 of 94

Date: 2019-04-10



4. 802.11b at 11Mbps of CH01

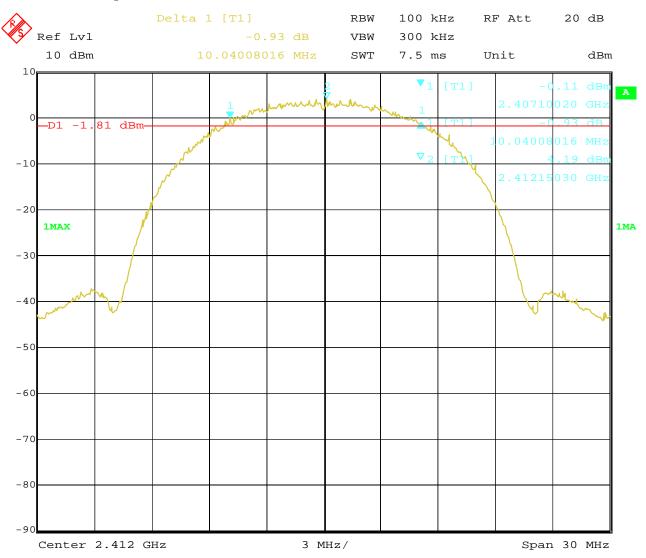


25.MAR.2019 13:43:34 Date:

Report No.: FCC1903224-01 Page 29 of 94

Date: 2019-04-10



5. 802.11b at 11Mbps of CH06

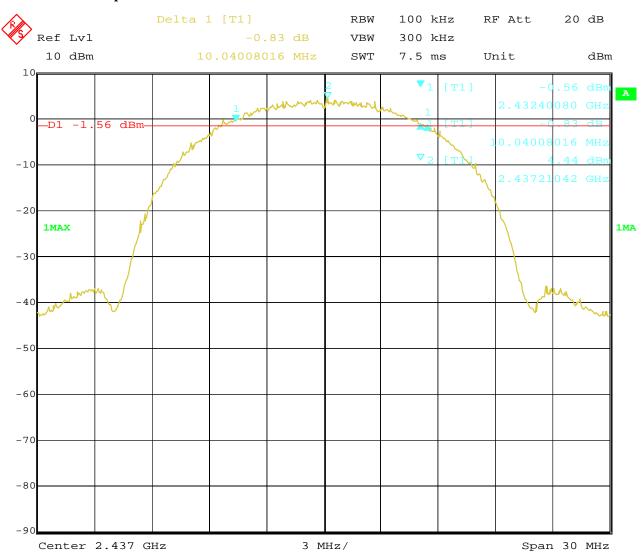


25.MAR.2019 13:48:46 Date:

Page 30 of 94 Report No.: FCC1903224-01

Date: 2019-04-10



6. 802.11b at 11Mbps of CH11

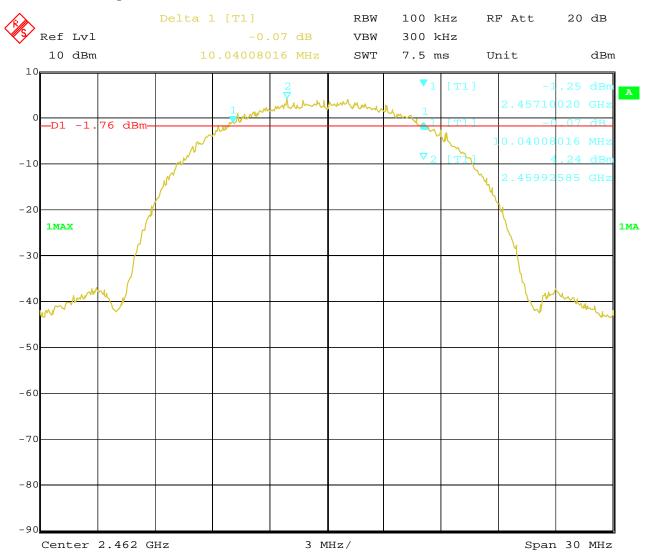

25.MAR.2019 14:00:34 Date:

Page 31 of 94 Report No.: FCC1903224-01

Date: 2019-04-10



6dB Occupied Bandwidth

EUT		Deve	loper Board	d	Model			DB8
Mode		8	302.11g		Input Vol	tage		120V~
Temperat	emperature		4 deg. C,		Humidity	,	5	6% RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)			num Limit MHz)	Pass/ Fail
1		2412	6	16	5.41		0.5	Pass
6	2437		6	16	5.41		0.5	Pass
11	2462		6	16.41		0.5		Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.


Page 32 of 94 Report No.: FCC1903224-01

Date: 2019-04-10



Test Plots:

1. 802.11g at 6Mbps of CH01

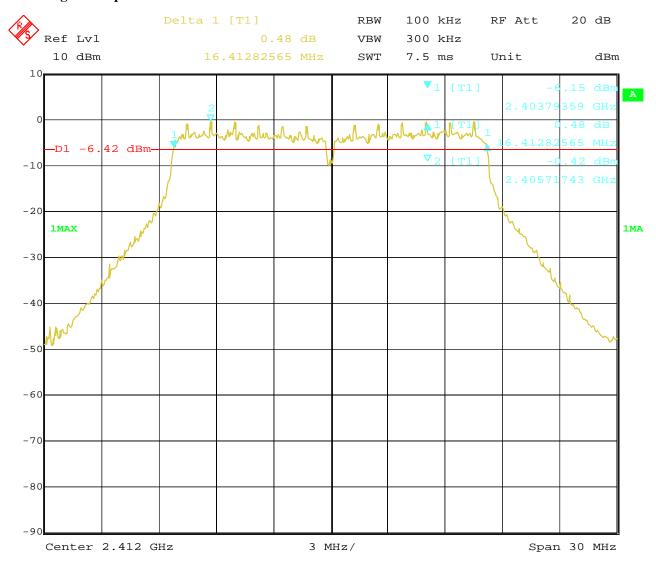


Date: 25.MAR.2019 13:39:42 Report No.: FCC1903224-01 Page 33 of 94

Date: 2019-04-10



2. 802.11g at 6Mbps of CH06

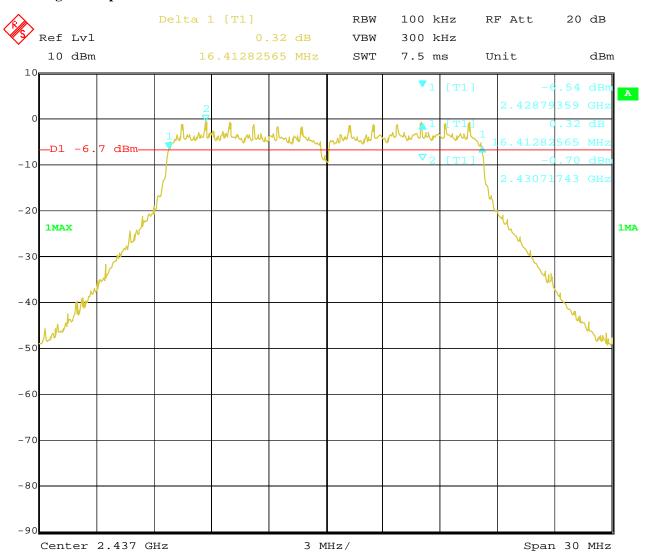


25.MAR.2019 Date: 13:51:13 Report No.: FCC1903224-01 Page 34 of 94

Date: 2019-04-10



3. 802.11g at 6Mbps of CH11

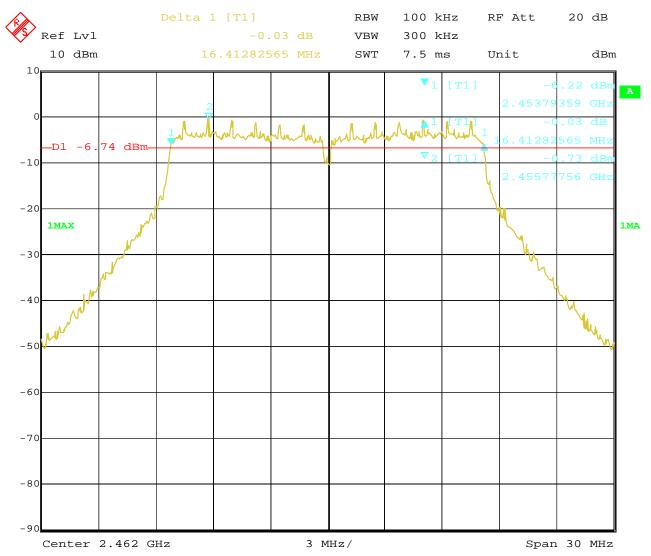

25.MAR.2019 13:58:43 Date:

Page 35 of 94 Report No.: FCC1903224-01

Date: 2019-04-10



6dB Occupied Bandwidth

EUT		Deve	loper Board	d	Model		D	B8
Mode		802	.11n HT20		Input Vol	tage	12	0V~
Temperat	erature 2		4 deg. C,		Humidity		56%	6 RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)			mum Limit MHz)	Pass/ Fail
1		2412	mcs0	17	.56		0.5	Pass
6		2437	mcs0	17	7.56		0.5	Pass
11	2462		mcs0	17	.56		0.5	Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.


Page 36 of 94 Report No.: FCC1903224-01

Date: 2019-04-10



Test Plots:

1. 802.11n at HT20 of CH01

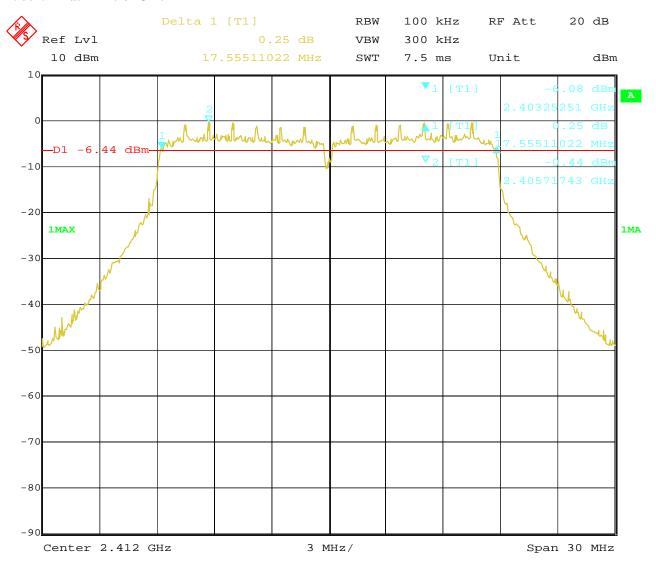


Date: 25.MAR.2019 14:05:00 Report No.: FCC1903224-01 Page 37 of 94

Date: 2019-04-10



2. 802.11n at HT20 of CH06

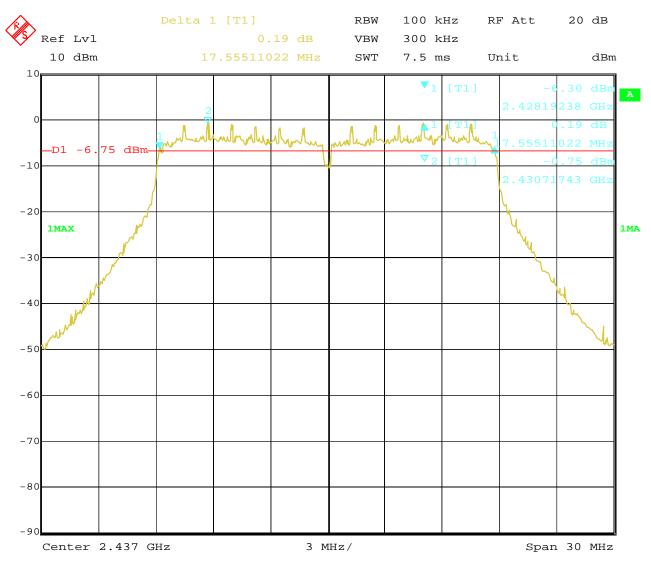


25.MAR.2019 Date: 14:03:17 Report No.: FCC1903224-01 Page 38 of 94

Date: 2019-04-10



3. 802.11n at HT20 of CH11

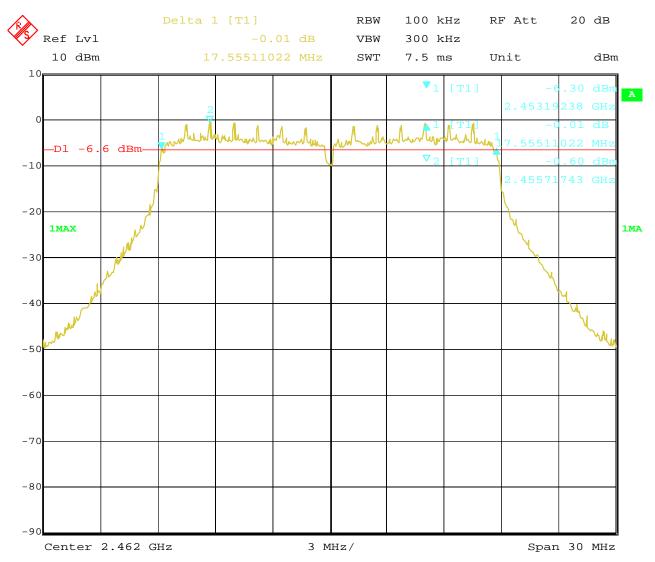

25.MAR.2019 14:01:32 Date:

Report No.: FCC1903224-01 Page 39 of 94

Date: 2019-04-10



6dB Occupied Bandwidth

EUT		Deve	loper Board	d	Model		D	B8
Mode		802	.11n HT40		Input Voltage		120V~	
Temperature		24		Humidity		56% RH		
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
3		2422	mcs0	36.35			0.5	Pass
6		2437		35.35		35 0.5		Pass
9	2452		mcs0	35	.35		0.5	Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 1 was the worst case.


Report No.: FCC1903224-01 Page 40 of 94

Date: 2019-04-10



Test Plots:

1. 802.11n at HT40 of CH03

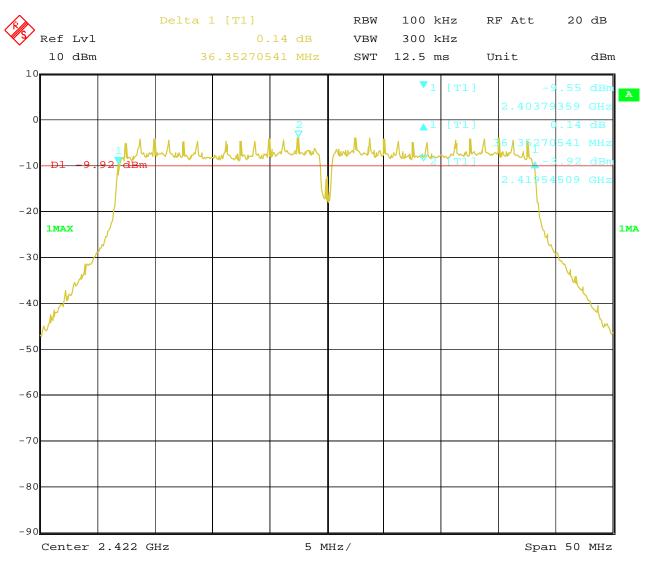


Date: 25.MAR.2019 14:06:13 Report No.: FCC1903224-01 Page 41 of 94

Date: 2019-04-10



2. 802.11n at HT40 of CH06

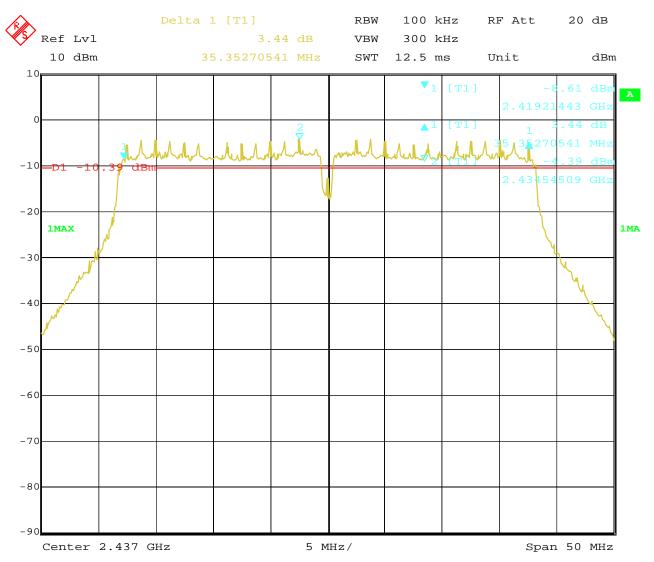


25.MAR.2019 14:08:25 Date:

Report No.: FCC1903224-01 Page 42 of 94

Date: 2019-04-10



3. 802.11n at HT40 of CH09

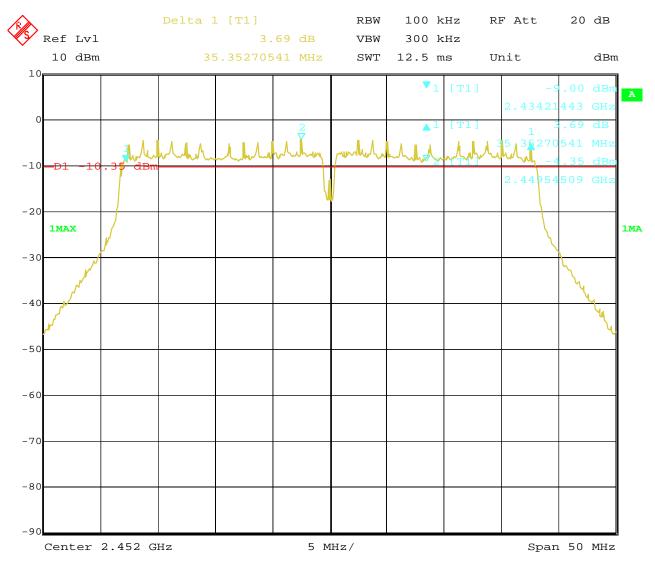

25.MAR.2019 Date: 14:10:24 Report No.: FCC1903224-01


Date: 2019-04-10



Page 43 of 94

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power was measured

Page 44 of 94

Report No.: FCC1903224-01

Date: 2019-04-10



8.4Test Results

EUT		I	Develop	er Board		N	Iodel	DI	38		
Mode			802.	11b		Inpu	Voltage	120	120V~		
Temperature		24 deg. C,				Hı	midity	56%	56% RH		
Channel	Frequ (MH	uency z)	An1 Po	ower mW	Ant 2 Power		Total Max Power Output (dBm)	Power Limit (dBm)	Pass/ Fail		
1	2412		18.67	73.62	18.56	71.78	21.63	30	Pass		
6	2437		18.82	76.21	18.69	73.96	21.77	30	Pass		
11	11 2462 18.93 78.16 18.8		18.81	76.03	21.88	30	Pass				

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT]	Develop	er Board			Mo	del	DB8		
Mode			802.	11g		Input Voltage			120V~		
Temperature		24 deg. C,				Humidity			56% RH		
Channel	Frequency		Ant 2	2 Power		Total Max. Power	Power Limit	Pass/ Fail			
Chamier	(MH	z)	dBm	mW	dBm	ı	mW	Output (dBm)	(dBm)	1 455/ 1 411	
1	2412		19.17	82.60	19.05	5	80.35	22.12	30	Pass	
6	2437		18.36	68.55	18.25	18.25 66.8		21.32	30	Pass	
11	2462		18.79	75.68	18.65	18.65 73		21.73	30	Pass	

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 45 of 94

Report No.: FCC1903224-01

Date: 2019-04-10



EUT		I	Develope	er Board			Mo	del	DB	88	
Mode	Mode 802.11n (HT20)				Input Voltage			120V~			
Temperature			24 deg. C,			Humidity			56% RH		
Channel	Frequ (MH	uency z)	An1 Po	ower mW	Ant 2 Powe		wer mW	Total Max. Power Output (dBm)	Power Limit (dBm)	Pass/ Fail	
1	2412		19.20	83.18	18.96	6	78.70	22.09	30	Pass	
6	2437		18.74	74.82	18.58	8	72.11	21.67	30	Pass	
11	2462	2462 18.64 73.11 18.2		18.29	9	67.45	21.48	30	Pass		

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		I	Develope	er Board		M	odel	DE	88	
Mode			802.11n	(HT40)		Input	Voltage	120V~		
Temperature		24 deg. C,				Hur	nidity	56% RH		
Channel	Frequency		An1 Po	ower	Ant 2	Power	Total Max. Power	Power Limit	Pass/ Fail	
Chamier	(MH	z)	dBm mW d		dBm	mW	Output (dBm)	(dBm)	1 455/ 1 411	
3	2422		18.75	74.99	18.51	70.96	21.64	30	Pass	
6	2437		18.44	69.82	18.27	67.14	21.37	30	Pass	
9	2452		18.32	2 67.92 18.1		65.92	21.27	30	Pass	

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

- 2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded


Report No.: FCC1903224-01 Page 46 of 94

Date: 2019-04-10



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Page 47 of 94

Report No.: FCC1903224-01

Date: 2019-04-10



9.4Test Result

EUT		Developer Board			N	Model		DB8	
Mode			802.11b 11Mbps			Input Voltage			
Temperat	ure		24 deg. C,			Humidity 56% RH			
Channel	_	uency (Hz)	-		actor	Total Power Spectral Density (dBm)		Limit (dBm)	Pass/ Fail
1	24	112	-6.01		3.01	-3.00		8	Pass
6	24	137	-5.39		3.01	-2	.38	8	Pass
1	24	162	-5.00		3.01	-1	.99	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. Ant1 and Ant 2 were tested and Ant 1 was the worst case

EUT]	Developer Board		N	Model	DB8		
Mode		802.11b 1Mbps			Input Voltage			120V~	
Temperat	ture	24 deg. C,			Hu	Humidity 56% RH			
Channel	Freq	uency	uency Ant1 Power		actor	Total Power Spectral		Limit	Pass/ Fail
	(M	(Hz)	Spectral Density			Density	y (dBm)	(dBm)	
1	24	112	-5.29		3.01	-2	.28	8	Pass
6	24	37 -4.20		3.01	-1.19		8	Pass	
1	24	162	-4.61		3.01	-1	.60	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01


3. Ant1 and Ant 2 were tested and Ant 1 was the worst case

Report No.: FCC1903224-01 Page 48 of 94

Date: 2019-04-10

EUT

Mode

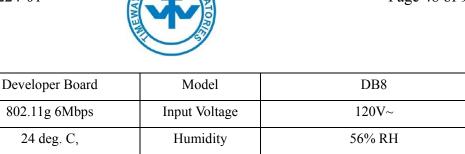

Temperat	Temperature		24 deg. C,	Hu	midity	56% RH			
Channel	Freq	requency Ant1 Power		F	actor	Total Power Spectral		Limit	Pass/ Fail
	(M	Hz)	Spectral Density			Density (dBm)		(dBm)	
1	24	112	-8.86		3.01	-5	.85	8	Pass
6	24	137	-8.79		3.01	-5	.78	8	Pass
1	24	162	-9.20		3.01	-6	.19	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

802.11g 6Mbps

2. Factor=10log2=3.01

3. Ant1 and Ant 2 were tested and Ant 1 was the worst case

EUT]	Developer Board		N	Model		DB8	
Mode		80	802.11n HT20 mcs0			Input Voltage			
Temperat	ure		24 deg. C,			ımidity		56% RH	
Channel	Freq	uency	uency Ant1 Power			Total Pow	er Spectral	Limit	Pass/ Fail
	(M	Hz)	Spectral Density			Density	y (dBm)	(dBm)	
1	24	112	-8.70		3.01	-5.69		8	Pass
6	24	137	-9.12		3.01	-6	.11	8	Pass
1	24	162	-8.51		3.01	-5	.50	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. Ant1 and Ant 2 were tested and Ant 1 was the worst case

Report No.: FCC1903224-01 Page 49 of 94

Date: 2019-04-10



EUT		Developer Board			N	/lodel		DB8	
Mode		802.11n HT40 mcs0			Input Voltage			120V~	
Temperat	ure		24 deg. C,			Humidity			
Channel	Freq	uency	uency Ant1 Power			Total Power Spectral		Limit	Pass/ Fail
	(M	IHz)	Spectral Density			Density	y (dBm)	(dBm)	
3	24	422	-12.50		3.01	-9	.49	8	Pass
6	24	437	-13.05		3.01	-10	0.04	8	Pass
9	24	452	-12.97		3.01	-9	.96	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

^{2.} Factor=10log2=3.01

^{3.} Ant1 and Ant 2 were tested and Ant 1 was the worst case


Page 50 of 94 Report No.: FCC1903224-01

Date: 2019-04-10



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

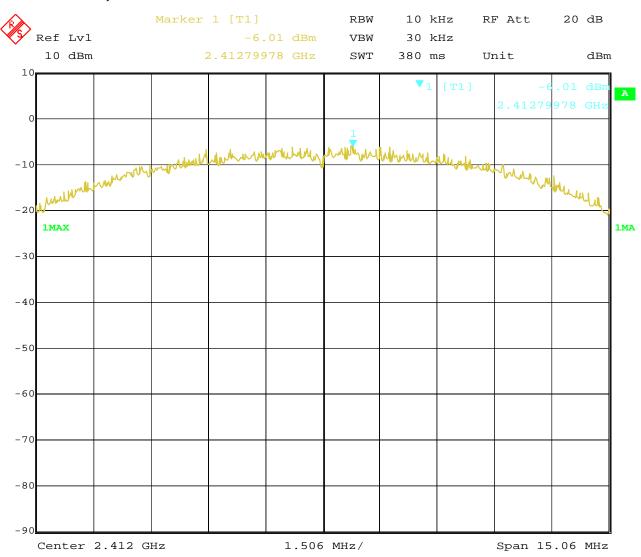

Date: 25.MAR.2019 15:12:35