



Report No.: FCC 1909217-01 File Reference No.: 2019-10-12

Applicant: Shenzhen Geniatech Inc., Ltd.

Product: Smart Gateway

Model No.: GTW350,GTW350N,9501293,GTW350T,GTW360,

GTW370,GTW389,GTW410,GTW410E-L,SRF321,

UZW-100,UZB-100,UBT-100,ULR-100

Trademark: N/A

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: October 12, 2019

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1909217-01 Page 2 of 91

Date: 2019-10-12



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Page 3 of 91

Report No.: FCC1909217-01

Date: 2019-10-12



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results	8
3.2	Test Standards	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test	9
5.1	Schematics of the Test	9
5.2	Test Method and Test Procedure	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result	10
6.0	Radiated Emission test	13
6.1	Test Method and Test Procedure	13
6.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit	14
7.0	6dB Bandwidth Measurement	23
8.0	Maximum Output Power	43
9.0	Power Spectral Density Measurement	46
10.0	Out of Band Measurement	64
11.0	Antenna Requirement	79
12.0	FCC ID Label	80
13.0	Photo of Test Setup and EUT View	81

Report No.: FCC1909217-01 Page 4 of 91

Date: 2019-10-12



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Geniatech Inc., Ltd.

Address: 18F, GDC Building, No 9th, Gaoxin Middle 3rd Road, Nanshan, Shenzhen, China

Telephone: -Fax: --

1.3 Description of EUT

Product: GTW350

Manufacturer: Shenzhen Geniatech Inc., Ltd.

Address: 18F, GDC Building, No 9th, Gaoxin Middle 3rd Road, Nanshan, Shenzhen, China

Brand Name: N/A

Model Number: GTW350

Additional Model Number: GTW350N,9501293,GTW350T,GTW360,GTW370,GTW389,GTW410,

GTW410E-L,SRF321,UZW-100,UZB-100,UBT-100,ULR-100

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40) : OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n HT20,HT40

Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/HT40: mcs0-mcs9

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20) : 11 Channels; EEE 802.11n (HT40) : 7 Channels;

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1909217-01

Date: 2019-10-12



Page 5 of 91

Antenna: Integral antennas used. The gain of the antennas is 2.0dBi.

Input Voltage: DC5.0V, 2A

Power Supply: Model: TEKA012-0503000UK; Input: 100-240V~, 50/60Hz, 0.35A MAX;

Output: DC5V, 2A

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2019-09-29 to 2019-10-12

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty =3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 91 Report No.: FCC1909217-01

Date: 2019-10-12



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2019-06-21	2020-06-20
LISN	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
LISN	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Ultra Broadband ANT	R&S	HL562	100157	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2018-06-25	2021-06-24
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2021-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2019-08-22	2020-08-21
Power sensor	Anritsu	MA2491A	32263	2019-08-22	2020-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Report No.: FCC1909217-01 Page 7 of 91

Date: 2019-10-12



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing, Dutycycle>98%.

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing ,Dutycycle>98%.

Page 8 of 91

Report No.: FCC1909217-01

Date: 2019-10-12



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: FCC1909217-01

Date: 2019-10-12



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

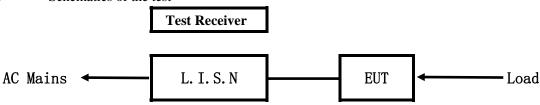


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

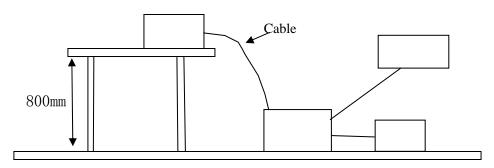

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Smart Gateway	Shenzhen Geniatech Inc., Ltd.	GTW350 (see the page 4 for additional models)	ZJU-E19C05

B. Internal Device

De	evice	Manufacturer	Model	FCC ID/DOC
	N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1909217-01 Page 10 of 91

Date: 2019-10-12



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)					
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level				
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*				
$0.50 \sim 5 00$	73.0	60.0	56.0	46.0				
5.00 ~ 30.00	73.0	60.0	60.0	50.0				

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1909217-01 Page 11 of 91

Date: 2019-10-12



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

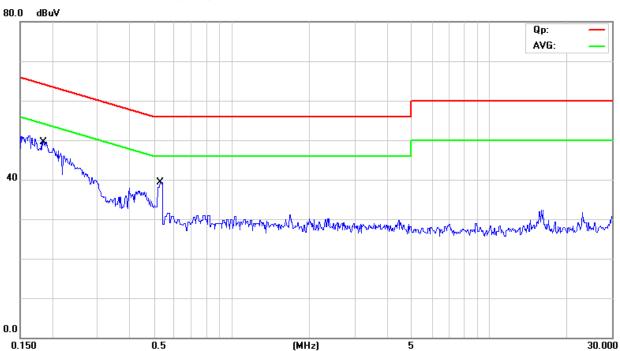

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1 *	0.5264	25.50	9.77	35.27	56.00	-20.73	QP	
2	0.5264	10.30	9.77	20.07	46.00	-25.93	AVG	
3	0.1842	31.70	9.76	41.46	64.29	-22.83	QP	
4	0.1842	6.50	9.76	16.26	54.29	-38.03	AVG	

Report No.: FCC1909217-01 Page 12 of 91

Date: 2019-10-12



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

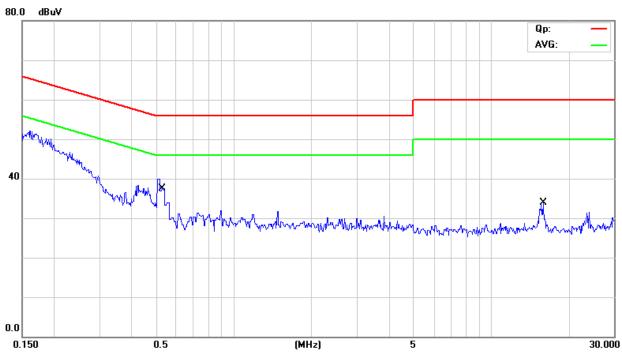

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1	*	0.5255	25.60	9.77	35.37	56.00	-20.63	QP	
2		0.5255	11.80	9.77	21.57	46.00	-24.43	AVG	
3		15.8857	12.40	10.43	22.83	60.00	-37.17	QP	
4		15.8857	0.60	10.43	11.03	50.00	-38.97	AVG	

Report No.: FCC1909217-01 Page 13 of 91

Date: 2019-10-12



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1909217-01 Page 14 of 91

Date: 2019-10-12



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Worse case were recorded in the test report. 802.11g was the worst case.

Report No.: FCC1909217-01 Page 15 of 91

Date: 2019-10-12




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

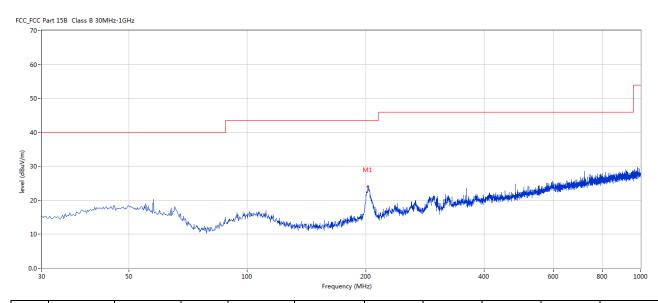

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	202.859	24.02	-13.42	43.5	-19.48	Peak	266.00	100	Н	Pass

Page 16 of 91

Report No.: FCC1909217-01

Date: 2019-10-12




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass



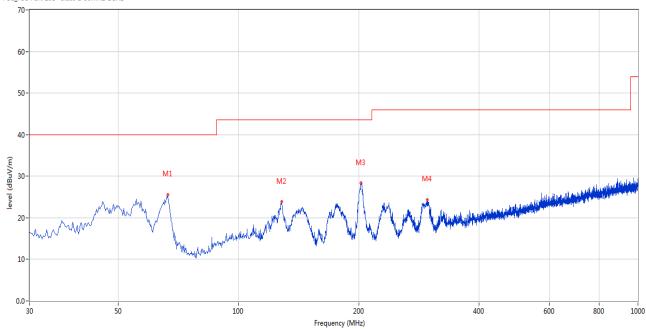

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	66.608	25.58	-14.16	40.0	-14.42	Peak	63.00	100	V	Pass
2	128.430	23.91	-16.75	43.5	-19.59	Peak	28.00	100	V	Pass
3	202.859	28.34	-13.42	43.5	-15.16	Peak	94.00	100	V	Pass
4	297.168	24.39	-11.09	46.0	-21.61	Peak	90.00	100	V	Pass

Page 17 of 91 Report No.: FCC1909217-01

Date: 2019-10-12

30

20-



Please refer to the following test plots for details:

CH01 for 11g at 6Mbps: Horizontal

FCC_FCC Part 15B Class B 1GHz-18GHz - 2 80 70 60 level (dBuV/m) 50

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
2	4824.044	49.95	3.15	54.0	-4.05	Peak	197.00	100	Н	Pass

Frequency (MHz)

6000

18000


2483.5

Page 18 of 91 Report No.: FCC1909217-01

Date: 2019-10-12



CH01 for 11g at 6Mbps: Vertical

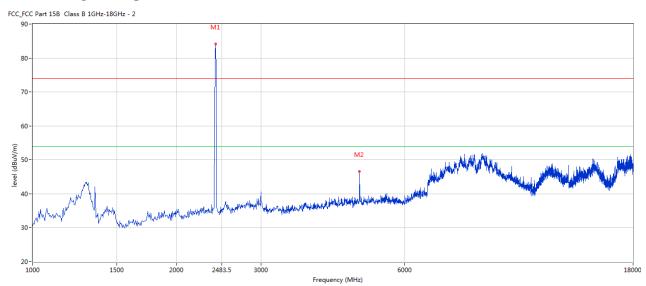


ſ	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
	2	4824.044	46.59	3.15	54.0	-7.41	Peak	46.00	100	V	Pass

Page 19 of 91 Report No.: FCC1909217-01

Date: 2019-10-12



CH06 for 11g at 6Mbps: Vertical

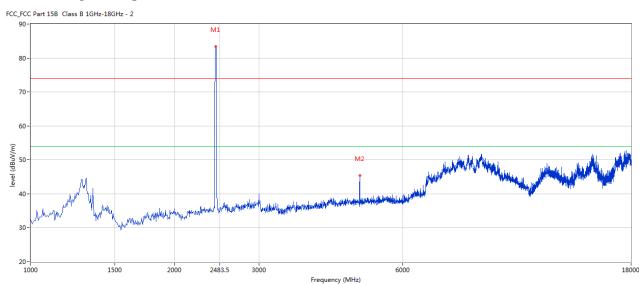


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4875.031	45.45	3.19	54.0	-8.55	Peak	45.00	100	V	Pass

Page 20 of 91 Report No.: FCC1909217-01

Date: 2019-10-12



CH06 for 11g at 6Mbps: Horizontal

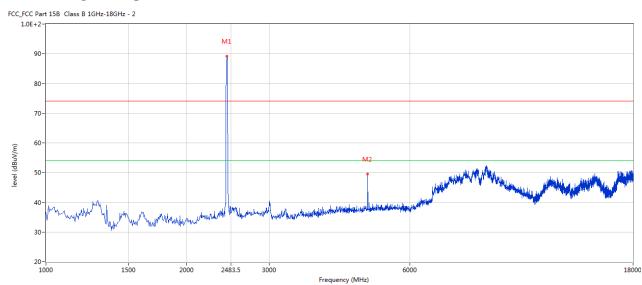


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4875.031	49.52	3.19	54.0	-4.48	Peak	204.00	100	Н	Pass

Page 21 of 91 Report No.: FCC1909217-01

Date: 2019-10-12



CH11 for 11g at 6Mbps: Vertical

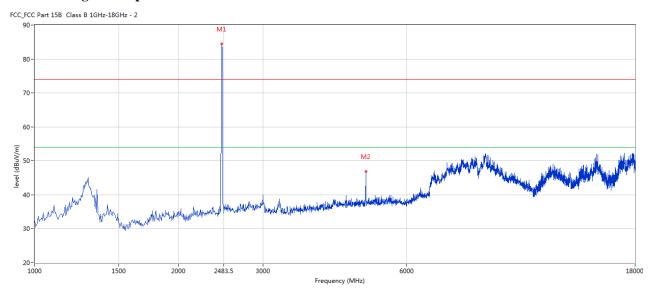


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4921.770	46.94	3.27	54.0	-7.06	Peak	78.00	100	V	Pass

Report No.: FCC1909217-01 Page 22 of 91

Date: 2019-10-12



CH11 for 11g at 6Mbps: Horizontal

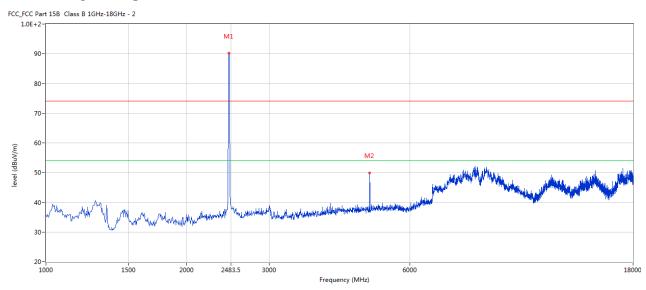

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4921.770	49.80	3.27	54.0	-4.20	Peak	204.00	100	Н	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz, it is only the floor noise.
- 5. The PK emission level less than the AV limit. No necessary to record the AV emission level.

Page 23 of 91


Report No.: FCC1909217-01

Date: 2019-10-12



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 24 of 91 Report No.: FCC1909217-01

Date: 2019-10-12



6dB Occupied Bandwidth


EUT		Sma	rt Gateway		Mod	lel	GTV	W350
Mode		8	302.11b		Input Vol	tage	120	0V~
Temperat	ure	24	deg. C,		Humidity 5			% RH
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1	2412		1	10.04		0.5		Pass
6		2437	1	9.62			0.5	Pass
11		2462	1	9.	56		0.5	Pass
1		2412	11	10	.04		0.5	Pass
6	2437		11	9.92			0.5	Pass
11	2462		11	9.	98		0.5	Pass

Report No.: FCC1909217-01 Page 25 of 91

Date: 2019-10-12



1. 802.11b at 1Mbps of CH01

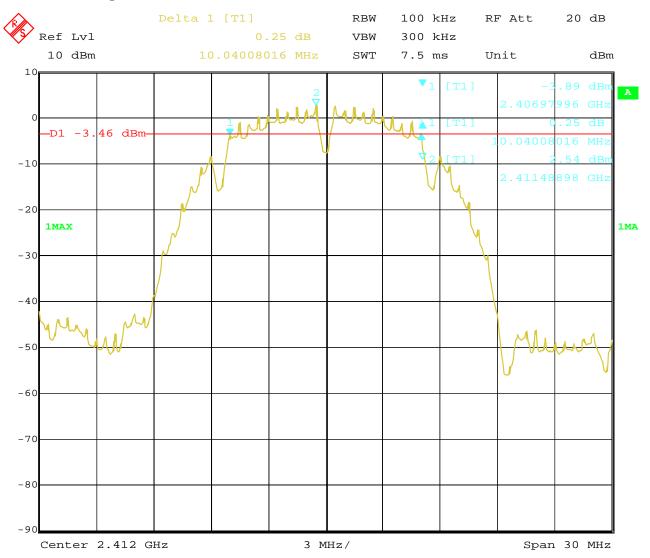


Report No.: FCC1909217-01 Page 26 of 91

Date: 2019-10-12



2. 802.11b at 1Mbps of CH06

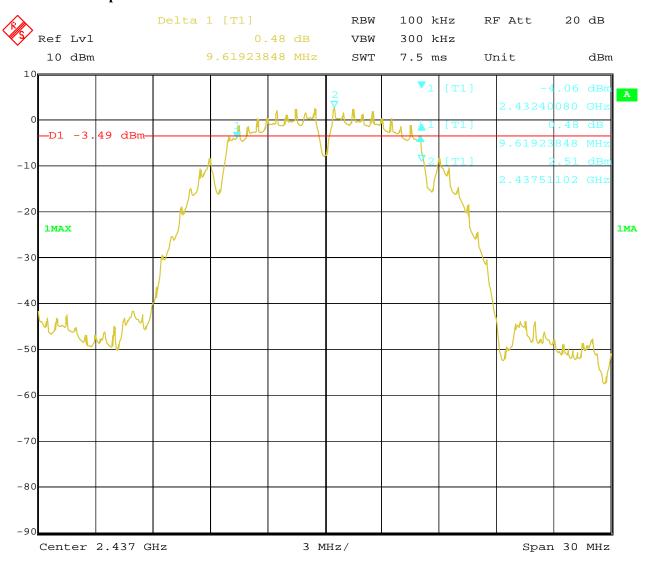


Report No.: FCC1909217-01 Page 27 of 91

Date: 2019-10-12



3. 802.11b at 1Mbps of CH11

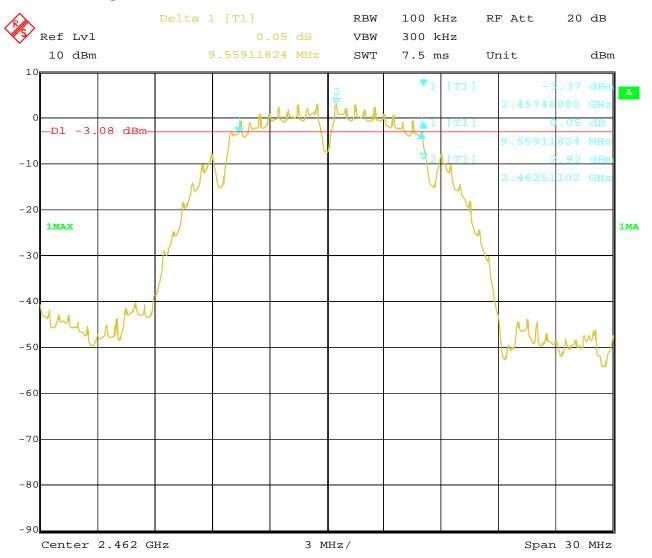


Report No.: FCC1909217-01 Page 28 of 91

Date: 2019-10-12



4. 802.11b at 11Mbps of CH01

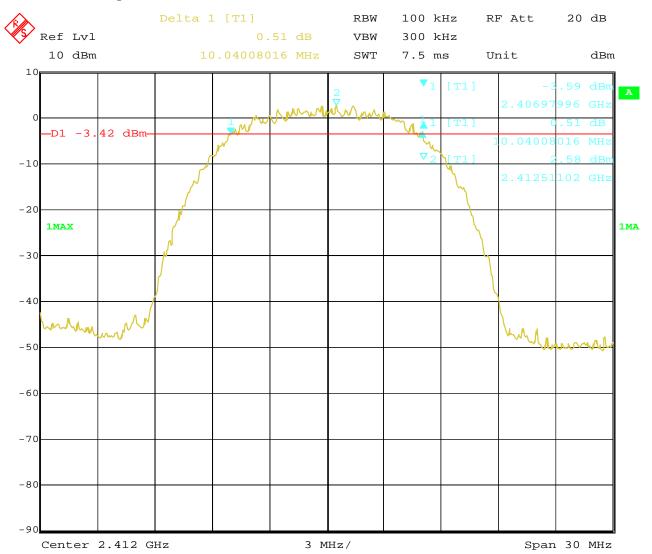


Report No.: FCC1909217-01 Page 29 of 91

Date: 2019-10-12



5. 802.11b at 11Mbps of CH06

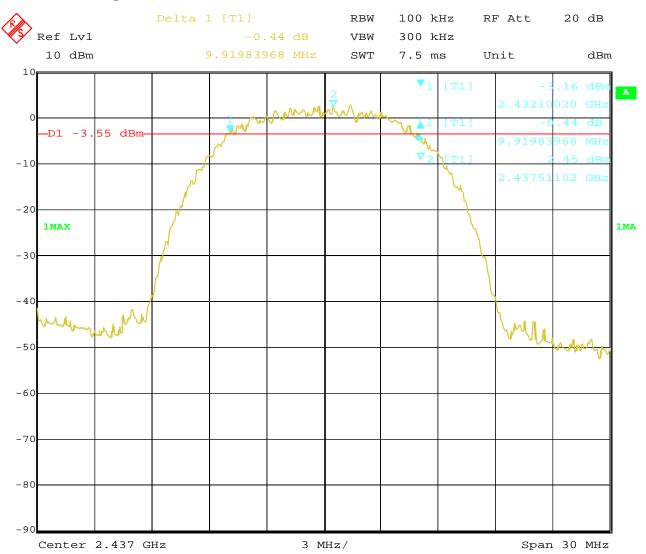


Report No.: FCC1909217-01 Page 30 of 91

Date: 2019-10-12



6. 802.11b at 11Mbps of CH11

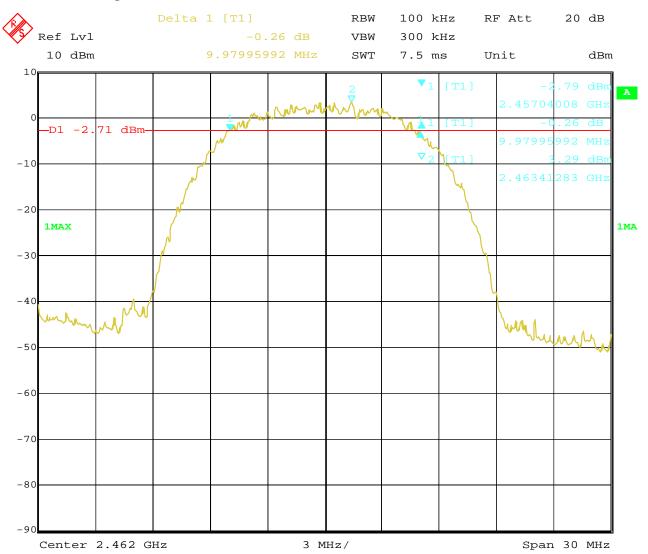

Page 31 of 91 Report No.: FCC1909217-01

Date: 2019-10-12



6dB Occupied Bandwidth

EUT		Sma	rt Gateway		Mod	lel	G	TW350
Mode		8	302.11g		Input Vol	tage		120V~
Temperature		24	deg. C,		Humidity		5	6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	6	15	.75	0.5		Pass
6		2437	6	15	.75		0.5	Pass
11	11 2462		6	15.87		0.5		Pass


Report No.: FCC1909217-01 Page 32 of 91

Date: 2019-10-12



Test Plots:

1. 802.11g at 6Mbps of CH01

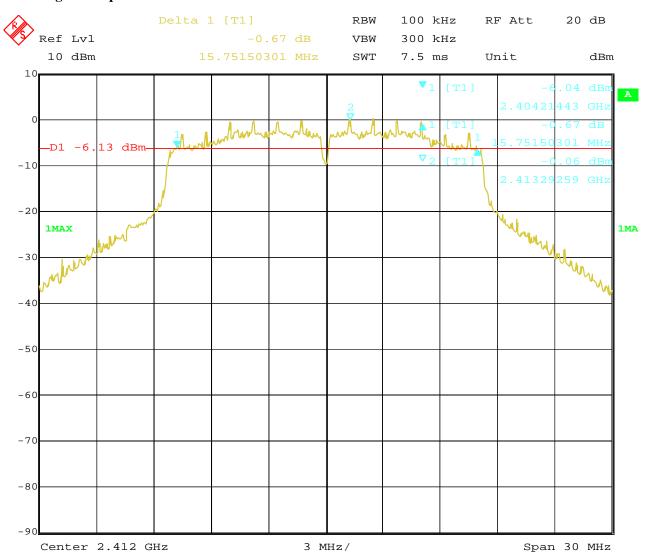


Report No.: FCC1909217-01 Page 33 of 91

Date: 2019-10-12



2. 802.11g at 6Mbps of CH06

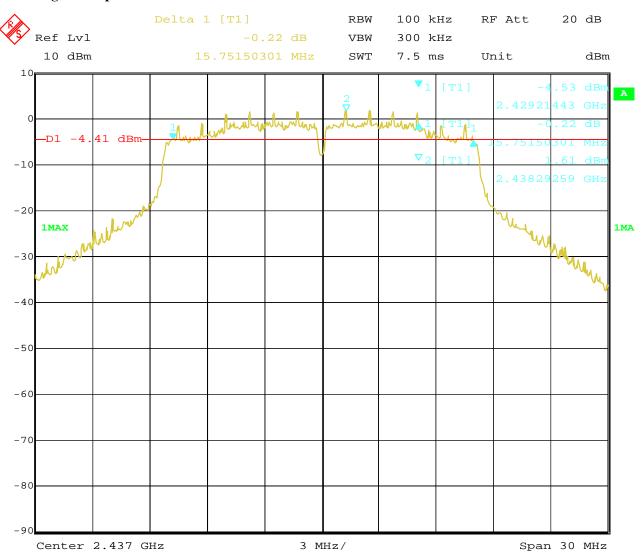


Report No.: FCC1909217-01 Page 34 of 91

Date: 2019-10-12



3. 802.11g at 6Mbps of CH11

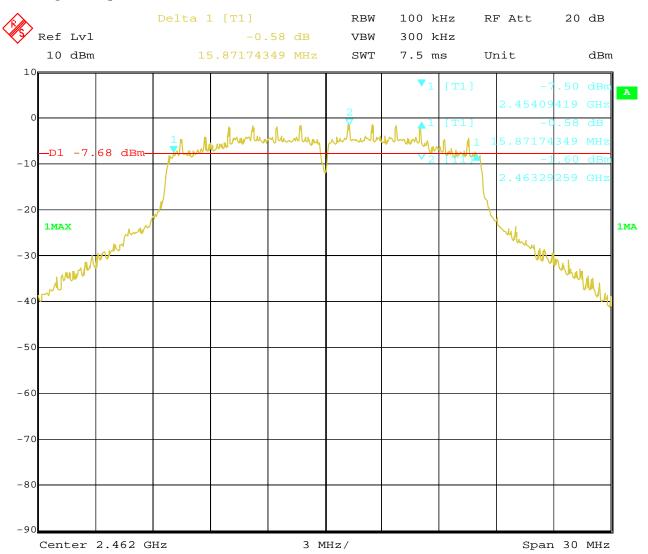

Page 35 of 91 Report No.: FCC1909217-01

Date: 2019-10-12



6dB Occupied Bandwidth

EUT		Sma	rt Gateway		Mod	el	GT	W350
Mode		802.11n HT20			Input Vol	tage	12	0V~
Temperature		24		Humidity		56% RH		
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)			num Limit MHz)	Pass/ Fail
1		2412		17	.31		0.5	Pass
6	2437		mcs0	16.95		0.5		Pass
11	2462		mcs0	16.41		0.5		Pass


Report No.: FCC1909217-01 Page 36 of 91

Date: 2019-10-12



Test Plots:

1. 802.11n at HT20 of CH01

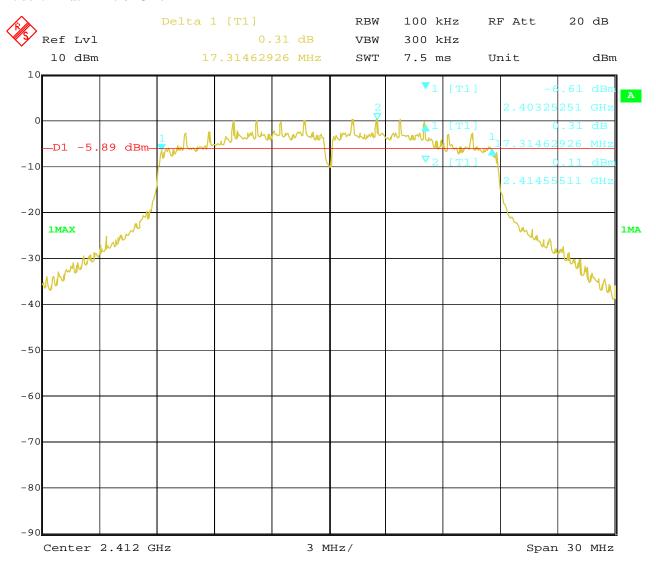


Report No.: FCC1909217-01 Page 37 of 91

Date: 2019-10-12



2. 802.11n at HT20 of CH06

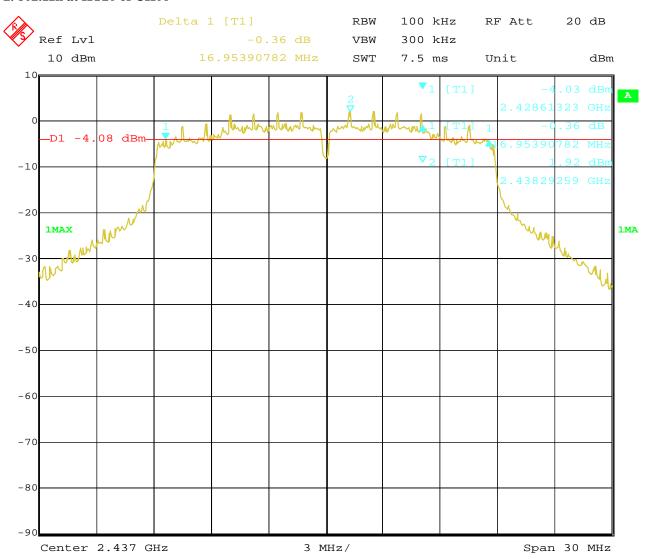


Report No.: FCC1909217-01 Page 38 of 91

Date: 2019-10-12



3. 802.11n at HT20 of CH11

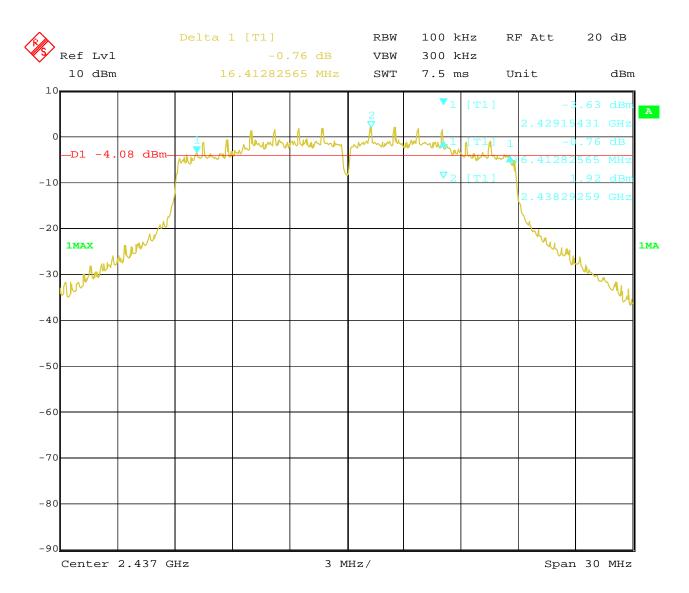

Page 39 of 91 Report No.: FCC1909217-01

Date: 2019-10-12



6dB Occupied Bandwidth

EUT		Sma	Model		GTW350				
Mode		802	.11n HT40		Input Vol	tage	12	0V~	
Temperat	ure	24	4 deg. C,		Humidity		56%	6 RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Fransfer 6 dB Bandwidth Rate (MHz)		Minimum Limit (MHz)		Pass/ Fail	
3		2422		2422 mcs0 35		.20		0.5	Pass
6		2437	mcs0	35	35.17		0.5	Pass	
9	2452		mcs0	35	.17		0.5	Pass	


Report No.: FCC1909217-01 Page 40 of 91

Date: 2019-10-12



Test Plots:

1. 802.11n at HT40 of CH03

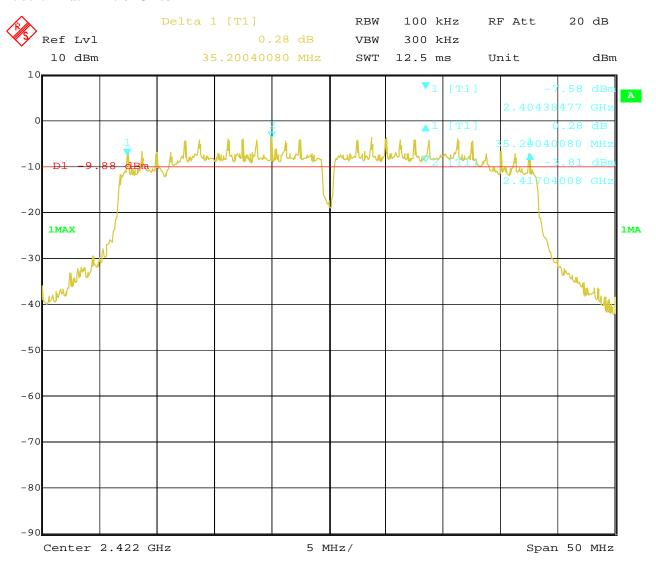


Report No.: FCC1909217-01 Page 41 of 91

Date: 2019-10-12



2. 802.11n at HT40 of CH06

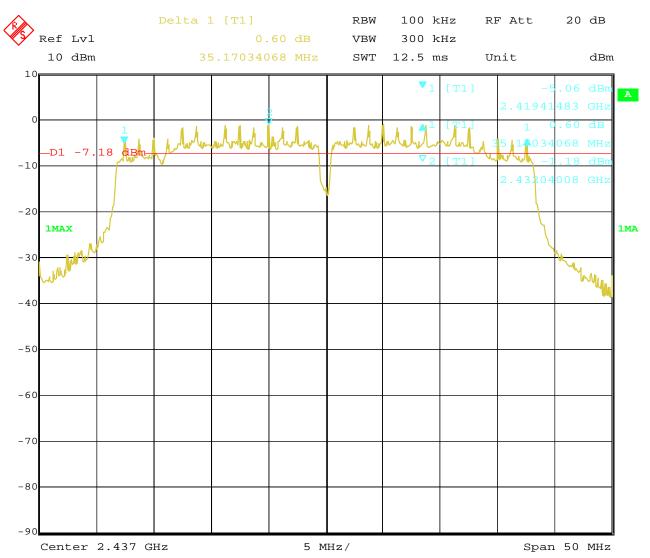


Report No.: FCC1909217-01 Page 42 of 91

Date: 2019-10-12



3. 802.11n at HT40 of CH09

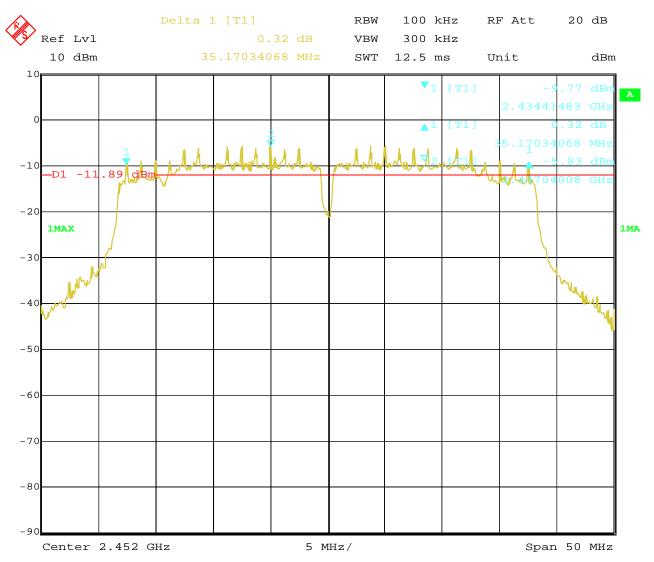

Report No.: FCC1909217-01


Date: 2019-10-12



Page 43 of 91

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power was measured

Page 44 of 91

Report No.: FCC1909217-01

Date: 2019-10-12



8.4Test Results

EUT			Smart Gateway	Model	GTW	350
Mode		802.11b		Input Voltage	120V~	
Temperat	ure		24 deg. C,	Humidity	56%	RH
Channel	Frequ (MH	requency ЛНz) Total Max. Po		ower Output (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412			18.13	30	Pass
6	2437			18.20	30	Pass
11	2462			18.61	30	Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		TABLET		Model	EGQ380	
Mode		802.11g		Input Voltage	120V~	
Temperat	ure		24 deg. C,	Humidity	56%	RH
Channel	_	Frequency (MHz) Total Max. Po		ower Output (dBm)	Power Limit (dBm)	Pass/ Fail
1	2412			19.12	30	Pass
6	2437			20.86	30	Pass
11	2462			17.44	30	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 45 of 91

Report No.: FCC1909217-01

Date: 2019-10-12



EUT	EUT		Smart Gateway	Model	GTW350	
Mode			802.11n (HT20)	Input Voltage	120V~	
Temperat	ure		24 deg. C,	Humidity	56% RH	
Channel	Frequency (MHz)		Total Max. Po	Total Max. Power Output (dBm)		Pass/ Fail
1	2412	2412		19.02	30	Pass
6	2437	2437		20.76	30	Pass
11	2462			17.41	30	Pass

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow:

 Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

EUT		Smart Gatewa		Model	GTW350		
Mode			802.11n (HT40)	ln (HT40) Input Voltage		120V~	
Temperat	ure		24 deg. C,	Humidity	56% RH		
Channel	Frequency (MHz)		Total Max. Po	Total Max. Power Output (dBm)		Pass/ Fail	
3	2422			18.03		Pass	
6	2437	7		20.58	30	Pass	
9	2452	2 1		15.90	30	Pass	

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

- 2. The result basic equation calculation as follow:

 Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded


Report No.: FCC1909217-01 Page 46 of 91

Date: 2019-10-12



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Page 47 of 91 Report No.: FCC1909217-01

Date: 2019-10-12



9.4Test Result

EUT		Smart Gateway		Model	GTW350		
Mode			802.11b 11Mbps	Input Voltage		120V~	
Temperat	ure		24 deg. C,	Humidity	56% RH		
Channel	Freq	uency	Power Spectral Density			Limit	Pass/ Fail
	(M	Hz)				(dBm)	
1	24	112		-6.43		8	Pass
6	24	137		-6.51		8	Pass
1	24	162		-7.19		8	Pass

EUT		Smart Gateway		Model	GTW350		
Mode			802.11b 1Mbps	Input Voltage	120V~		
Temperat	ure		24 deg. C,	Humidity		56% RH	
Channel	Freq	uency	Ant1 Power Spectral Density			Limit	Pass/ Fail
	(M	Hz)				(dBm)	
1	24	112		-6.14		8	Pass
6	24	137	-6.57			8	Pass
1	24	162		-6.13		8	Pass

Page 48 of 91

Report No.: FCC1909217-01

Date: 2019-10-12



EUT		Smart Gateway		Model	GTW350		
Mode			802.11g 6Mbps	Input Voltage		120V~	
Temperat	ure		24 deg. C,	Humidity	56% RH		
Channel	Freq	uency	Power	Spectral Density		Limit	Pass/ Fail
	(M	(Hz)				(dBm)	
1	24	412	-8.62			8	Pass
6	24	137		-6.64		8	Pass
1	24	162		-10.44		8	Pass

EUT			Smart Gateway Model		GTW350	
Mode		80	02.11n HT20 mcs0	Input Voltage	120V~	
Temperat	ture		24 deg. C,	Humidity	56% RH	
Channel	Freq	uency	Power	Spectral Density	Limit	Pass/ Fail
	(M	(Hz)			(dBm)	
1	24	412	-9.40		8	Pass
6	24	137		-6.50	8	Pass
1	24	162		-10.25	8	Pass

EUT		Smart Gateway		Model	GTW350		
Mode		80	02.11n HT40 mcs0	Input Voltage		120V~	
Temperat	ure		24 deg. C, Humidity			56% RH	
Channel	-	uency	Pow	ver Spectral Density		Limit	Pass/ Fail
	(M	Hz)				(dBm)	
3	24	122	-13.57			8	Pass
6	24	137		-10.18		8	Pass
9	24	152		-14.44		8	Pass


Report No.: FCC1909217-01 Page 49 of 91

Date: 2019-10-12



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

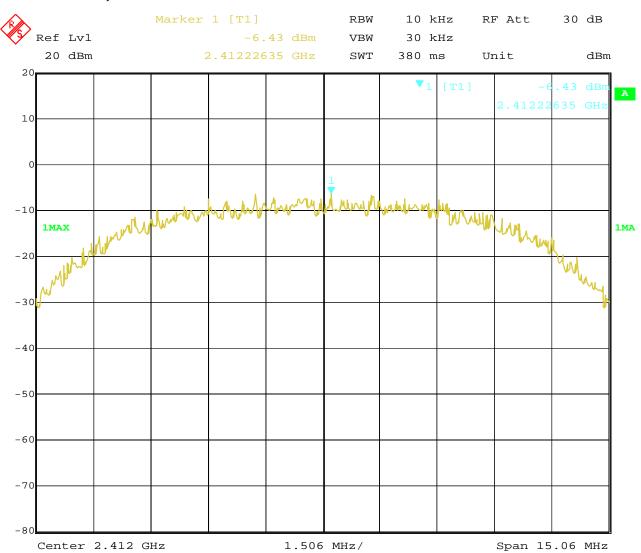

Report No.: FCC1909217-01 Page 50 of 91

Date: 2019-10-12



2. 802.11b at 11Mbps at CH06

