


iT1-AMP

Attachment Module for iT100

Iris ID's iT1-AMP module is an integrated device of iT100.

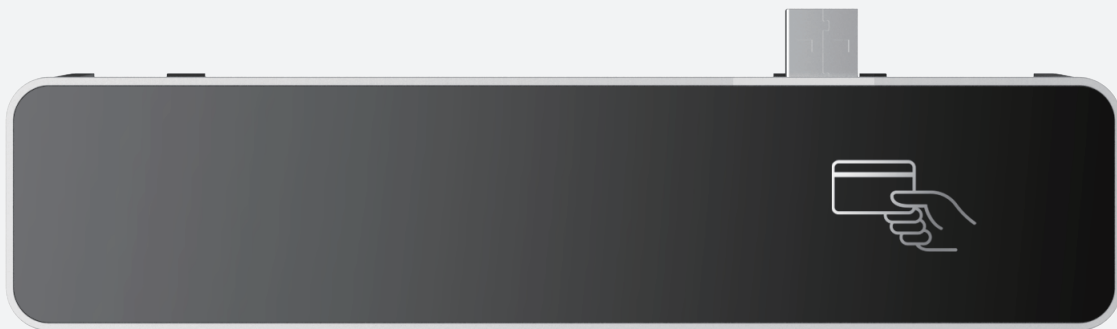

HID Proxy II Card



Easy Installation



Powerful Connectivity



Supports POE

Specifications

Dimensions (W x H x D)	180mm x 41mm x 32mm (7.08" x 1.61" x 1.25") (included Install Plate)
Weight	0.39lbs (177g) (included Install Plate)
Type	Attached Module
Power Input (POE)	Required POE+ (30W)
Power Input (DC)	12 - 24 VDC auto, +/- 500 mv ripple voltage industry standard
Power Output	24 VDC / Max 1.2A
Certifications	CE, FCC, KC
Temperature	Operating: 0 ~ 45°C (32 ~ 113°F) / Storage: -20 ~ 90°C (-4 ~ 194°F)
Humidity	5% to 95% non-condensing
RFID Card Reader	125.56KHz HID Proxy II Reader

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment under FCC rules

- This appliance and its antenna must not be co-located or operation in conjunction with any other antenna or transmitter.

RF specification
Frequency:125.56 kHz