



RF TEST REPORT

Report No.: FCC2012-8029R
Product: GSM Tracker
Model No.: PRIME AT PLT
Applicant: Micron Electronics LLC
Address: 601 North Congress Ave Suite 439, Delray Beach, FL 33445
Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.
Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen China
Tel: 86 755 26627338 **Fax:** 86 755 26627238



This test report consists of 63 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product..... : GSM Tracker

Model No. : PRIME AT PLT

Brand Name : PRIME

Applicant : Micron Electronics LLC

Applicant Address : 601 North Congress Ave Suite 439, Delray Beach, FL 33445

Manufacturer..... : Micron Electronics LLC

Manufacturer Address..... : 601 North Congress Ave Suite 439, Delray Beach, FL 33445

Test Standards..... : 47 CFR Part 2(10-1-09 Edition) Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
47 CFR Part 22(10-1-09 Edition) Public Mobile Services
47 CFR Part 24(10-1-09 Edition) Personal Communications Services

Test Result : PASS

Tested by : Shuangwen Zhang Oct .10. 2012
Signature, Date

Reviewed by..... : Zhu Di Oct .10. 2012
Signature, Date

Product..... : 黄波 Oct .10. 2012
Signature, Date



Table of Contents

1.	GENERAL INFORMATION	4
1.1	EUT Description.....	4
1.2	Test Standards and Results	5
1.3	Facilities and Accreditations.....	6
2.	47 CFR PART 2, PART 22H & 24E REQUIREMENTS	7
2.1	Conducted RF Output Power.....	7
2.2	99% Occupied Bandwidth	18
2.3	Frequency Stability	25
2.4	Conducted Out of Band Emissions.....	27
2.5	Band Edge.....	40
2.6	Transmitter Radiated Power (EIRP/ERP).....	45
2.7	Radiated Out of Band Emissions.....	50



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-09 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-09 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-09 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.1046	Conducted RF Output Power	PASS
2	2.1049	99% Occupied Bandwidth	PASS
3	2.1055 22.355 24.235	Frequency Stability	PASS
4	2.1051 2.1057 22.917 24.238	Conducted Out of Band Emissions	PASS
5	2.1051 2.1057 22.917 24.238	Band Edge	PASS
6	22.913 24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
7	2.1053 2.1057 22.917 24.238	Radiated Out of Band Emissions	PASS

NOTE: Measurement method according to TIA/EIA 603.D-2010



1.3 Facilities and Accreditations

1.3.1 Test Facilities

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4(m) fully anechoic chamber was used for the radiated spurious emissions test.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% - 60%
Atmospheric Pressure (kPa):	86KPa - 106KPa

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS


2.1 Conducted RF Output Power

2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Test Description

1. Test Setup:

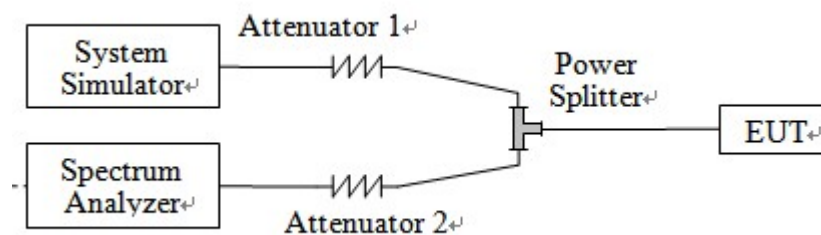

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	1100.008.02	2012.06
Spectrum Analyzer	Agilent	E7405A	US44210471	2012.06
Power Splitter	Weinschel	1506A	NW521	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)

2.1.3 Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted



RF output power of the EUT.

1. GSM Model Test Verdict:

Band	Channel	Frequency (MHz)	Measured Output Power		Limit dBm	Slots	Verdict
			dBm	Refer to Plot			
GSM 850MHz	128	824.2	33.1	Plot A1 to A3	35	/	PASS
	190	836.6	33.04			/	PASS
	251	848.8	33.39			/	PASS
GSM 1900MHz	512	1850.0	29.32	Plot B1 to B3	32	/	PASS
	661	1880.0	29.47			/	PASS
	810	1910.0	28.87			/	PASS
GPRS 850MHz	128	824.2	31.76	Plot C1 to C3	35	1U4D	PASS
	190	836.6	31.63			1U4D	PASS
	251	848.8	31.71			1U4D	PASS
GPRS 1900MHz	512	1850.2	27.2	Plot D1 to D3	32	1U4D	PASS
	661	1880.0	27.08			1U4D	PASS
	810	1909.8	27.79			1U4D	PASS
GPRS 850MHz	128	824.2	31.99	Plot E1 to E3	35	2U3D	PASS
	190	836.6	31.96			2U3D	PASS
	251	848.8	32.20			2U3D	PASS
GPRS 1900MHz	512	1850.2	27.54	Plot F1 to F3	32	2U3D	PASS
	661	1880.0	29.29			2U3D	PASS
	810	1909.8	28.97			2U3D	PASS




2. GSM Model Test Plots:




(Plot A1: GSM 850MHz Channel = 128)




(Plot A2: GSM 850MHz Channel = 190)

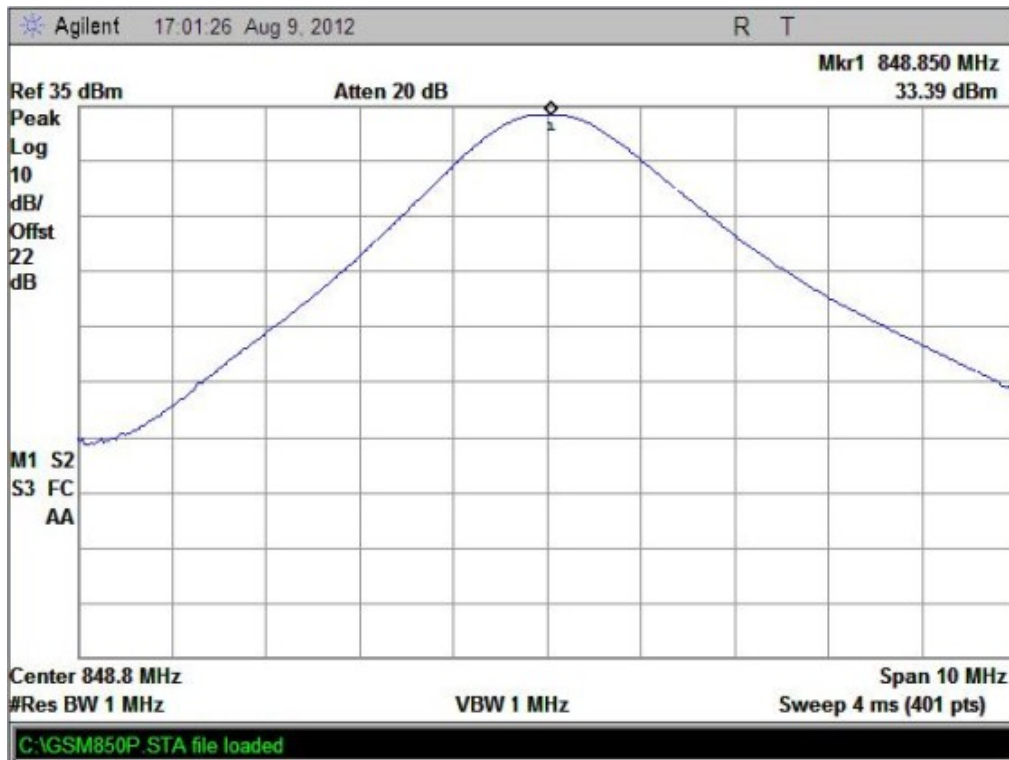

(Plot A3: GSM 850MHz Channel = 251)

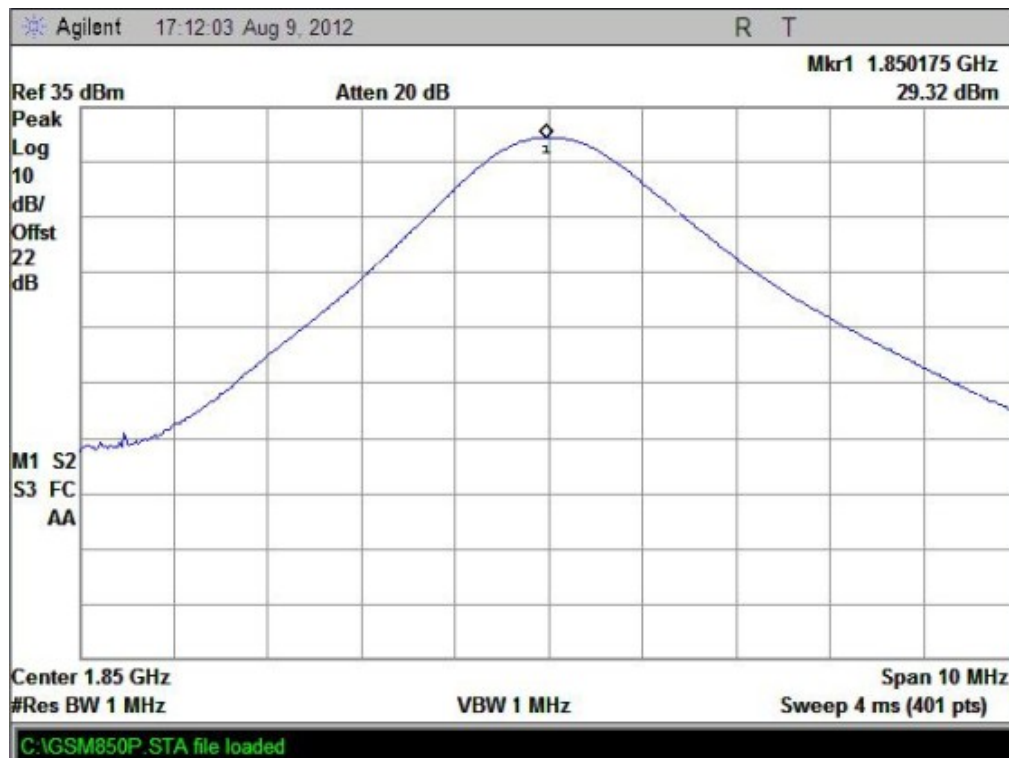

(Plot B1: GSM 1900MHz Channel = 512)

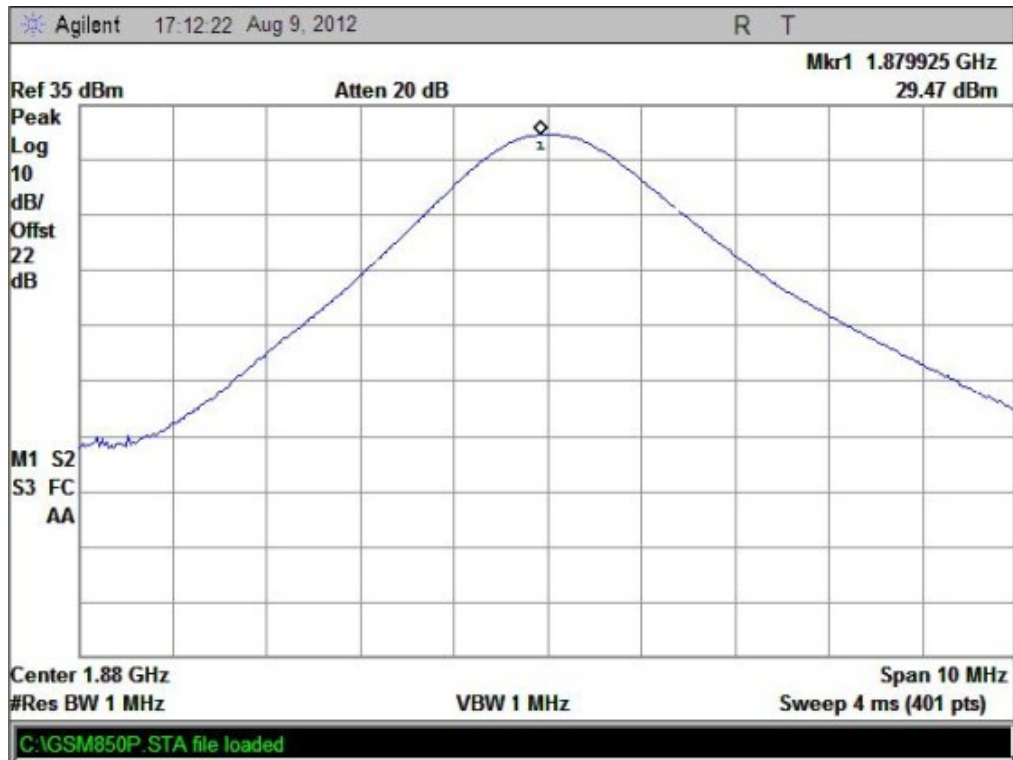

(Plot B2: GSM 1900MHz Channel = 661)



(Plot B3: GSM 1900MHz Channel = 810)


3. GPRS Model Test Plots:



(Plot C1: GPRS 850MHz Channel = 128)




(Plot C2: GPRS 850MHz Channel = 190)

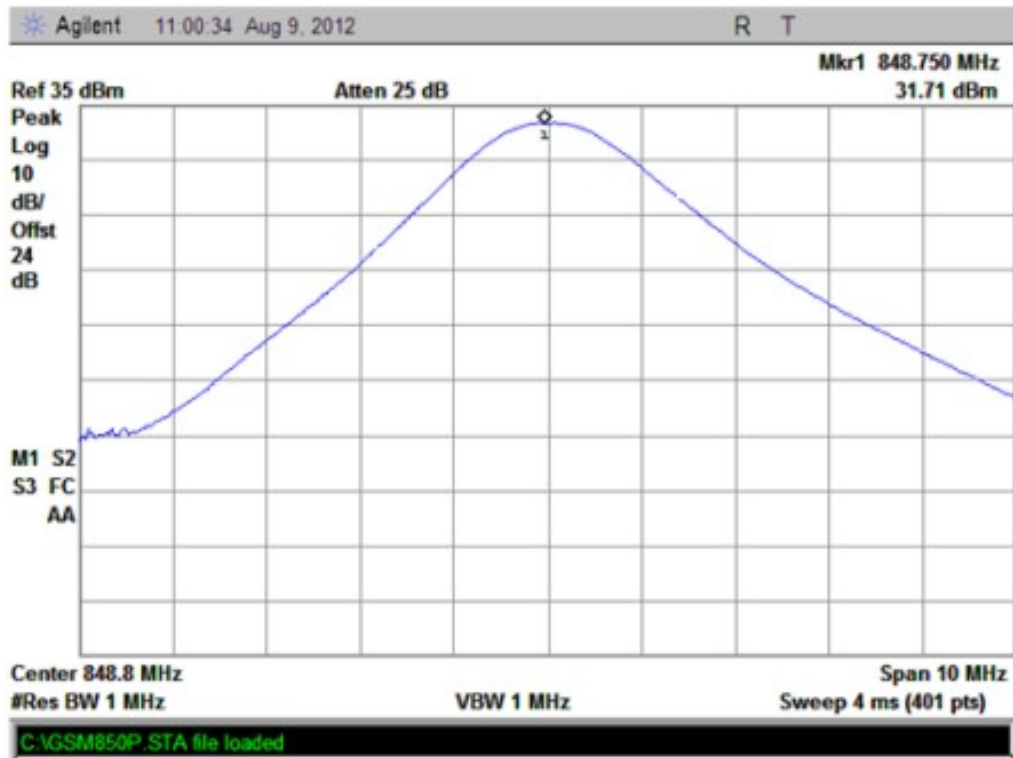

(Plot C3: GPRS 850MHz Channel = 251)




(Plot D1: GPRS 1900MHz Channel = 512)

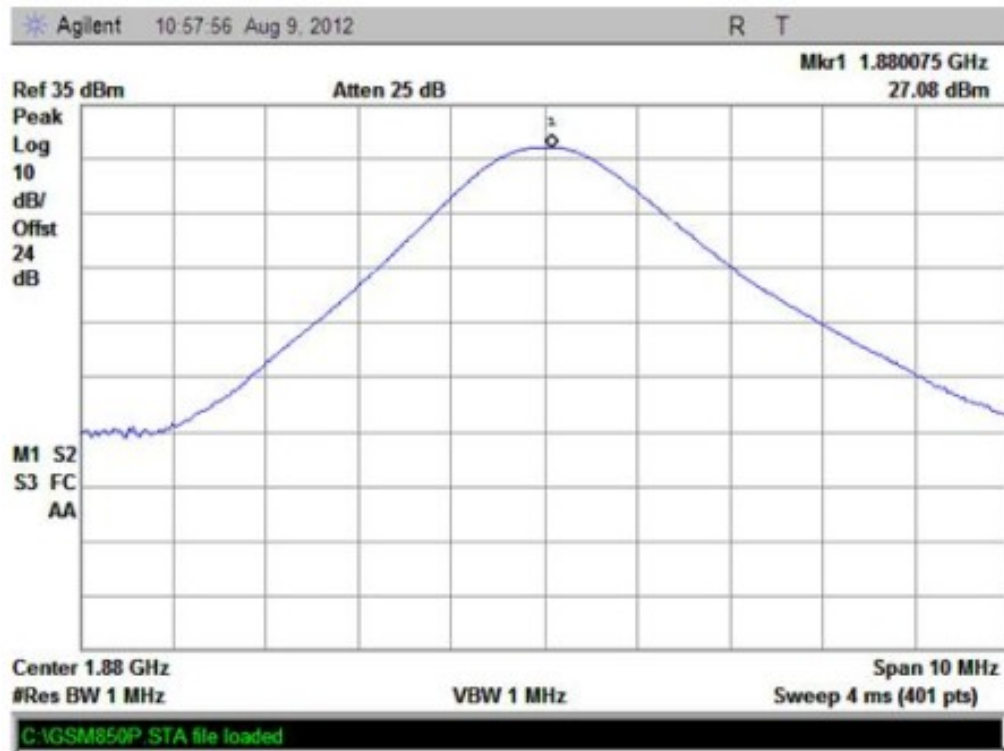


(Plot D2: GPRS 1900MHz Channel = 661)




(Plot D3: GPRS 1900MHz Channel = 810)

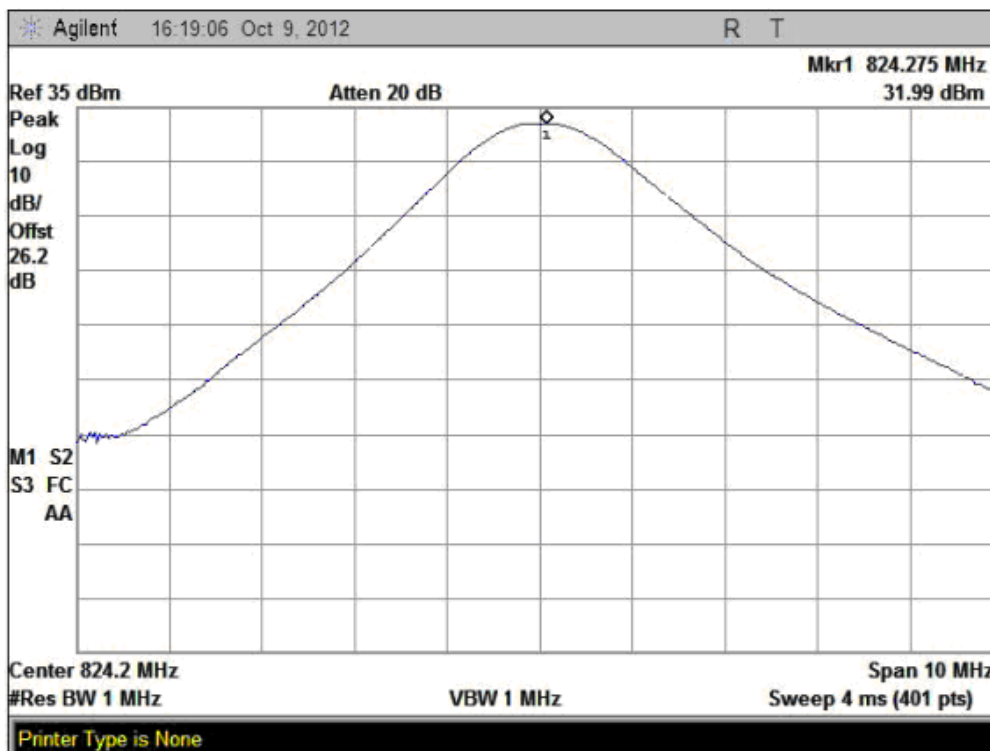


(Plot E1: GPRS 850MHz Channel = 128)

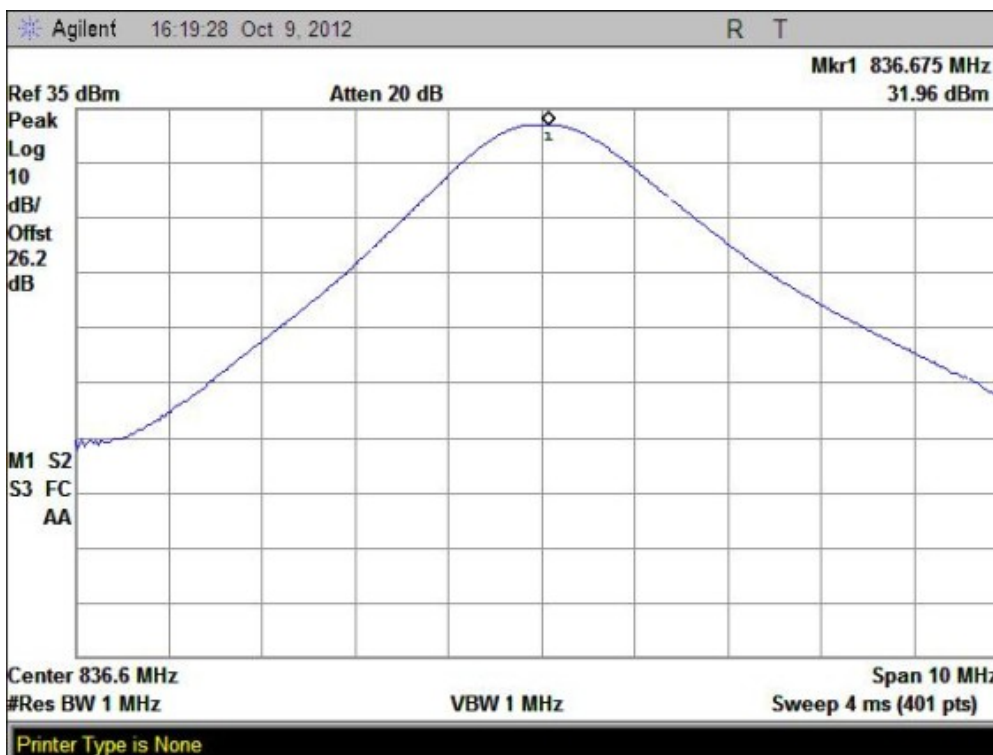


(Plot E2: GPRS 850MHz Channel = 190)

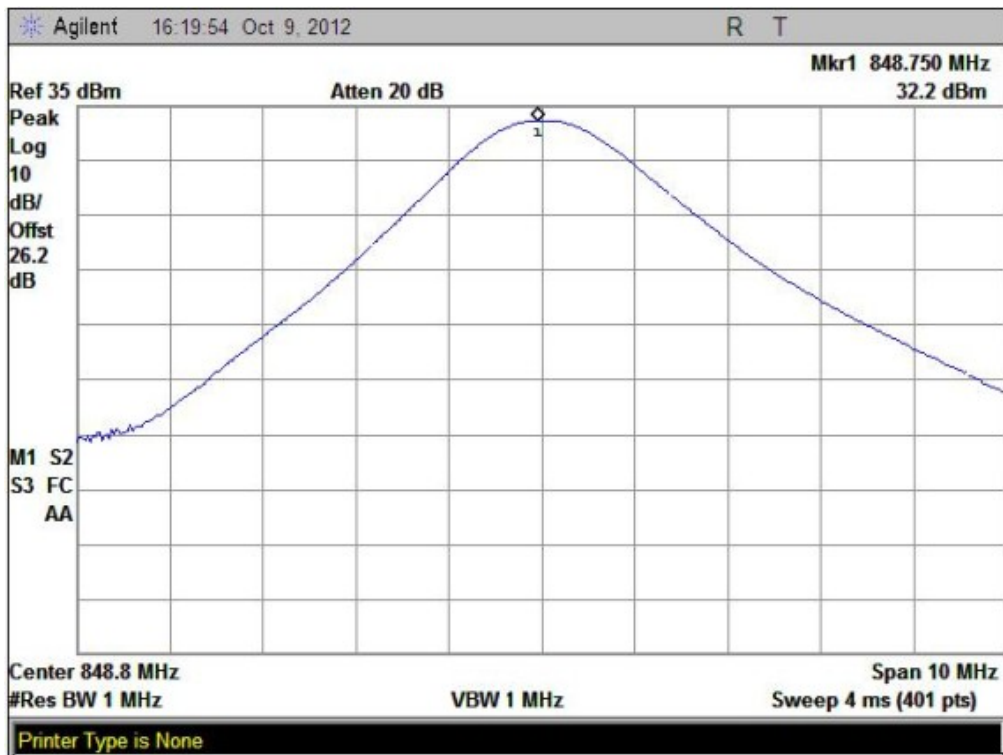


(Plot E3: GPRS 850MHz Channel = 251)

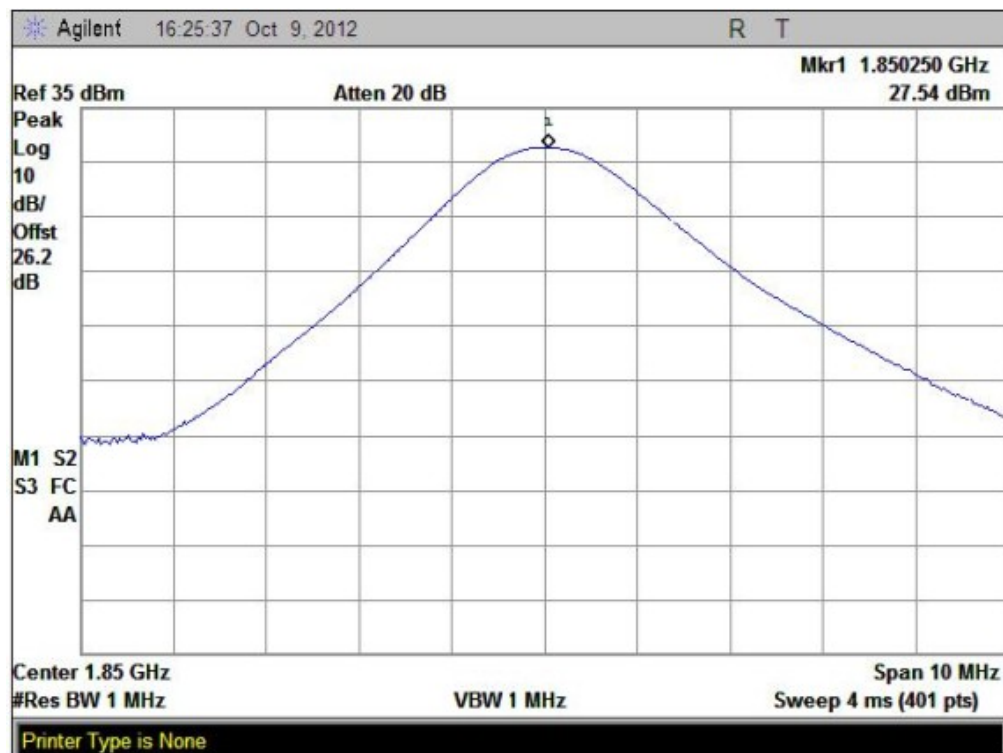

(Plot F1: GPRS 1900MHz Channel = 512)

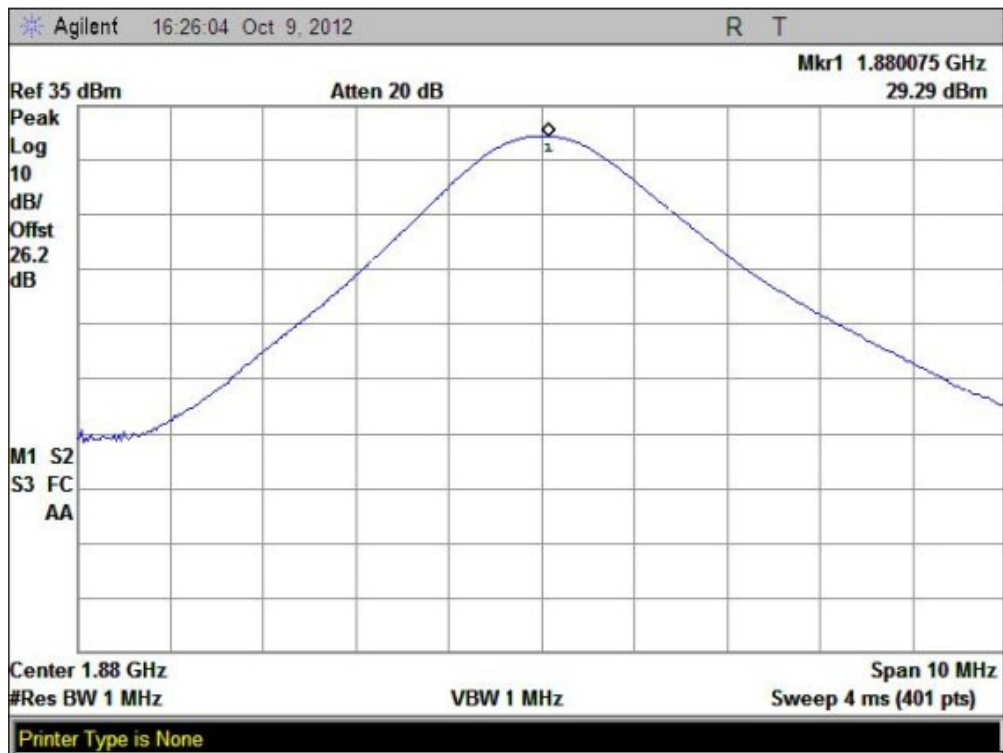

(Plot F2: GPRS 1900MHz Channel = 661)

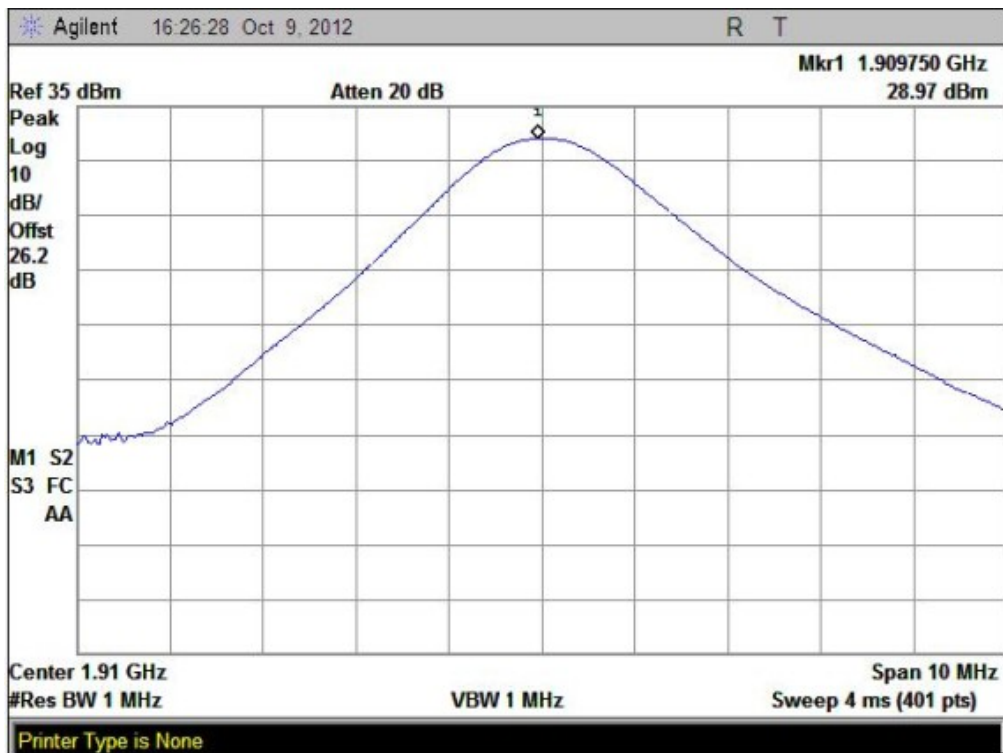

(Plot F3: GPRS 1900MHz Channel = 810)



2.2 99% Occupied Bandwidth

2.2.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

2.2.2 Test Description

See section 2.1.2 of this report.


2.2.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.


1. Test Verdict:

Band	Channel	Frequency (MHz)	99% Occupied Bandwidth	Refer to Plot
GSM 850MHz	128	824.2	246.7698 kHz	Plot 1
	190	836.6	247.0981 kHz	Plot 2
	251	848.8	245.9076 kHz	Plot 3
GSM 1900MHz	512	1850.2	249.7750 kHz	Plot 4
	661	1880.0	248.4672 kHz	Plot 5
	810	1909.8	249.6080 kHz	Plot 6
GPRS 850MHz	128	824.2	245.6045 kHz	Plot 7
	190	836.6	245.7807 kHz	Plot 8
	251	848.8	249.8369 kHz	Plot 9
GPRS 1900MHz	512	1850.2	245.0969 kHz	Plot 10
	661	1880.0	248.9513 kHz	Plot 11
	810	1909.8	249.3489 kHz	Plot 12


2. Test Plots:

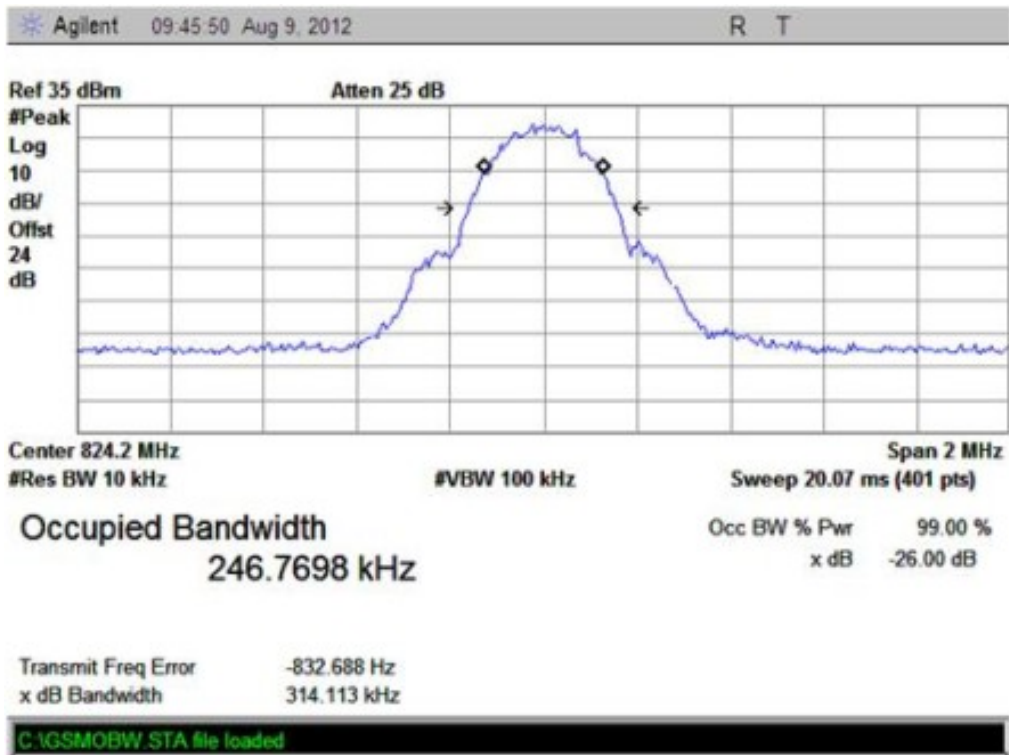


(Plot 1: GSM 850MHz Channel = 128)

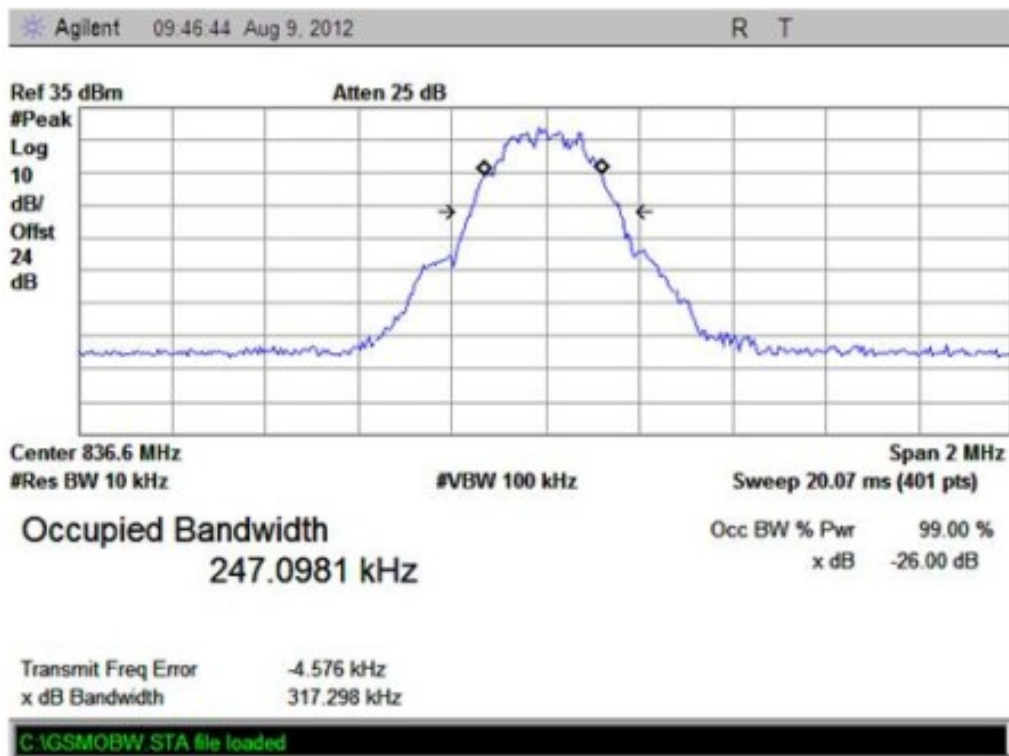


(Plot 2: GSM 850MHz Channel = 190)

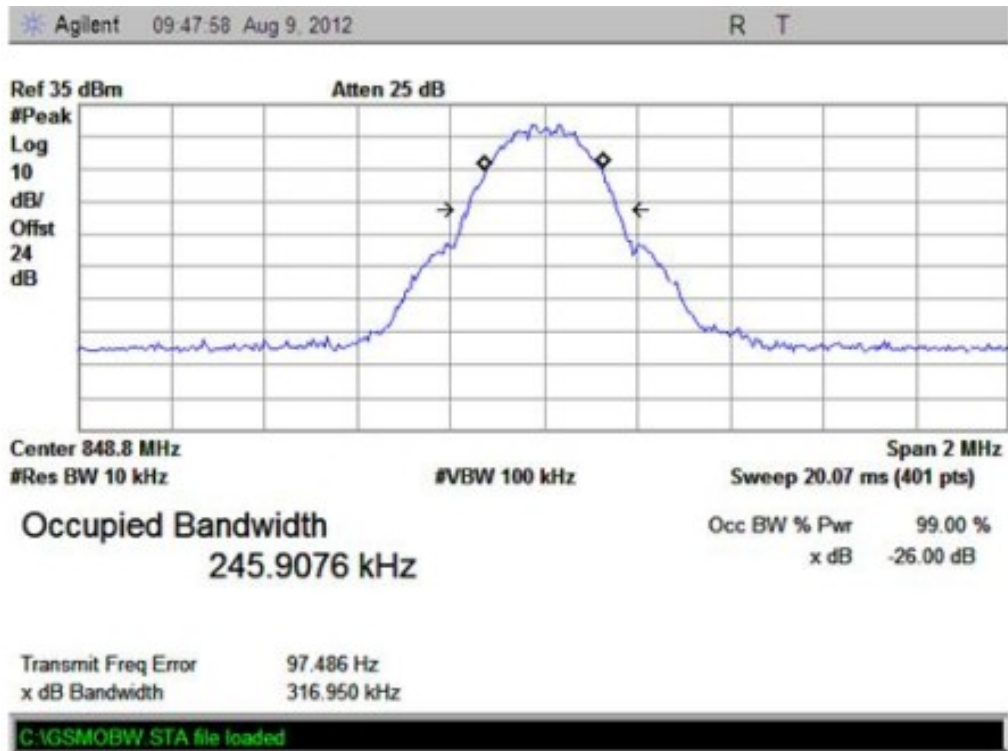


(Plot 3: GSM 850MHz Channel = 251)

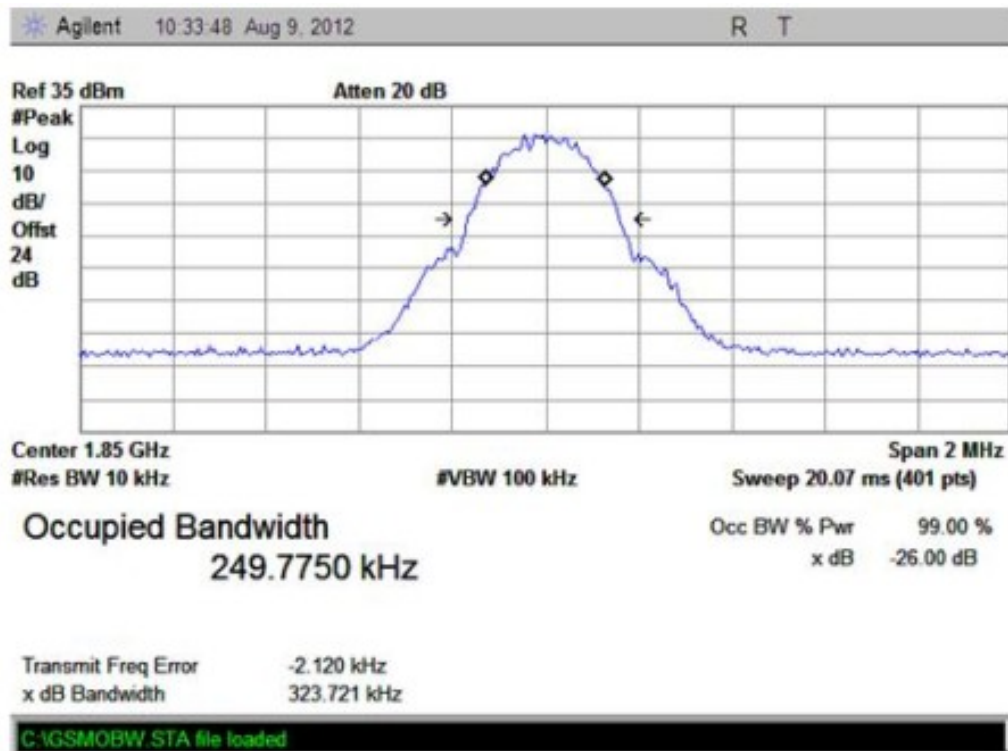


(Plot 4: GSM 1900MHz Channel = 512)

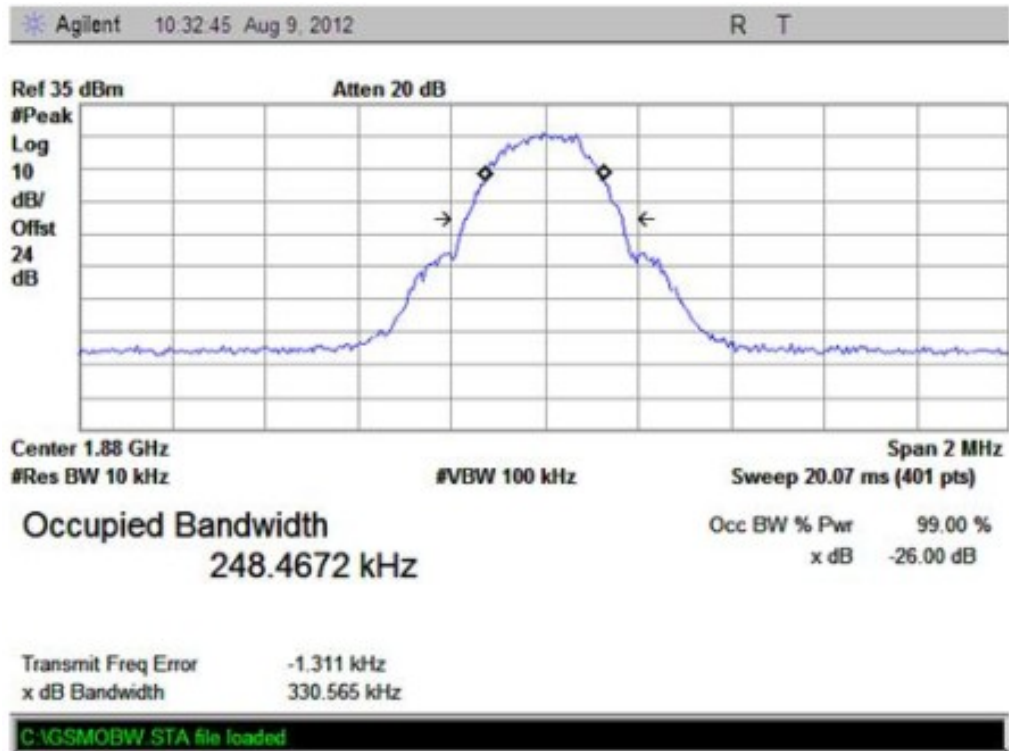


(Plot 5: GSM 1900MHz Channel = 661)

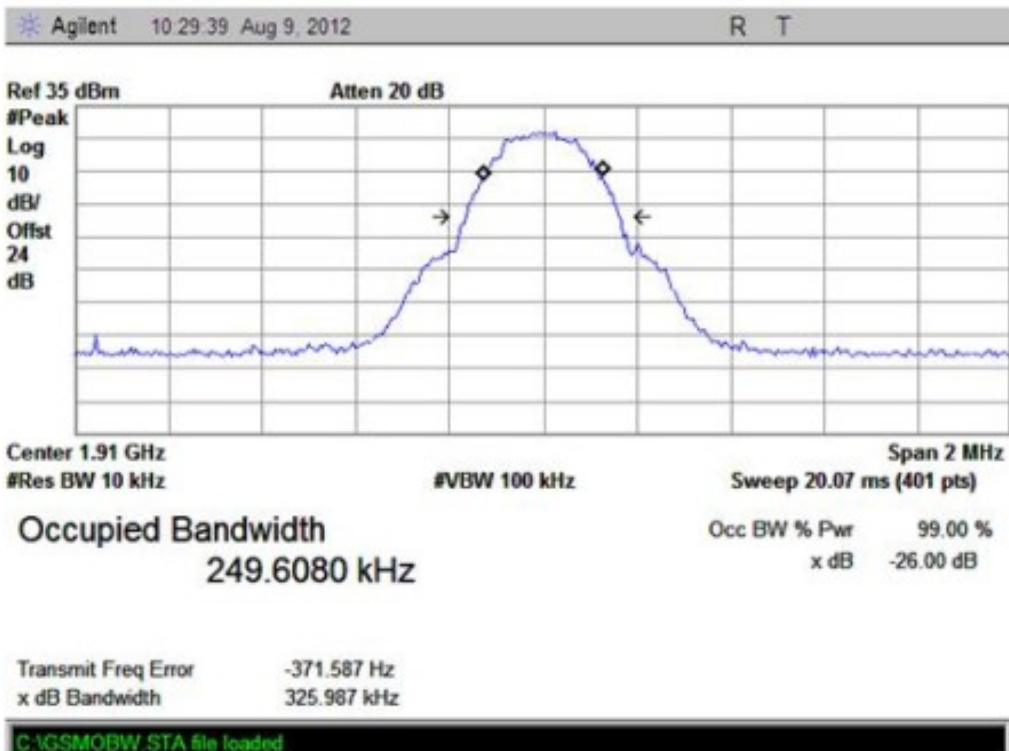


(Plot 6: GSM 1900MHz Channel = 810)

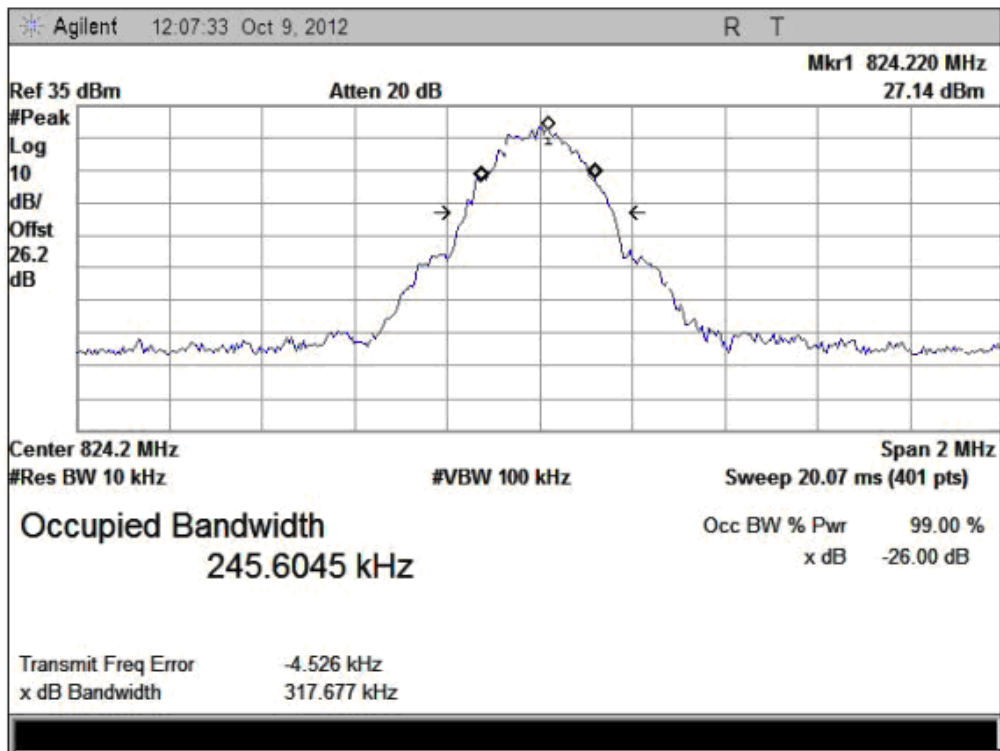


(Plot 7: GPRS 850MHz Channel = 128)

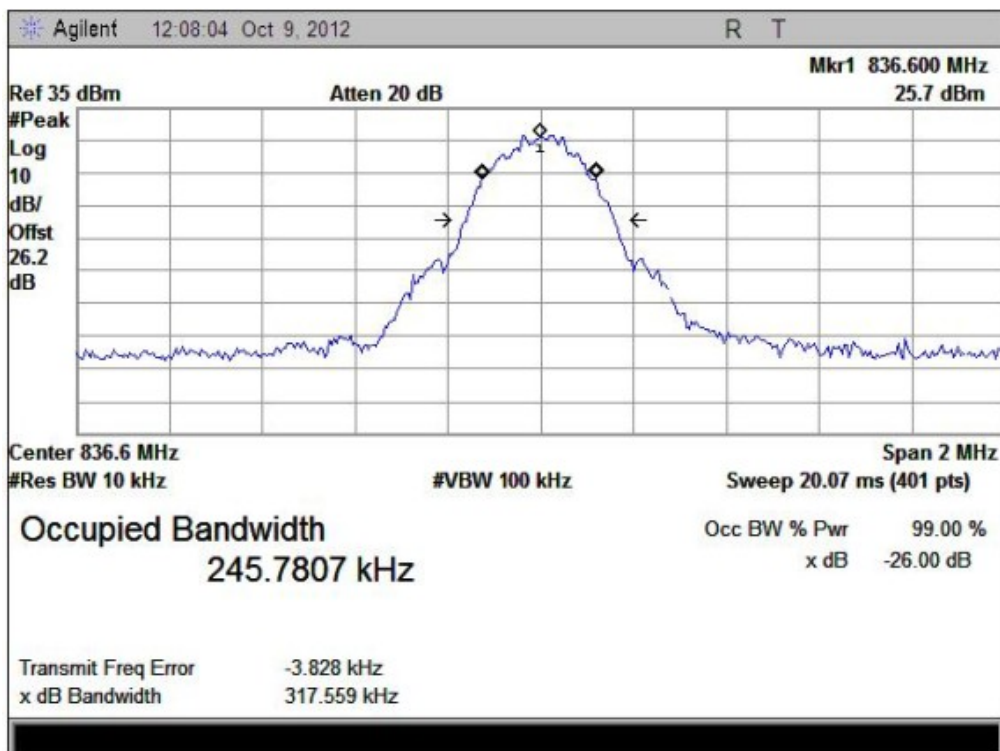


(Plot 8: GPRS 850MHz Channel = 190)

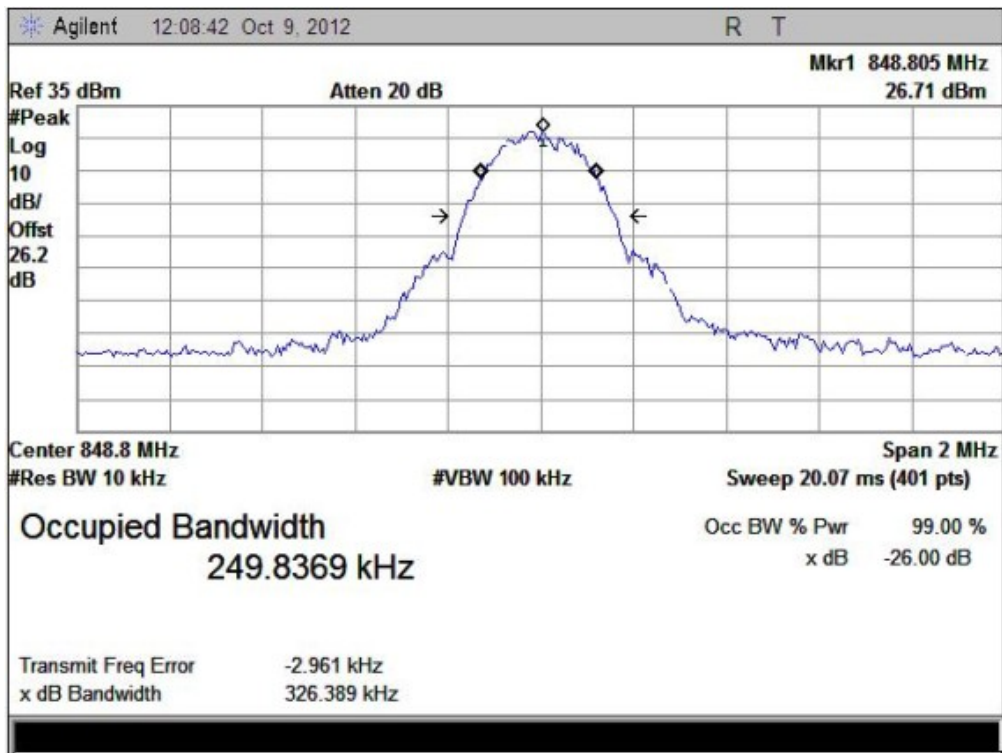


(Plot 9: GPRS 850MHz Channel = 251)

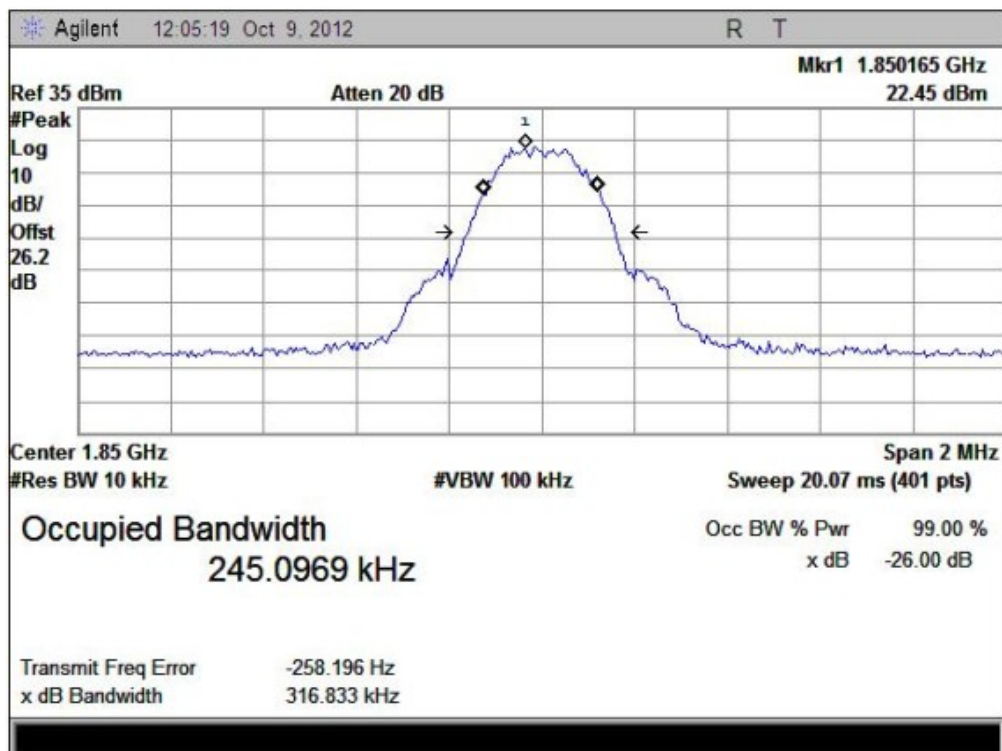

(Plot 10: GPRS 1900MHz Channel = 512)

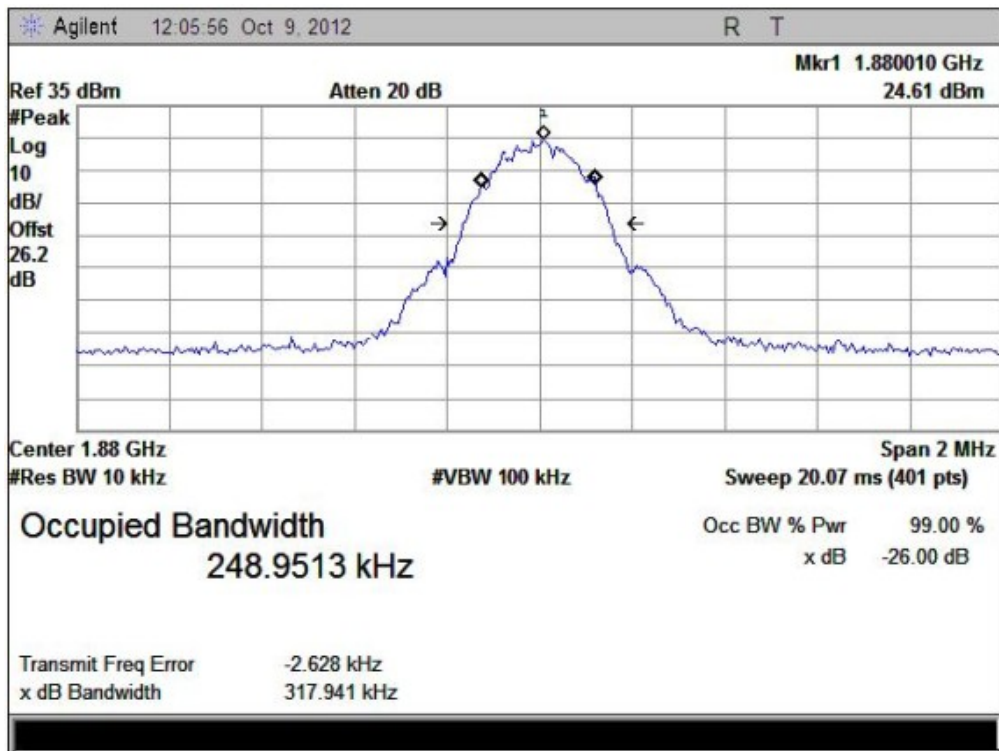

(Plot 11: GPRS 1900MHz Channel = 661)

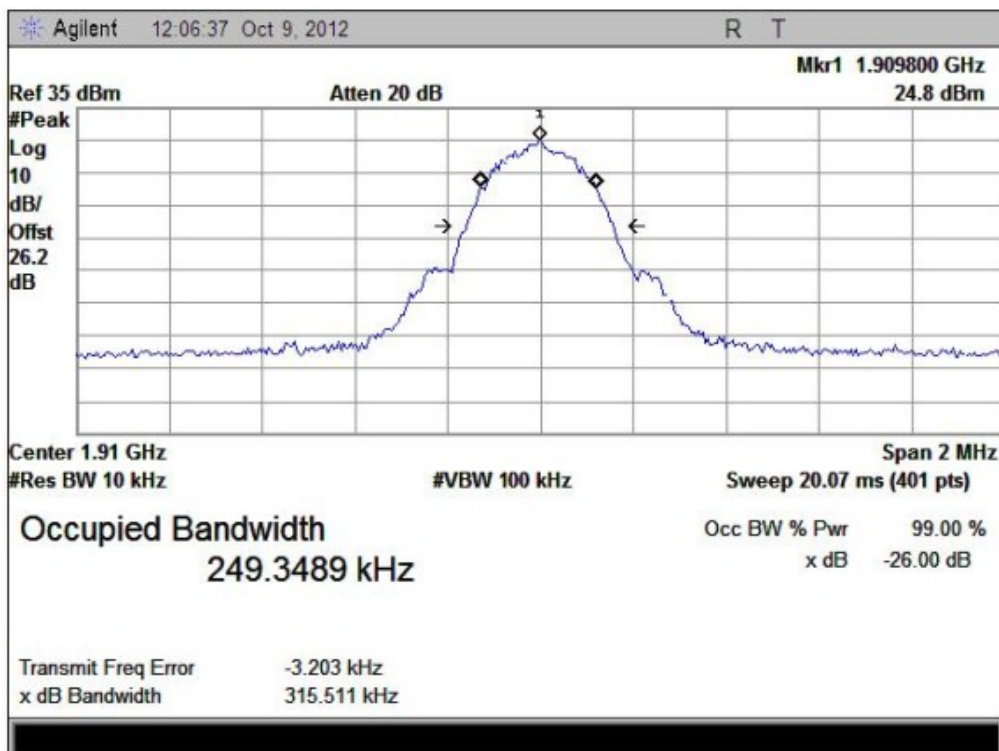

(Plot 12: GPRS 1900MHz Channel = 810)

2.3 Frequency Stability


2.3.1 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.3.2 Test Description

1. Test Setup:

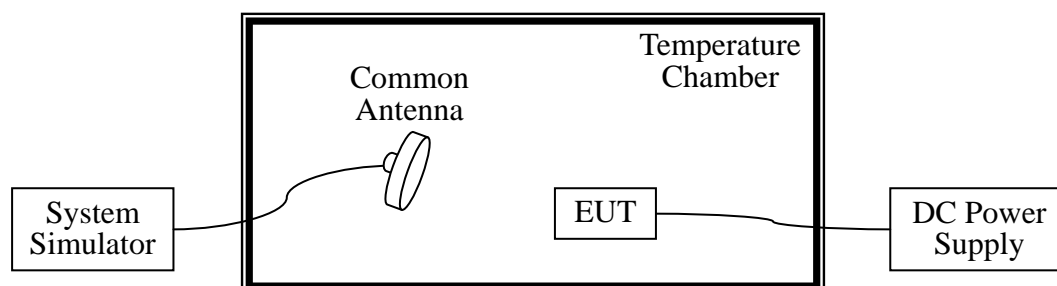

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	Agilent	E5515C	GB43130131	2012.06
DC Power Supply	Good Will	GPS-3030DD	EF920938	2012.06
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2012.06

2.3.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.7VDC, 4.2VDC and 3.4VDC, which are specified by the applicant; the normal temperature here used is 25°C . The frequency



deviation limit of 850MHz band is ± 2.5 ppm, and 1900MHz is ± 1 ppm

1. GSM 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.7	-30	10.72	± 2060.5	-9.66	± 2091.5	5.05	± 2122	PASS
	-20	-11.17		19.70		8.41		
	-10	17.28		-11.06		1.19		
	0	-23.03		21.06		34.30		
	+10	-13.02		13.05		17.11		
	+20	-10.39		-12.76		-15.51		
	+30	27.75		-2.05		19.46		
	+40	5.31		-3.77		-6.80		
+50	-22.19	5.39	7.58					
4.2	+25	23.74	19.65	23.11				
3.4	+25	23.29	-20.70	-14.93				

2. GSM 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.7	-30	-10.39	± 1850.2	38.28	± 1880.0	27.27	± 1909.8	PASS
	-20	27.75		-2.15		9.49		
	-10	5.31		40.06		-12.90		
	0	-22.19		1.99		12.66		
	+10	23.74		-19.86		5.05		
	+20	-10.39		-2.32		3.02		
	+30	-18.89		23.12		-13.01		
	+40	44.49		11.33		0.51		
+50	40.72	-17.55	21.45					
4.2	+25	16.15	38.10	-16.04				
3.4	+25	32.34	-22.06	-21.86				



2.4 Conducted Out of Band Emissions

2.4.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.4.2 Test Description

See section 2.1.2 of this report.

2.4.3 Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-20.48	Plot A1toA1.1	-13	PASS
	190	836.6	-19.81	Plot A2toA2.1		PASS
	251	848.8	-19.59	Plot A3toA3.1		PASS
GSM 1900MHz	512	1850.2	-19.28	Plot B1toB1.1	-13	PASS
	661	1880.0	-18.63	Plot B2toB2.1		PASS
	810	1909.8	-18.98	Plot B3toB3.1		PASS
GPRS 850MHz	128	824.2	-29.51	Plot C1toC1.1	-13	PASS
	190	836.6	-28.68	Plot C2toC2.1		PASS
	251	848.8	-29.44	Plot C3toC3.1		PASS
GPRS 1900MHz	512	1850.2	-32.71	Plot D1toD1.1	-13	PASS
	661	1880.0	-32.57	Plot D2toD2.1		PASS
	810	1909.8	-32.13	Plot D3toD3.1		PASS

2. Test Plots for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

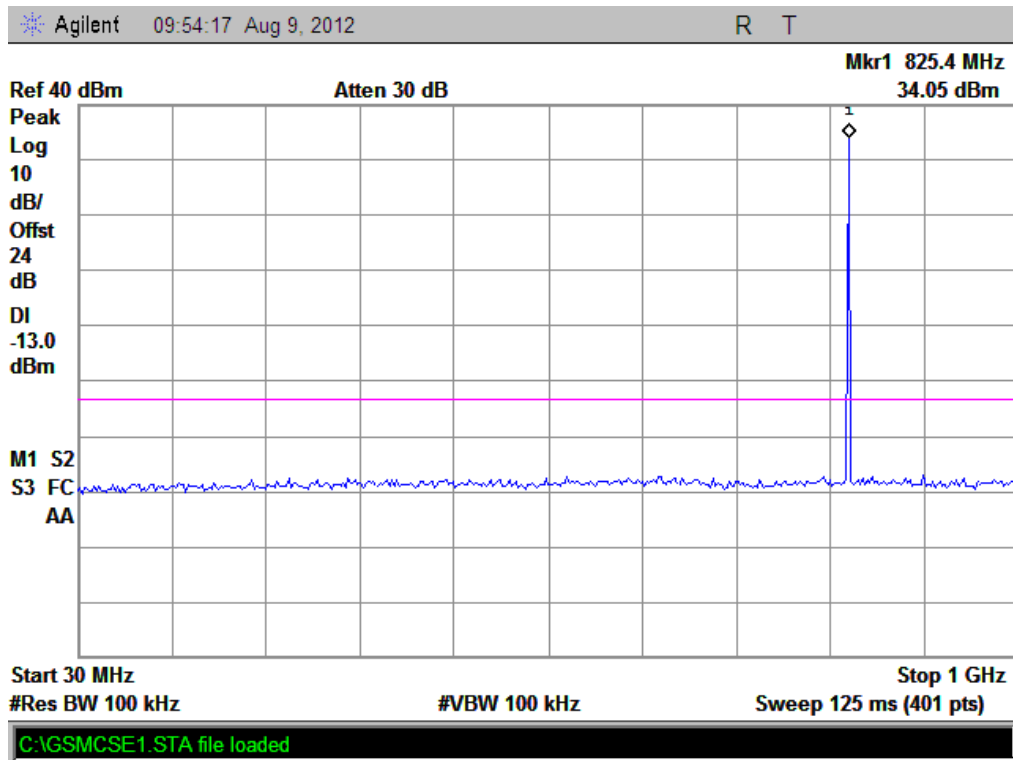


(Plot A1: GSM 850MHz Channel = 128, 30MHz to 1GHz)

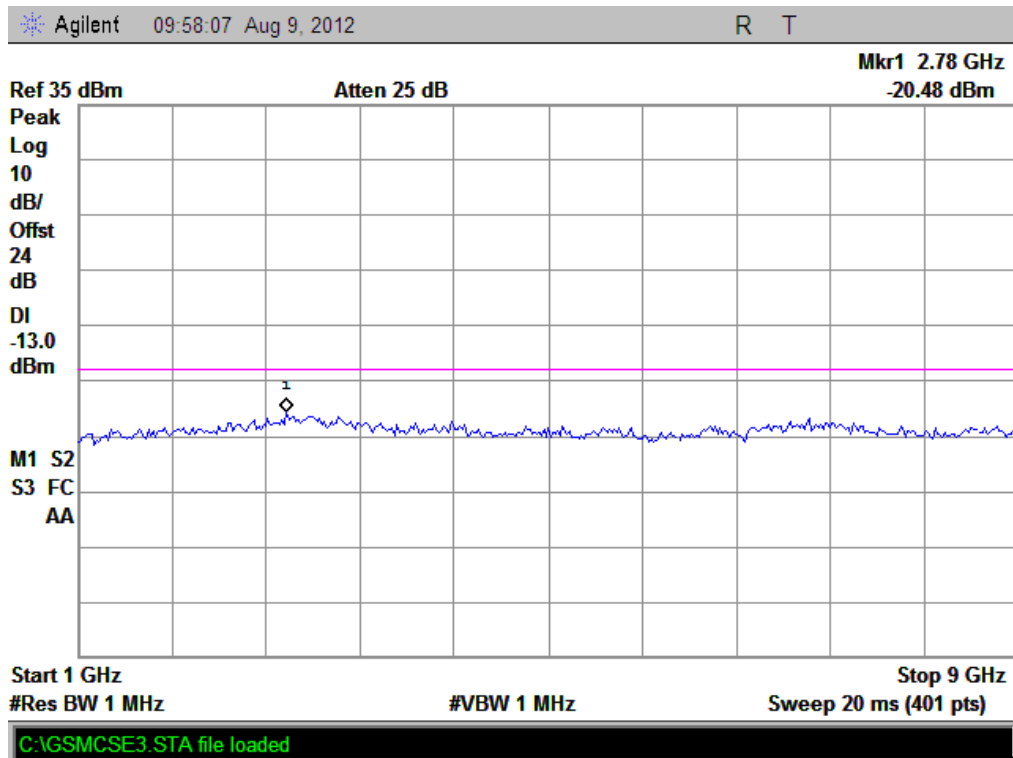


(Plot A1.1: GSM 850MHz Channel = 128, 1GHz to 9GHz)

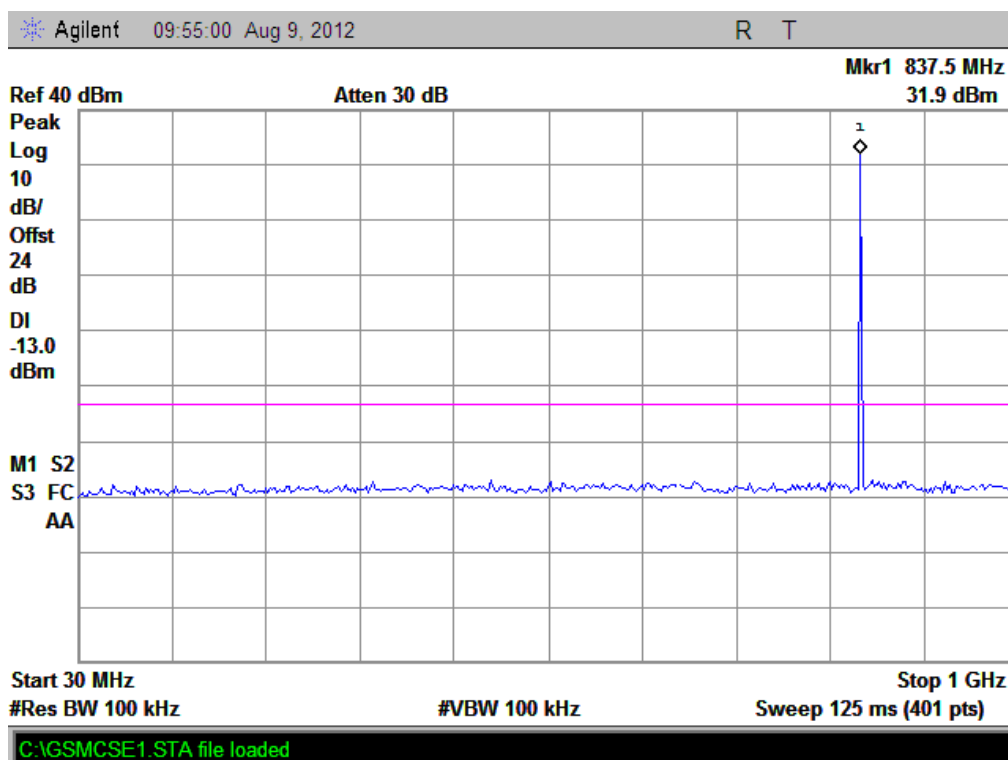


(Plot A2: GSM 850MHz Channel = 190, 30MHz to 1GHz)

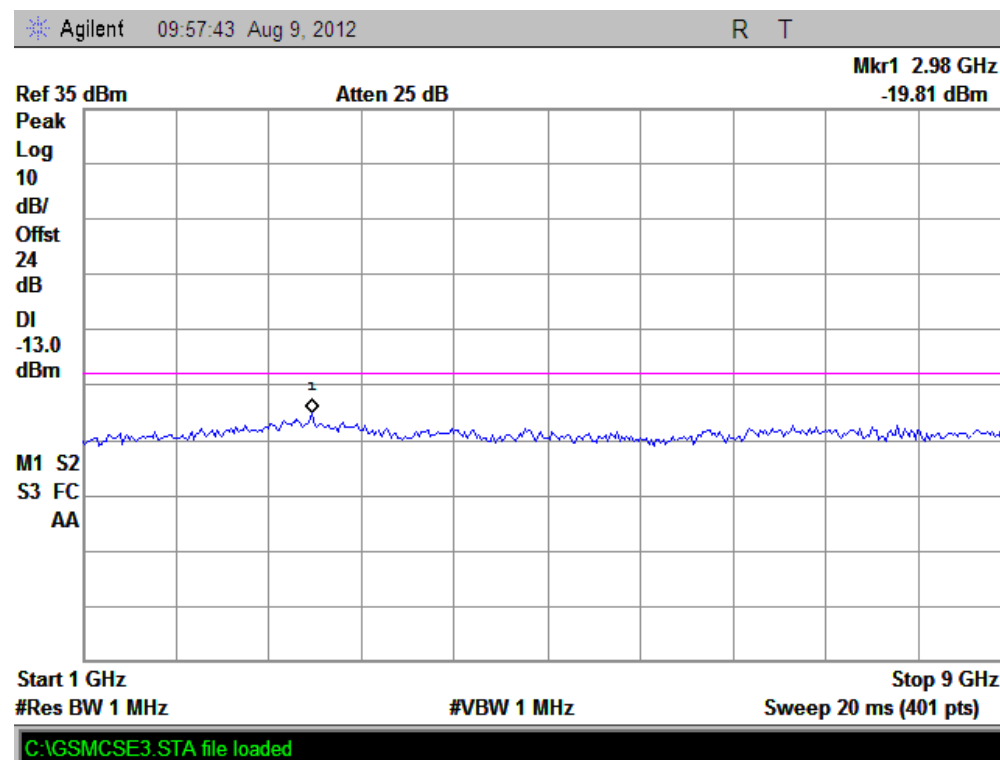


(Plot A2.1: GSM 850MHz Channel = 190, 1GHz to 9GHz)

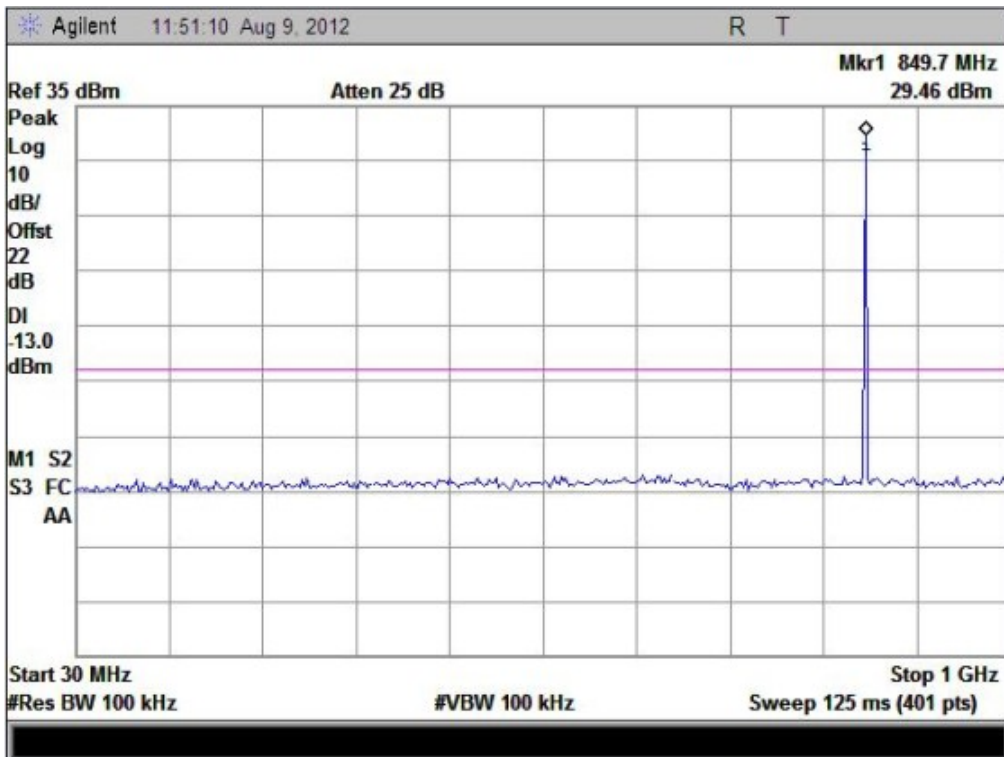


(Plot A3: GSM 850MHz Channel = 251, 30MHz to 1GHz)

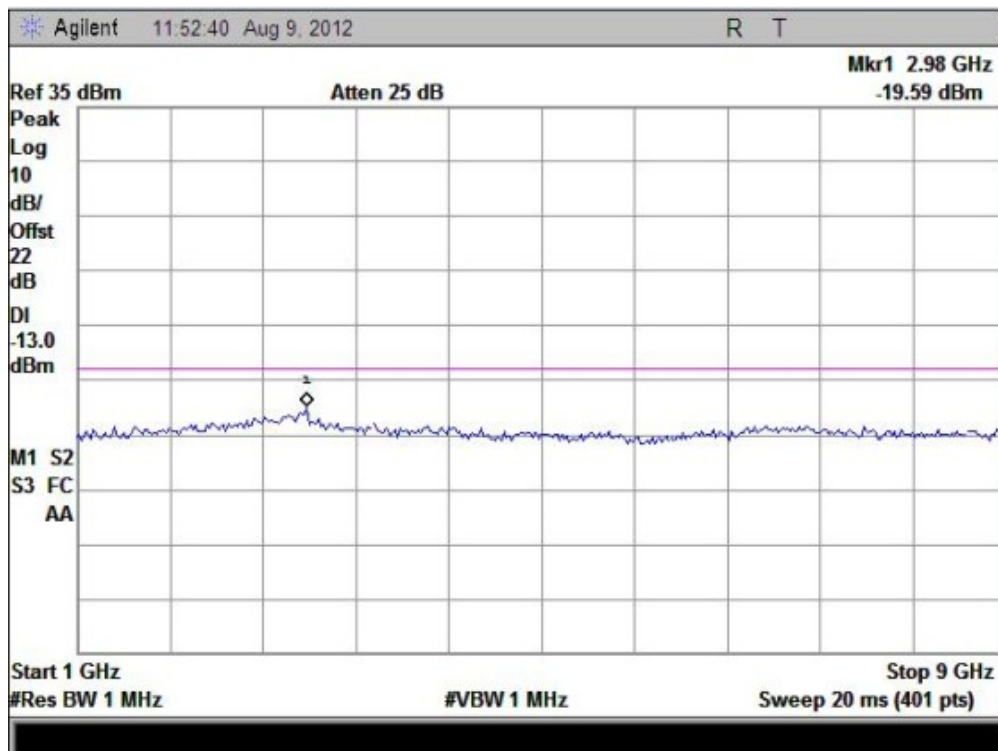


(Plot A3.1: GSM 850MHz Channel = 251, 1GHz to 9GHz)

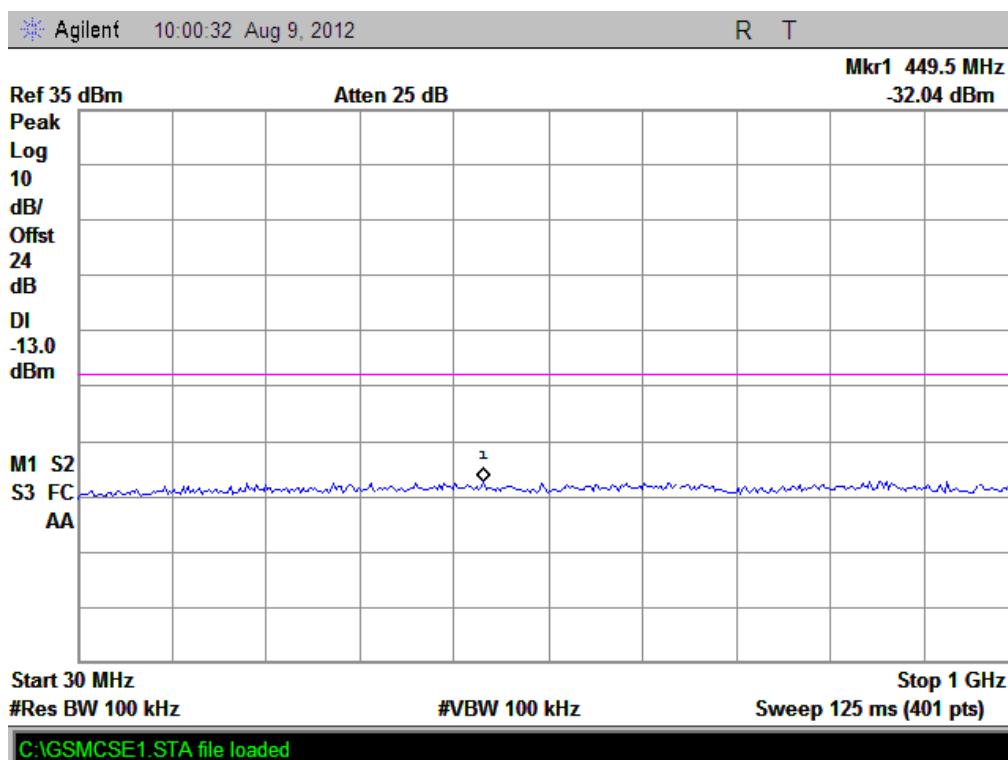


(Plot B1: GSM 1900MHz Channel = 512, 30MHz to 1GHz)

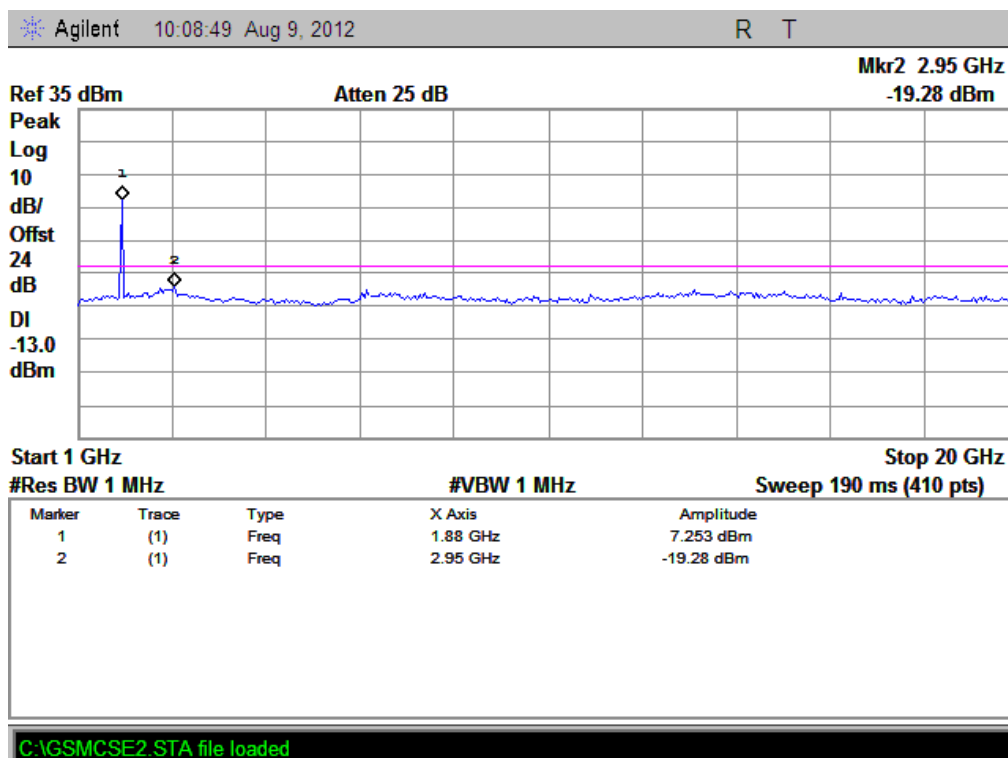


(Plot B1.1: GSM 1900MHz Channel = 512, 1GHz to 20GHz)

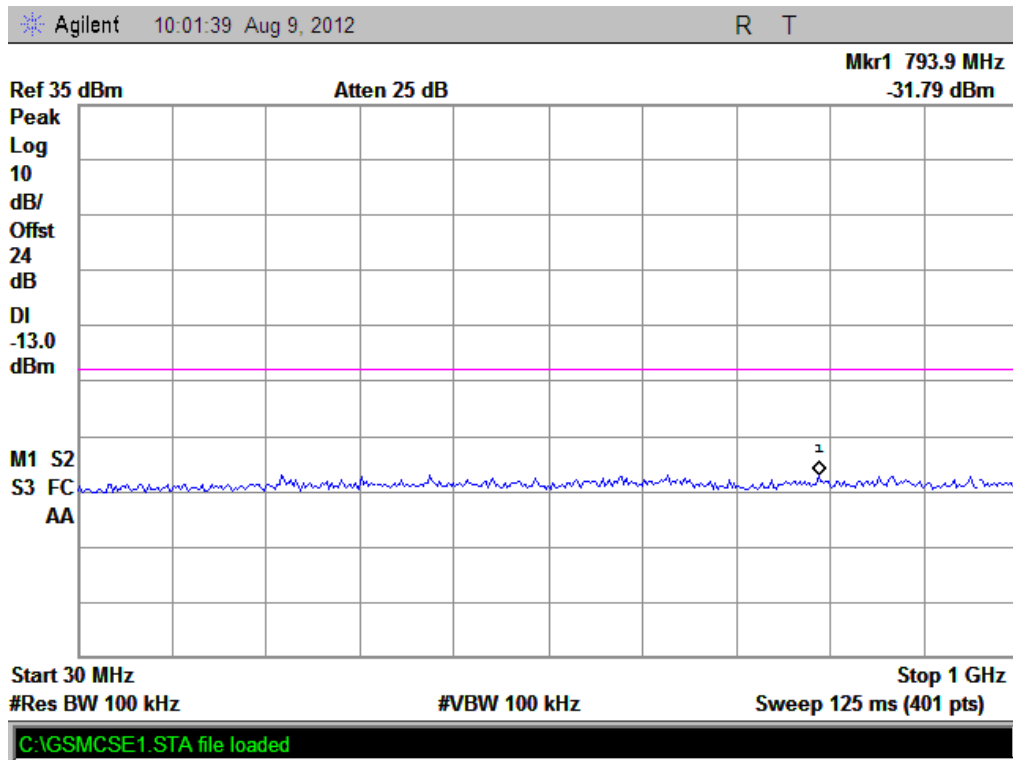


(Plot B2: GSM 1900MHz Channel = 661, 30MHz to 1GHz)

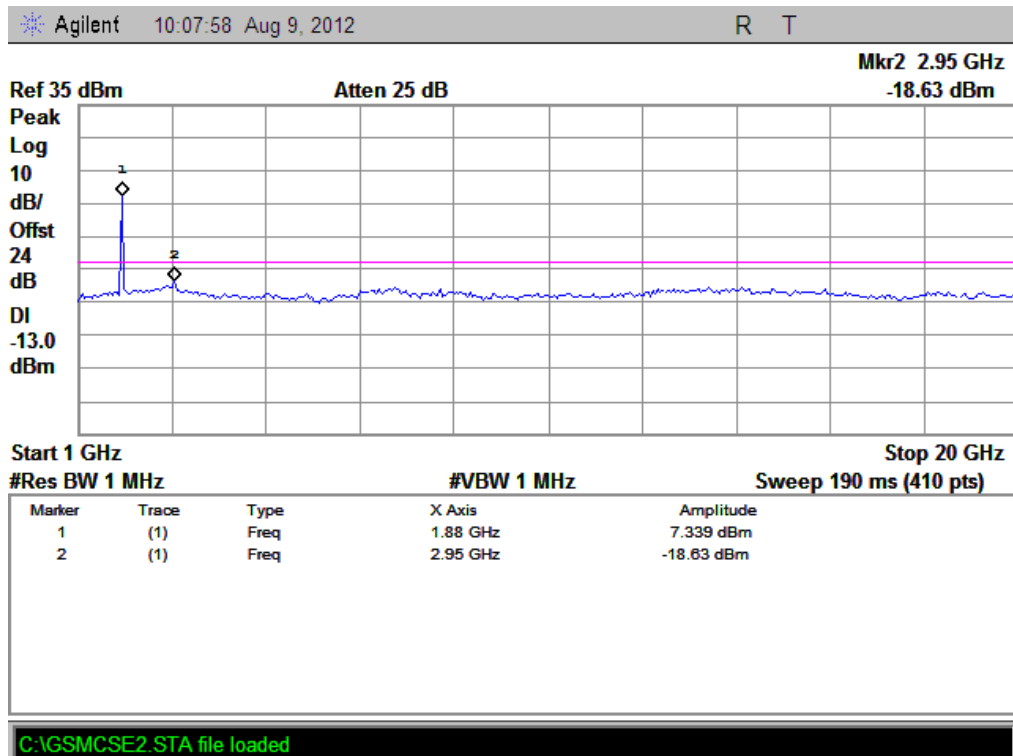


(Plot B2.1: GSM 1900MHz Channel = 661, 1GHz to 20GHz)

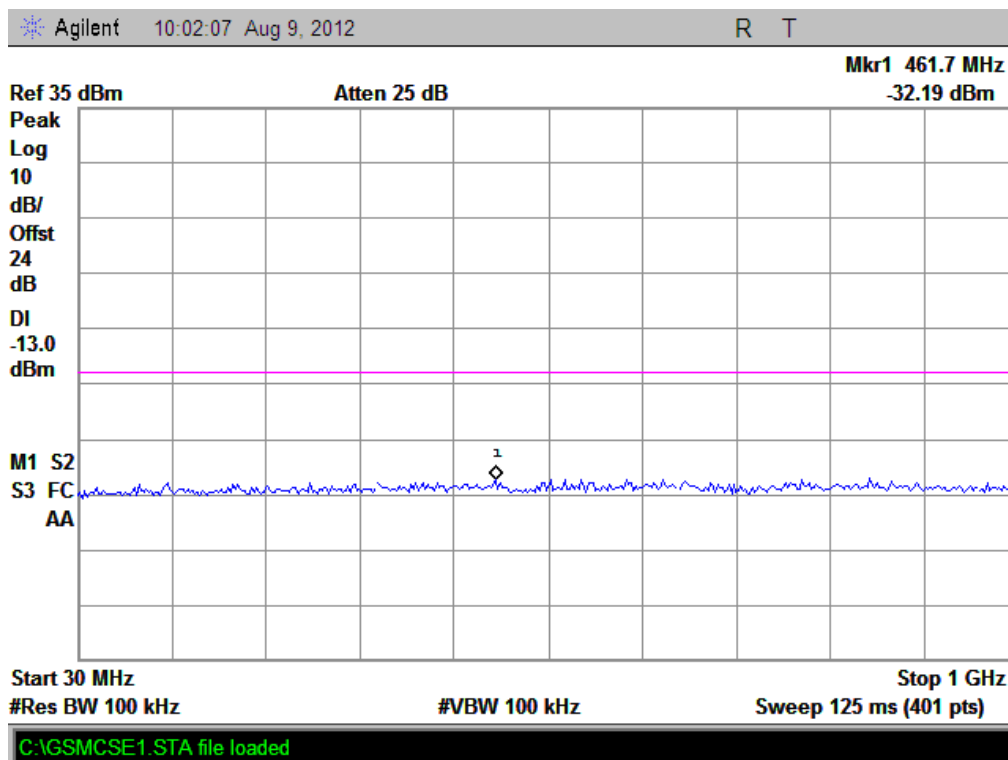


(Plot B3: GSM 1900MHz Channel = 810, 30MHz to 1GHz)

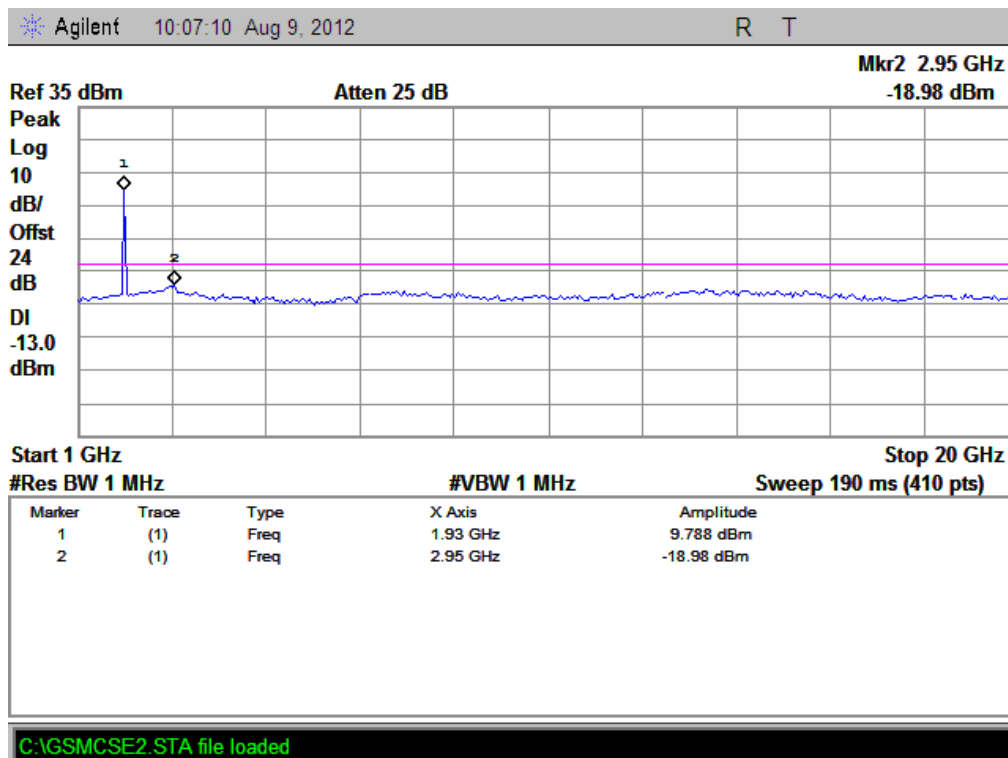


(Plot B3.1: GSM 1900MHz Channel = 810, 1GHz to 20GHz)

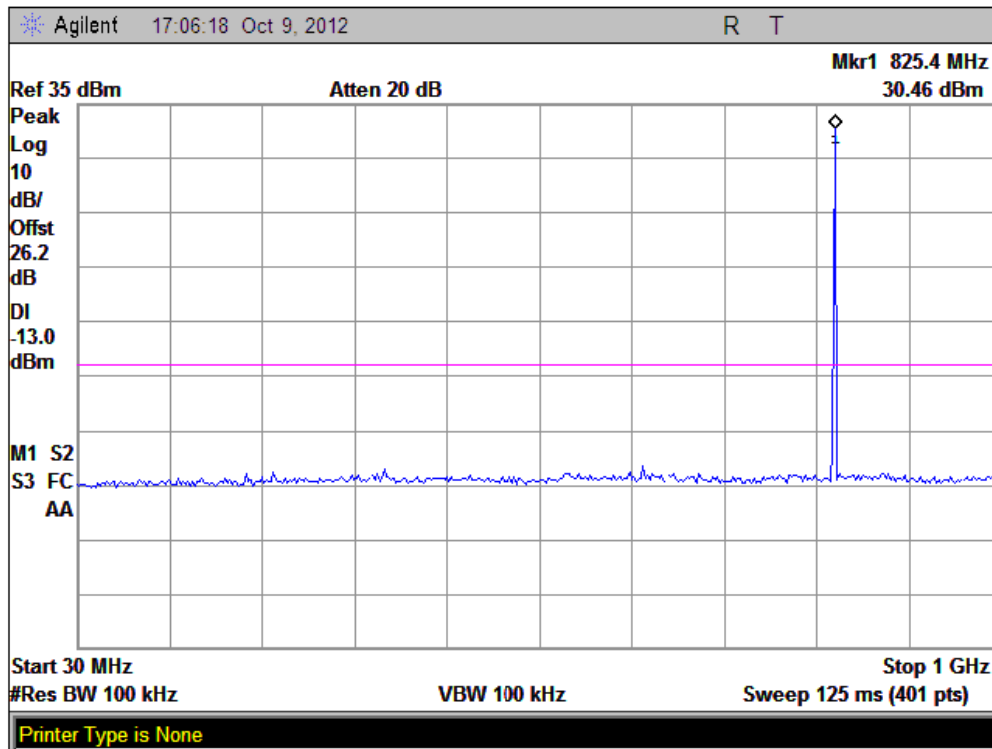


(Plot C1: GPRS 850MHz Channel = 128, 30MHz to 1GHz)

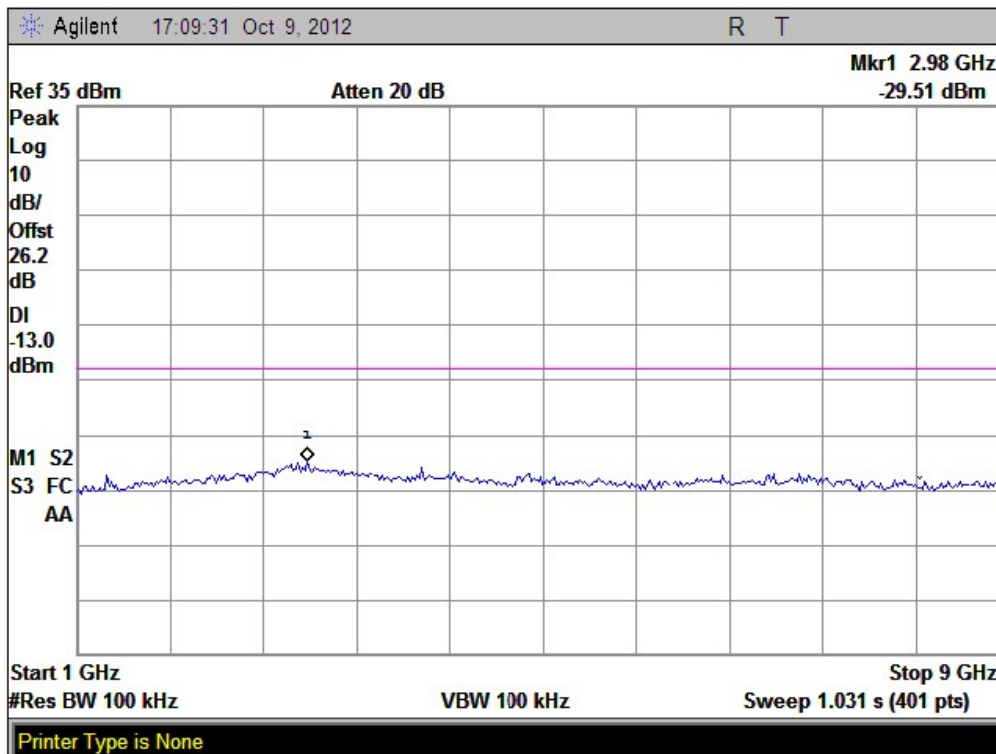


(Plot C1.1: GPRS 850MHz Channel = 128, 1GHz to 9GHz)

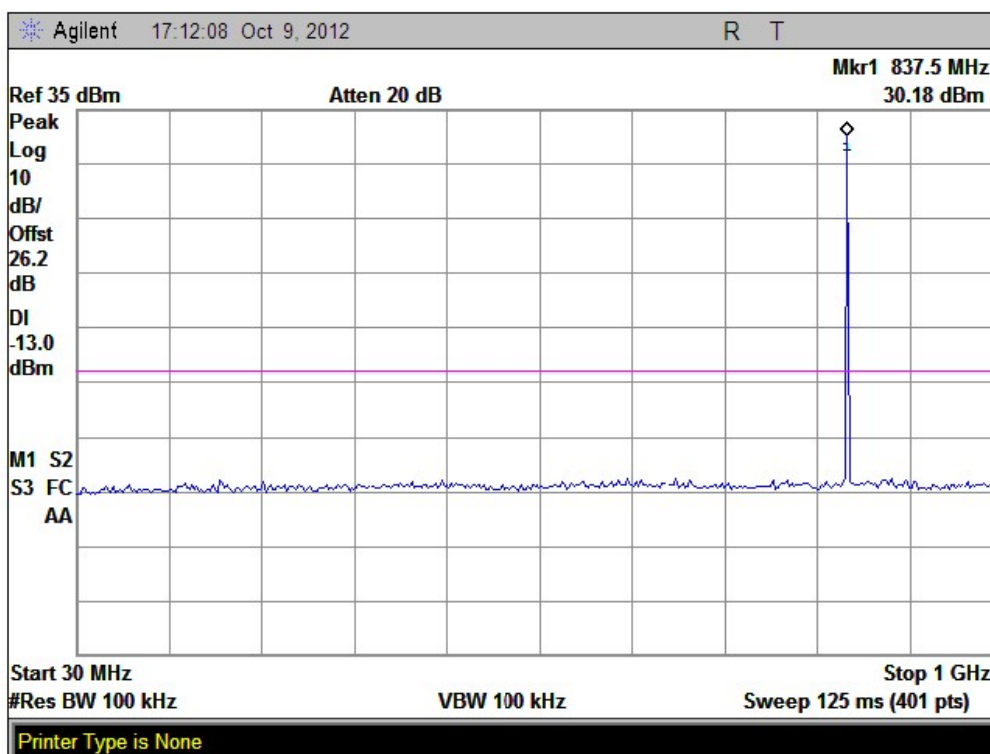


(Plot C2: GPRS 850MHz Channel = 190, 30MHz to 1GHz)

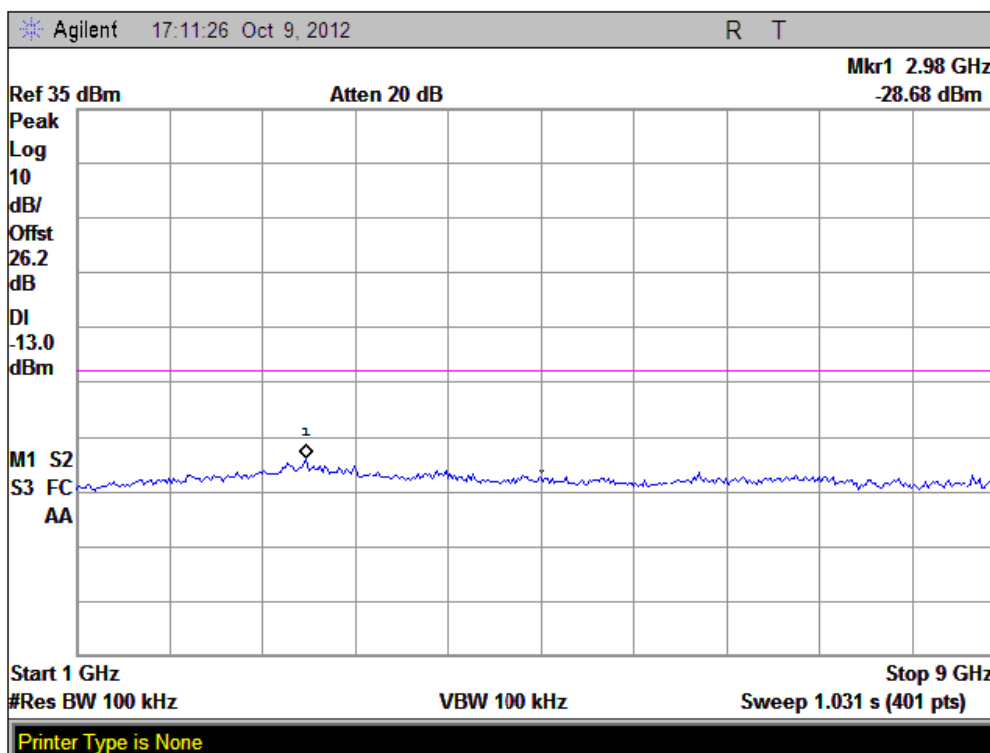


(Plot C2.1: GPRS 850MHz Channel = 190, 1GHz to 9GHz)

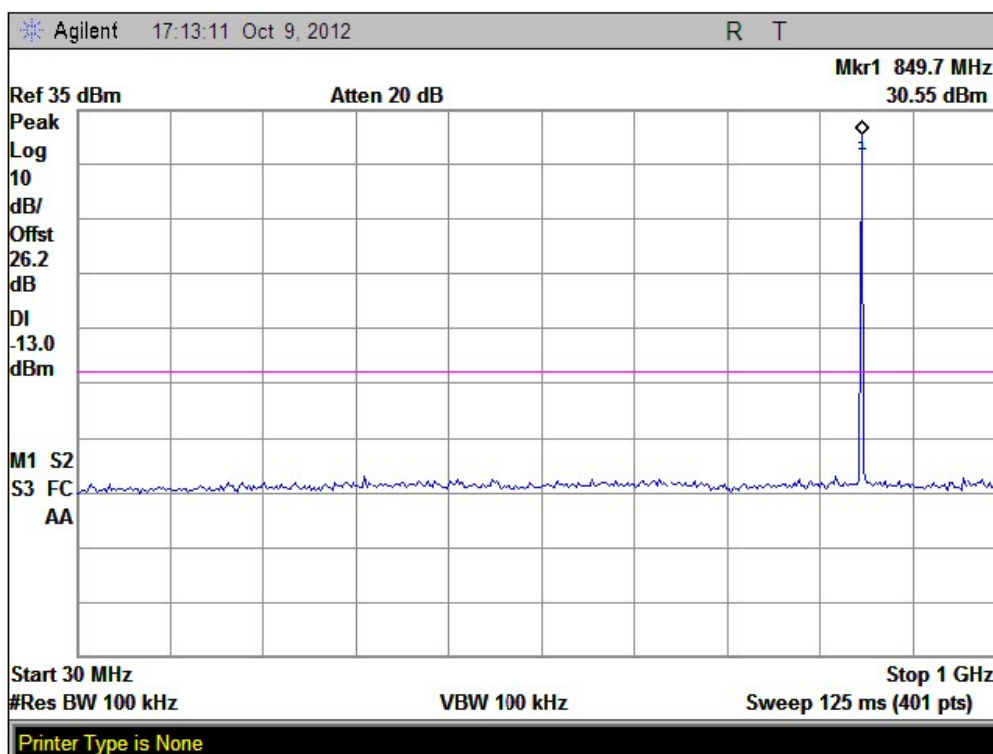


(Plot C3: GPRS 850MHz Channel = 251, 30MHz to 1GHz)

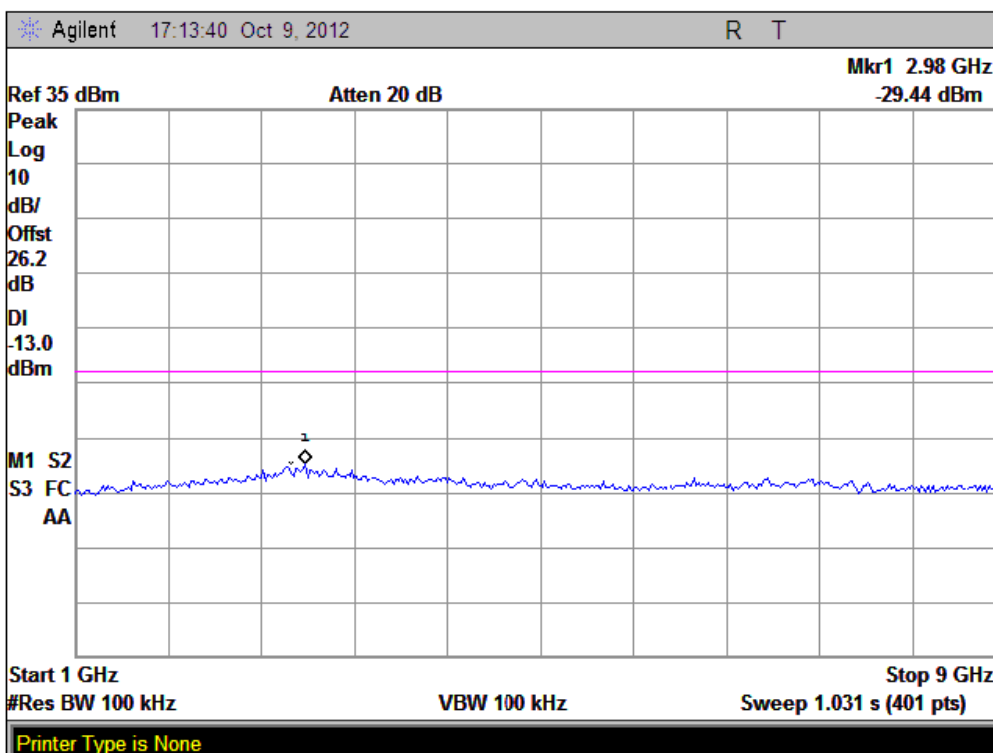


(Plot C3.1: GPRS 850MHz Channel = 251, 1GHz to 9GHz)

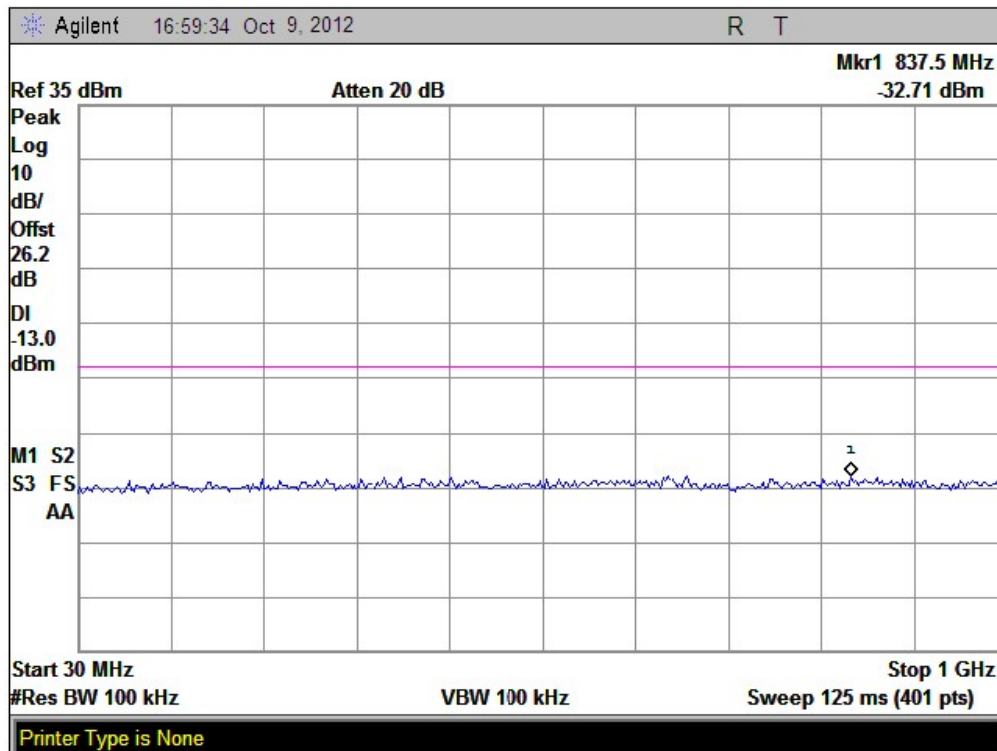


(Plot D1: GPRS 1900MHz Channel = 512, 30MHz to 1GHz)

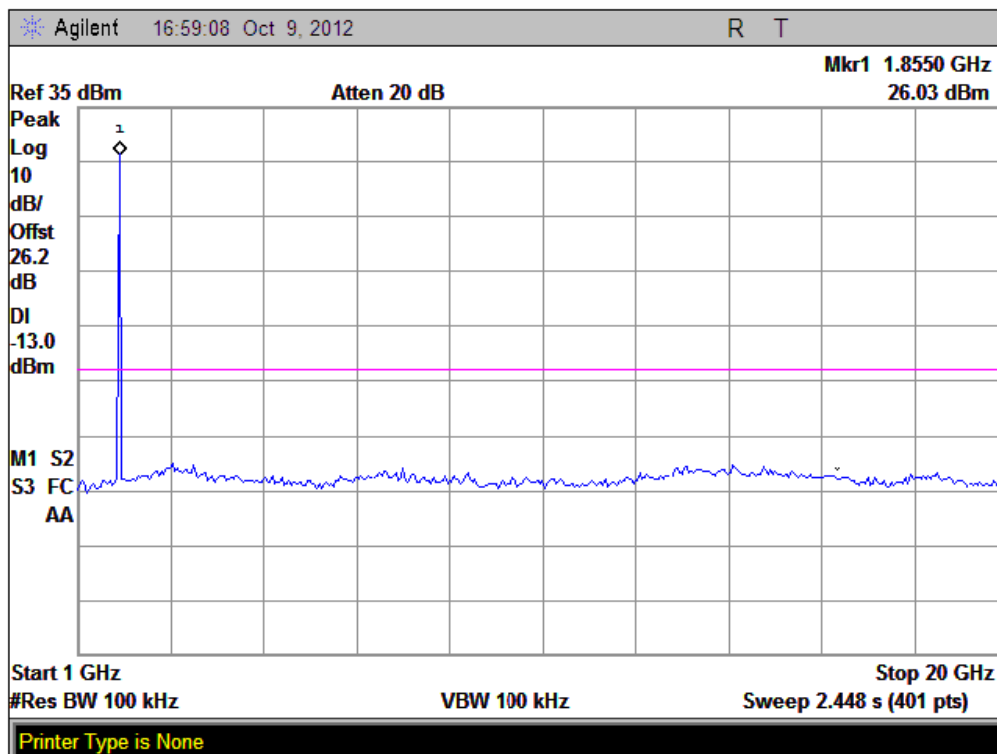


(Plot D1.1: GPRS 1900MHz Channel = 512, 1GHz to 20GHz)

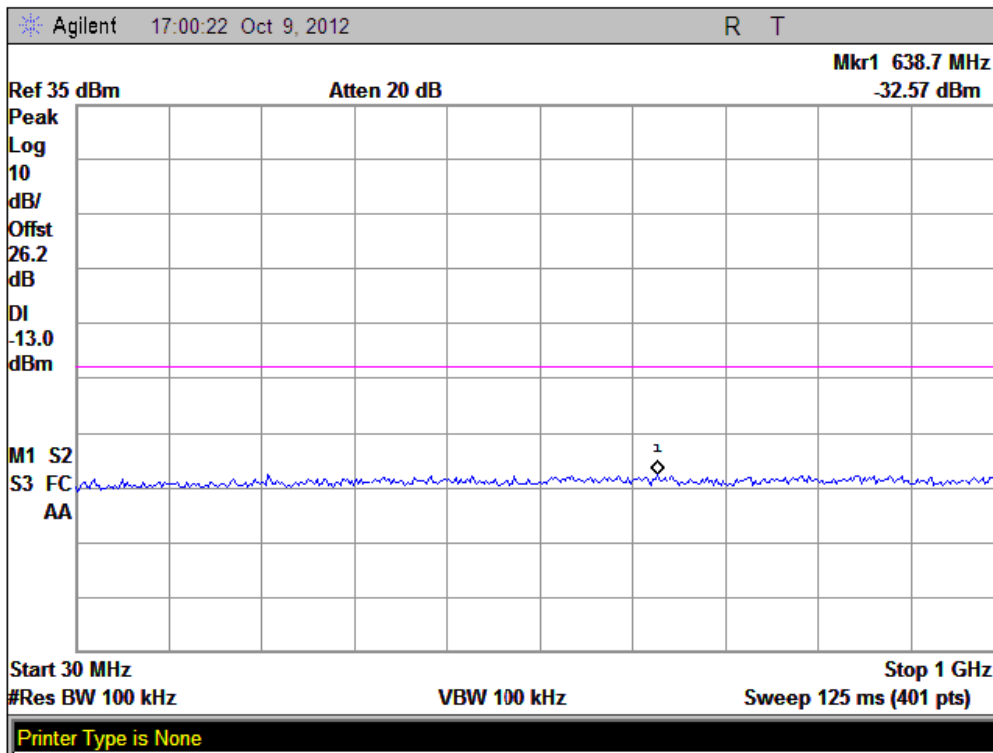


(Plot D2: GPRS 1900MHz Channel = 661, 30MHz to 1GHz)

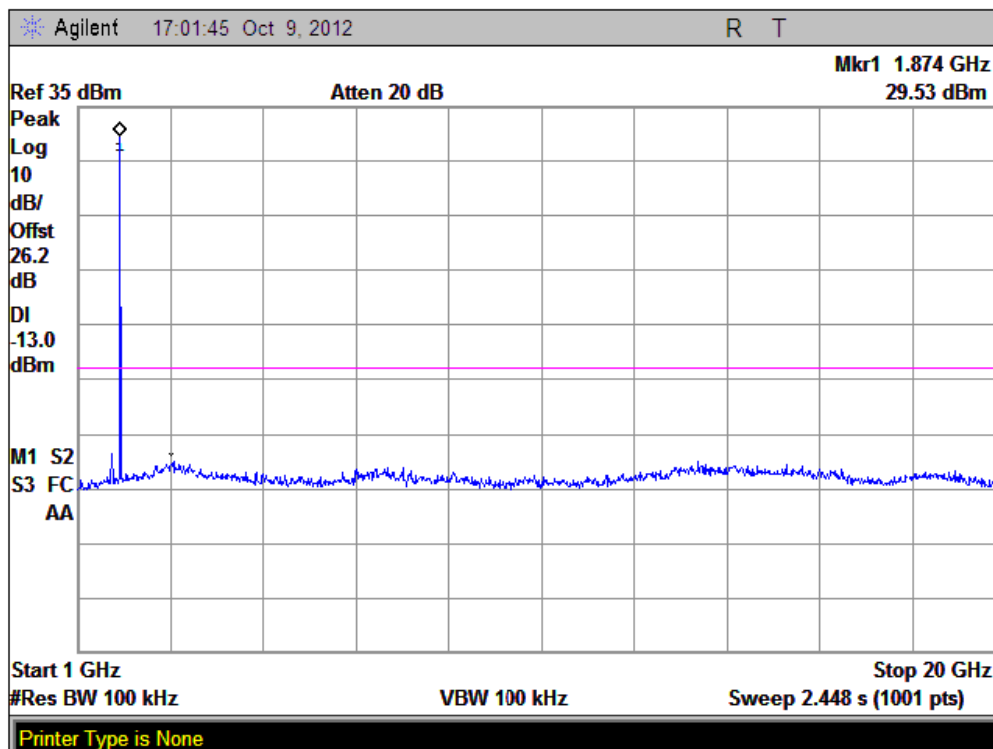

(Plot D2.1: GPRS 1900MHz Channel = 661, 1GHz to 20GHz)

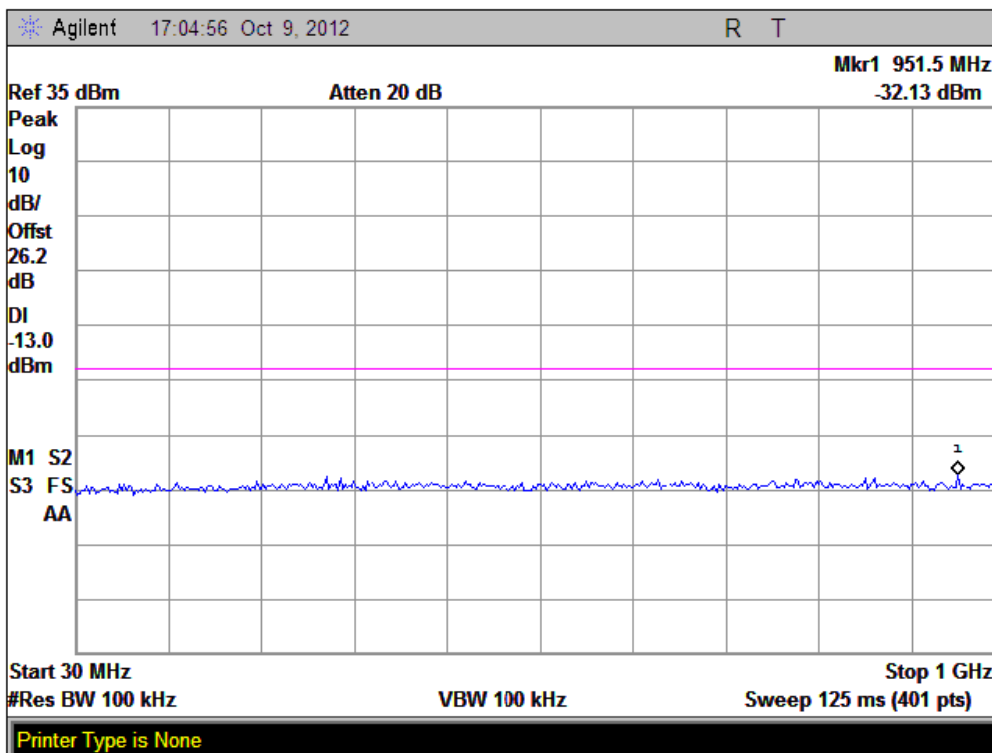

(Plot D3: GPRS 1900MHz Channel = 810, 30MHz to 1GHz)

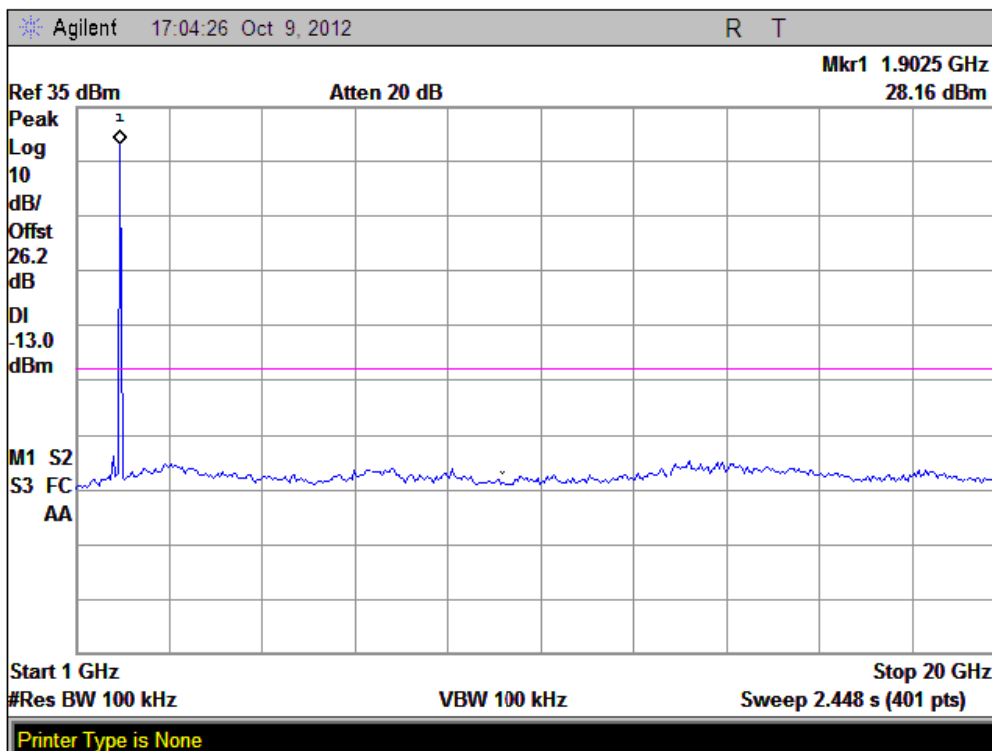

(Plot D3.1: GPRS 1900MHz Channel = 810, 1GHz to 20GHz)



2.5 Band Edge

2.5.1 Requirement

According to FCC section 22.917(b) and FCC section 24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result


The lowest and highest channels are tested to verify the band edge emissions.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-13.87	Plot 1	-13	PASS
	251	848.8	-13.4	Plot 2		PASS
GSM 1900MHz	512	1850.2	-18.5	Plot 3	-13	PASS
	810	1909.8	-17.79	Plot 4		PASS
GPRS 850MHz	128	824.2	-15.54	Plot 5	-13	PASS
	251	848.8	-16.62	Plot 6		PASS
GPRS 1900MHz	512	1850.2	-19.39	Plot 7	-13	PASS
	810	1909.8	-19.93	Plot 8		PASS




2. Test Plots:

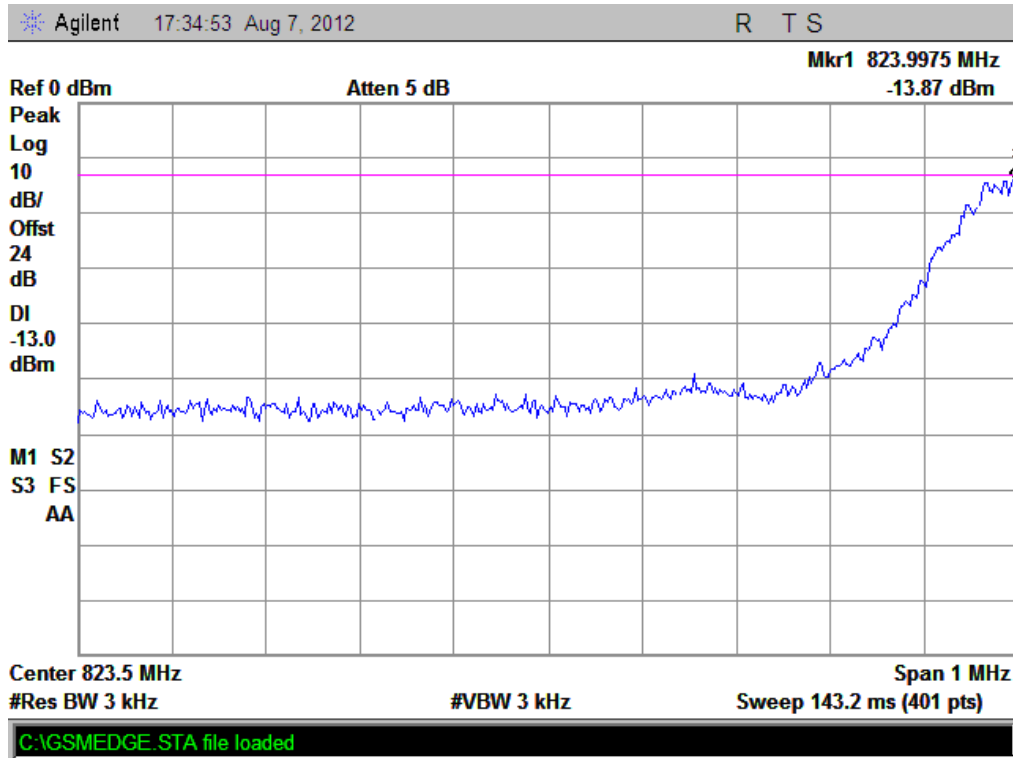


(Plot 1: GSM 850 Channel = 128)

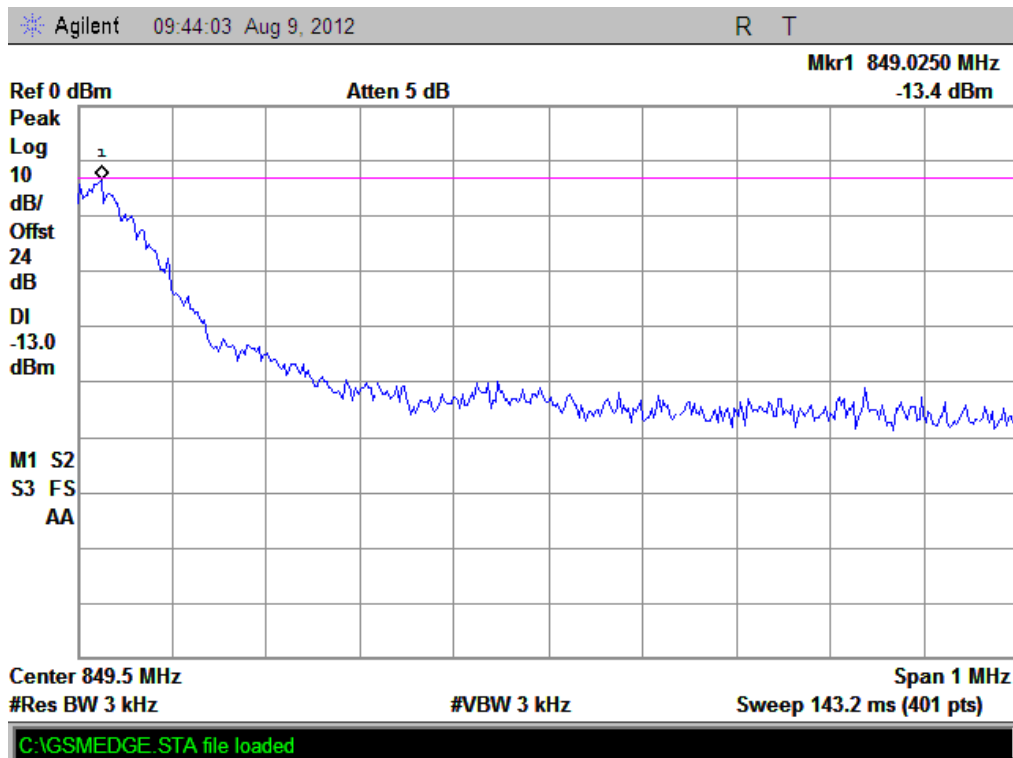


(Plot 2: GSM 850 Channel = 251)

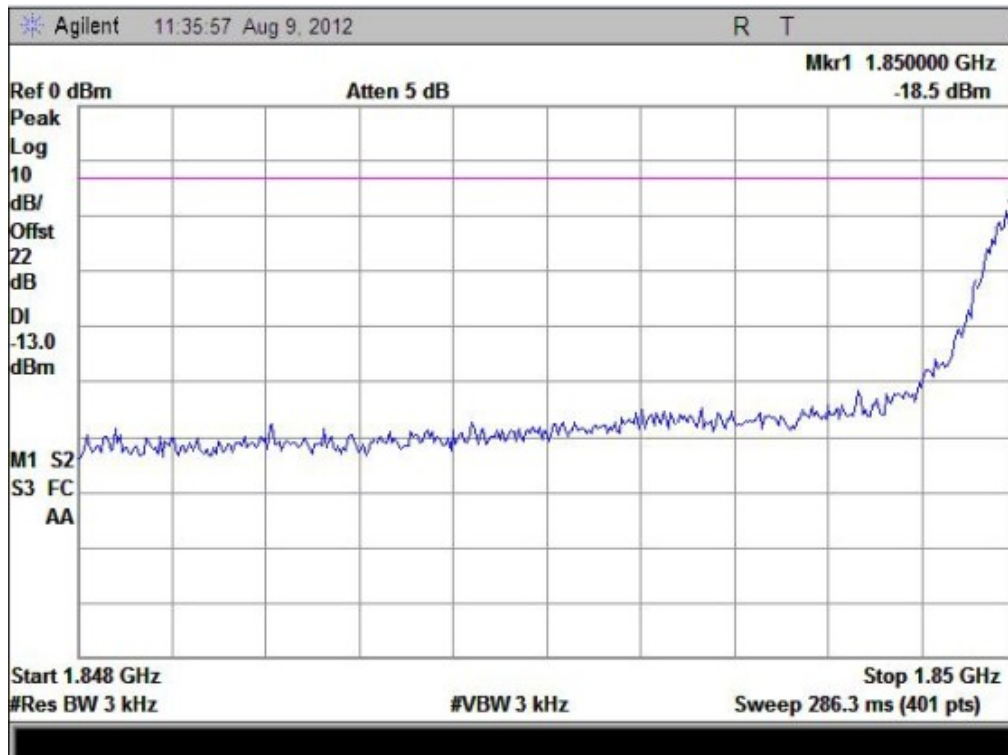


(Plot 3: GSM 1900 Channel = 512)

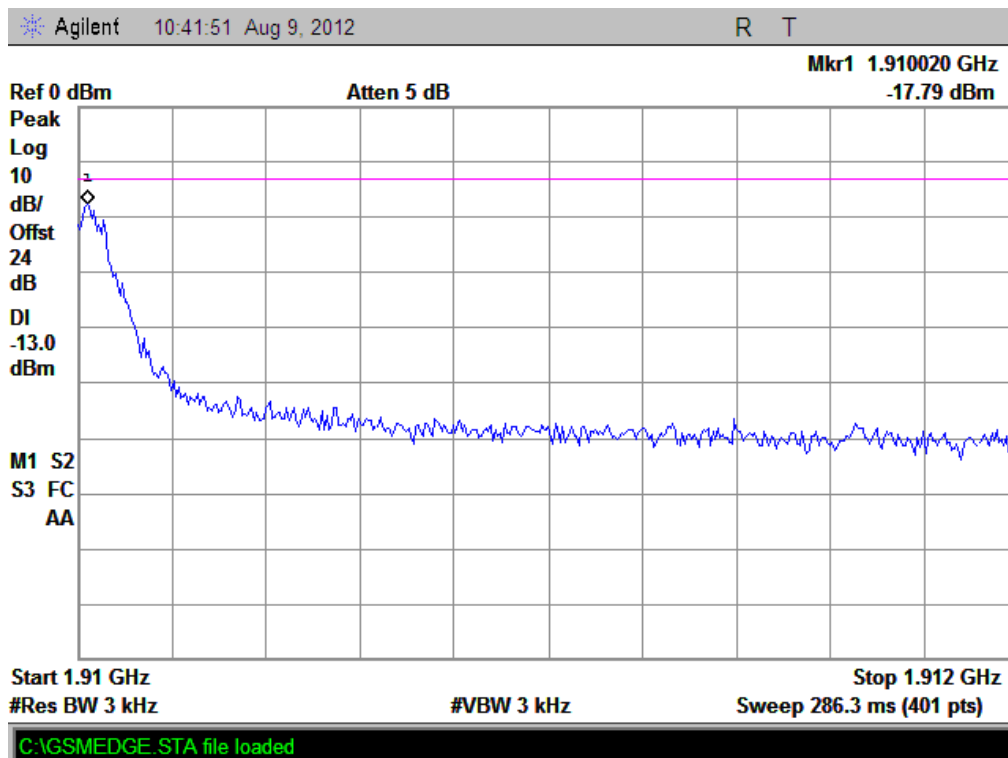


(Plot 4: GSM 1900 Channel = 810)

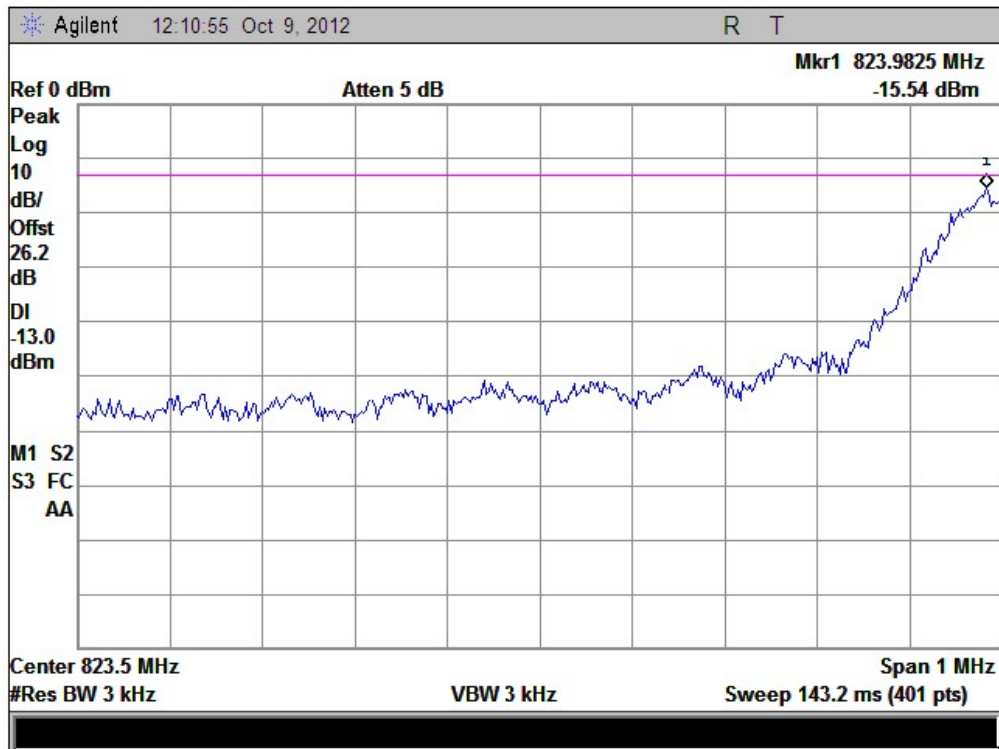


(Plot 5: GPRS 850 Channel = 128)

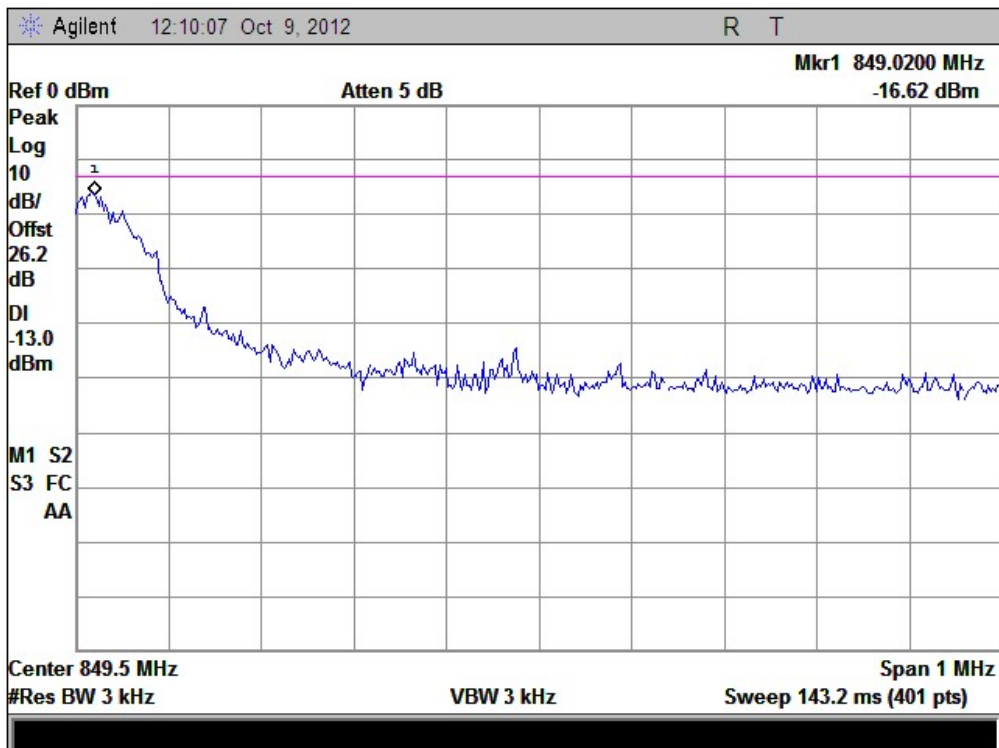

(Plot 6: GPRS 850 Channel = 251)

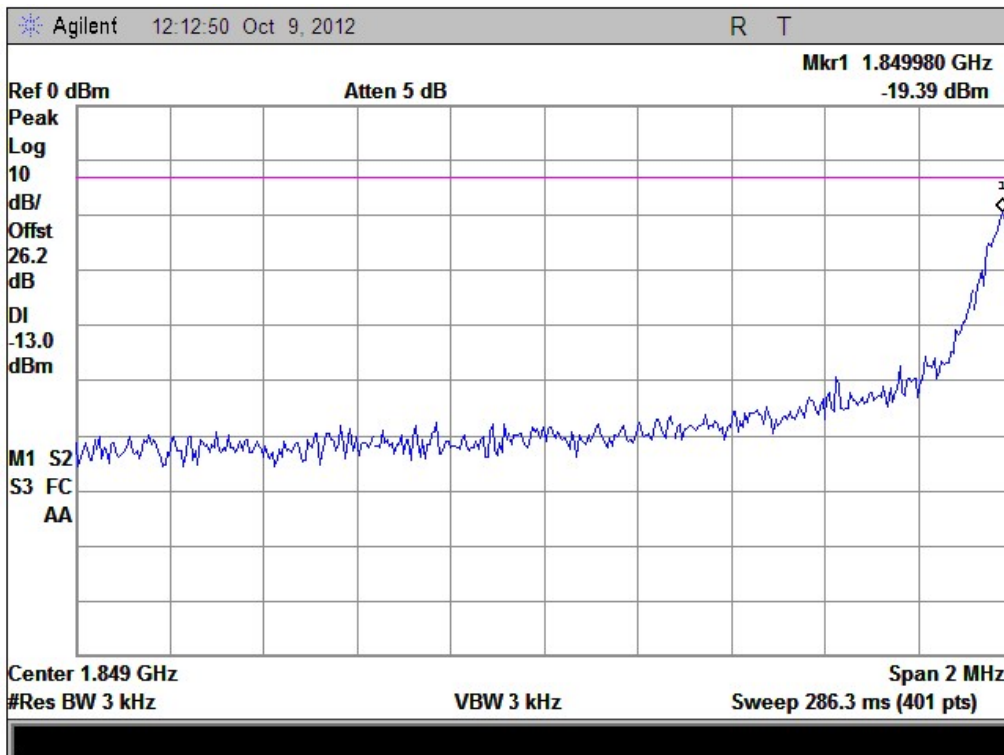

(Plot 7: GPRS 1900 Channel = 512)

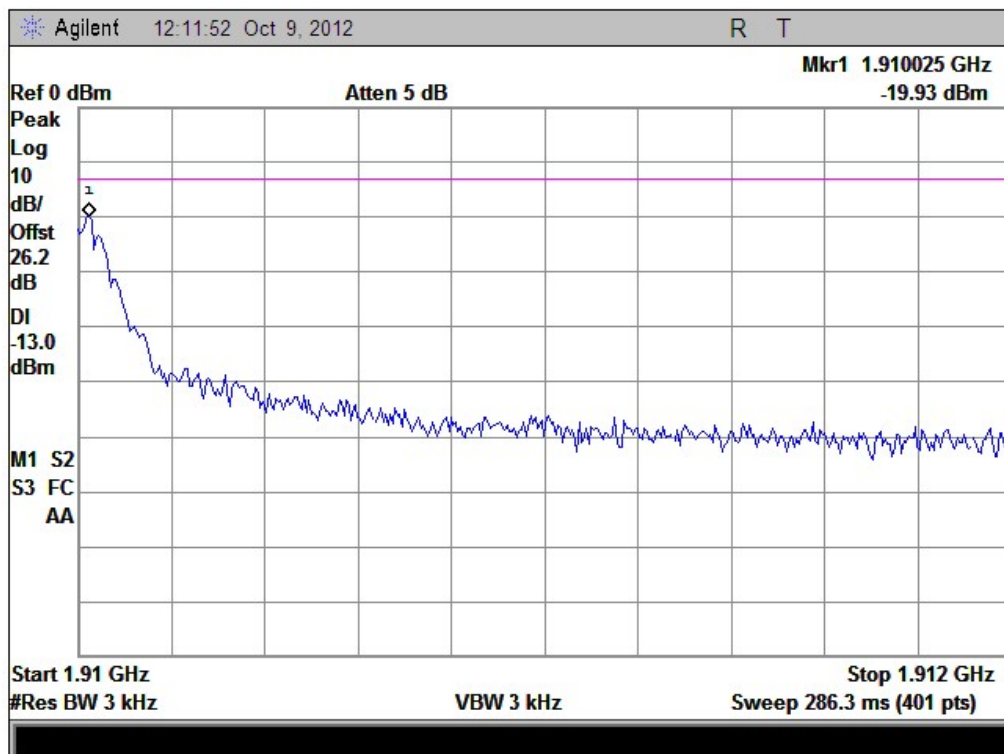

(Plot 8: GPRS 1900 Channel = 810)


2.6 Transmitter Radiated Power (EIRP/ERP)

2.6.1 Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

2.6.2 Test Description

1. Test Setup:

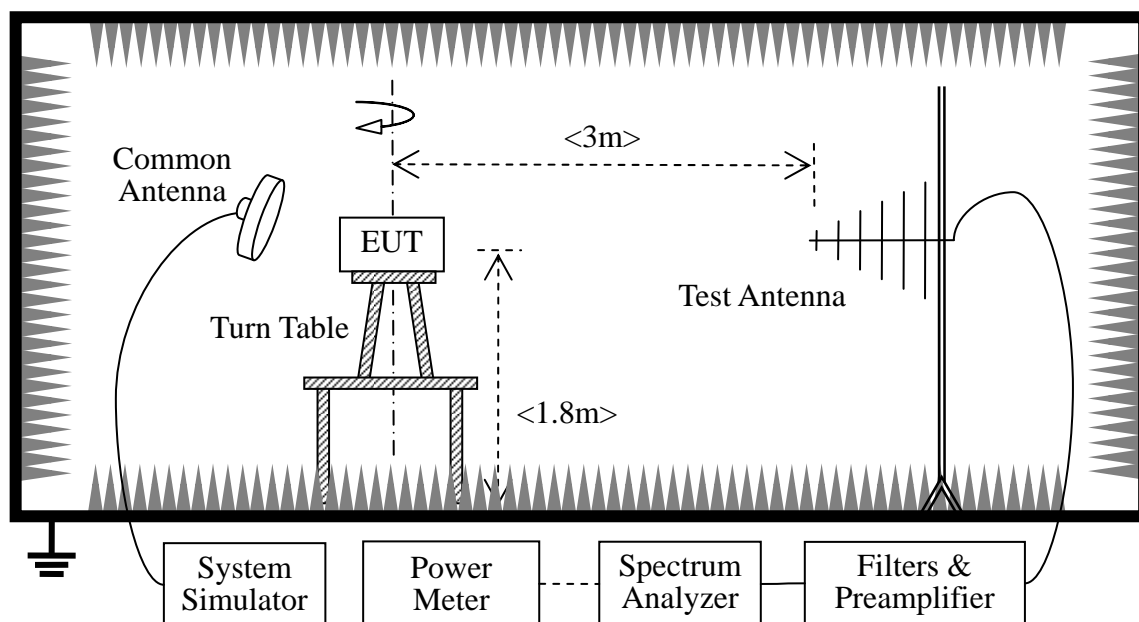

The EUT, which is powered by the Battery charged with the AC Adapter, is located in a 3m Full-Anechoic Chamber; the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded.

- GSM Maximum RF output power: GSM850 33.39dBm, GSM1900 29.47dBm, Please refer to section 2.1.3 of this report.

- Step size (dB): 3dB

- Minimum RF power: GSM850 2.9dBm, GSM 1900 0.5dBm.



The Test Antenna is a Bi-Log one (used for 30MHz to 1GHz) or a Horn one (used for above 3GHz), and it's located at the same height as the EUT. The Filters consists of Notch Filters and High Pass Filter.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	1100.008.02	2012.06
Spectrum Analyzer	Agilent	E7405A	US44210471	2012.06
Full-Anechoic Chamber	Albatross ~ Projects	12.8m*6.8m* 6.4m	A0412372	2012.06
Double ridge horn antenna	R&S	HF906	A0304225	2012.06
Ultra-wideband antenna	R&S	HL562	A0304224	2012.06

2.6.3 Test Result

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST_TX}} - P_{\text{SUBST_RX}} - L_{\text{SUBST_CABLES}} + G_{\text{SUBST_TX_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

$P_{\text{SUBST_TX}}$ is signal generator level,

$P_{\text{SUBST_RX}}$ is receiver level,

$L_{\text{SUBST_CABLES}}$ is cable losses including TX cable,

$G_{\text{SUBST_TX_ANT}}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the Test Spectrum Analyze, so Spectrum Analyze reading is the final values which contain the data of A_{TOT} .




1. GSM Model Test Verdict:


Band	Channel	Frequency (MHz)	PCL	Measured ERP			Limit		Verdict
				dBm	W	Refer to Plot	dBm	W	
GSM 850MHz	128	824.20	5	33.88	2.44343	Plot A	38.5	7	PASS
	190	836.60	5	33.18	2.07970				PASS
	251	848.80	5	33.84	2.42103				PASS
GPRS 850MHz	128	824.20	5	30.26	1.06170	Plot B ^{Note 1}	38.5	7	PASS
	190	836.60	5	30.66	1.16413				PASS
	251	848.80	5	31.19	1.31523				PASS

Band	Channel	Frequency (MHz)	PCL	Measured EIRP			Limit		Verdict
				dBm	W	Refer to Plot	dBm	W	
GSM 1900MHz	512	1850.2	0	31.13	1.29718	Plot C	33	2	PASS
	661	1880.0	0	29.10	0.81283				PASS
	810	1909.8	0	29.41	0.87297				PASS
GPRS 1900MHz	512	1850.2	0	27.40	0.550	Plot D ^{Note 1}	33	2	PASS
	661	1880.0	0	27.18	0.522				PASS
	810	1909.8	0	27.04	0.506				PASS


2. Test Plots:

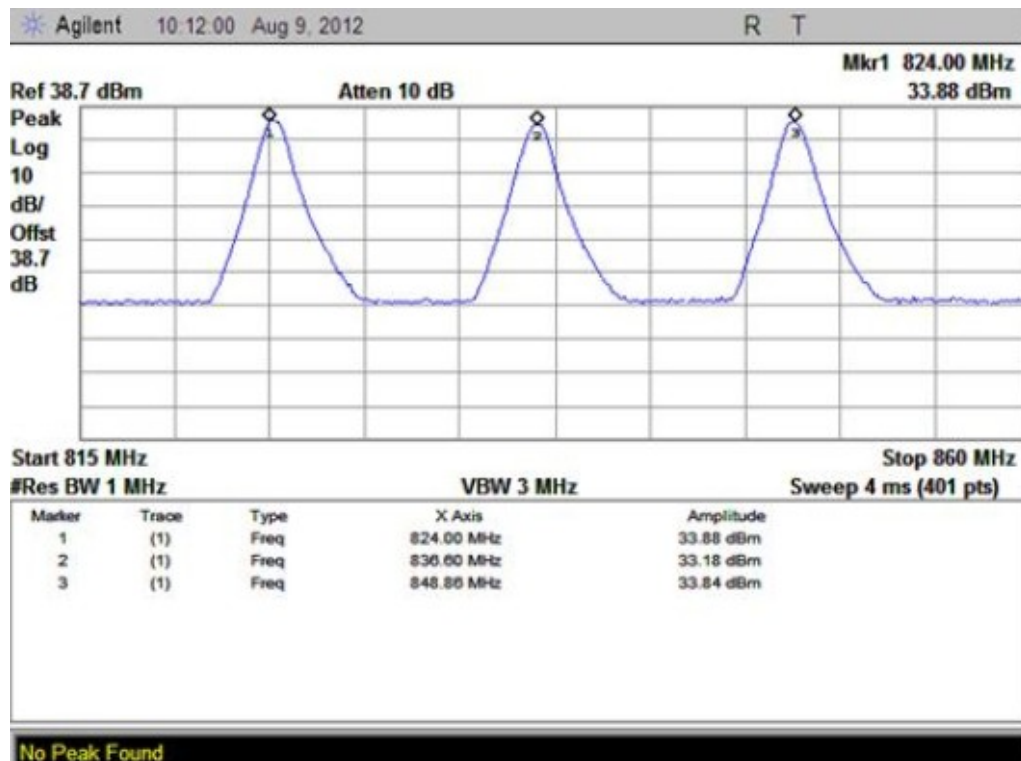


(Plot A: GSM 850MHz Channel = 128, 190, 251)

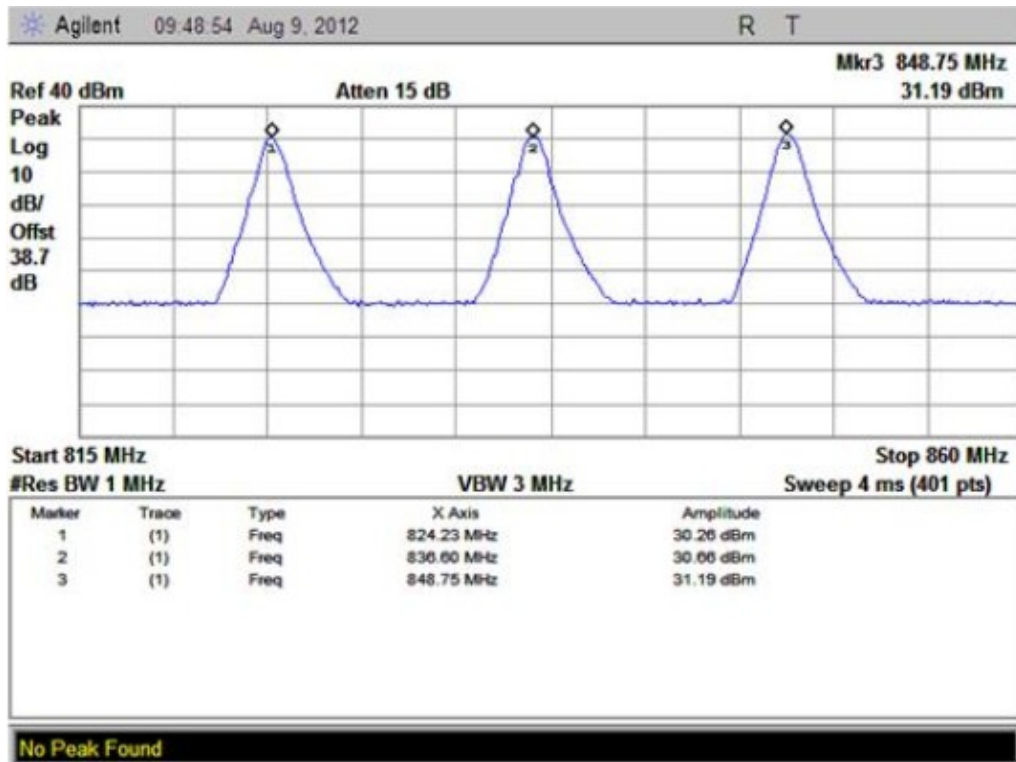

(Plot B: GPRS 850MHz Channel = 128, 190, 251)

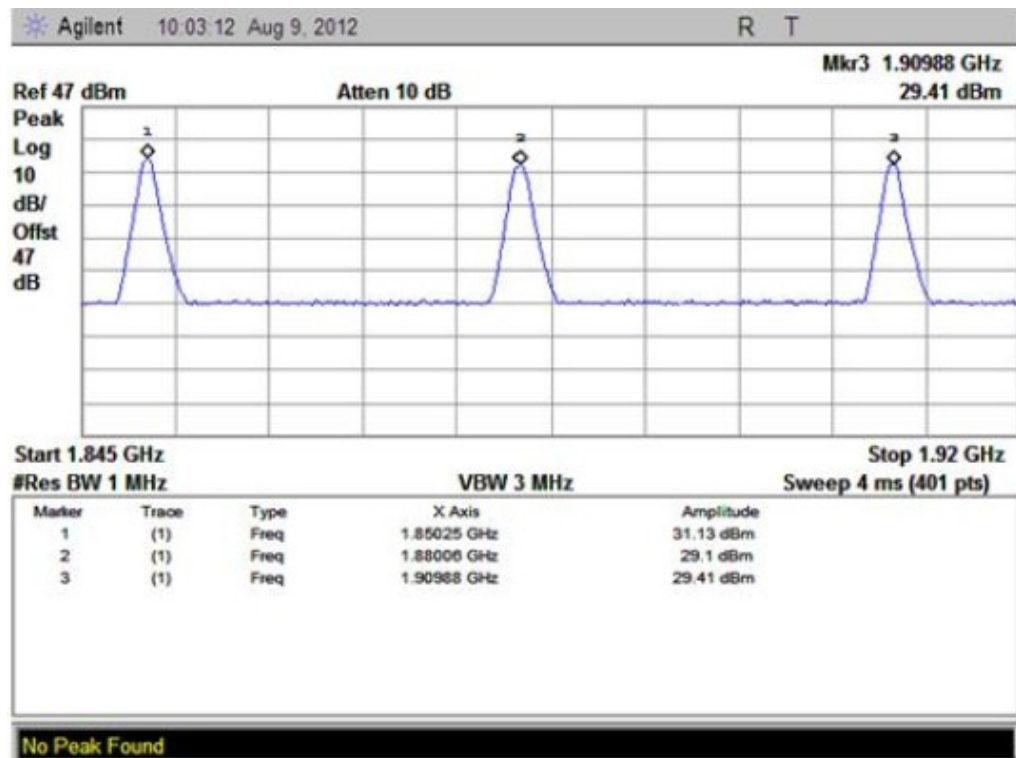

(Plot C: GSM1900MHz Channel = 512, 661, 810)

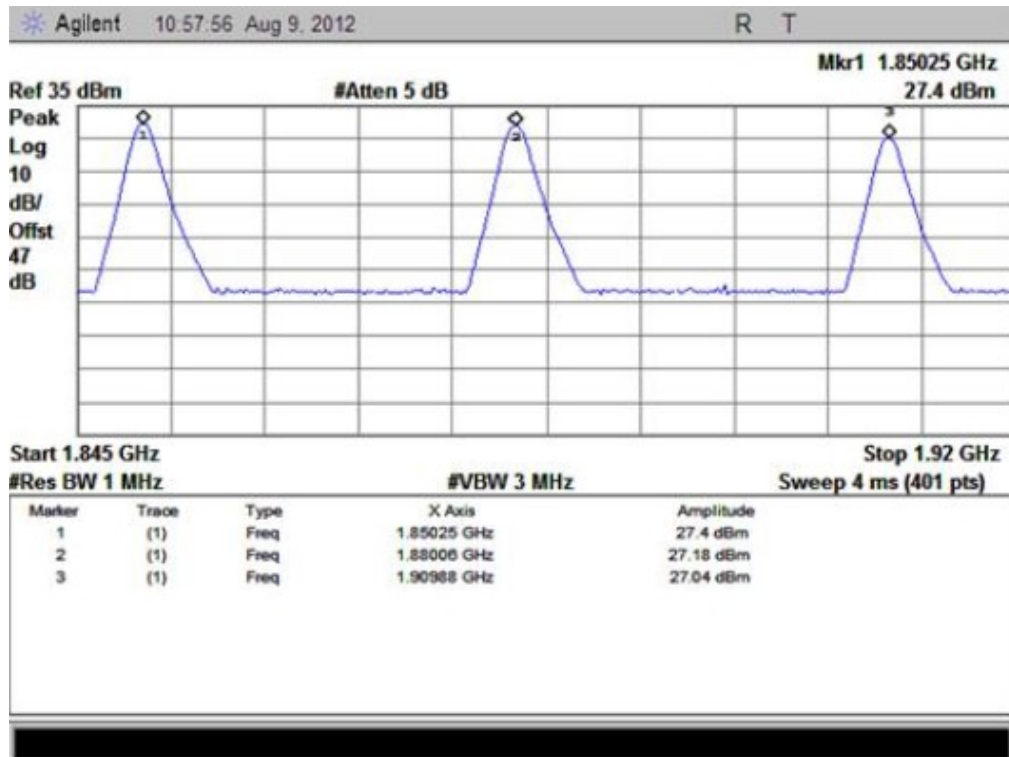

(Plot D: GPRS 1900MHz Channel = 512, 661, 810)



2.7 Radiated Out of Band Emissions

2.7.1 Requirement

According to FCC section 22.917(a) and section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.7.2 Test Description

See section 2.6.2 of this report.

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.7.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical			
GSM 850MHz	128	824.2	< -25	< -25	Plot A.1/A.2	-13	PASS
	190	836.6	< -25	< -25	Plot A.3/A.4		PASS
	251	848.8	< -25	< -25	Plot A.5/A.6		PASS
GSM 1900MHz	512	1850.2	< -25	< -25	Plot B.1/B.2	-13	PASS
	661	1880.0	< -25	< -25	Plot B.3/B.4		PASS
	810	1909.8	< -25	< -25	Plot B.5/B.6		PASS
GPRS 850MHz	128	824.2	< -25	< -25	Plot C.1/C.2	-13	PASS
	190	836.6	< -25	< -25	Plot C.3/C.4		PASS
	251	848.8	< -25	< -25	Plot C.5/C.6		PASS
GPRS 1900MHz	512	1850.2	< -25	< -25	Plot D.1/D.2	-13	PASS
	661	1880.0	< -25	< -25	Plot D.3/D.4		PASS
	810	1909.8	< -25	< -25	Plot D.5/D.6		PASS




2. Test Plots for the Whole Measurement Frequency Range:

Note1: the power of the EUT transmitting frequency should be ignored.


Note2: All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

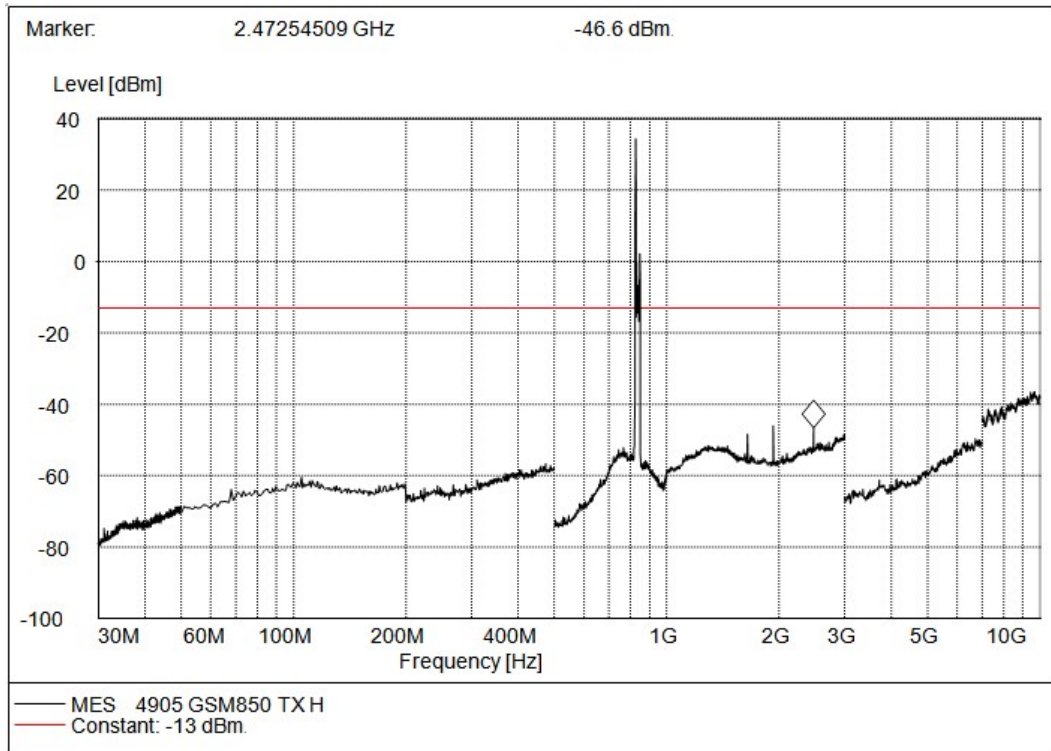


(Plot A.1: GSM 850MHz Channel = 128, Test Antenna Horizontal)

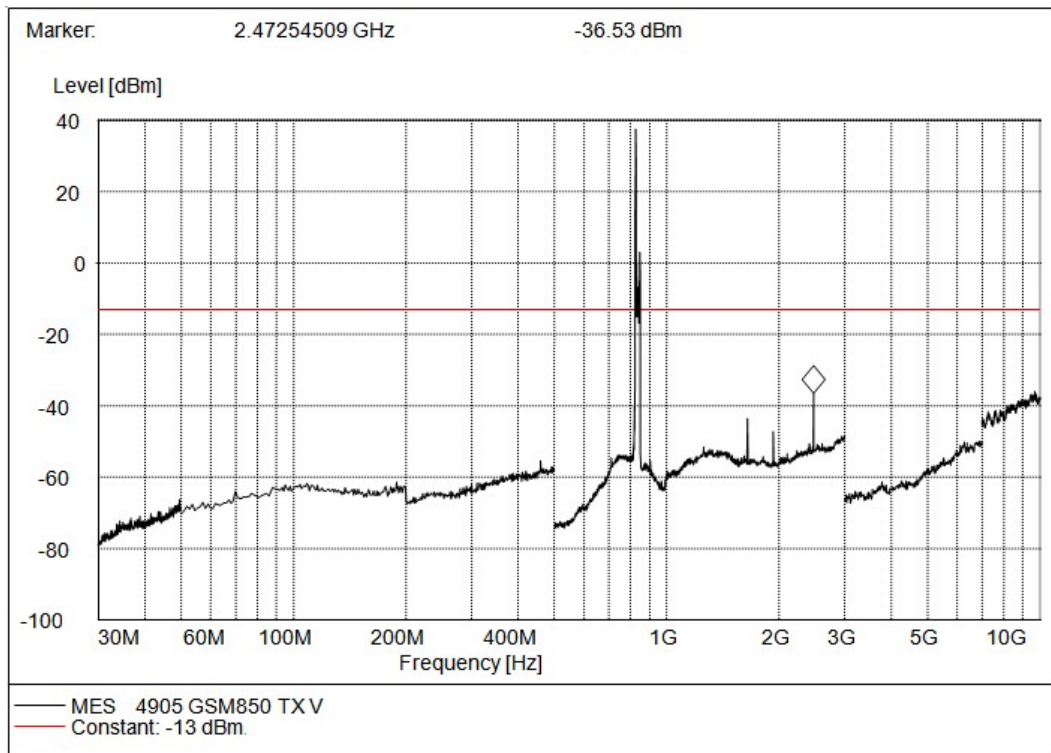


(Plot A.2: GSM 850MHz Channel = 128, Test Antenna Vertical)

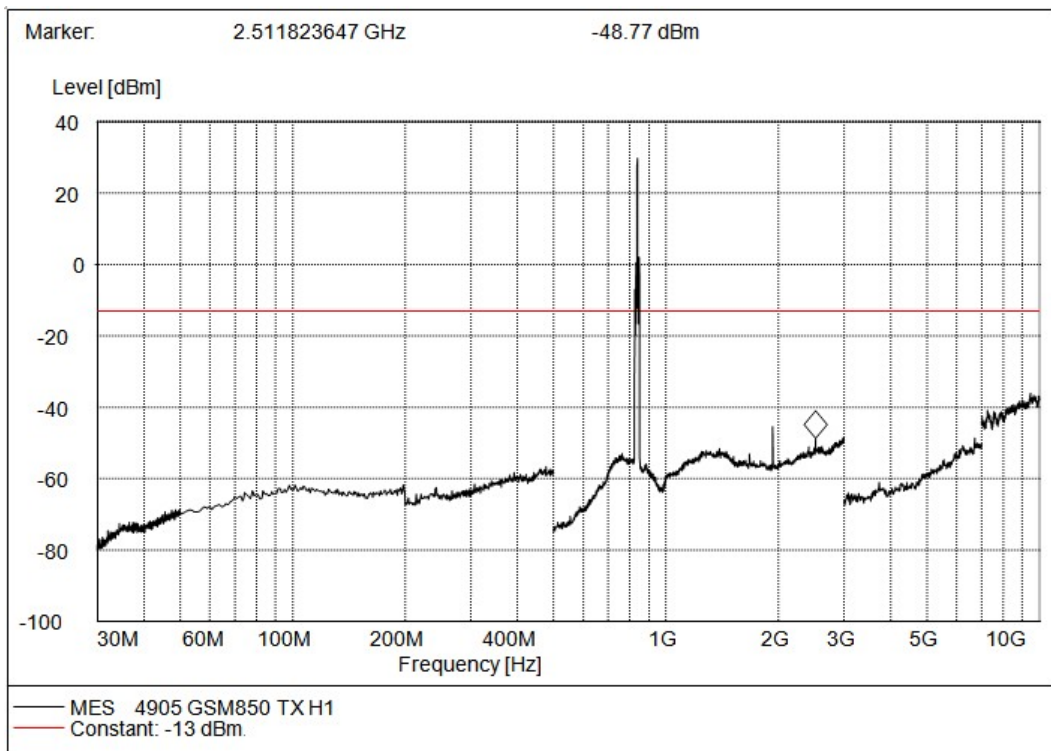


(Plot A.3: GSM 850MHz Channel = 190, Test Antenna Horizontal)

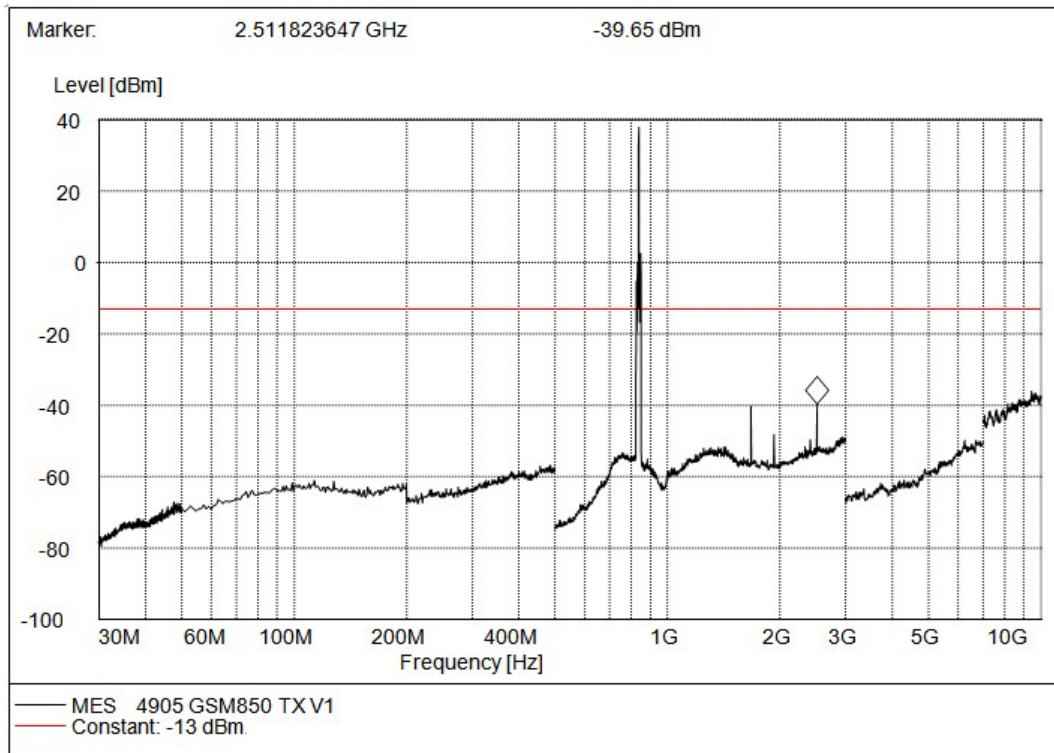


(Plot A.4: GSM 850MHz Channel = 190, Test Antenna Vertical)

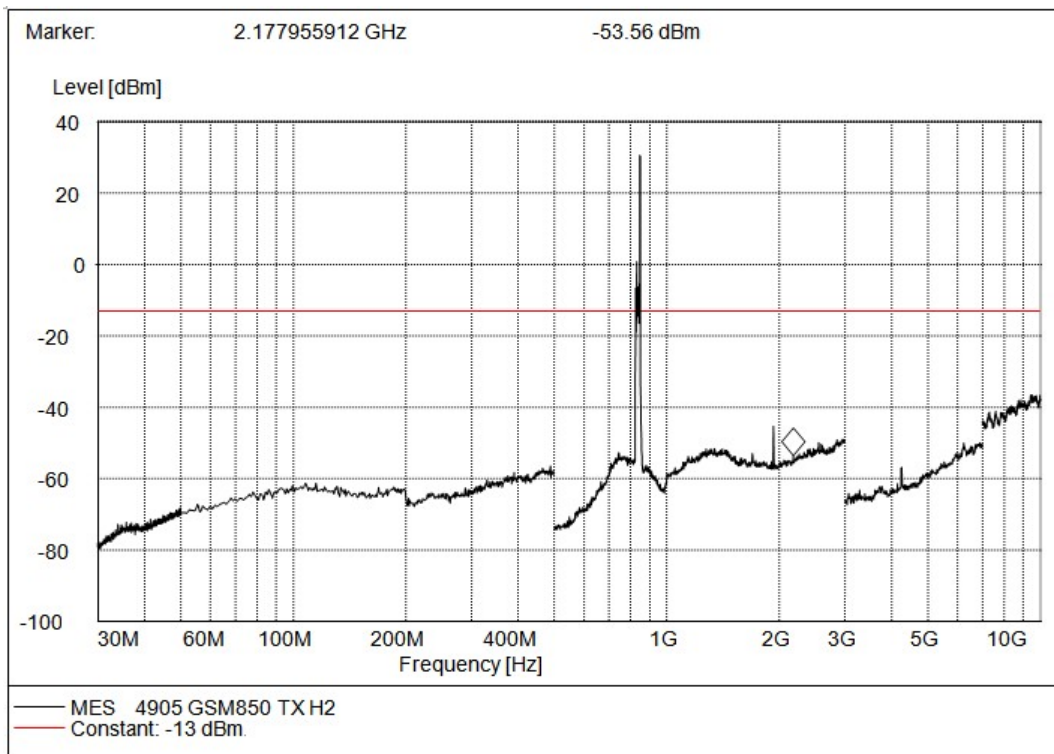


(Plot A.5: GSM 850MHz Channel = 251, Test Antenna Horizontal)

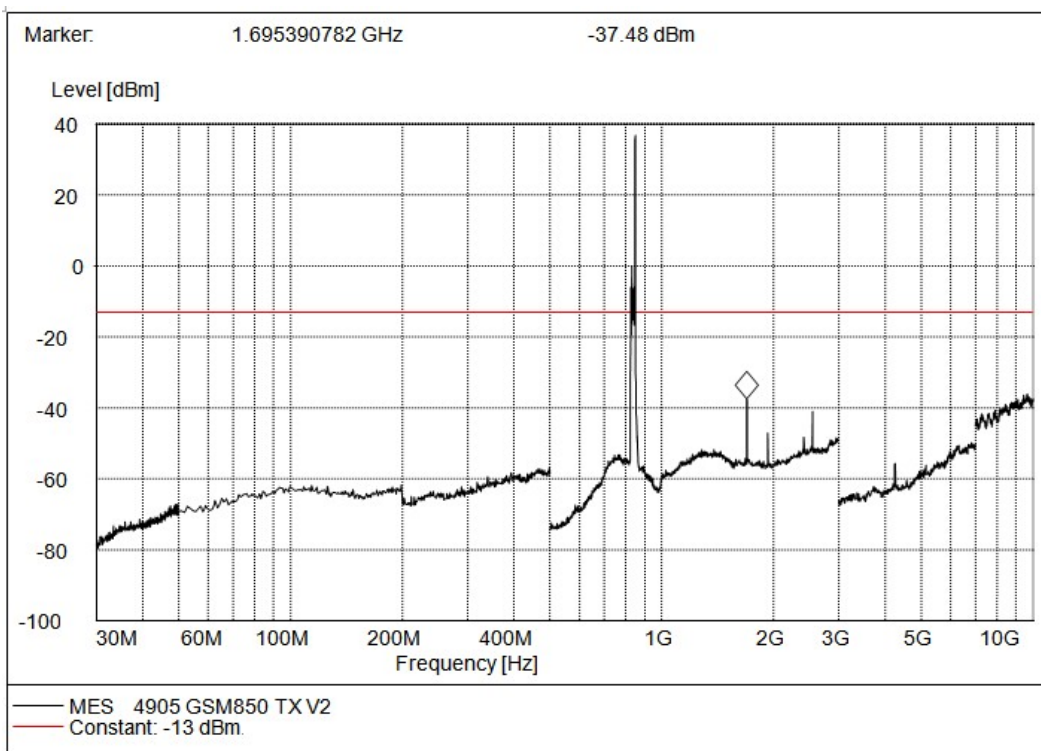


(Plot A.6: GSM 850MHz Channel = 251, Test Antenna Vertical)

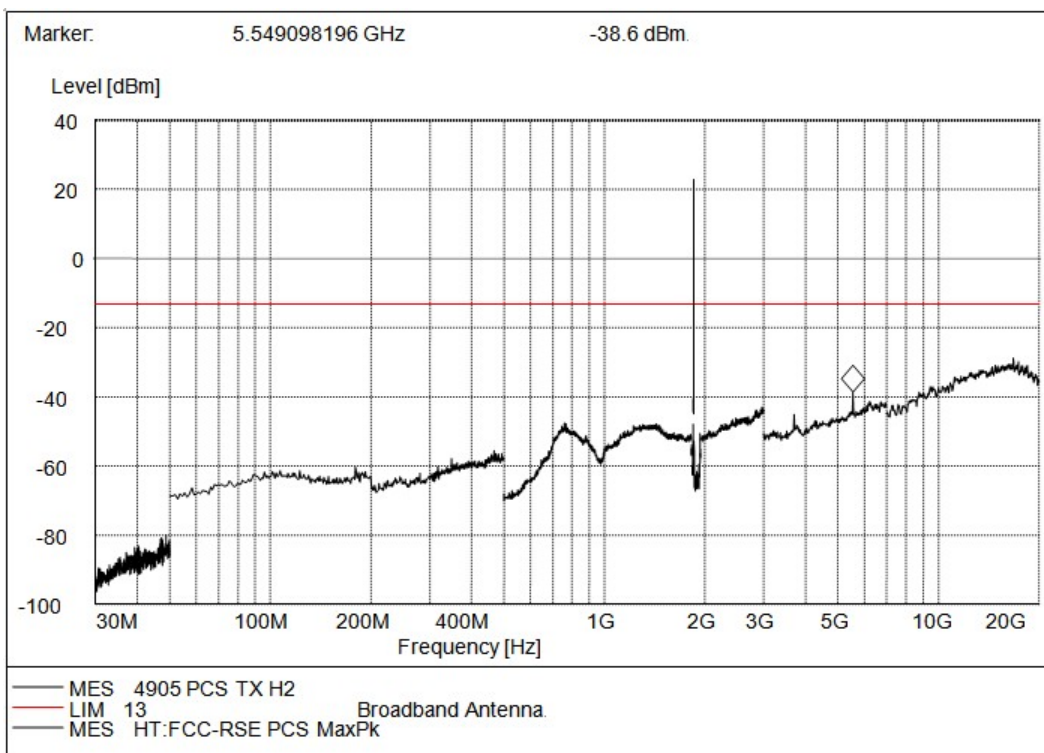


(Plot B.1: GSM 1900MHz Channel = 512, Test Antenna Horizontal)

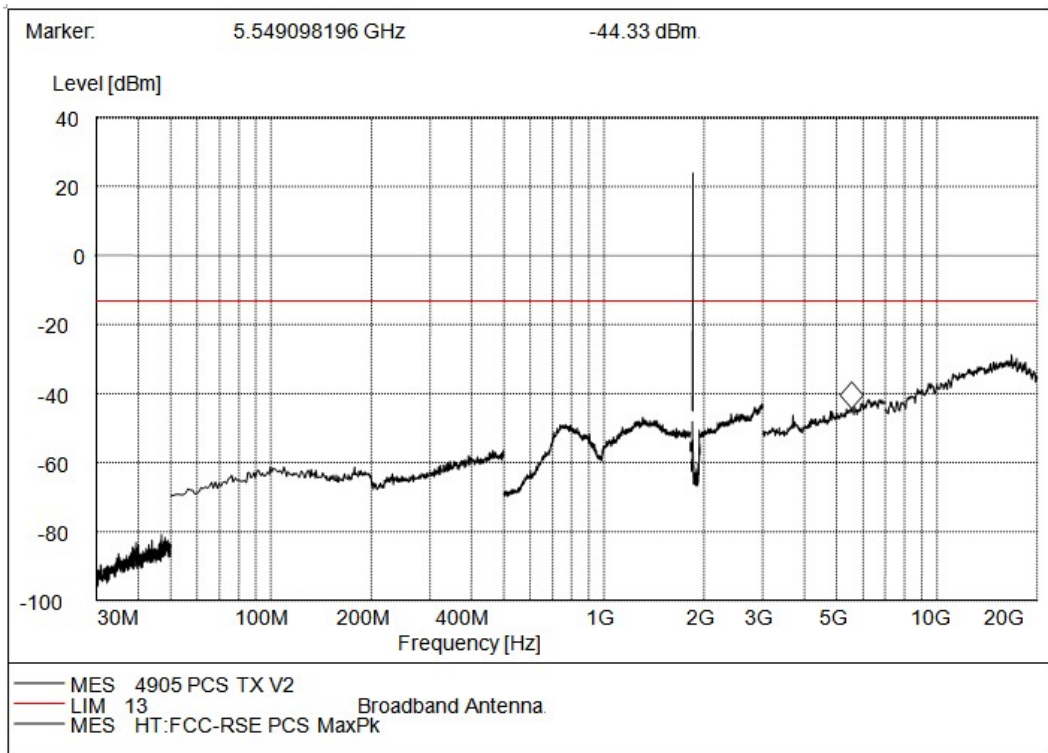


(Plot B.2: GSM 1900MHz Channel = 512, Test Antenna Vertical)

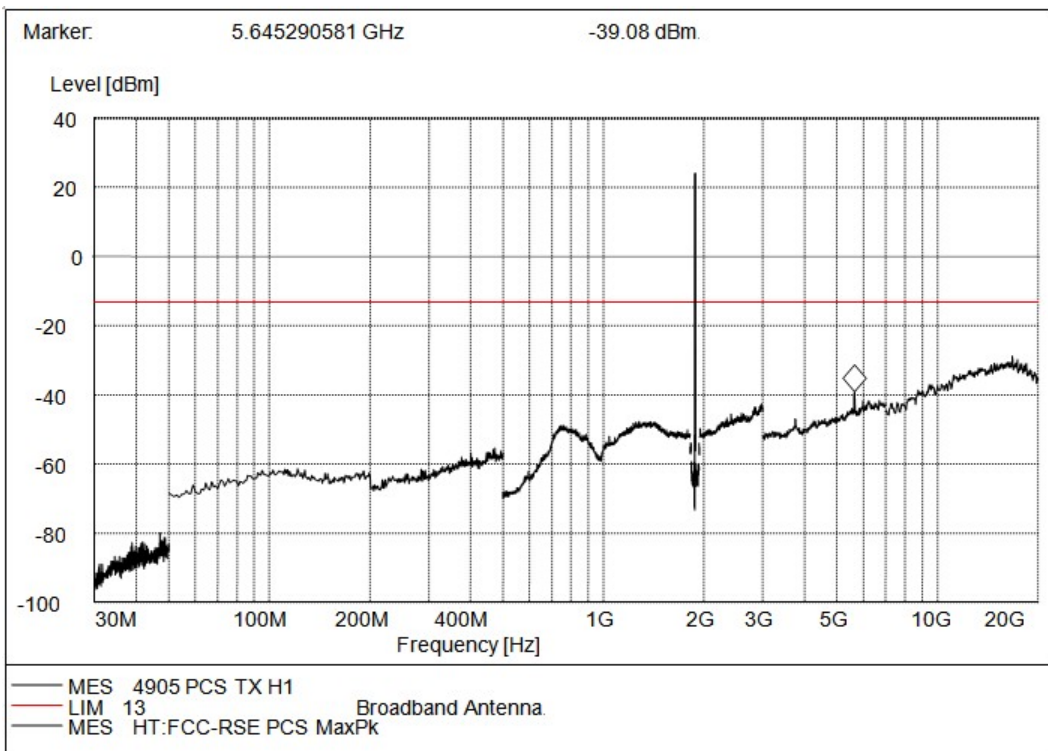


(Plot B.3: GSM 1900MHz Channel = 661, Test Antenna Horizontal)

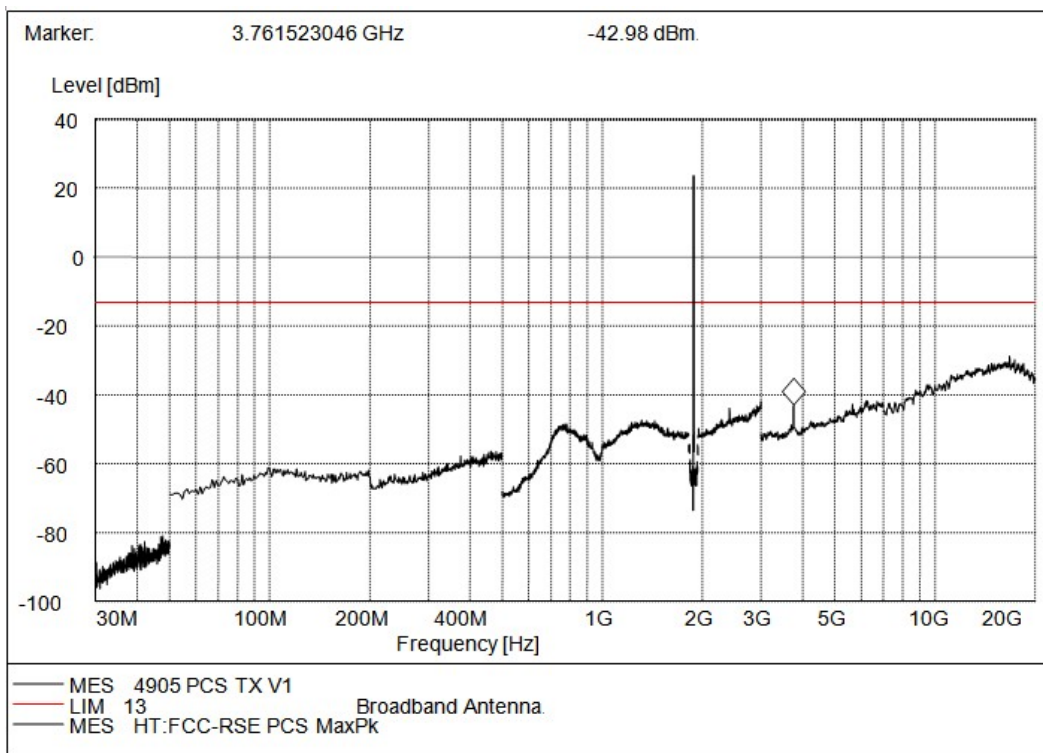


(Plot B.4: GSM 1900MHz Channel = 661, Test Antenna Vertical)

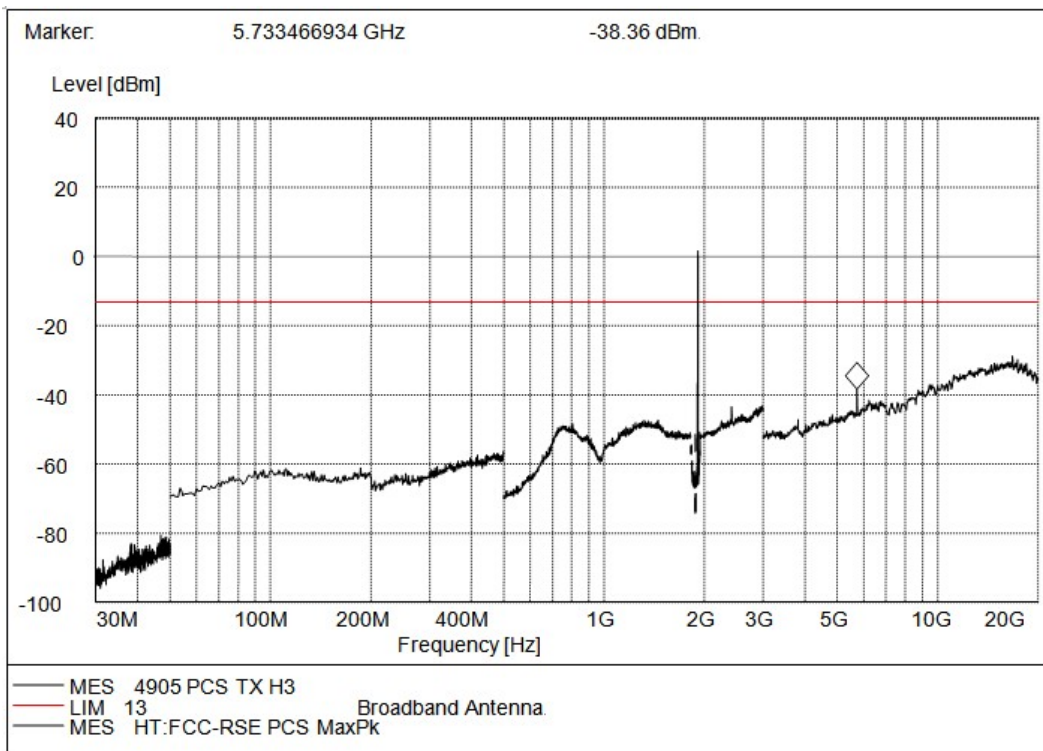


(Plot B.5: GSM 1900MHz Channel = 810, Test Antenna Horizontal)

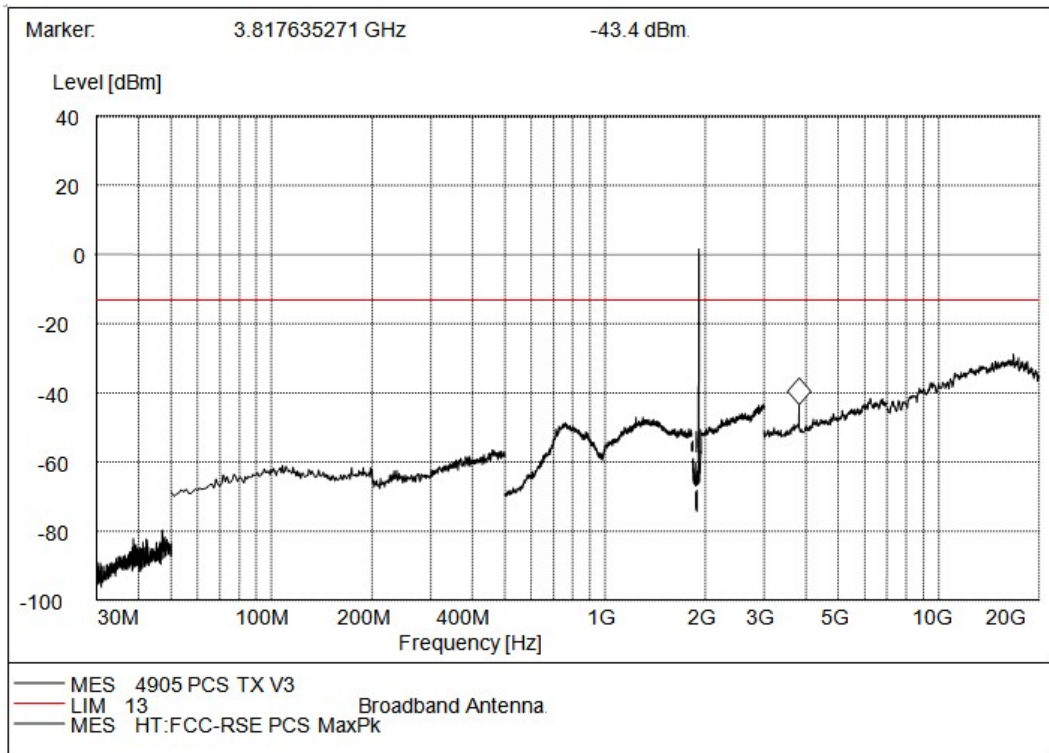


(PlotB.6: GSM 1900MHz Channel = 810, Test Antenna Vertical)

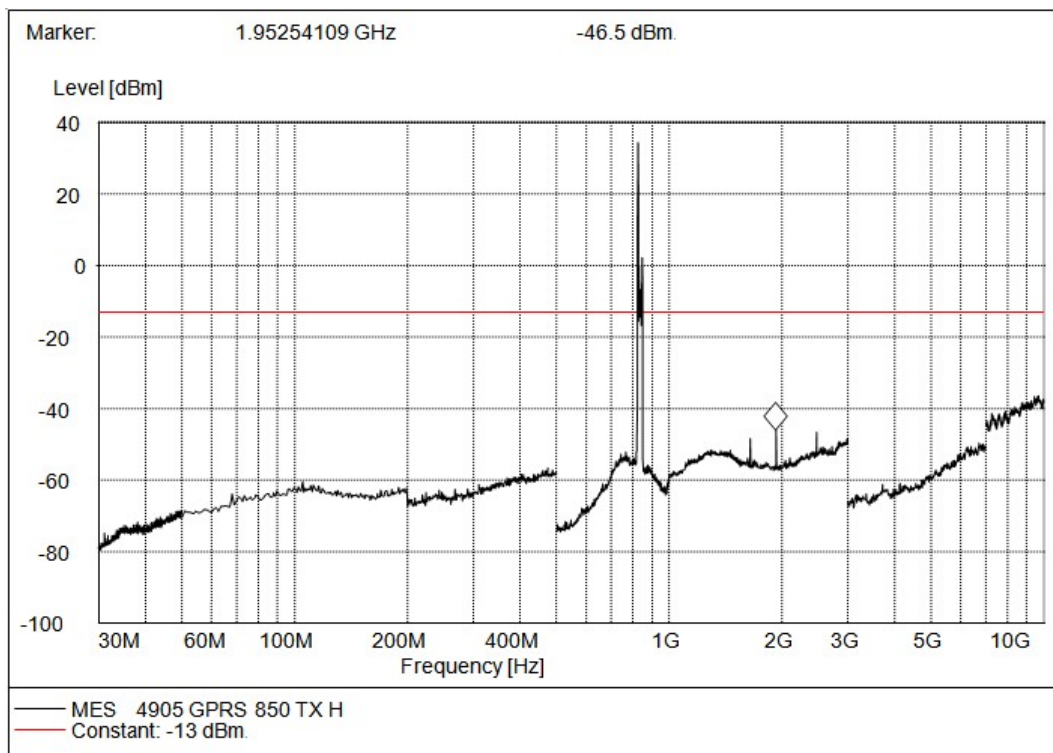


(Plot C.1: GPRS 850MHz Channel = 128, Test Antenna Horizontal)

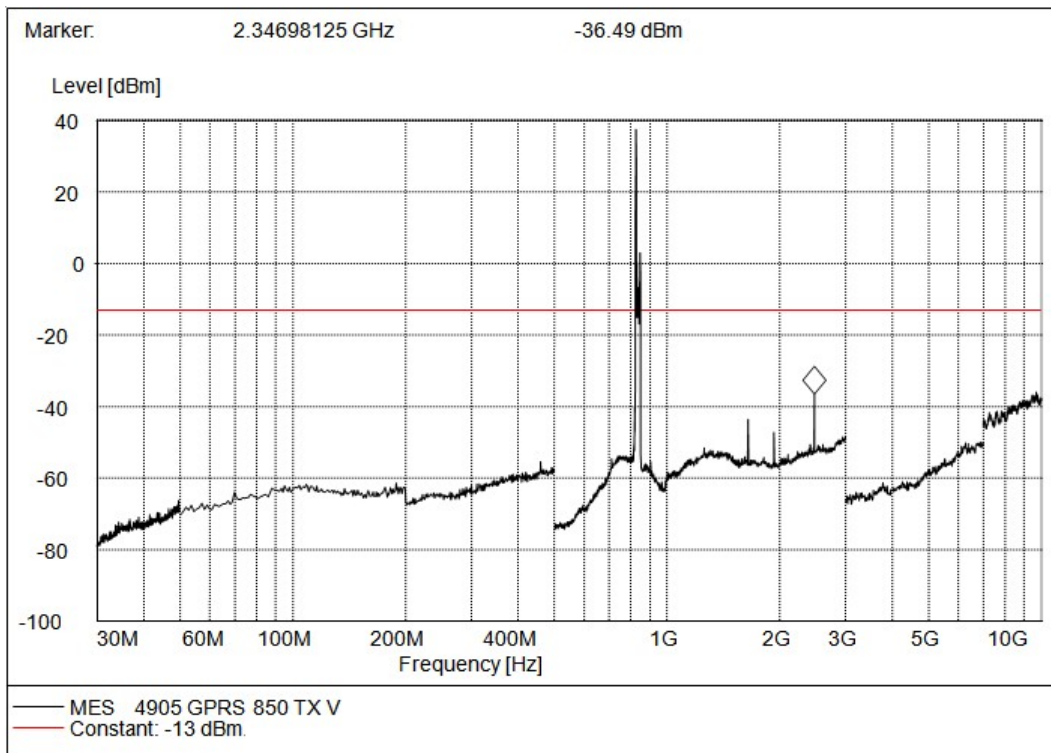


(PlotC.2: GPRS 850MHz Channel = 128, Test Antenna Vertical)

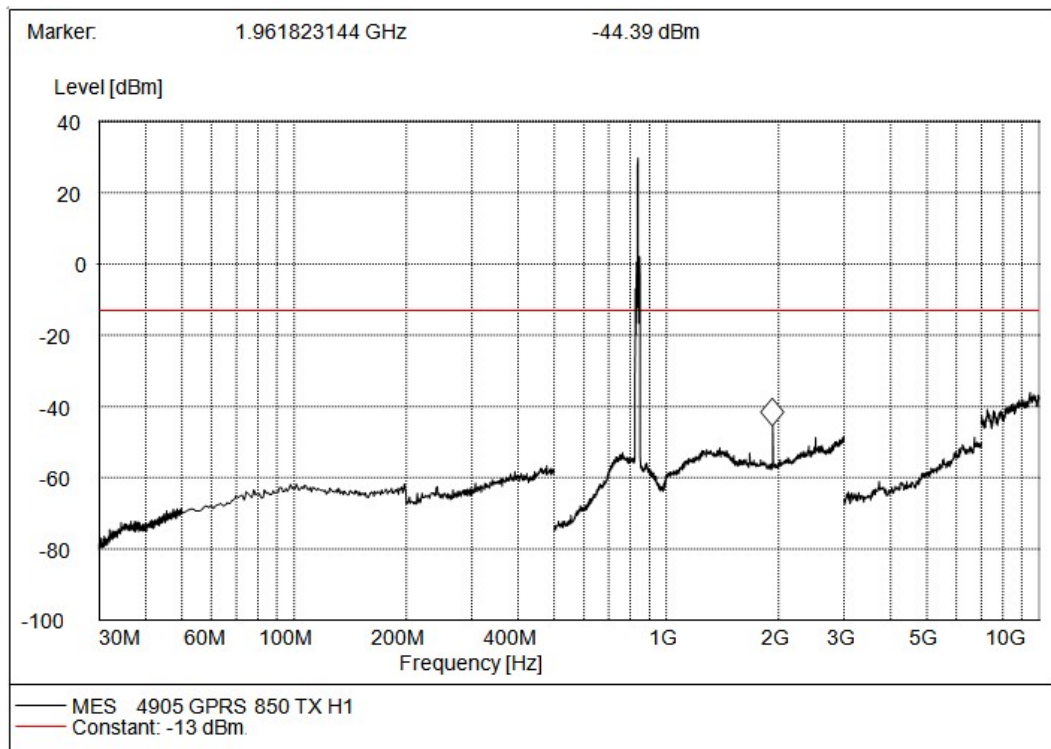


(Plot C.3: GPRS 850MHz Channel = 190, Test Antenna Horizontal)

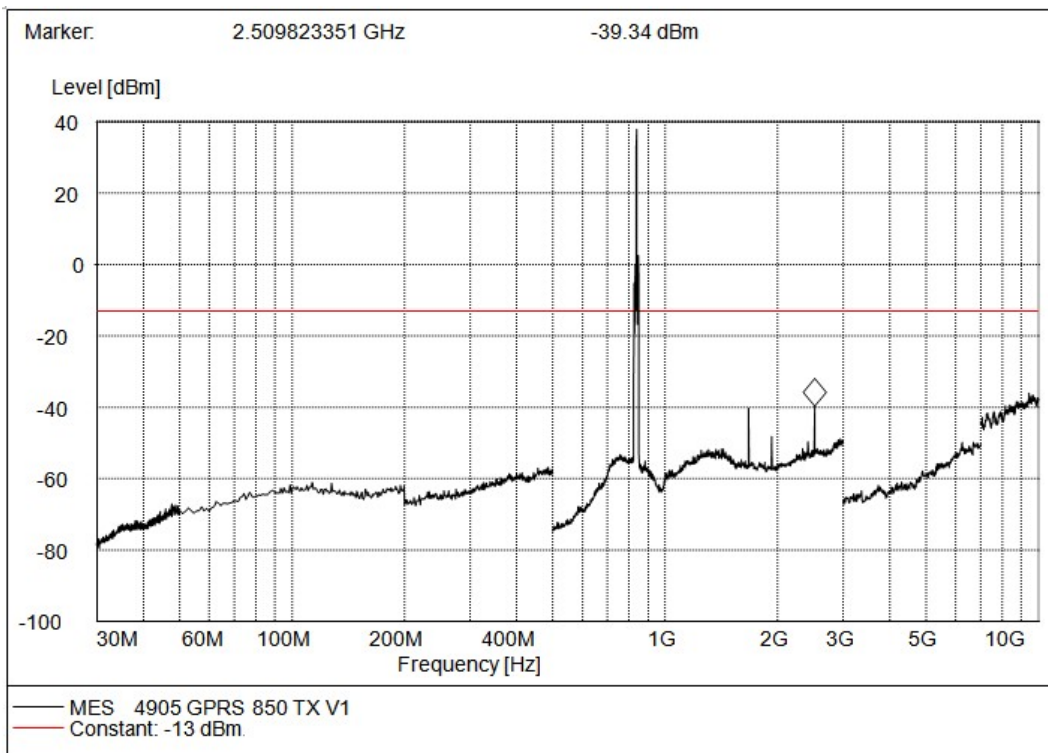


(PlotC.4: GPRS 850MHz Channel = 190, Test Antenna Vertical)

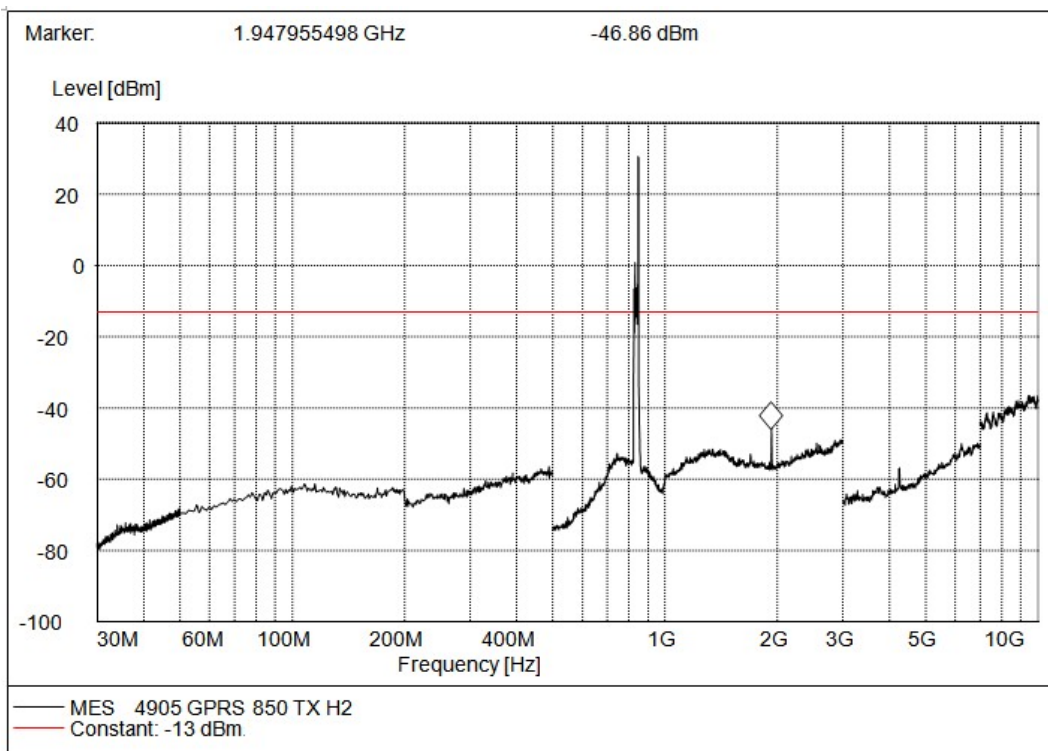


(Plot C.5: GPRS 850MHz Channel = 251, Test Antenna Horizontal)

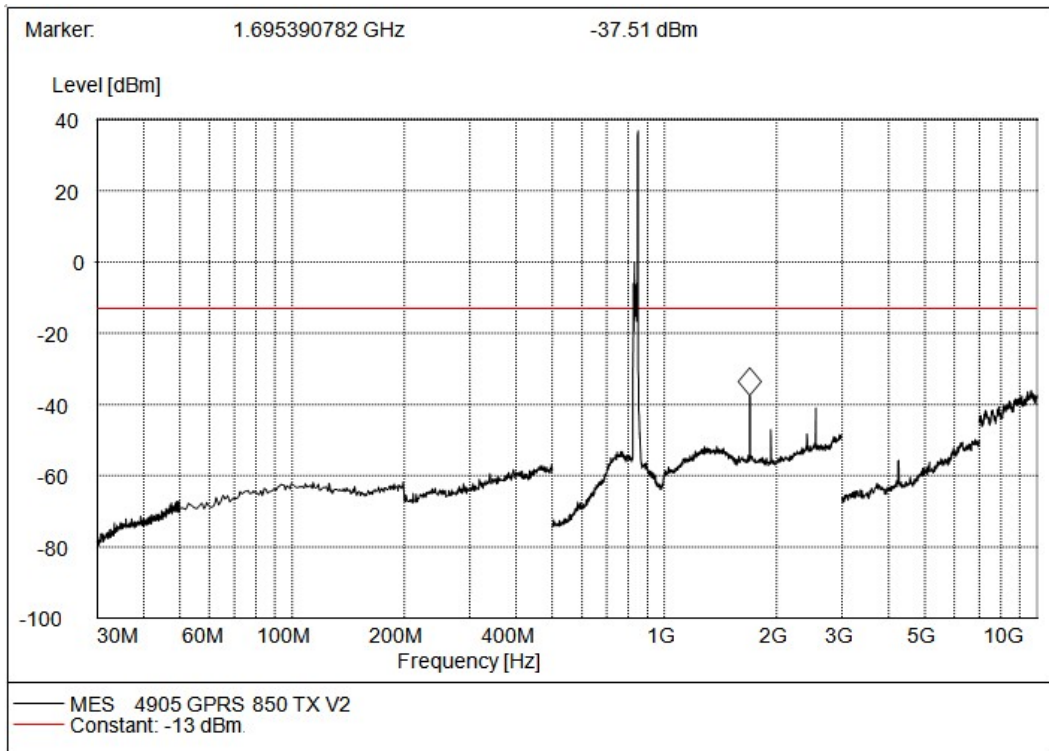


(PlotC.6: GPRS 850MHz Channel = 251, Test Antenna Vertical)

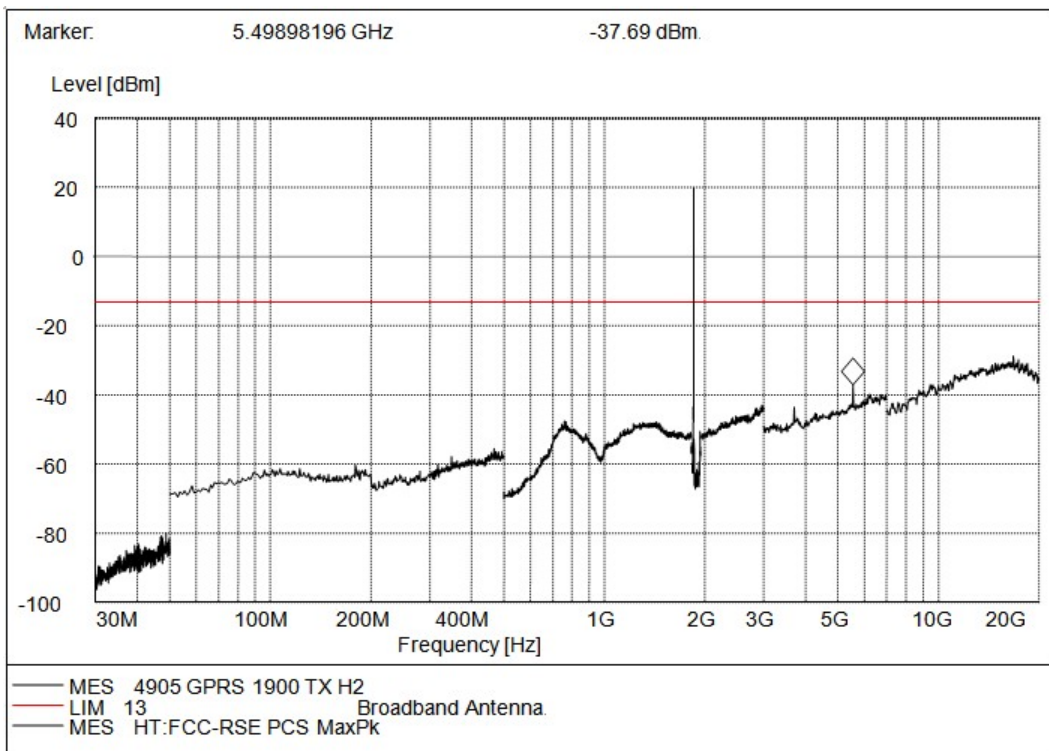


(Plot D.1: GPRS 1900MHz Channel = 512, Test Antenna Horizontal)

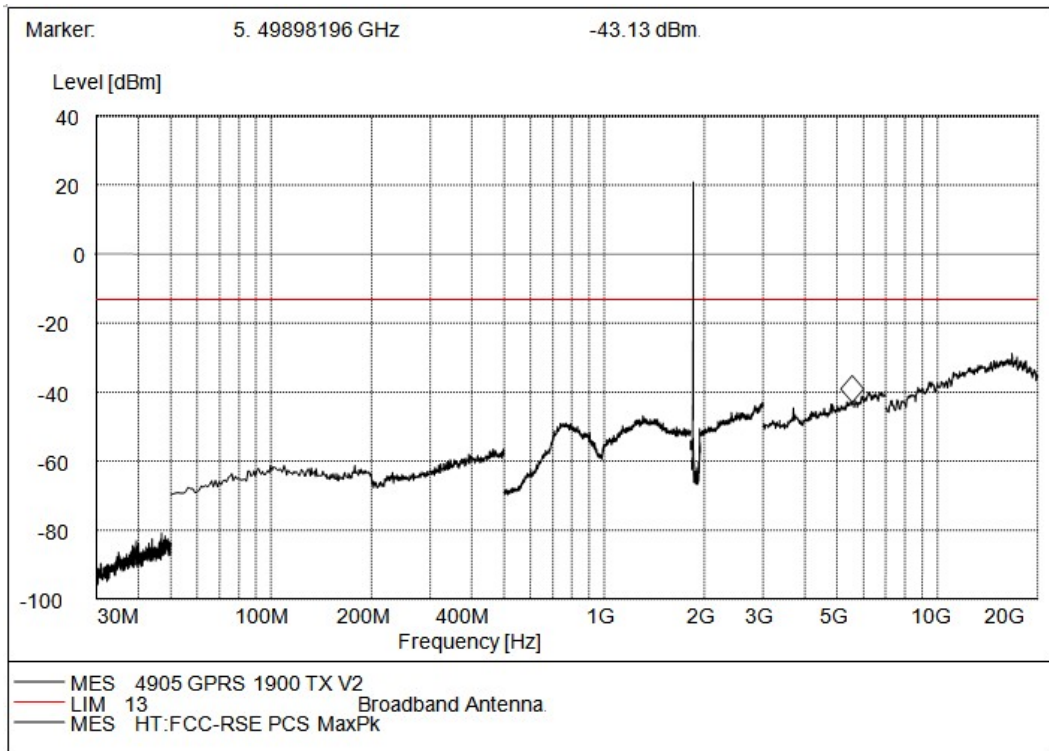


(PlotD.2: GPRS 1900MHz Channel = 512, Test Antenna Vertical)

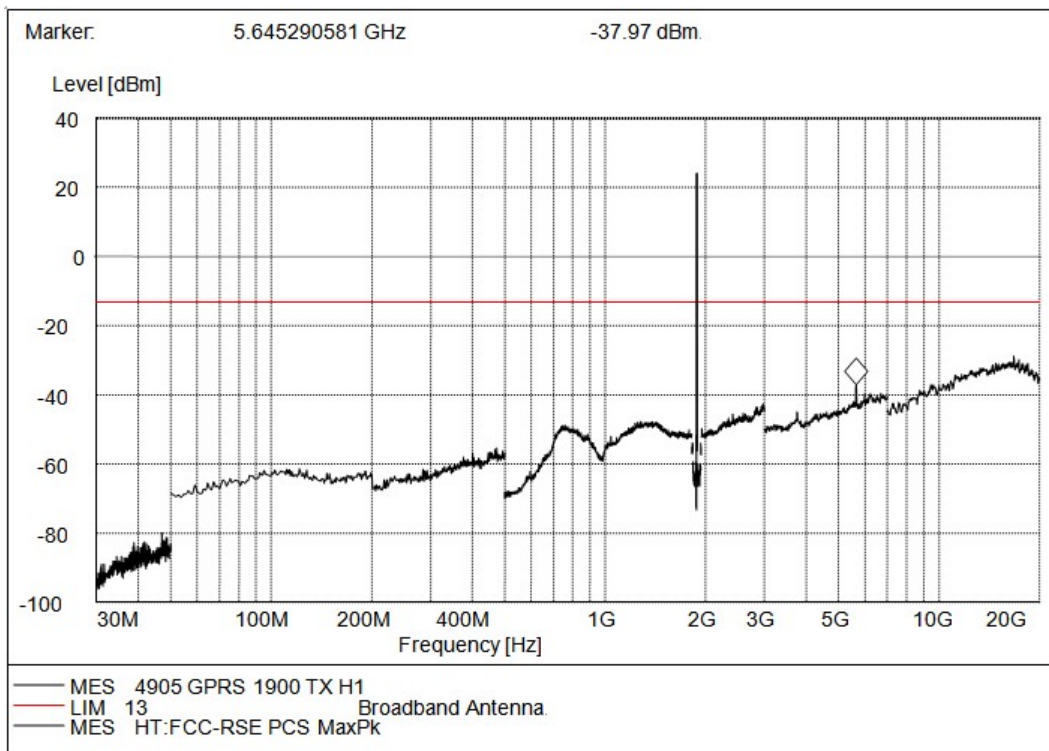


(Plot D.3: GPRS 1900MHz Channel = 661, Test Antenna Horizontal)

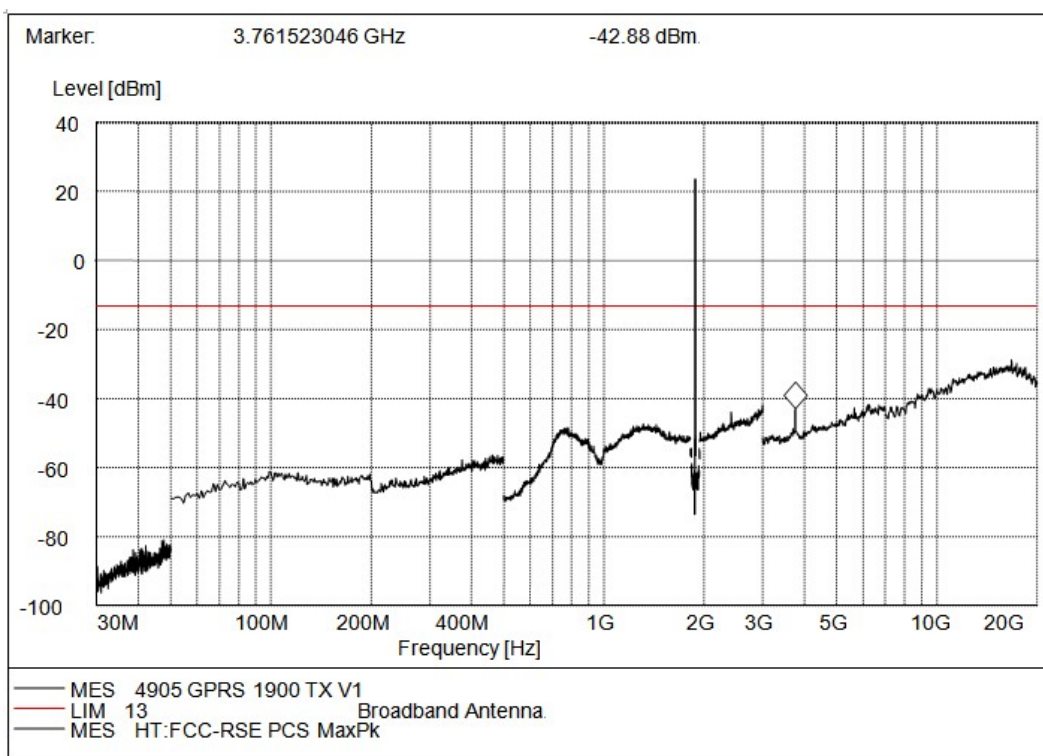

(PlotD.4: GPRS 1900MHz Channel = 661, Test Antenna Vertical)

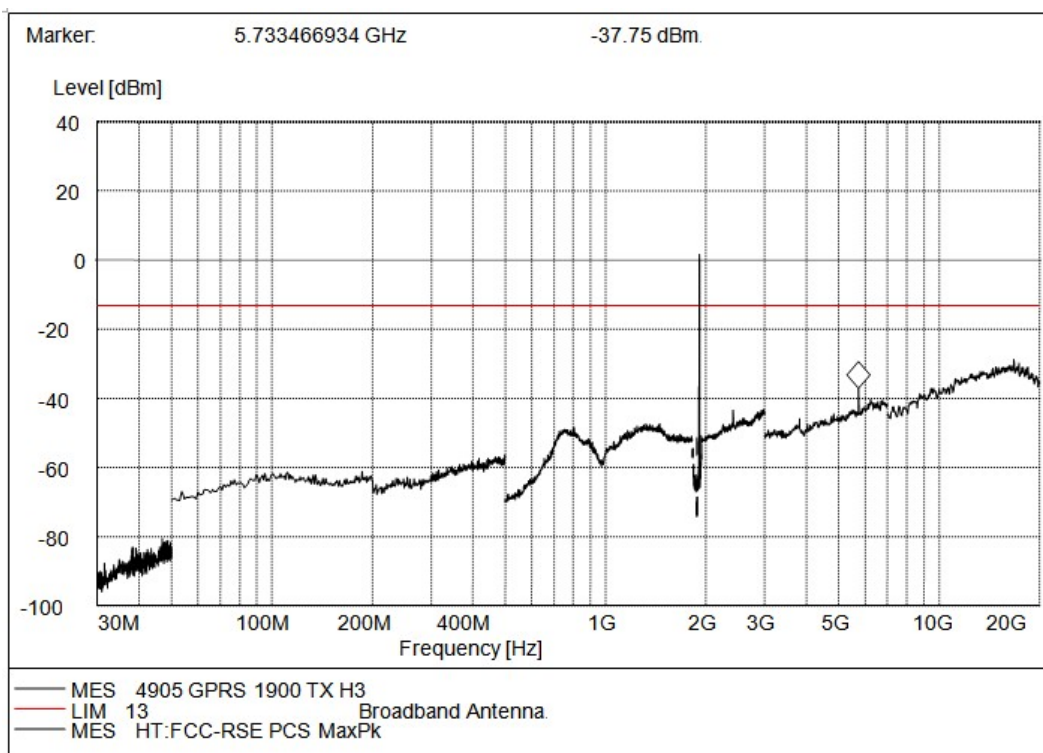

(Plot D.5: GPRS 1900MHz Channel = 810, Test Antenna Horizontal)

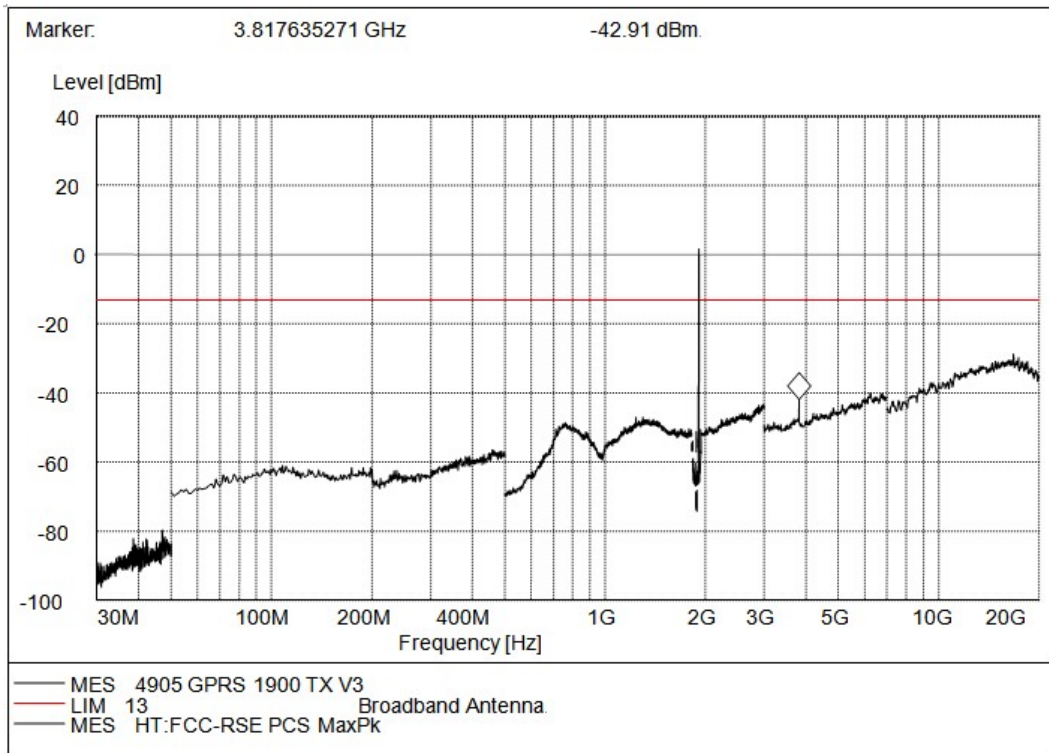

(PlotD.6: GPRS 1900MHz Channel = 810, Test Antenna Vertical)

** END OF REPORT **