



# FCC RF Test Report

**APPLICANT** : Bullitt Mobile Limited  
**EQUIPMENT** : Mobile Phone  
**BRAND NAME** : CAT  
**MODEL NAME** : B35  
**FCC ID** : ZL5B35E  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Aug. 23, 2018 and testing was completed on Nov. 02, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

**Sporton International (Kunshan) Inc.**  
**No. 1098, Pengxi North Road, Kunshan Economic Development Zone,**  
**Jiangsu Province 215335, China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Modification of EUT ..... 5

    1.6 Testing Location ..... 6

    1.7 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Test Mode ..... 9

    2.3 Connection Diagram of Test System ..... 10

    2.4 Support Unit used in test configuration and system ..... 10

    2.5 EUT Operation Test Setup ..... 11

    2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB Bandwidth Measurement ..... 12

    3.2 Output Power Measurement..... 14

    3.3 Power Spectral Density Measurement ..... 15

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 17

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 30

    3.6 AC Conducted Emission Measurement..... 34

    3.7 Antenna Requirements ..... 36

**4 LIST OF MEASURING EQUIPMENT ..... 37**

**5 UNCERTAINTY OF EVALUATION ..... 38**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**

**APPENDIX F. PRODUCT EQUALITY DECLARATION**



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR840307-04C	Rev. 01	Initial issue of report	Nov. 06, 2018



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.01 dB at 4924.000 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.83 dB at 0.1640 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Bullitt Mobile Limited**

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

## 1.2 Manufacturer

**Bullitt Mobile Limited**

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	CAT
Model Name	B35
FCC ID	ZL5B35E
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+(16QAM uplink is not supported)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth BR/EDR/LE
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four types of EUT: Sample 1 is dual SIM with main source receiver, Sample 2 is dual SIM with second source receiver, Sample 3 is single SIM with main source receiver, Sample 4 is single SIM with second source receiver, just different suppliers, please refer the product equality declaration as Appendix F. According to the difference, we choose sample 1 to full test.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 15.01 dBm (0.0317 W) 802.11g : 21.81 dBm (0.1517 W) 802.11n HT20 : 21.48 dBm (0.1406 W) 802.11n HT40 : 21.52 dBm (0.1419 W)
Antenna Type / Gain	PIFA Antenna type with gain 0.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

<b>Test Site</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-KS CO01-KS	CN5013	630927

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0).

<b>Test Site</b>	Sporton International (Shenzhen) Inc.		
<b>Test Site Location</b>	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District, Shenzhen City, Guangdong Province 518055, China TEL: +86-755- 3320-2398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH02-SZ	CN5019	577730



## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		






## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
<b>AC Conducted Emission</b>	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + Camera(Rear) + USB Cable (Charging from Adapter2) + Earphone 2
<b>Remark:</b>	For Radiated Test Cases, The tests were performed with Adapter 1, Earphone 1 and USB Cable.

## 2.3 Connection Diagram of Test System

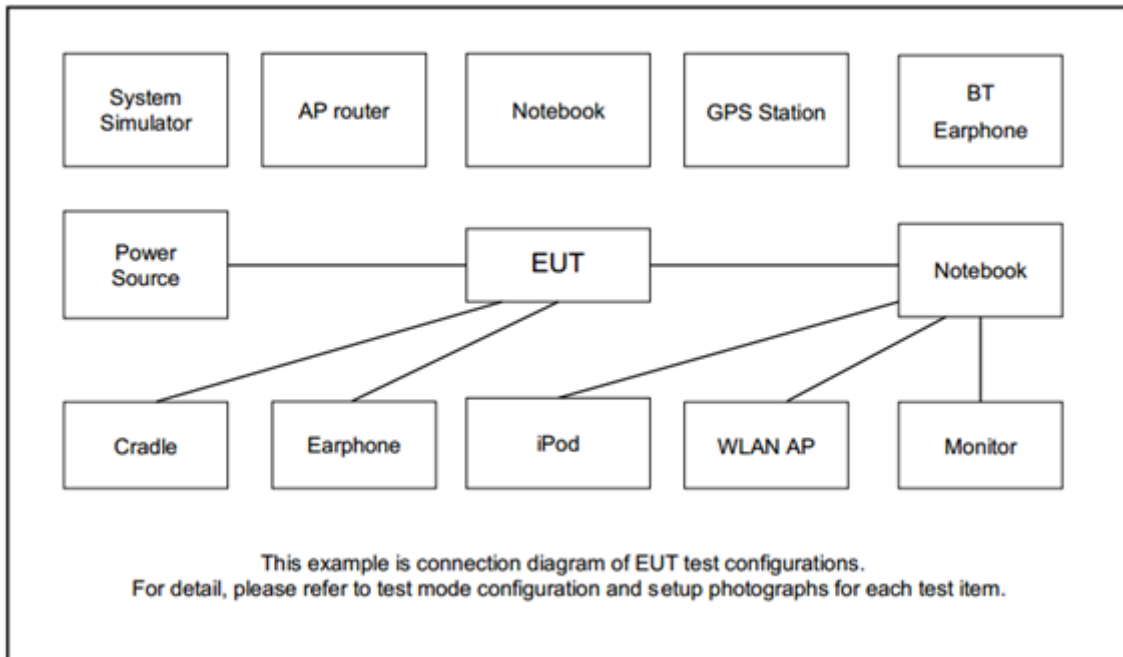

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A



## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss*

Following shows an offset computation example with cable loss 5.5dB

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


##### 3.1.4 Test Setup

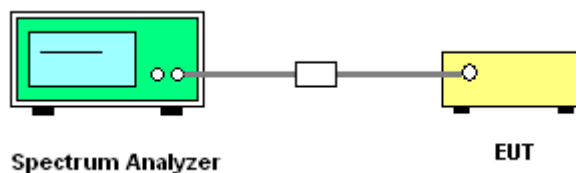



### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

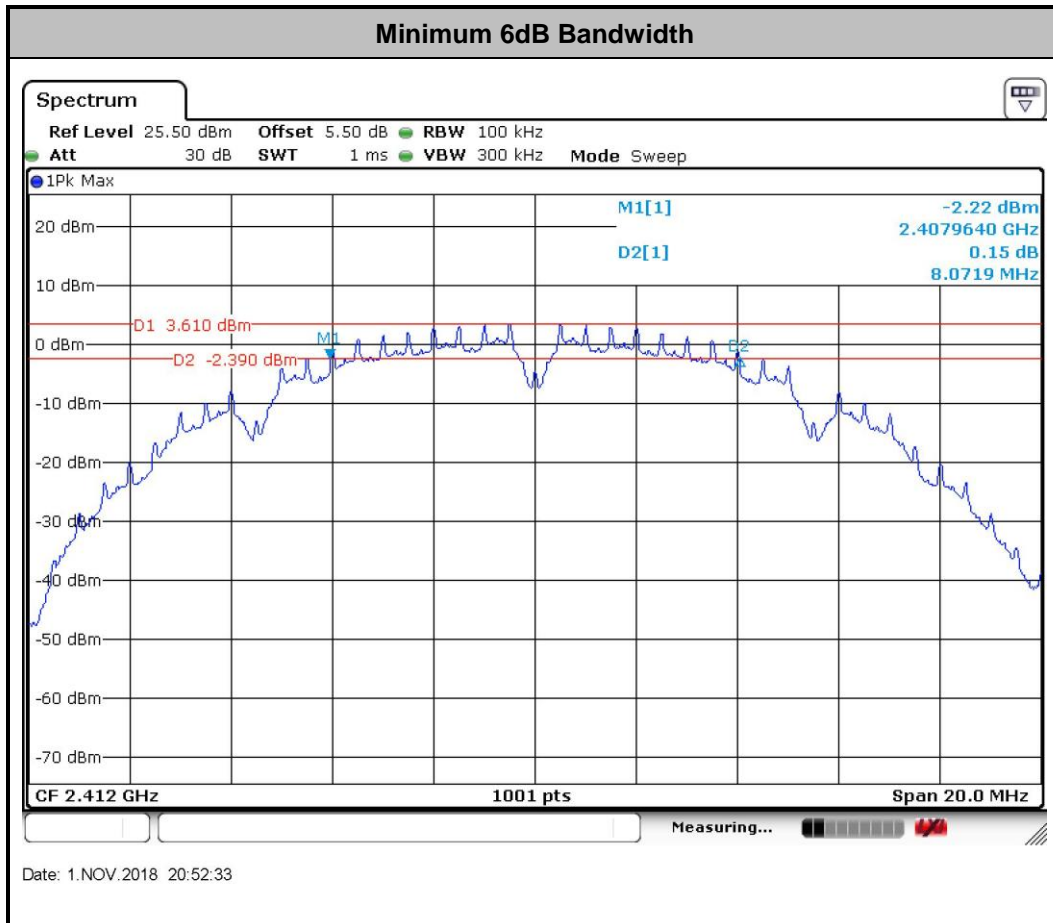

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

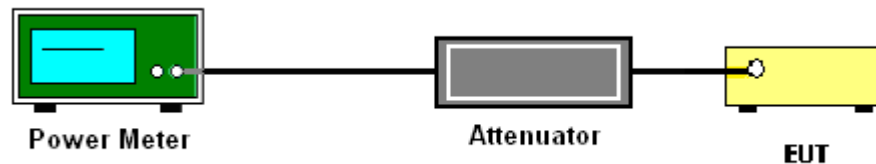

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


#### 3.3.4 Test Setup

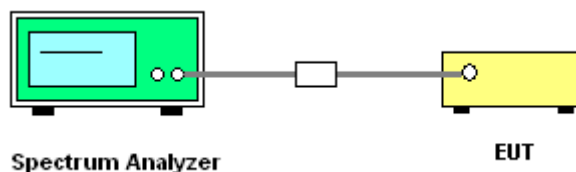



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

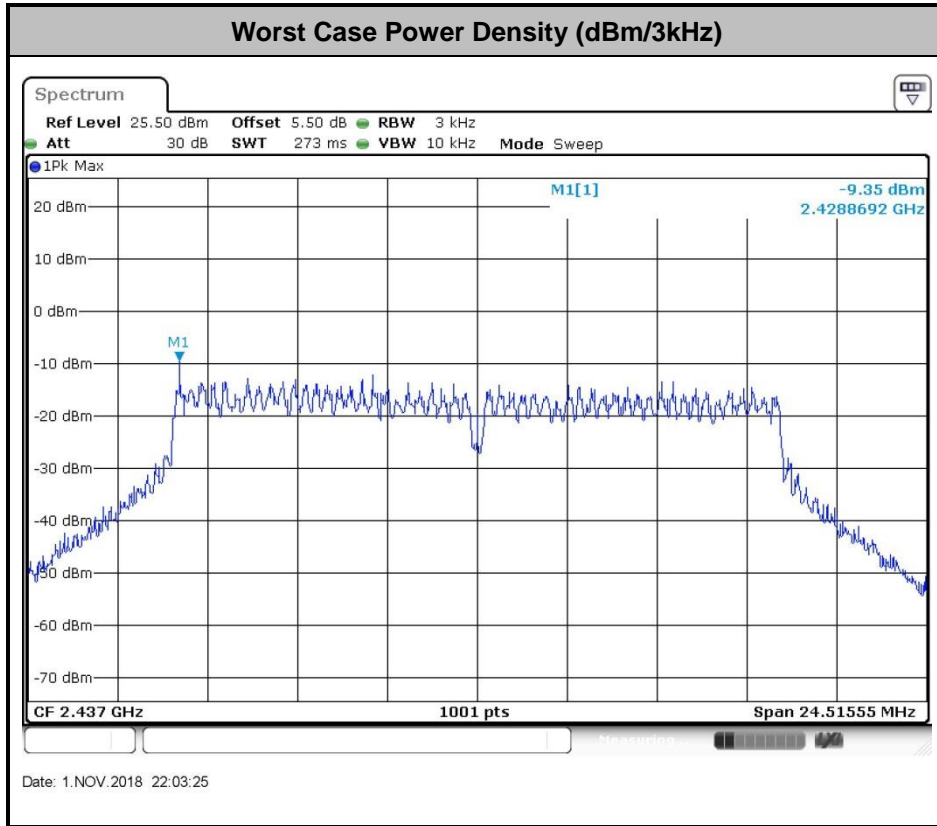



## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup


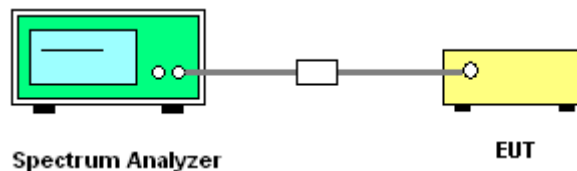




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer : Orion Li	Temperature :	21~25°C
	Relative Humidity :	49~51%


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

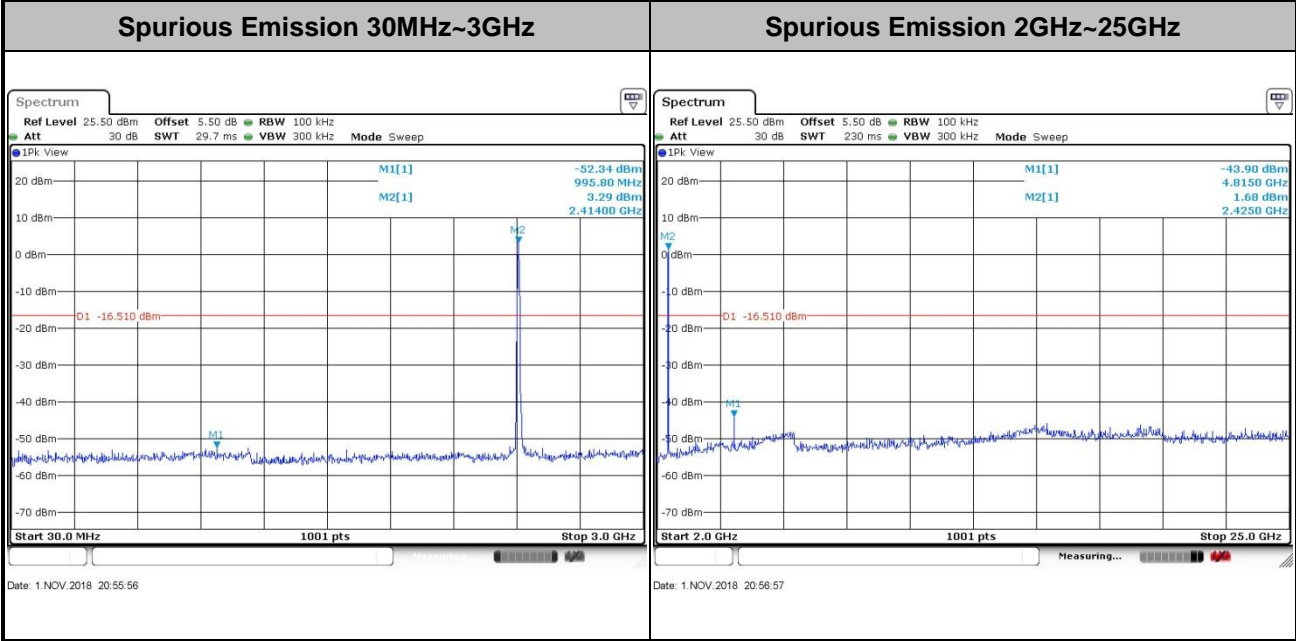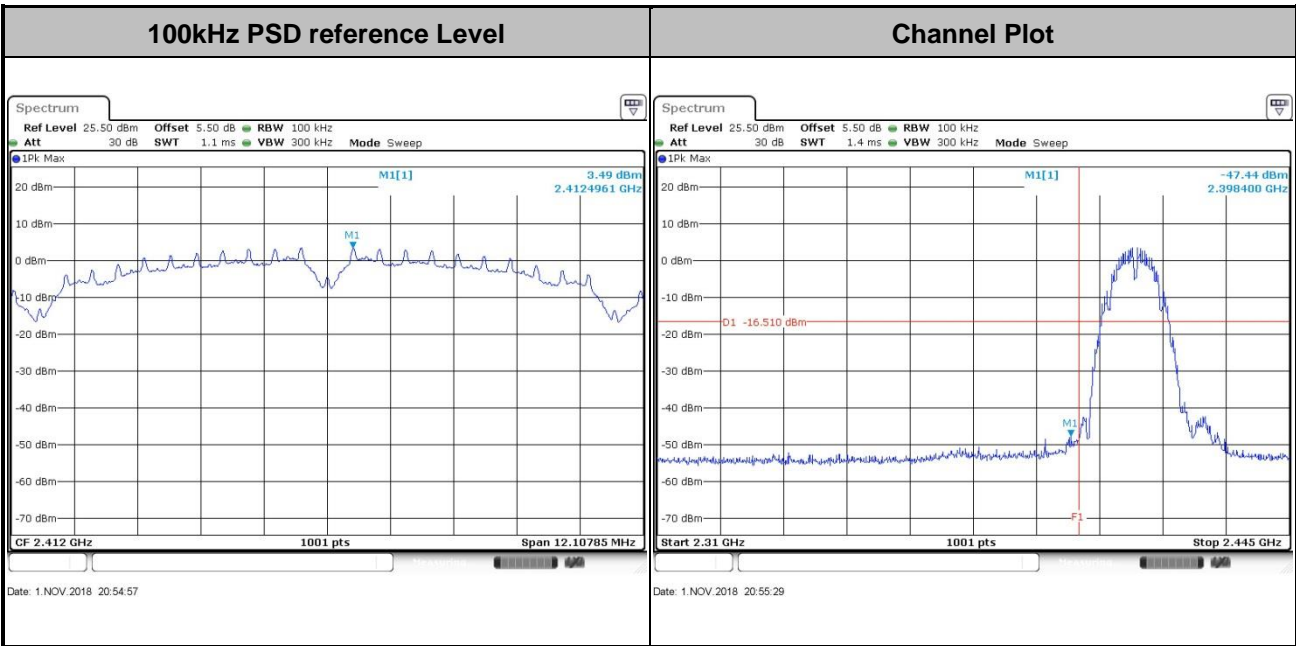




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----


100kHz PSD reference Level

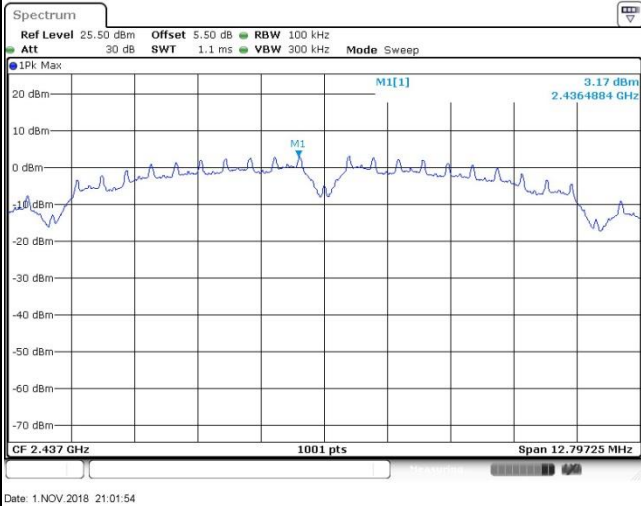

Spurious Emission 30MHz~3GHz


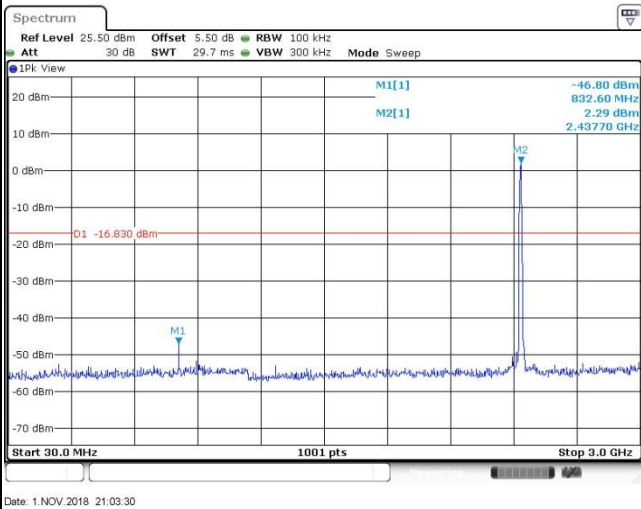


Spurious Emission 2GHz~25GHz

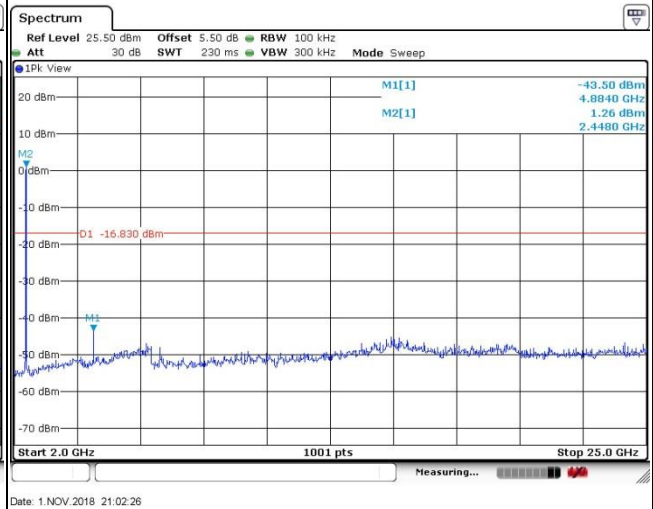





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

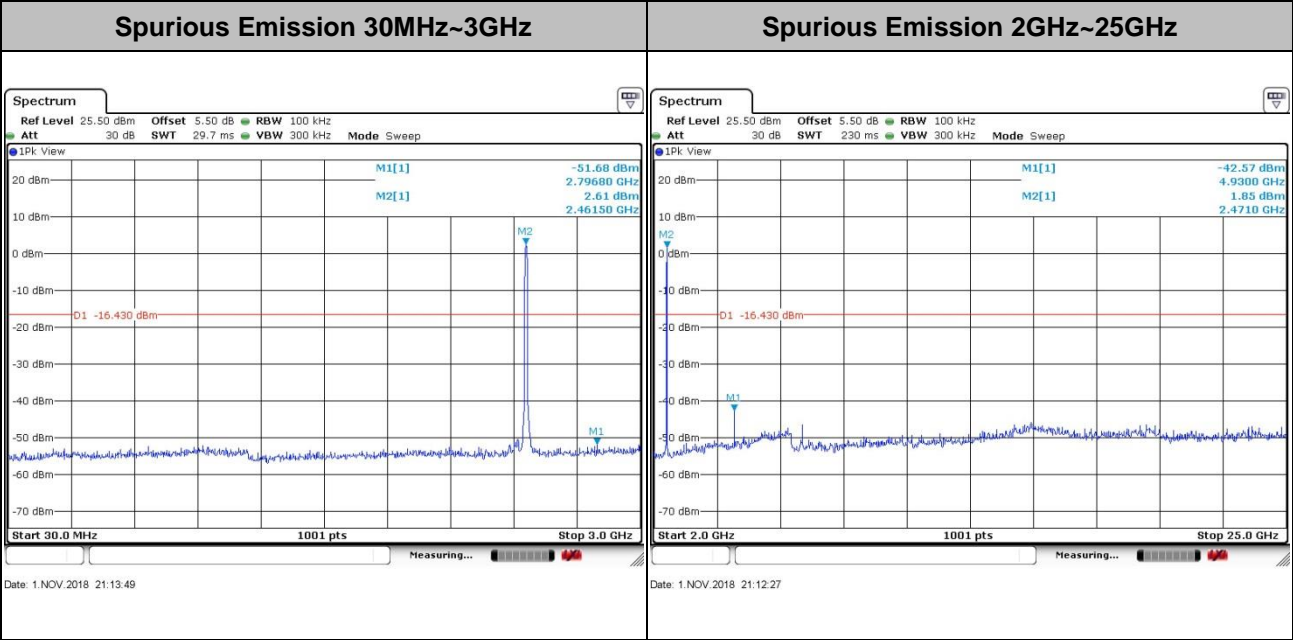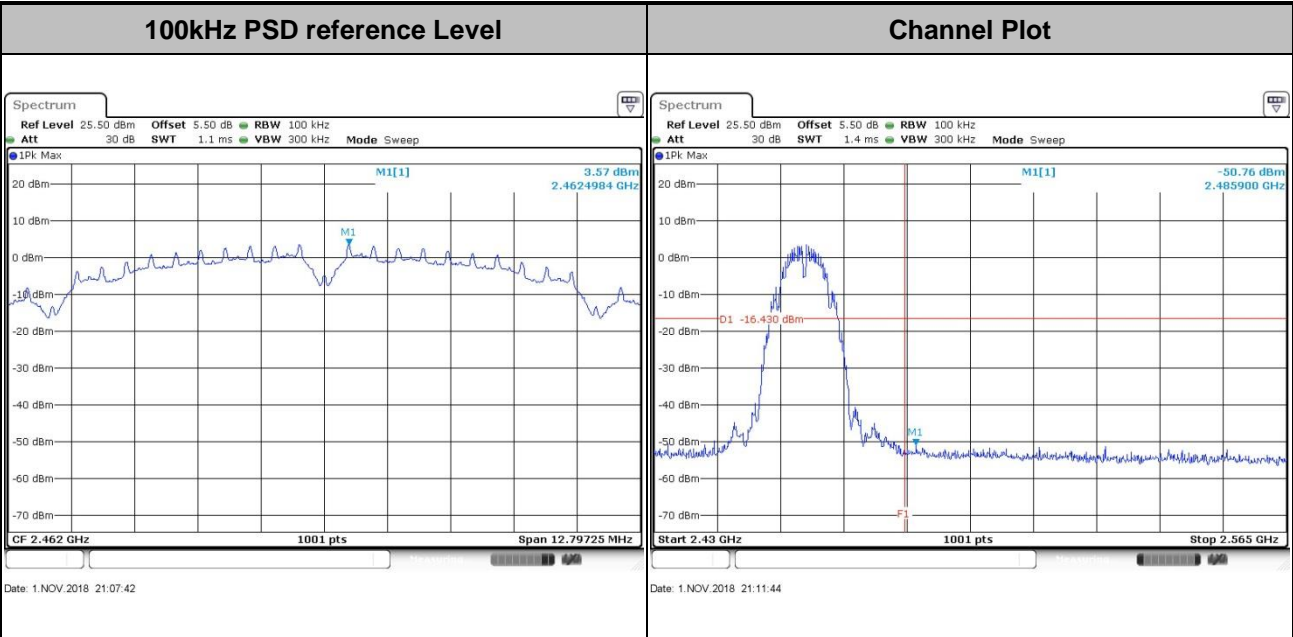






Test Mode : 802.11g Test Channel : 01

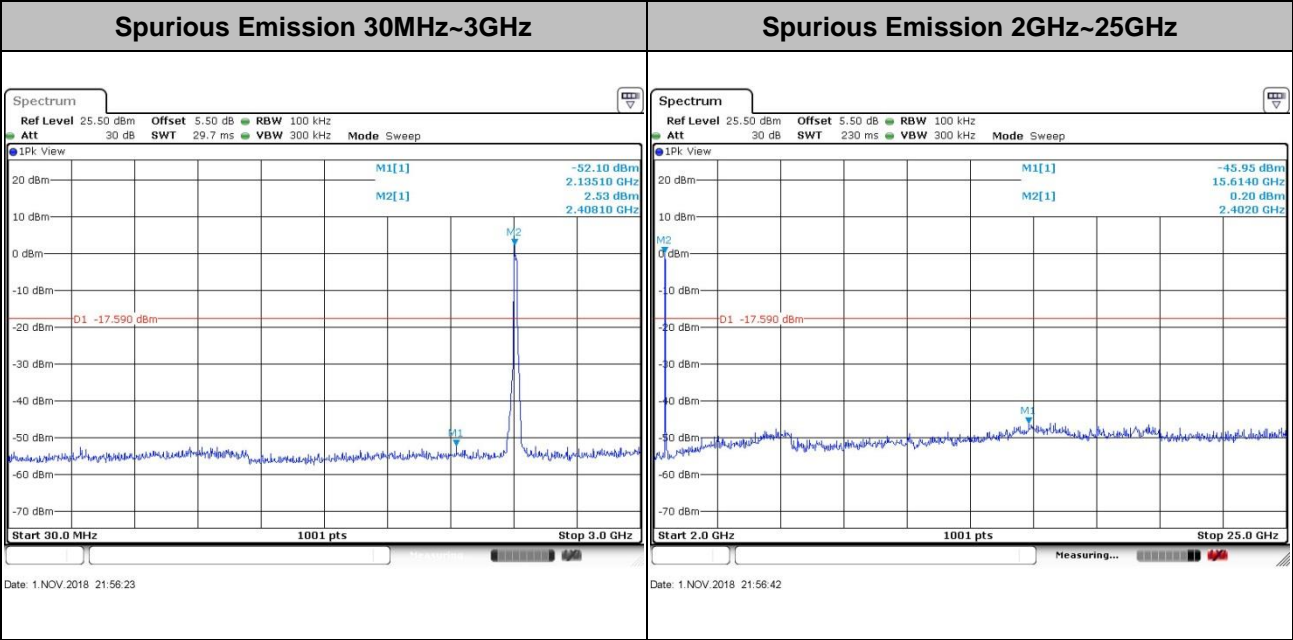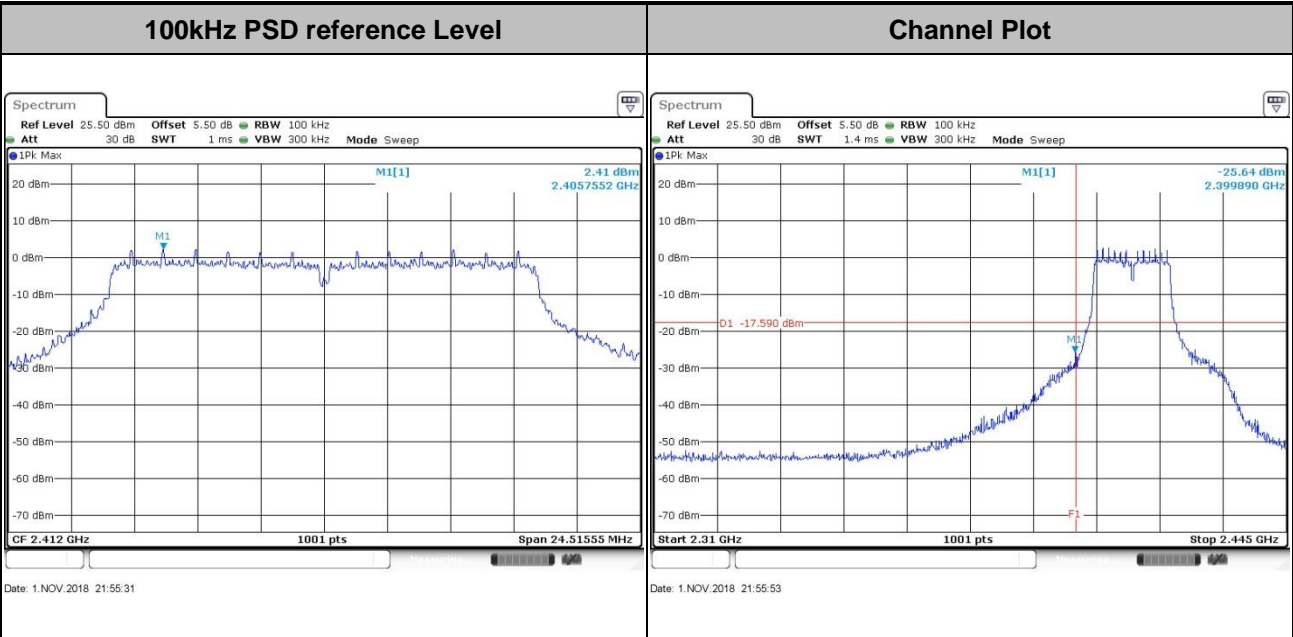





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

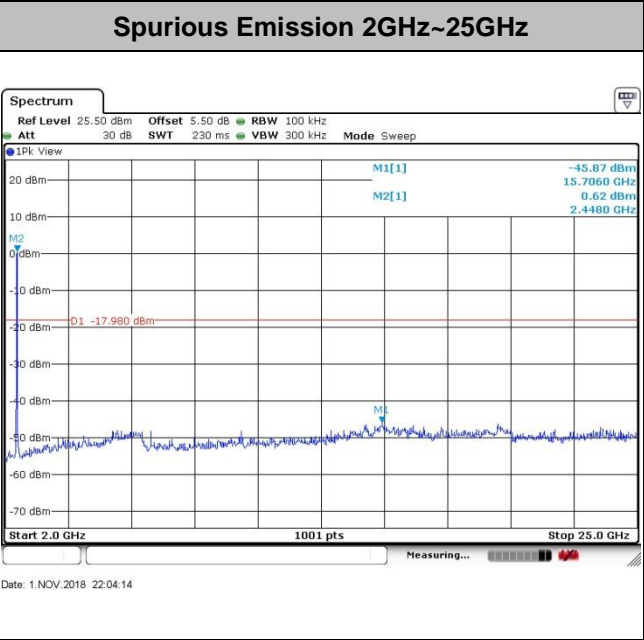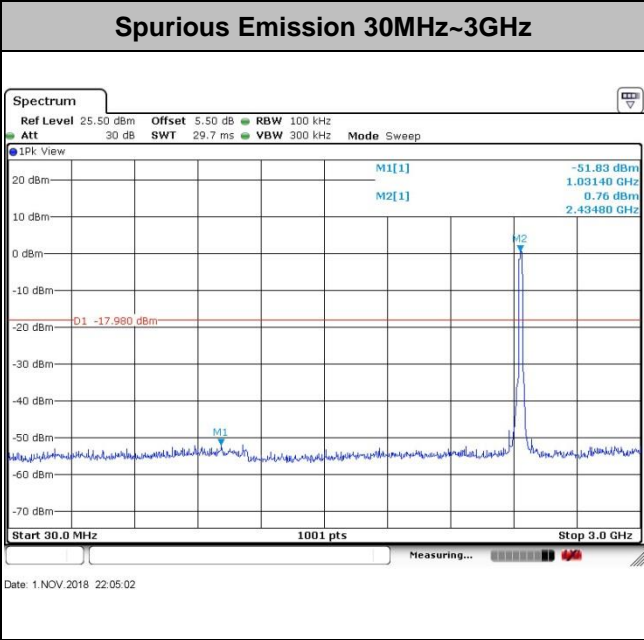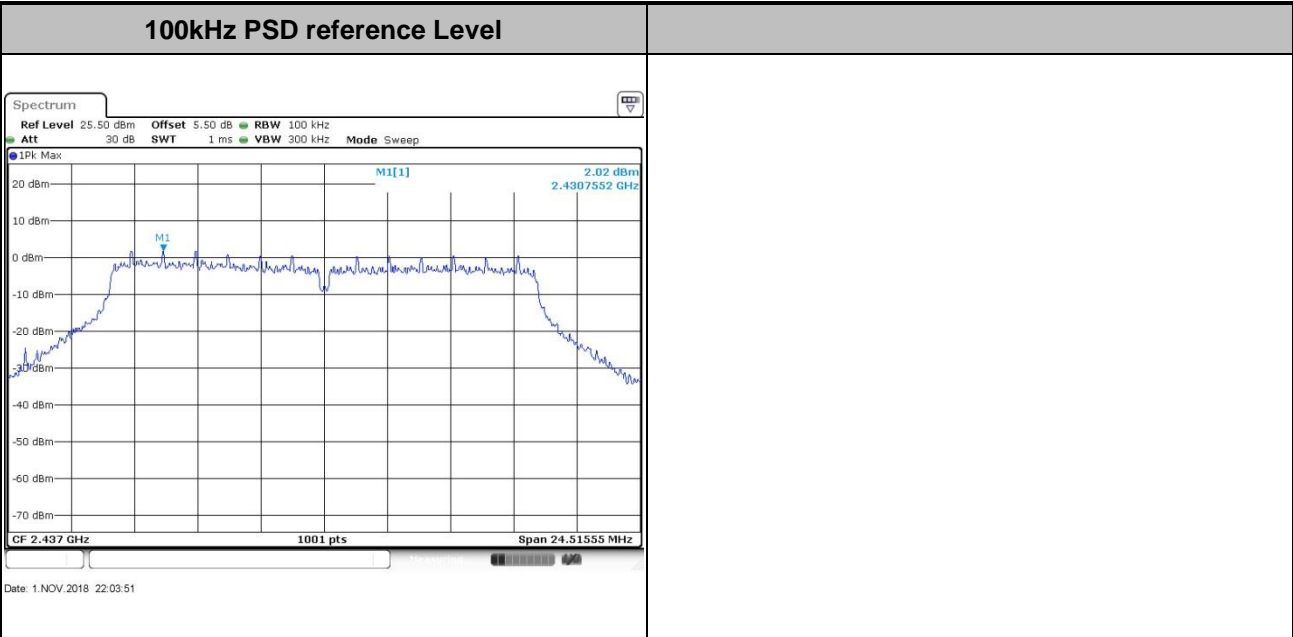





Test Mode : 802.11g Test Channel : 11

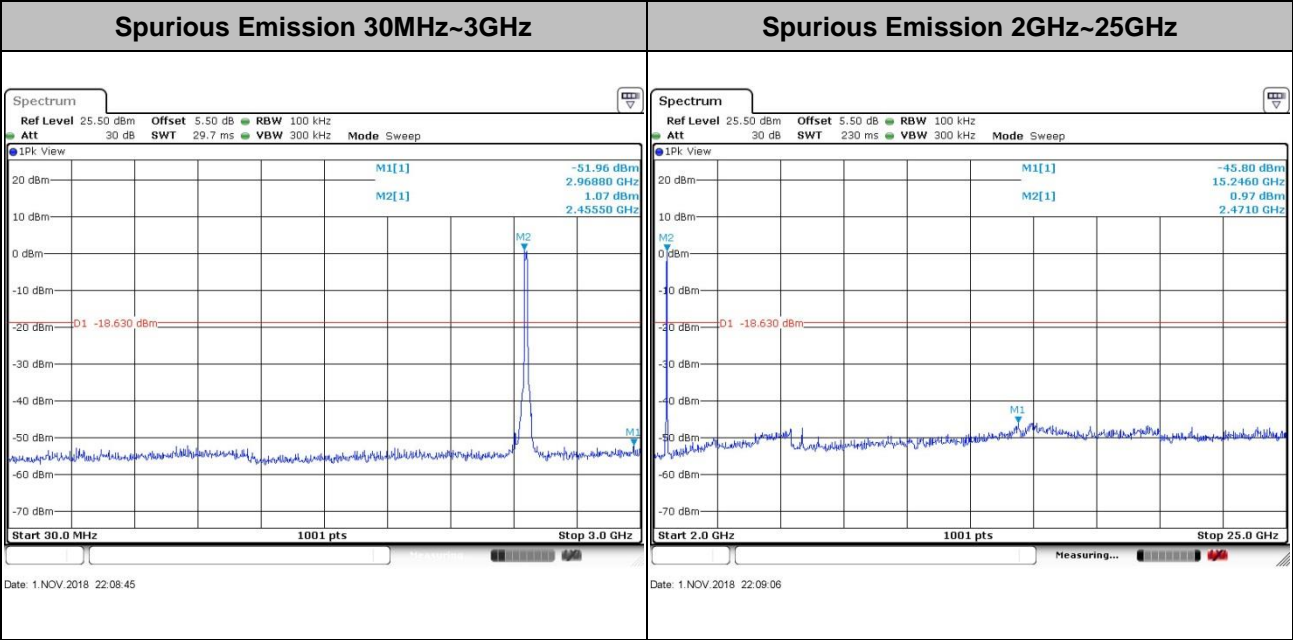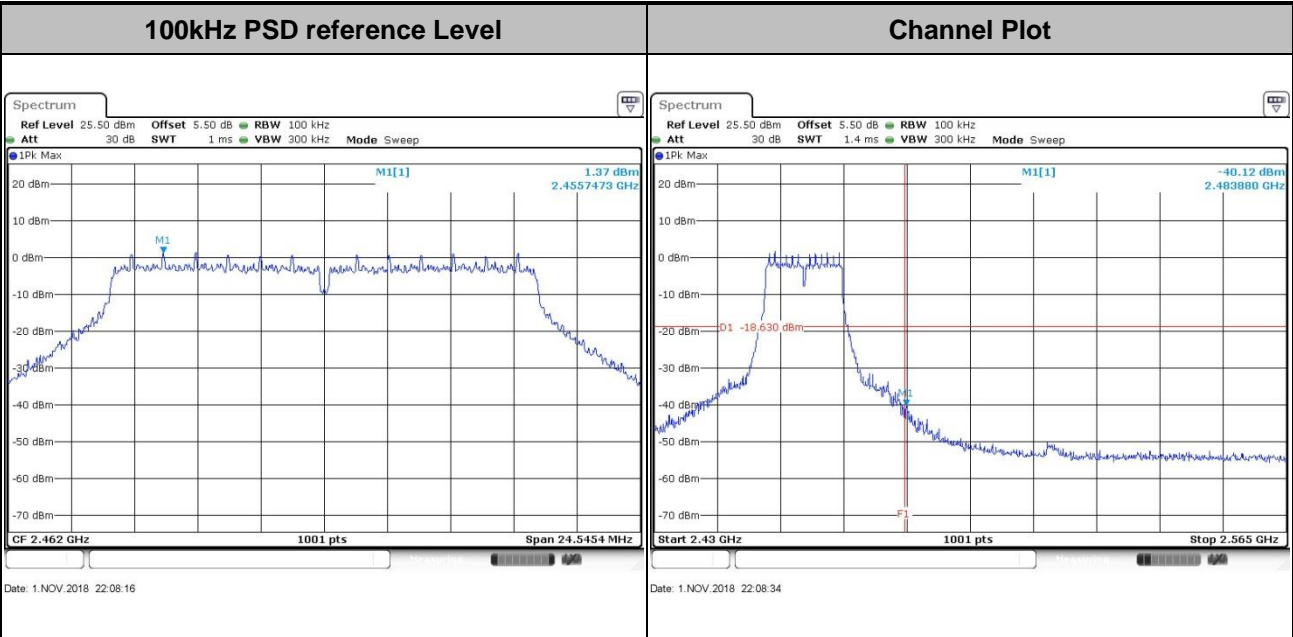






Test Mode : 802.11n HT20 Test Channel : 01

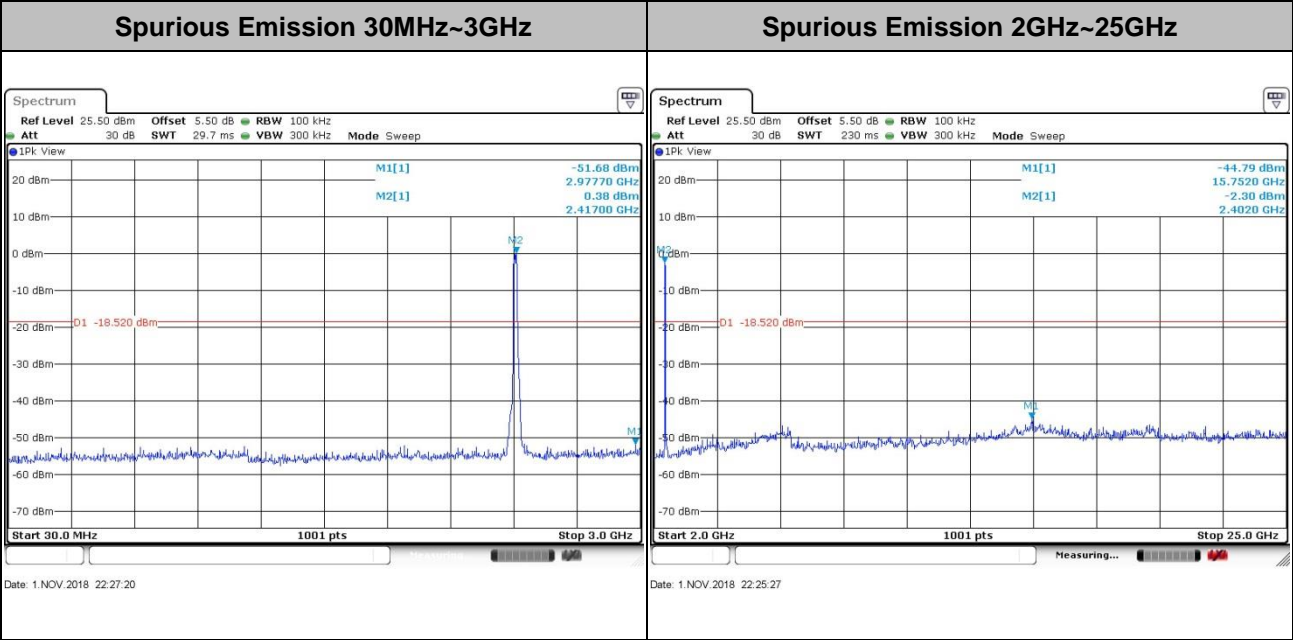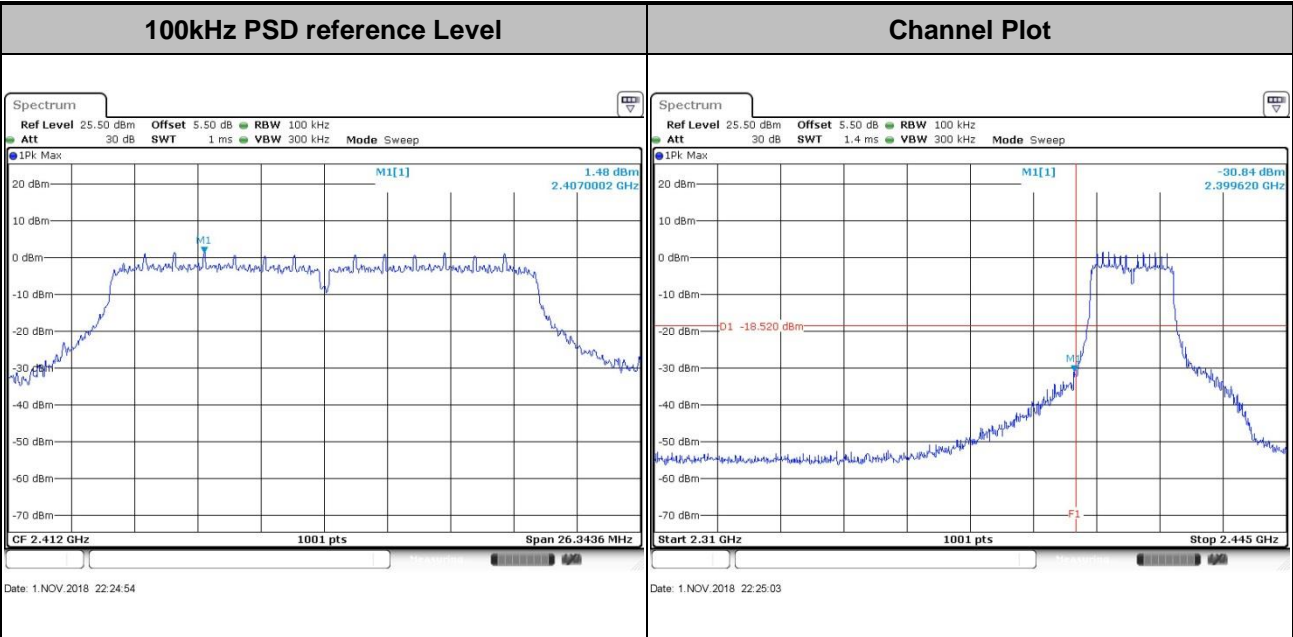







Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

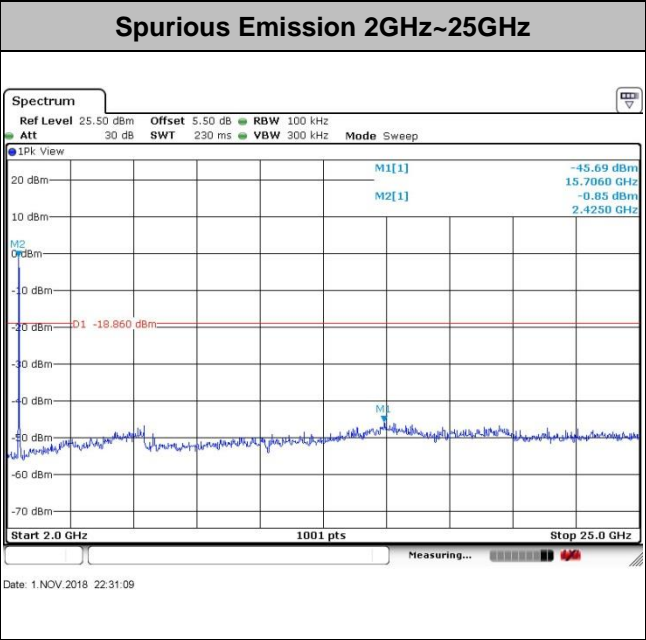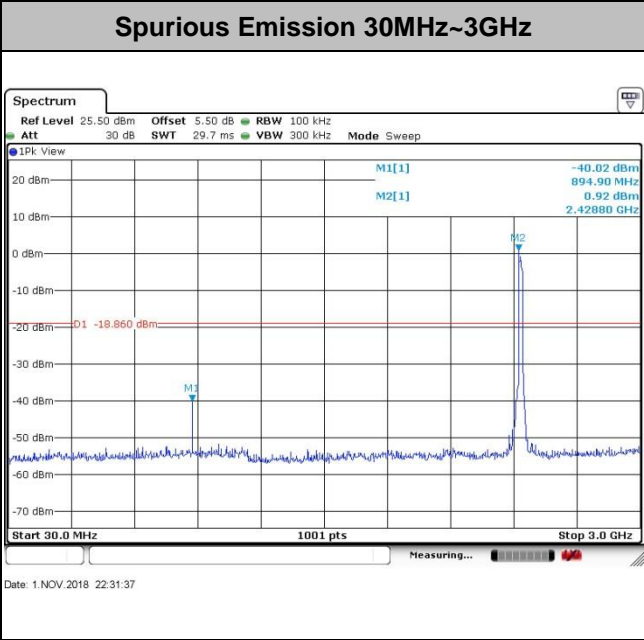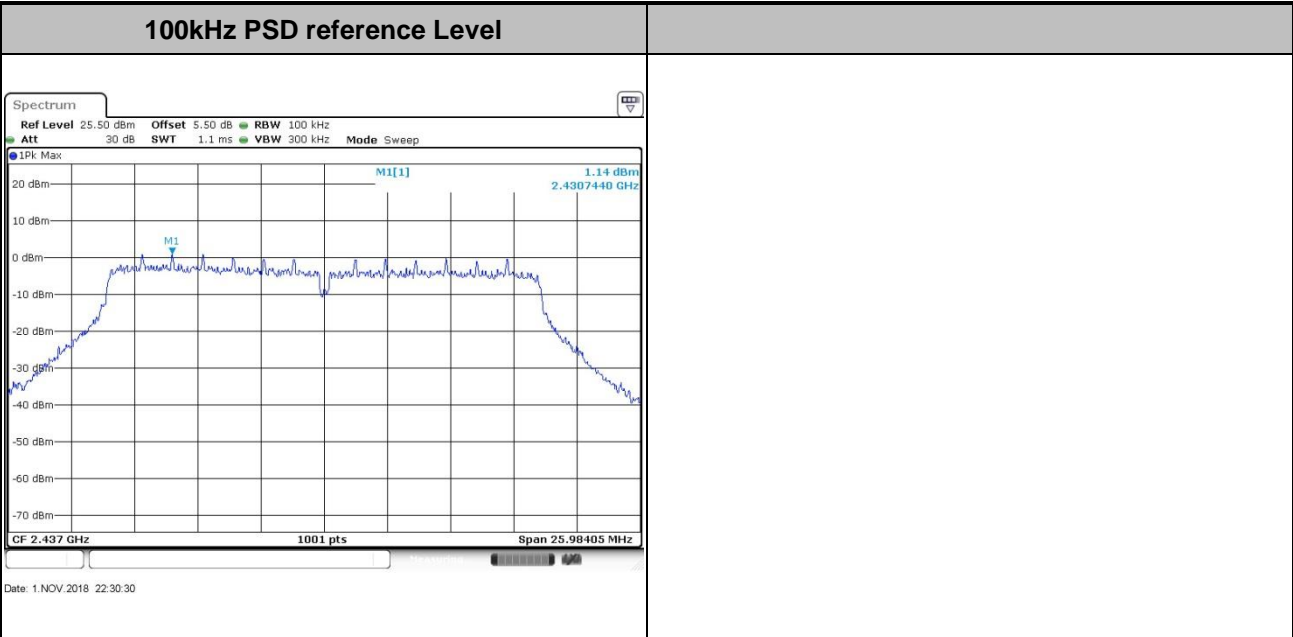





Test Mode : 802.11n HT20 Test Channel : 11

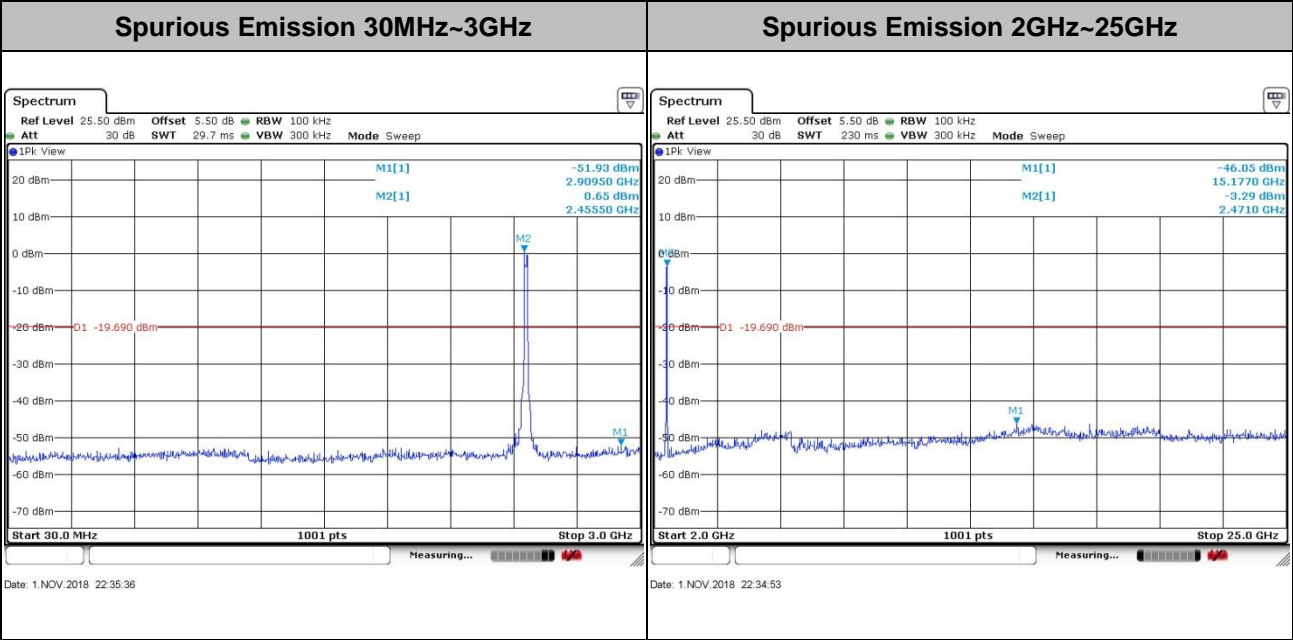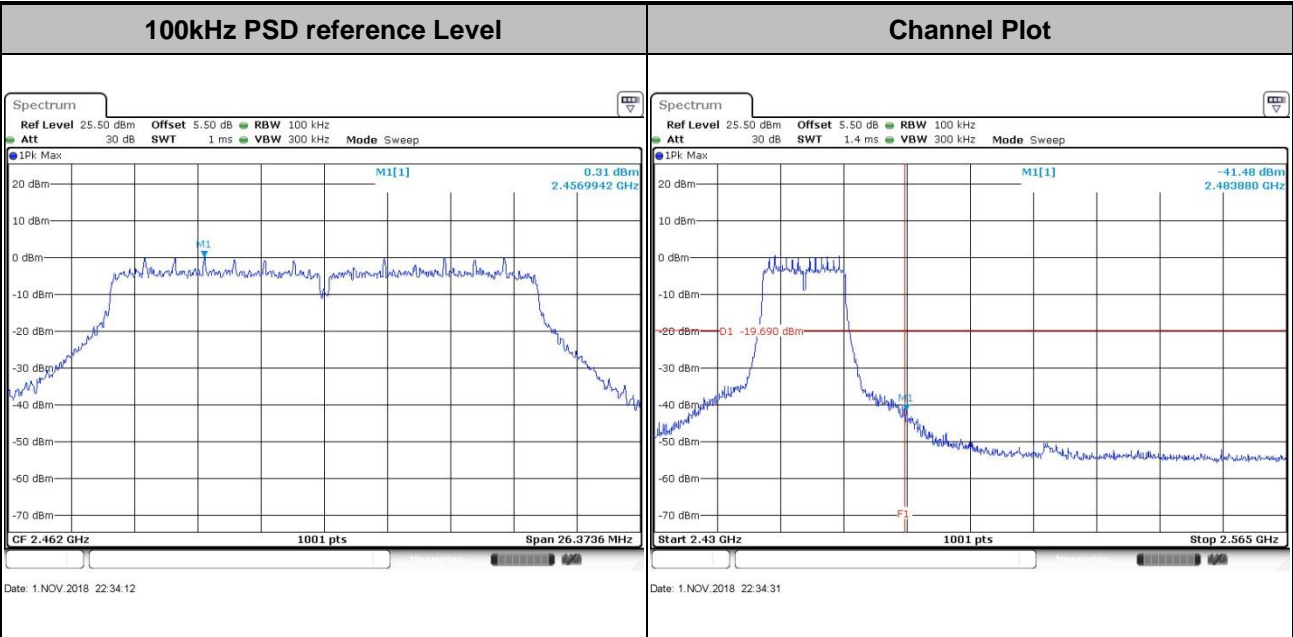






Test Mode :	802.11n HT40	Test Channel :	03
-------------	--------------	----------------	----

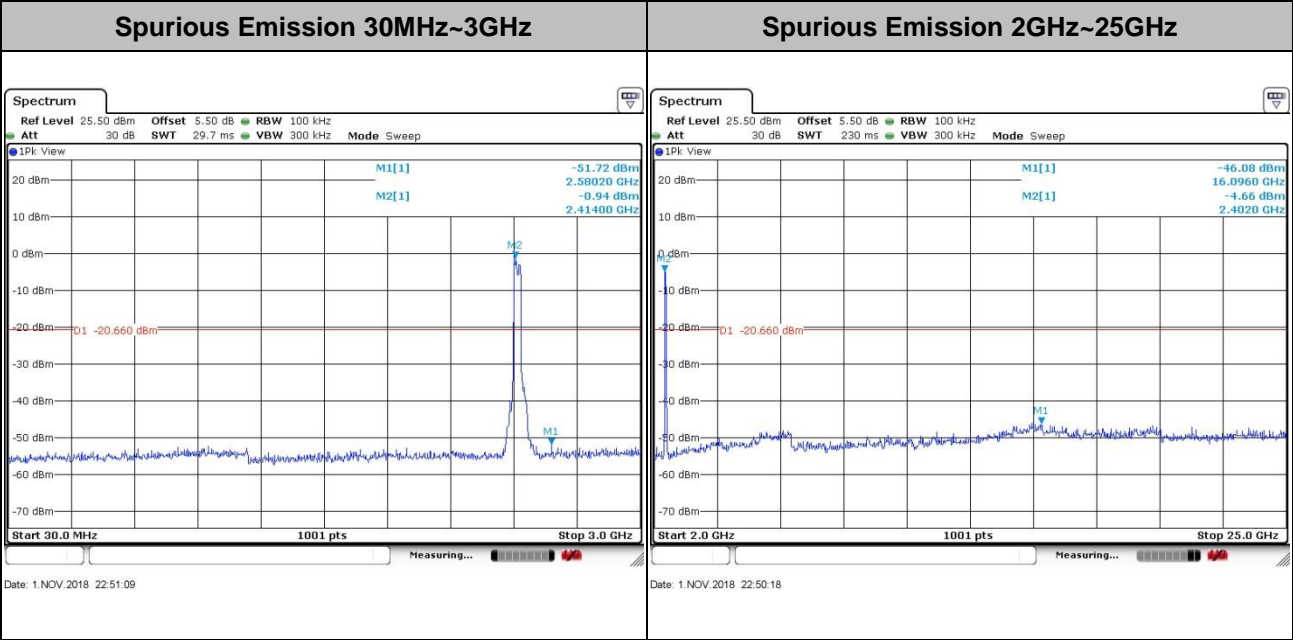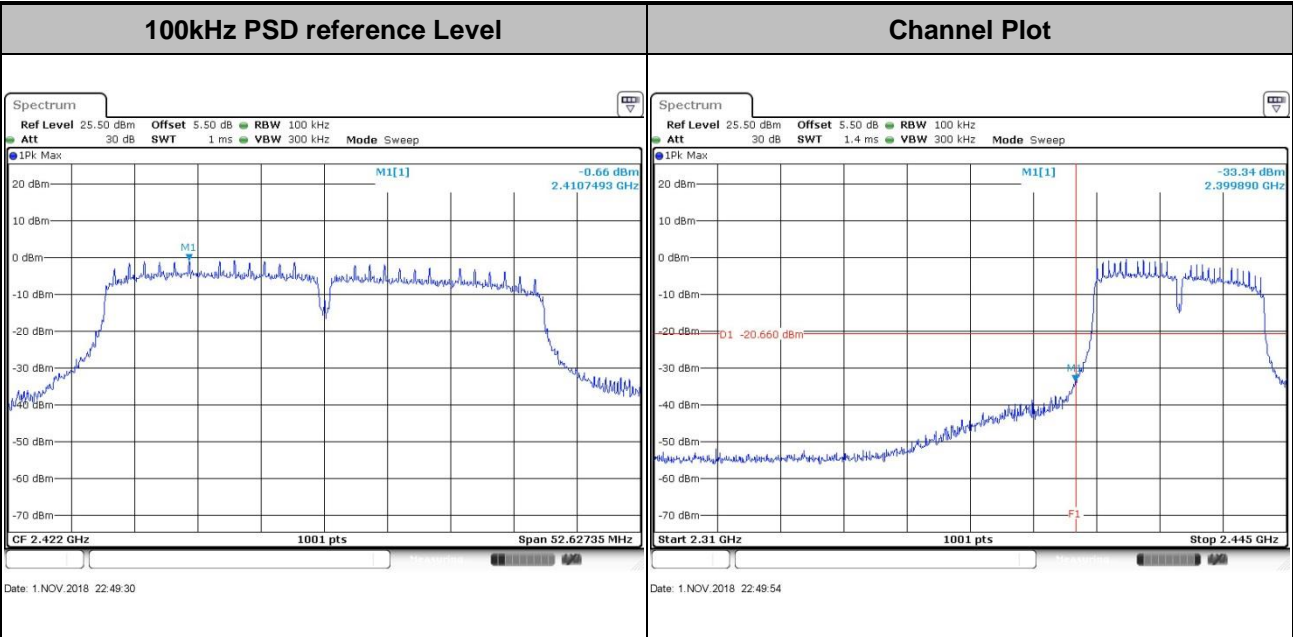





Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

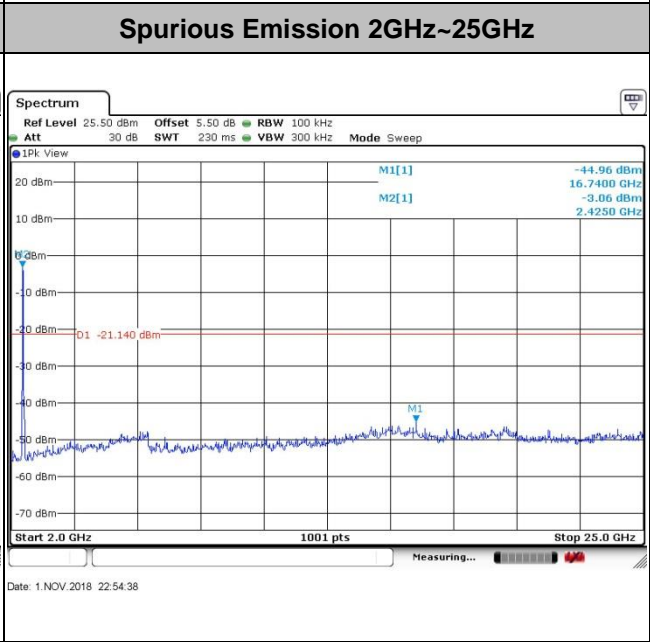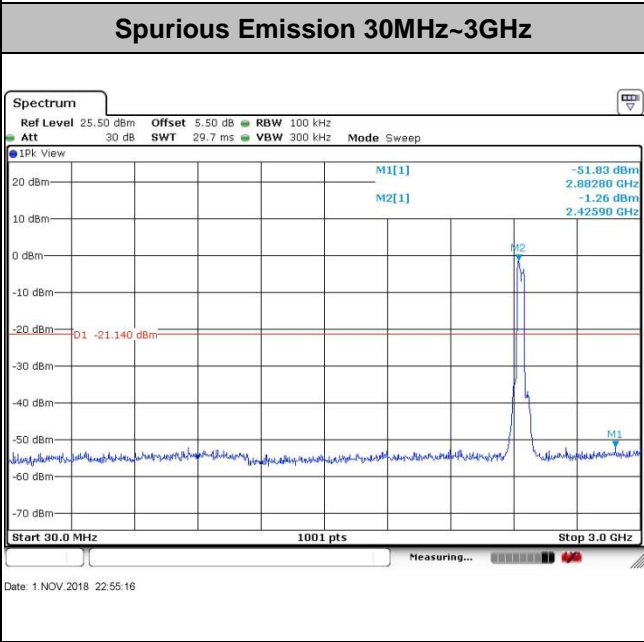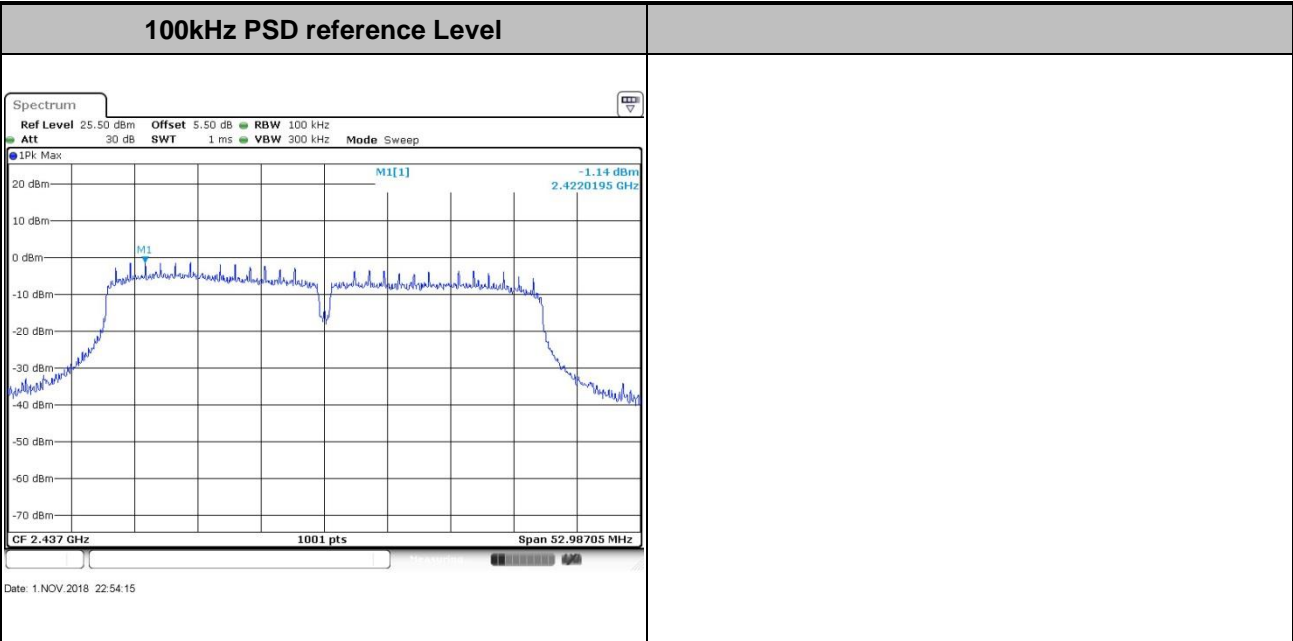



Test Mode : 802.11n HT40      Test Channel : 09

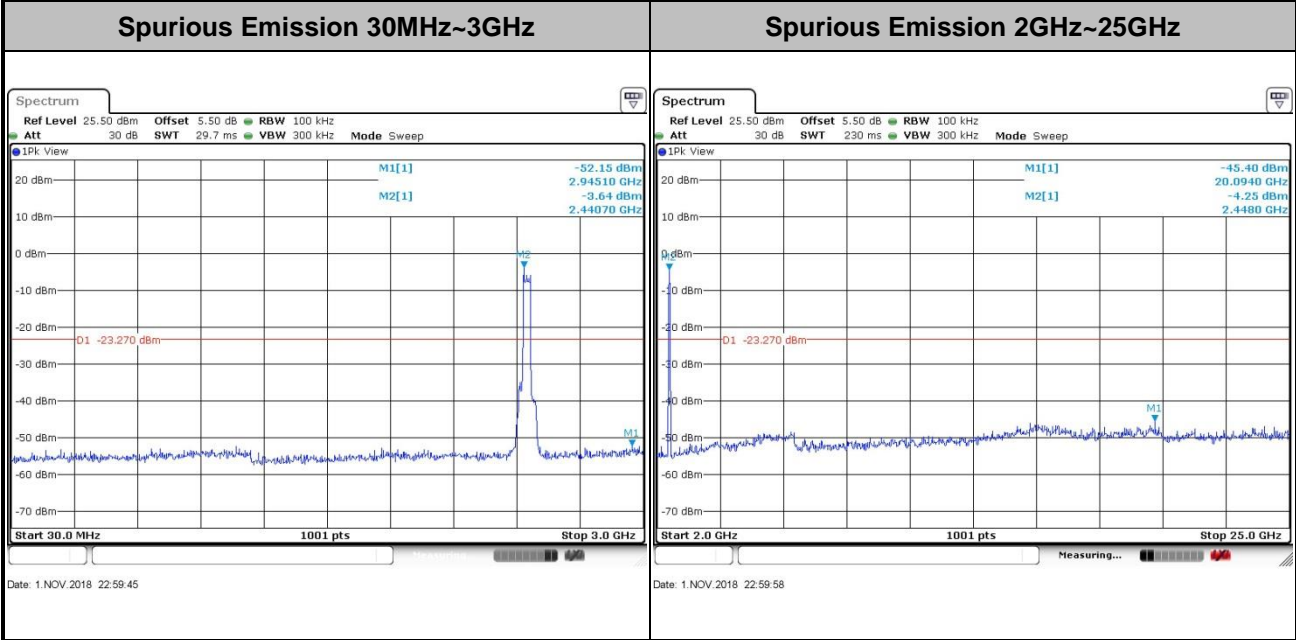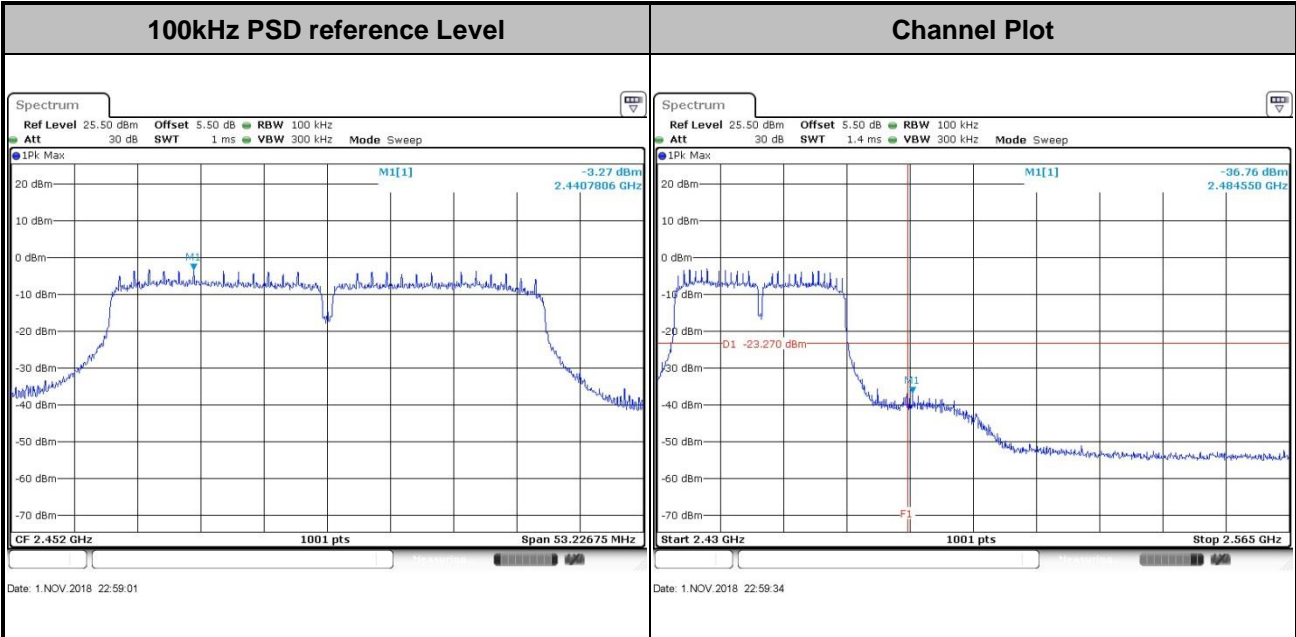



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

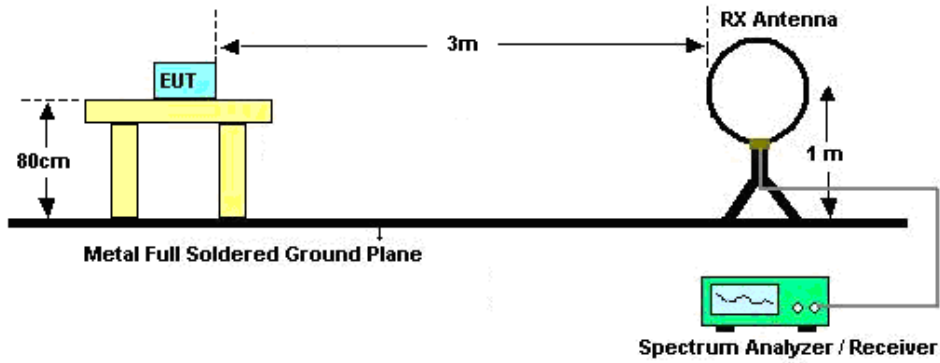

For radiated emissions from 30MHz to 1GHz

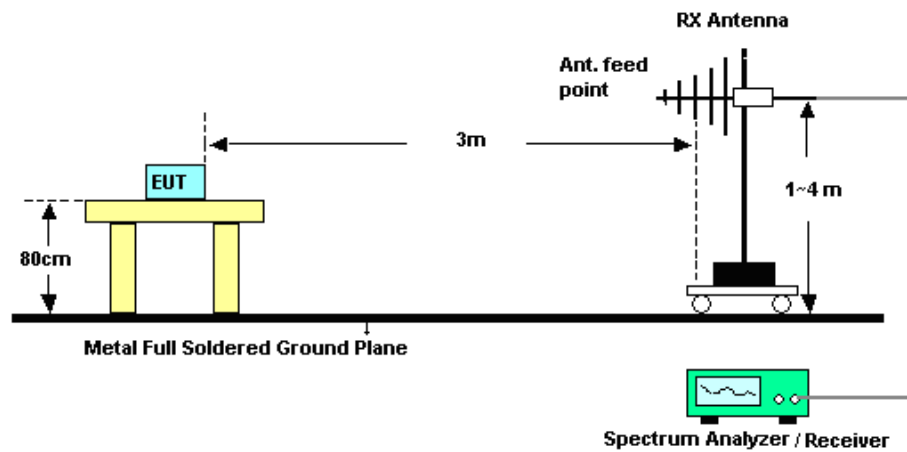

For radiated emissions above 1GHz

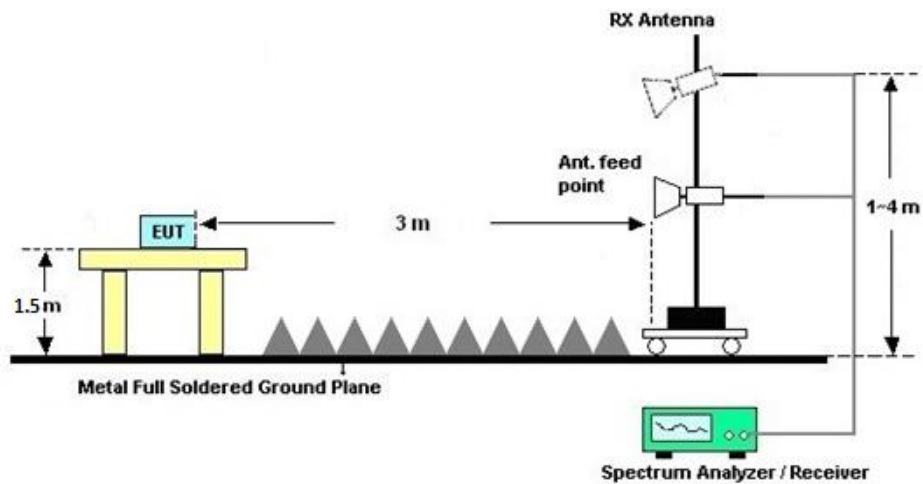





### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

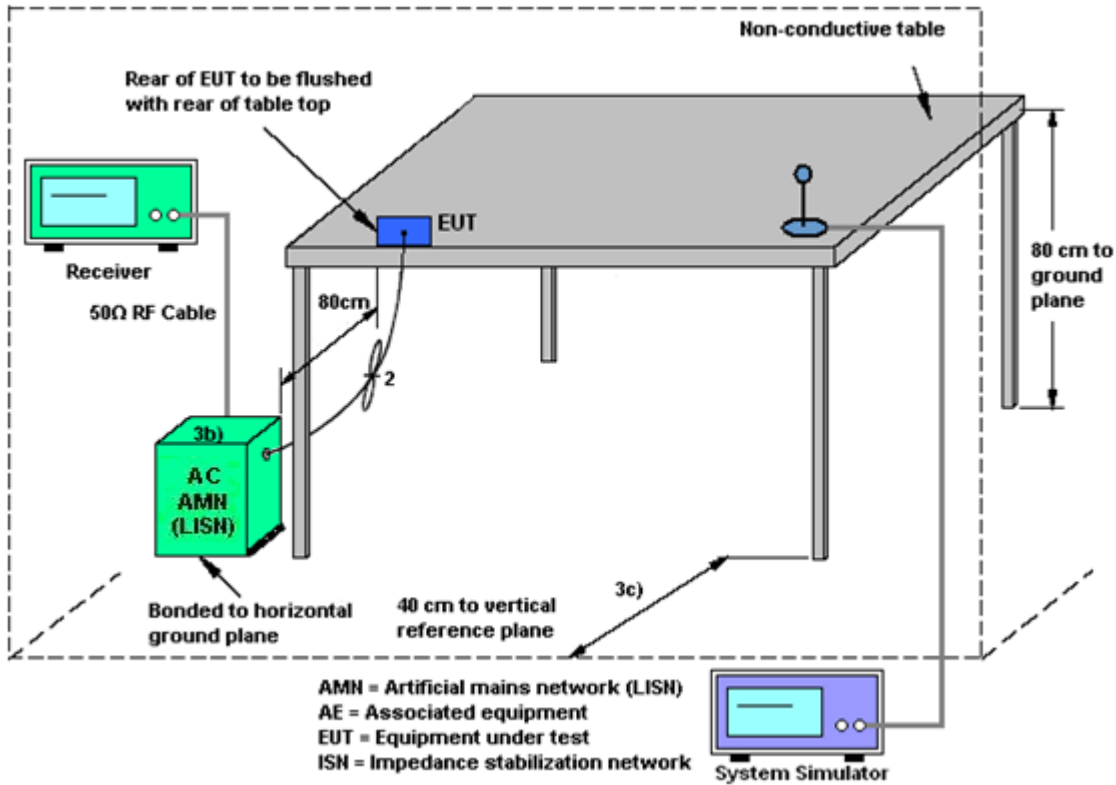

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Nov. 01, 2018	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 18, 2018	Nov. 01, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 18, 2018	Nov. 01, 2018	Jan. 17, 2019	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Oct. 08, 2018	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2017	Oct. 08, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2017	Oct. 08, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2017	Oct. 08, 2018	Oct. 11, 2018	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz; Max 30dBm	Oct. 19, 2017	Sep. 13, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz; Max 30dBm	Oct. 20, 2018	Nov. 02, 2018	Oct 19, 2019	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 14, 2018	Sep. 13, 2018~Nov. 02, 2018	May 13, 2019	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	May 10, 2018	Sep. 13, 2018~Nov. 02, 2018	May 09, 2019	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Dec. 13, 2017	Sep. 13, 2018~Nov. 02, 2018	Dec. 12, 2018	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Mar. 30, 2018	Sep. 13, 2018~Nov. 02, 2018	Mar. 29, 2019	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 19, 2017	Sep. 13, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 20, 2018	Nov. 02, 2018	Oct 19, 2019	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1707137	1GHz~18GHz	Oct. 19, 2017	Sep. 13, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1707137	1GHz~18GHz	Oct. 20, 2018	Nov. 02, 2018	Oct 19, 2019	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 30, 2018	Sep. 13, 2018~Nov. 02, 2018	Jul. 29, 2019	Radiation (03CH02-SZ)
Amplifier	Agilent	8449B	3008A01023	1GHz~26.5GHz	Oct. 19, 2017	Sep. 13, 2018	Oct. 18, 2018	Radiation (03CH02-SZ)
Amplifier	Agilent	8449B	3008A01023	1GHz~26.5GHz	Oct. 20, 2018	Nov. 02, 2018	Oct 19, 2019	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Sep. 13, 2018~Nov. 02, 2018	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Sep. 13, 2018~Nov. 02, 2018	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Sep. 13, 2018~Nov. 02, 2018	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.9 dB
-------------------------------------------------------------------------	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0 dB
-------------------------------------------------------------------------	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0 dB
-------------------------------------------------------------------------	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.4 dB
-------------------------------------------------------------------------	--------



## **Appendix A. Conducted Test Results**

**A1 - DTS Part**

Test Engineer:	Orion Li	Temperature:	21~25	°C
Test Date:	2018/11/1	Relative Humidity:	49~51	%



**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.29	8.07	0.50	Pass
11b	1Mbps	1	6	2437	13.39	8.53	0.50	Pass
11b	1Mbps	1	11	2462	13.29	8.53	0.50	Pass
11g	6Mbps	1	1	2412	19.63	16.34	0.50	Pass
11g	6Mbps	1	6	2437	18.98	16.34	0.50	Pass
11g	6Mbps	1	11	2462	18.83	16.36	0.50	Pass
HT20	MCS0	1	1	2412	19.58	17.56	0.50	Pass
HT20	MCS0	1	6	2437	19.53	17.32	0.50	Pass
HT20	MCS0	1	11	2462	19.43	17.58	0.50	Pass
HT40	MCS0	1	3	2422	36.66	35.08	0.50	Pass
HT40	MCS0	1	6	2437	37.16	35.32	0.50	Pass
HT40	MCS0	1	9	2452	37.16	35.48	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	14.58	30.00	0.50	15.08	36.00	Pass
11b	1Mbps	1	6	2437	14.91	30.00	0.50	15.41	36.00	Pass
11b	1Mbps	1	11	2462	15.01	30.00	0.50	15.51	36.00	Pass
11g	6Mbps	1	1	2412	21.65	30.00	0.50	22.15	36.00	Pass
11g	6Mbps	1	6	2437	21.81	30.00	0.50	22.31	36.00	Pass
11g	6Mbps	1	11	2462	21.76	30.00	0.50	22.26	36.00	Pass
HT20	MCS0	1	1	2412	21.12	30.00	0.50	21.62	36.00	Pass
HT20	MCS0	1	6	2437	21.48	30.00	0.50	21.98	36.00	Pass
HT20	MCS0	1	11	2462	21.27	30.00	0.50	21.77	36.00	Pass
HT40	MCS0	1	3	2422	21.20	30.00	0.50	21.70	36.00	Pass
HT40	MCS0	1	6	2437	21.52	30.00	0.50	22.02	36.00	Pass
HT40	MCS0	1	9	2452	20.32	30.00	0.50	20.82	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

2.4GHz Band						
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.10	11.75
11b	1Mbps	1	6	2437	0.10	11.95
11b	1Mbps	1	11	2462	0.10	11.98
11g	6Mbps	1	1	2412	0.60	12.92
11g	6Mbps	1	6	2437	0.60	12.95
11g	6Mbps	1	11	2462	0.60	12.94
HT20	MCS0	1	1	2412	0.62	11.97
HT20	MCS0	1	6	2437	0.62	11.98
HT20	MCS0	1	11	2462	0.62	11.96
HT40	MCS0	1	3	2422	0.63	11.91
HT40	MCS0	1	6	2437	0.63	11.96
HT40	MCS0	1	9	2452	0.63	10.98


**TEST RESULTS DATA**  
**Peak Power Density**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-9.74	0.50	8.00	Pass
11b	1Mbps	1	6	2437	-9.84	0.50	8.00	Pass
11b	1Mbps	1	11	2462	-10.02	0.50	8.00	Pass
11g	6Mbps	1	1	2412	-11.61	0.50	8.00	Pass
11g	6Mbps	1	6	2437	-9.35	0.50	8.00	Pass
11g	6Mbps	1	11	2462	-12.06	0.50	8.00	Pass
HT20	MCS0	1	1	2412	-12.22	0.50	8.00	Pass
HT20	MCS0	1	6	2437	-13.43	0.50	8.00	Pass
HT20	MCS0	1	11	2462	-13.39	0.50	8.00	Pass
HT40	MCS0	1	3	2422	-15.11	0.50	8.00	Pass
HT40	MCS0	1	6	2437	-16.01	0.50	8.00	Pass
HT40	MCS0	1	9	2452	-17.18	0.50	8.00	Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Morris Li	Temperature :	23.5~25.8°C
		Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line

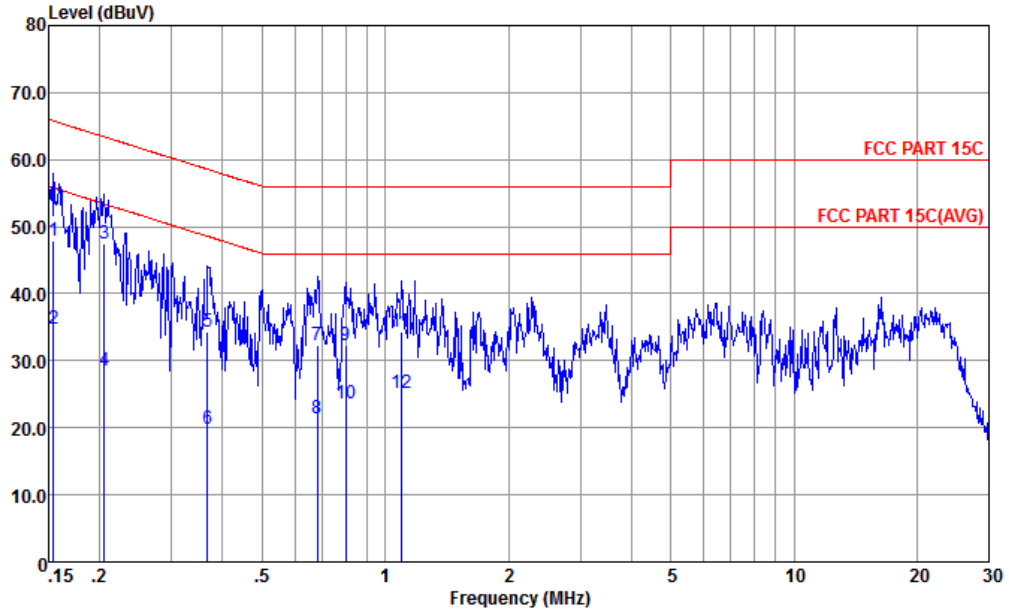


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L-171013-060103 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.154	47.83	-17.95	65.78	37.20	0.16	10.47	QP
2	0.154	34.83	-20.95	55.78	24.20	0.16	10.47	Average
3 *	0.205	47.36	-16.04	63.40	36.80	0.20	10.36	QP
4	0.205	28.46	-24.94	53.40	17.90	0.20	10.36	Average
5	0.367	34.32	-24.24	58.56	23.80	0.24	10.28	QP
6	0.367	19.92	-28.64	48.56	9.40	0.24	10.28	Average
7	0.683	32.40	-23.60	56.00	21.90	0.26	10.24	QP
8	0.683	21.40	-24.60	46.00	10.90	0.26	10.24	Average
9	0.800	32.30	-23.70	56.00	21.80	0.26	10.24	QP
10	0.800	23.60	-22.40	46.00	13.10	0.26	10.24	Average
11	1.094	34.30	-21.70	56.00	23.81	0.26	10.23	QP
12	1.094	25.20	-20.80	46.00	14.71	0.26	10.23	Average



Test Engineer :	Morris Li	Temperature :	23.5~25.8°C
		Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

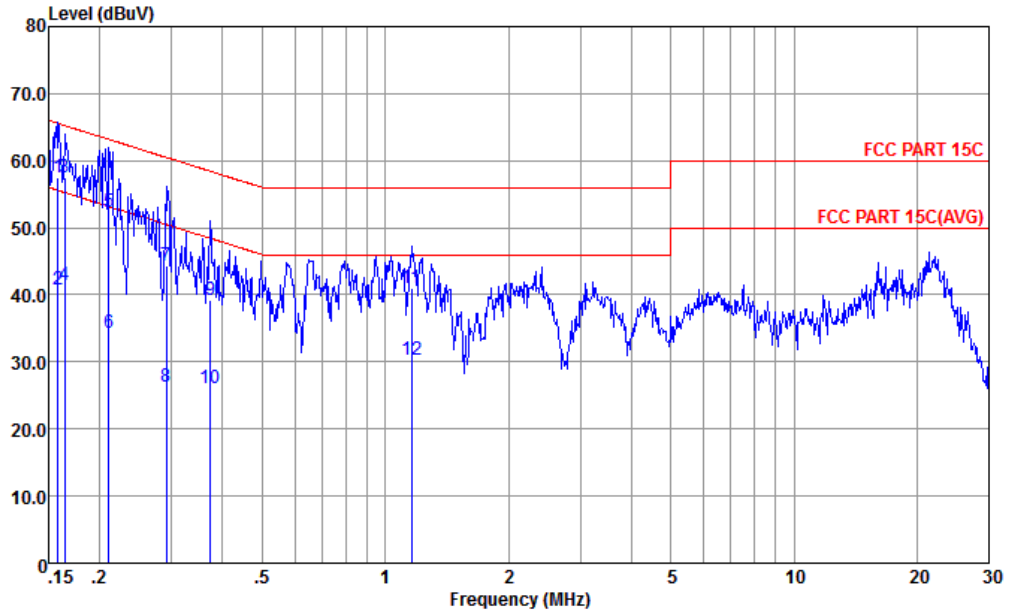

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N-171013-060103 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.158	57.43	-8.13	65.56	46.69	0.28	10.46	QP
2	0.158	40.83	-14.73	55.56	30.09	0.28	10.46	Average
3 *	0.164	57.42	-7.83	65.25	46.70	0.28	10.44	QP
4	0.164	41.52	-13.73	55.25	30.80	0.28	10.44	Average
5	0.211	52.46	-10.72	63.18	41.82	0.28	10.36	QP
6	0.211	34.26	-18.92	53.18	23.62	0.28	10.36	Average
7	0.291	44.44	-16.06	60.50	33.85	0.28	10.31	QP
8	0.291	26.24	-24.26	50.50	15.65	0.28	10.31	Average
9	0.373	39.22	-19.21	58.43	28.65	0.29	10.28	QP
10	0.373	26.12	-22.31	48.43	15.55	0.29	10.28	Average
11	1.160	40.90	-15.10	56.00	30.36	0.31	10.23	QP
12	1.160	30.20	-15.80	46.00	19.66	0.31	10.23	Average



## Appendix C. Radiated Spurious Emission

Test Engineer :	Reid Huang	Temperature :	24~25°C
		Relative Humidity :	48~49%

### 2.4GHz 2400~2483.5MHz

#### WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamplifier Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11b CH 01 2412MHz		2388.12	54.66	-19.34	74	52.25	27.09	6.6	31.28	311	252	P	H
		2374.68	41.23	-12.77	54	38.93	27.04	6.57	31.31	311	252	A	H
	*	2412	101.27	-	-	98.79	27.14	6.6	31.26	311	252	P	H
	*	2412	98.35	-	-	95.87	27.14	6.6	31.26	311	252	P	H
		2331.42	47.33	-26.67	74	45.3	26.88	6.5	31.35	367	56	P	V
		2374.68	35.6	-18.4	54	33.3	27.04	6.57	31.31	367	56	A	V
	*	2412	91.69	-	-	89.21	27.14	6.6	31.26	367	56	P	V
	*	2412	87.79	-	-	85.31	27.14	6.6	31.26	367	56	A	V
802.11b CH 06 2437MHz		2373.42	48.67	-25.33	74	46.37	27.04	6.57	31.31	348	255	P	H
		2381.4	38.54	-15.46	54	36.24	27.04	6.57	31.31	348	255	A	H
	*	2437	101.43	-	-	98.82	27.24	6.63	31.26	348	255	P	H
	*	2437	98.63	-	-	96.02	27.24	6.63	31.26	348	255	A	H
		2491.88	48.03	-25.97	74	45.1	27.4	6.73	31.2	348	255	P	H
		2492.79	37.66	-16.34	54	34.73	27.4	6.73	31.2	348	255	A	H
		2368.38	46.61	-27.39	74	44.36	26.99	6.57	31.31	362	51	P	V
		2389.66	35.45	-18.55	54	33.04	27.09	6.6	31.28	362	51	A	V
	*	2437	91.59	-	-	88.98	27.24	6.63	31.26	362	51	P	V
	*	2437	86.07	-	-	83.46	27.24	6.63	31.26	362	51	A	V
		2488.73	46.88	-27.12	74	43.97	27.4	6.73	31.22	362	51	P	V
		2498.95	35.99	-18.01	54	33.06	27.4	6.73	31.2	362	51	A	V



802.11b CH 11 2462MHz	*	2462	100.5	-	-	97.77	27.3	6.67	31.24	339	253	P	H
	*	2462	97.97	-	-	95.24	27.3	6.67	31.24	339	253	A	H
		2485.8	51.43	-22.57	74	48.6	27.35	6.7	31.22	339	253	P	H
		2483.76	38.43	-15.57	54	35.6	27.35	6.7	31.22	339	253	A	H
	*	2462	94.2	-	-	91.47	27.3	6.67	31.24	383	272	P	V
	*	2462	91.28	-	-	88.55	27.3	6.67	31.24	383	272	A	V
		2485.84	48.4	-25.6	74	45.57	27.35	6.7	31.22	383	272	P	V
		2484.2	37.35	-16.65	54	34.52	27.35	6.7	31.22	383	272	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												





**2.4GHz 2400~2483.5MHz  
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	51.79	-22.21	74	69.06	31.42	9.65	58.34	164	124	P	H
		4824	50.88	-3.12	54	68.15	31.42	9.65	58.34	164	124	A	H
		4824	45.69	-28.31	74	62.96	31.42	9.65	58.34	185	255	P	V
802.11b CH 06 2437MHz		4874	52.23	-21.77	74	69.34	31.51	9.71	58.33	141	126	P	H
		4874	50.91	-3.09	54	68.02	31.51	9.71	58.33	141	126	A	H
		7311	44.1	-29.9	74	55.13	36.36	12.01	59.4	174	100	P	H
		4874	45.16	-28.84	74	62.27	31.51	9.71	58.33	165	106	P	V
		7311	45	-29	74	56.03	36.36	12.01	59.4	174	100	P	V
802.11b CH 11 2462MHz		4924	52.3	-21.7	74	69.27	31.59	9.77	58.33	115	121	P	H
		4924	50.99	-3.01	54	67.96	31.59	9.77	58.33	115	121	A	H
		7386	43.98	-30.02	74	54.69	36.65	12.08	59.44	155	274	P	H
		4924	44.2	-29.8	74	61.17	31.59	9.77	58.33	150	285	P	V
		7386	46.03	-27.97	74	56.74	36.65	12.08	59.44	155	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11g CH 01 (2412MHz) and CH 06 (2437MHz).



802.11g CH 11 2462MHz	*	2462	103.4	-	-	100.67	27.3	6.67	31.24	136	243	P	H
	*	2462	95.38	-	-	92.65	27.3	6.67	31.24	136	243	A	H
		2483.72	64.73	-9.27	74	61.9	27.35	6.7	31.22	136	243	P	H
		2483.52	48.4	-5.6	54	45.57	27.35	6.7	31.22	136	243	A	H
	*	2462	97.5	-	-	94.77	27.3	6.67	31.24	370	252	P	V
	*	2462	88.32	-	-	85.59	27.3	6.67	31.24	370	252	A	V
		2483.64	58.35	-15.65	74	55.52	27.35	6.7	31.22	370	252	P	V
		2483.56	42.85	-11.15	54	40.02	27.35	6.7	31.22	370	252	A	V
Remark	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for CH 01 (2412MHz) and CH 06 (2437MHz) and CH 11 (2462MHz).



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11n HT20 CH 01 (2412MHz) and 802.11n HT20 CH 06 (2437MHz).



<b>802.11n</b> <b>HT20</b> <b>CH 11</b> <b>2462MHz</b>	*	2462	102.08	-	-	99.35	27.3	6.67	31.24	134	227	P	H
	*	2462	94.69	-	-	91.96	27.3	6.67	31.24	134	227	A	H
		2483.52	63.08	-10.92	74	60.25	27.35	6.7	31.22	134	227	P	H
		2483.52	47.78	-6.22	54	44.95	27.35	6.7	31.22	134	227	A	H
	*	2462	96.22	-	-	93.49	27.3	6.67	31.24	374	256	P	V
	*	2462	88.24	-	-	85.51	27.3	6.67	31.24	374	256	A	V
		2485.36	56.71	-17.29	74	53.88	27.35	6.7	31.22	374	256	P	V
		2483.6	42.33	-11.67	54	39.5	27.35	6.7	31.22	374	256	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		4824	48	-26	74	65.27	31.42	9.65	58.34	169	233	P	H
		4824	42.41	-31.59	74	59.68	31.42	9.65	58.34	200	199	P	V
802.11n HT20 CH 06 2437MHz		4874	48.39	-25.61	74	65.5	31.51	9.71	58.33	140	19	P	H
		7311	45.23	-28.77	74	56.26	36.36	12.01	59.4	129	240	P	H
		4874	42.12	-31.88	74	59.23	31.51	9.71	58.33	129	188	P	V
		7311	44.12	-29.88	74	55.15	36.36	12.01	59.4	145	99	P	V
802.11n HT20 CH 11 2462MHz		4924	48.51	-25.49	74	65.48	31.59	9.77	58.33	149	287	P	H
		7386	45.22	-28.78	74	55.93	36.65	12.08	59.44	166	210	P	H
		4924	43.77	-30.23	74	60.74	31.59	9.77	58.33	144	22	P	V
		7386	44.25	-29.75	74	54.96	36.65	12.08	59.44	182	176	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 03 2422MHz		2387.7	66.69	-7.31	74	64.28	27.09	6.6	31.28	150	268	P	H
		2389.8	48.76	-5.24	54	46.35	27.09	6.6	31.28	150	268	A	H
	*	2422	100.21	-	-	97.65	27.19	6.63	31.26	150	268	P	H
	*	2422	92.21	-	-	89.65	27.19	6.63	31.26	150	268	A	H
		2487.96	52.59	-21.41	74	49.68	27.4	6.73	31.22	150	268	P	H
		2483.76	39.6	-14.4	54	36.77	27.35	6.7	31.22	150	268	A	H
		2389.66	59.35	-14.65	74	56.94	27.09	6.6	31.28	309	276	P	V
		2389.52	44.54	-9.46	54	42.13	27.09	6.6	31.28	309	276	A	V
	*	2422	93.94	-	-	91.38	27.19	6.63	31.26	309	276	P	V
	*	2422	86.99	-	-	84.43	27.19	6.63	31.26	309	276	A	V
		2487.68	47.09	-26.91	74	44.18	27.4	6.73	31.22	309	276	P	V
		2489.15	36.51	-17.49	54	33.58	27.4	6.73	31.2	309	276	A	V
802.11n HT40 CH 06 2437MHz		2389.94	58.98	-15.02	74	56.57	27.09	6.6	31.28	143	267	P	H
		2389.94	46.21	-7.79	54	43.8	27.09	6.6	31.28	143	267	A	H
	*	2437	99.8	-	-	97.19	27.24	6.63	31.26	143	267	P	H
	*	2437	91.99	-	-	89.38	27.24	6.63	31.26	143	267	A	H
		2486	60.23	-13.77	74	57.4	27.35	6.7	31.22	143	267	P	H
		2483.62	47.46	-6.54	54	44.63	27.35	6.7	31.22	143	267	A	H
		2389.52	51.7	-22.3	74	49.29	27.09	6.6	31.28	288	265	P	V
		2389.38	40.34	-13.66	54	37.93	27.09	6.6	31.28	288	265	A	V
	*	2437	93.41	-	-	90.8	27.24	6.63	31.26	288	265	P	V
	*	2437	85.41	-	-	82.8	27.24	6.63	31.26	288	265	A	V
		2483.97	53.99	-20.01	74	51.16	27.35	6.7	31.22	288	265	P	V
		2483.5	40.78	-13.22	54	37.95	27.35	6.7	31.22	288	265	A	V





<b>802.11n</b>  <b>HT40</b>  <b>CH 09</b>  <b>2452MHz</b>		2374.82	48.54	-25.46	74	46.24	27.04	6.57	31.31	138	265	P	H
		2389.8	38.05	-15.95	54	35.64	27.09	6.6	31.28	138	265	A	H
	*	2452	97.66	-	-	94.99	27.24	6.67	31.24	138	265	P	H
	*	2452	89.65	-	-	86.98	27.24	6.67	31.24	138	265	A	H
		2486.84	64.21	-9.79	74	61.38	27.35	6.7	31.22	138	265	P	H
		2483.55	50.26	-3.74	54	47.43	27.35	6.7	31.22	138	265	A	H
		2380.7	48.18	-25.82	74	45.88	27.04	6.57	31.31	308	282	P	V
		2388.82	37.81	-16.19	54	35.4	27.09	6.6	31.28	308	282	A	V
	*	2452	92.41	-	-	89.74	27.24	6.67	31.24	308	282	P	V
	*	2452	84.7	-	-	82.03	27.24	6.67	31.24	308	282	A	V
		2493.84	57.69	-16.31	74	54.76	27.4	6.73	31.2	308	282	P	V
		2485.86	44.89	-9.11	54	42.06	27.35	6.7	31.22	308	282	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n		4844	45.67	-28.33	74	62.88	31.45	9.68	58.34	150	320	P	H
HT40		7266	45.44	-28.56	74	56.59	36.24	11.99	59.38	155	154	P	H
CH 03		4844	43.98	-30.02	74	61.19	31.45	9.68	58.34	150	350	P	V
2422MHz		7266	45.05	-28.95	74	56.2	36.24	11.99	59.38	200	360	P	V
802.11n		4874	45	-29	74	62.11	31.51	9.71	58.33	165	230	P	H
HT40		7311	45.36	-28.64	74	56.39	36.36	12.01	59.4	186	323	P	H
CH 06		4874	40.67	-33.33	74	57.78	31.51	9.71	58.33	138	219	P	V
2437MHz		7311	45.71	-28.29	74	56.74	36.36	12.01	59.4	188	295	P	V
802.11n		4904	42.54	-31.46	74	59.57	31.56	9.74	58.33	129	254	P	H
HT40		7356	45.68	-28.32	74	56.52	36.53	12.06	59.43	165	335	P	H
CH 09		4904	40.1	-33.9	74	57.13	31.56	9.74	58.33	150	360	P	V
2452MHz		7356	44.92	-29.08	74	55.76	36.53	12.06	59.43	149	285	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
2.4GHz WIFI 802.11b (LF)

Table with 14 columns: WIFI, Note, Frequency, Level, Over, Limit, Read, Antenna, Cable, Preamp, Ant, Table, Peak, Pol. It contains 12 rows of test data for 2.4GHz WIFI 802.11b LF and a Remark section at the bottom.



Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



### Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
11b	97.71	8.219	0.122	300Hz
11g	87.05	1.364	0.733	1KHz
11n HT20	86.71	1.277	0.783	1KHz
11n HT40	86.48	1.233	0.811	1KHz

11b

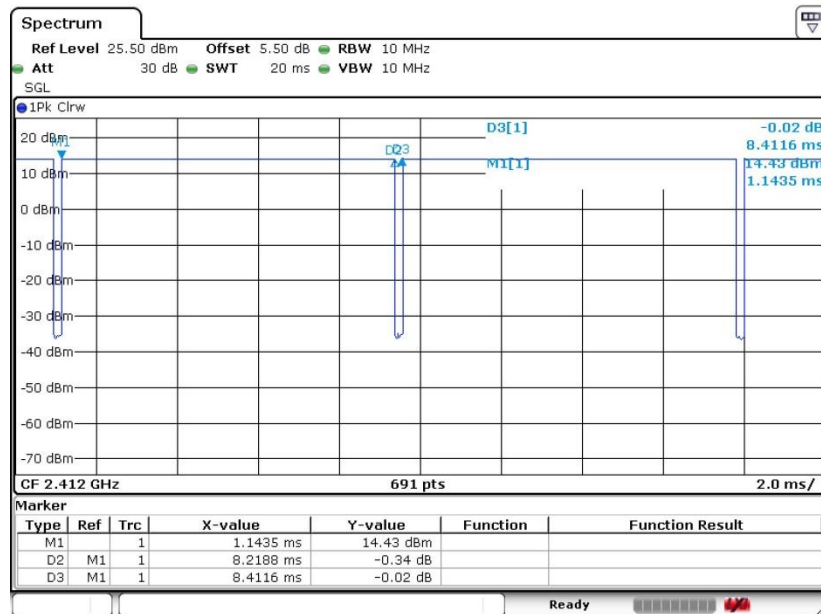




11g

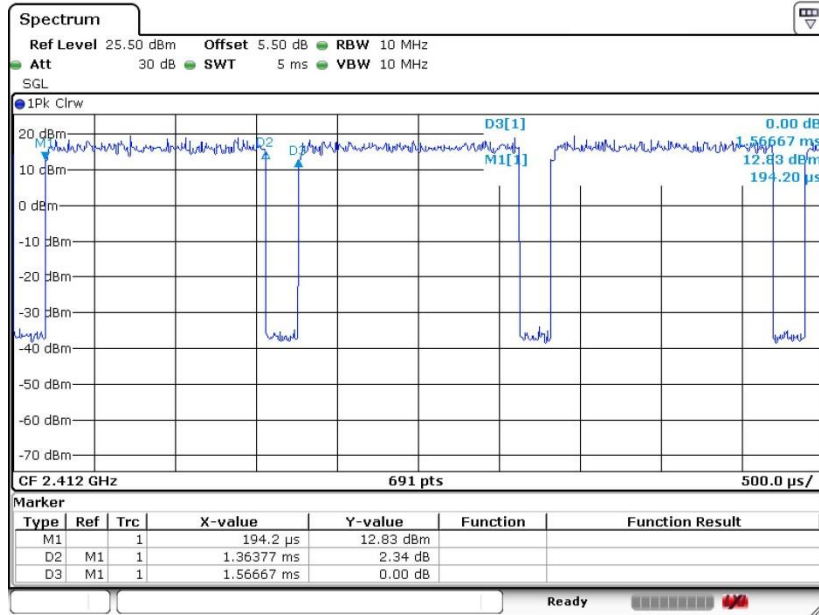


11n HT20

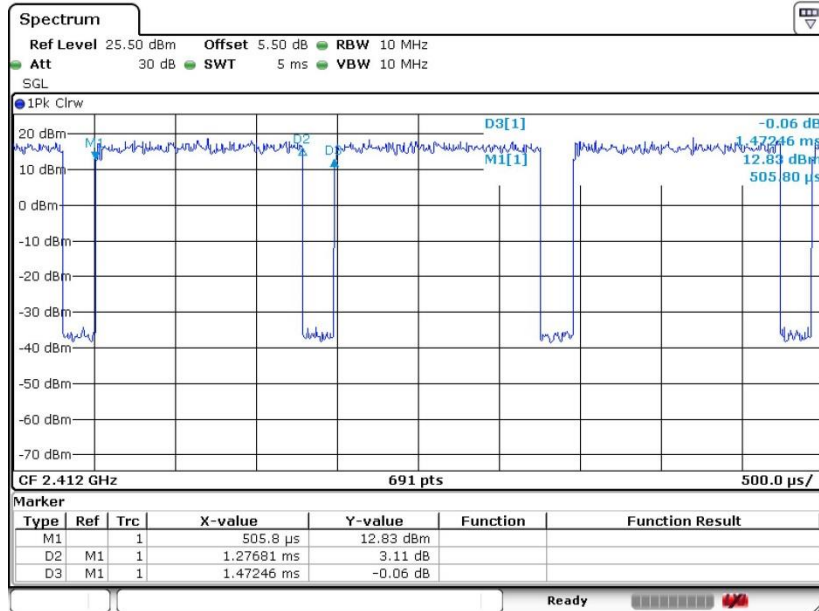



11n HT40

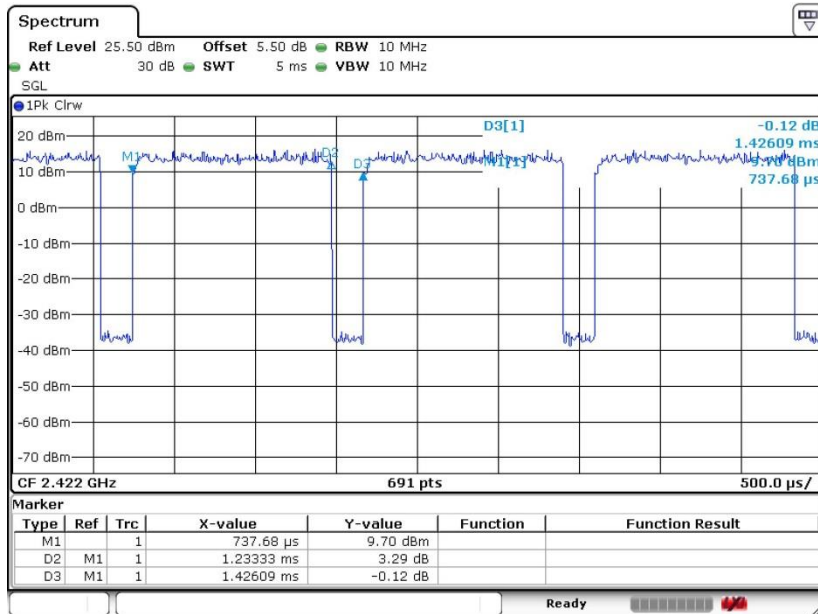





## **Appendix F. Product Equality Declaration**

# Bullitt Mobile Limited

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

Date: 6/28/2018

## Product Equality Declaration

We, Bullitt Mobile Limited, declare on our sole responsibility for the product of B35 as below:

1. The differences between present and previous are:

Object	Original Source (Dual SIMs) (Single SIM)	Second source (Dual SIMs) (Single SIM)	Remark
Receiver	R0612A24WT	PS120620HS02N	Only supplier difference

Dual SIM products are different from Single SIM products only in SIM card tray. The detailed differences are listed above.

Should you have any questions or comments regarding this matter, please have my best attention.

Sincerely yours,



Contact Person: Wayne Huang

COMPANY: Bullitt Mobile Ltd.

Tel: +886 – 2 -26278305

E-Mail: Whuang@bullitt-group.com