



# FCC RF Test Report

**APPLICANT** : Bullitt Group  
**EQUIPMENT** : Smartphone  
**BRAND NAME** : KODAK  
**MODEL NAME** : EKTRA  
**MARKETING NAME** : KODAK EKTRA Smartphone  
**FCC ID** : ZL5EKTRA  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Mar. 07, 2017 and testing was completed on Apr. 13, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



**Sporton International (KunShan) INC.**  
**No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China**



# TABLE OF CONTENTS

**1 GENERAL DESCRIPTION ..... 5**

1.1 Applicant ..... 5

1.2 Manufacturer ..... 5

1.3 Product Feature of Equipment Under Test ..... 5

1.4 Product Specification of Equipment Under Test ..... 6

1.5 Modification of EUT ..... 6

1.6 Testing Location ..... 7

1.7 Applicable Standards ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

2.1 Carrier Frequency and Channel ..... 8

2.2 Test Mode ..... 9

2.3 Connection Diagram of Test System ..... 10

2.4 Support Unit used in test configuration and system ..... 11

2.5 EUT Operation Test Setup ..... 11

2.6 Measurement Results Explanation Example ..... 12

**3 TEST RESULT ..... 13**

3.1 6dB and 99% Bandwidth Measurement ..... 13

3.2 Output Power Measurement ..... 15

3.3 Power Spectral Density Measurement ..... 17

3.4 Conducted Band Edges and Spurious Emission Measurement ..... 19

3.5 Radiated Band Edges and Spurious Emission Measurement ..... 32

3.6 AC Conducted Emission Measurement ..... 36

3.7 Antenna Requirements ..... 40

**4 LIST OF MEASURING EQUIPMENT ..... 41**

**5 UNCERTAINTY OF EVALUATION ..... 42**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED SPURIOUS EMISSION**

**APPENDIX C. DUTY CYCLE PLOTS**

**APPENDIX D. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-247 5.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-247 5.4(d)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-247 5.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-247 5.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.11 dB at 2483.500 MHz
3.6	15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 7.68 dB at 0.567 MHz
3.7	15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Bullitt Group**

One Valpy, Valpy Street, Reading, Berkshire, RG1 1AR, UK

## 1.2 Manufacturer

**Shanghai Sunrise Simcom Limited**

No. 888, Shengli Rd., Qingpu, Shanghai, P.R.China 201700

## 1.3 Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	Smartphone
<b>Brand Name</b>	KODAK
<b>Model Name</b>	EKTRA
<b>Marketing Name</b>	KODAK EKTRA Smartphone
<b>FCC ID</b>	ZL5EKTRA
<b>EUT supports Radios application</b>	GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE/Bluetooth v4.1 LE
<b>IMEI Code</b>	Conducted: 357682080001005 Radiation: N/A Conduction: 357682080000874
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	2412 MHz ~ 2462 MHz
<b>Maximum (Peak) Output Power to antenna</b>	802.11b : 17.34 dBm (0.0542 W) 802.11g : 23.91 dBm (0.2460 W) 802.11n HT20 : 23.94 dBm (0.2477 W) 802.11n HT40 : 23.95 dBm (0.2483 W)
<b>99% Occupied Bandwidth</b>	802.11b : 13.19MHz 802.11g : 18.18MHz 802.11n HT20 : 18.28MHz 802.11n HT40 : 36.76MHz
<b>Antenna Type / Gain</b>	PIFA Antenna with gain -0.12 dBi
<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

<b>Test Site</b>	Sporton International (KunShan) INC.	
<b>Test Site Location</b>	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH01-KS	CO01-KS

<b>Test Site</b>	SPORTON International (ShenZhen) INC.	
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC/IC Registration No.</b>
	03CH03-SZ	565805/4086F

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 2
- ♦ IC RSS-Gen Issue 4

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-





## 2.2 Test Mode


Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
<b>AC Conducted Emission</b>	Mode 1: GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + USB Cable (Charging from Adapter)
<b>Remark:</b> For Radiated TCs, The tests were performed with Adapter, Earphone, and USB Cable.	

## 2.3 Connection Diagram of Test System

### <WLAN Tx Mode>

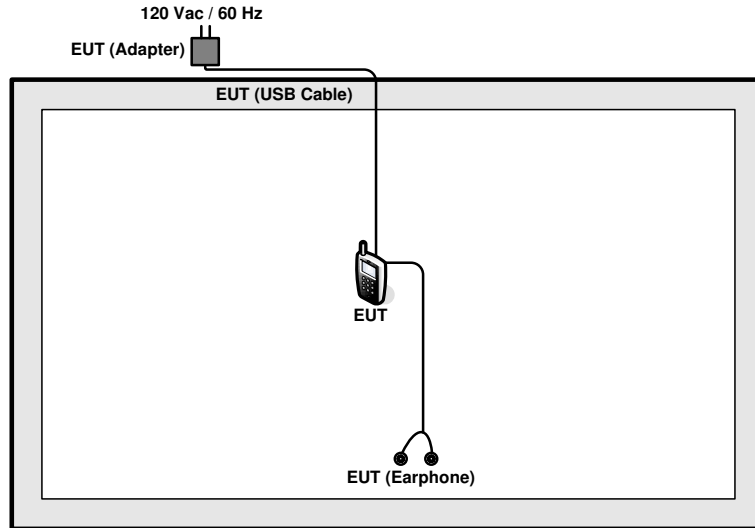

### <AC Conducted Emission Mode>

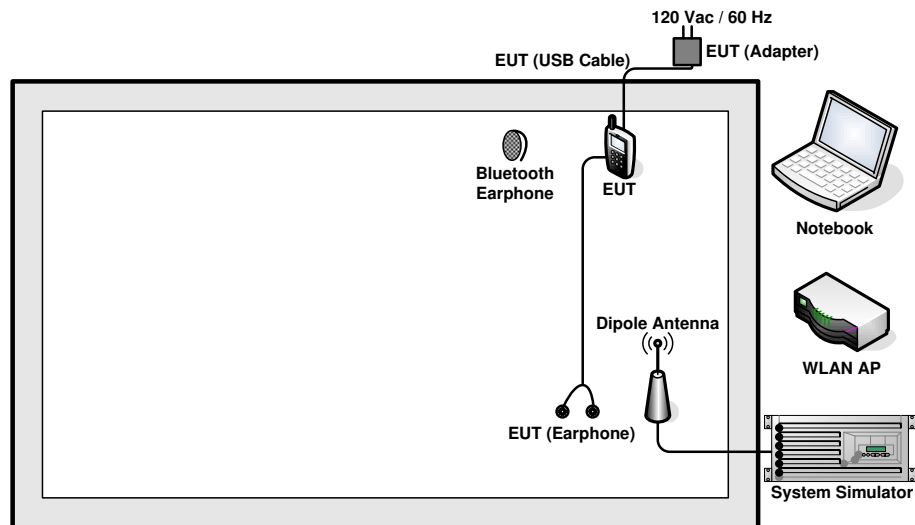

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.



## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 5.6 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.6 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


##### 3.1.4 Test Setup





### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

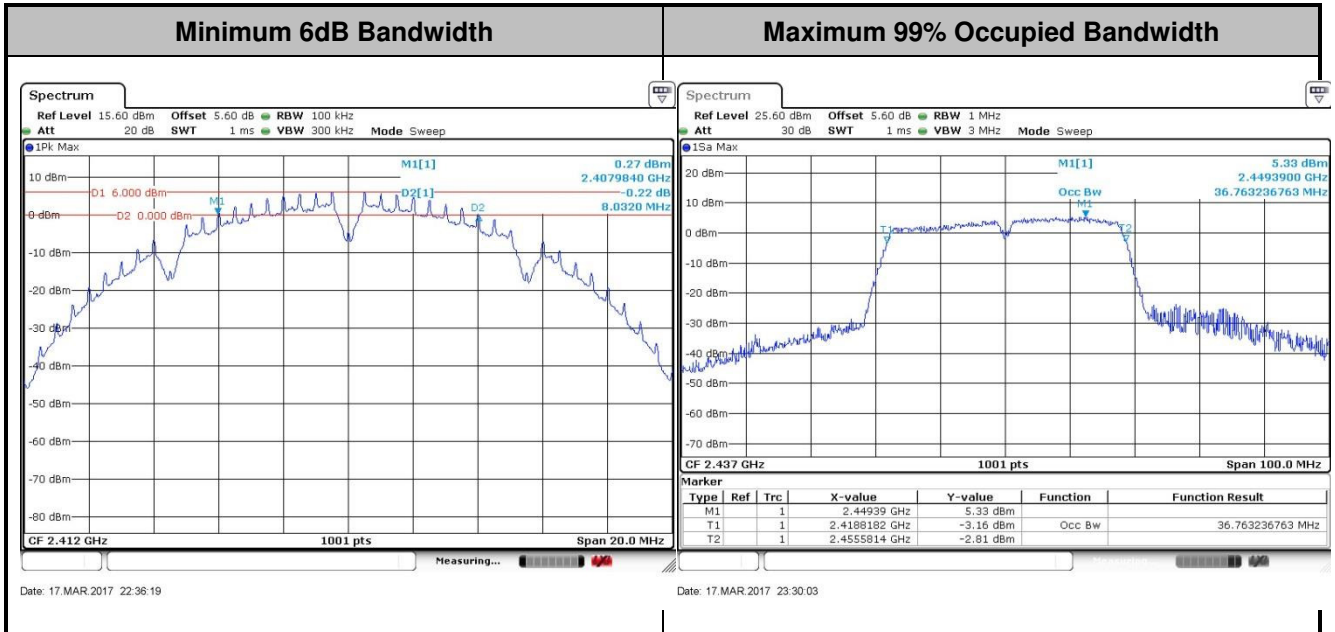

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

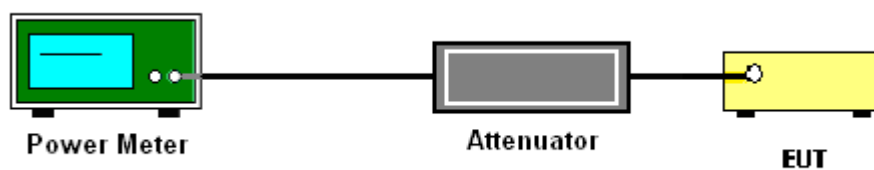



### **3.2.5 Test Result of Peak Output Power**

Please refer to Appendix A.

### **3.2.6 Test Result of Average output Power (Reporting Only)**

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


#### 3.3.4 Test Setup

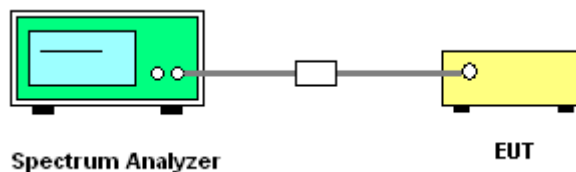



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

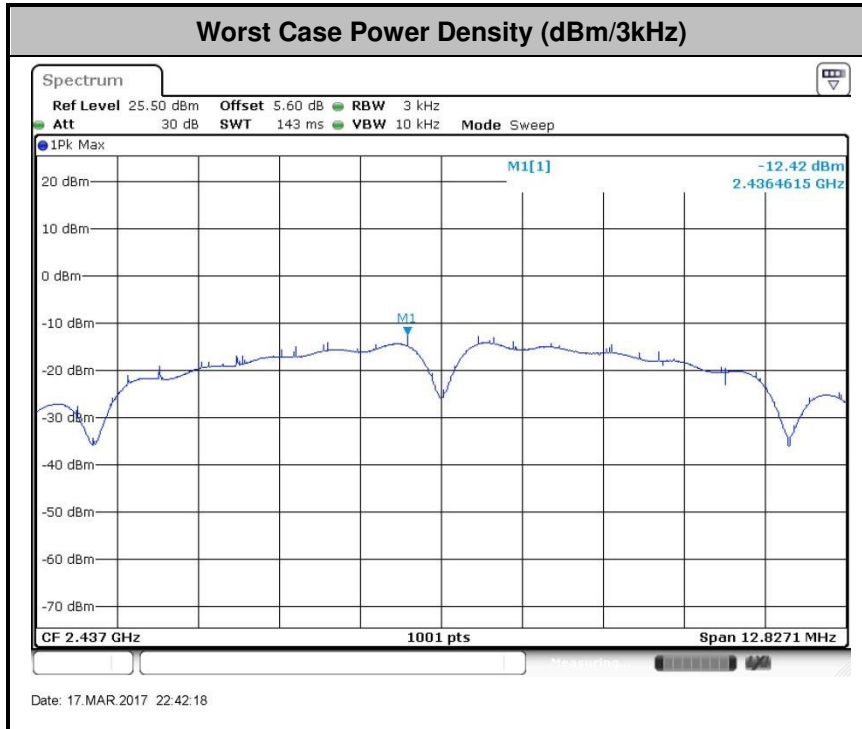

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

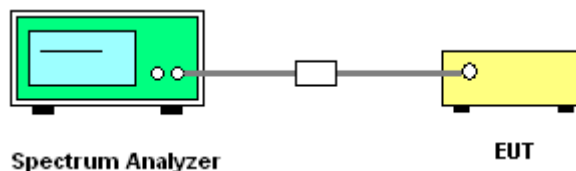



### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

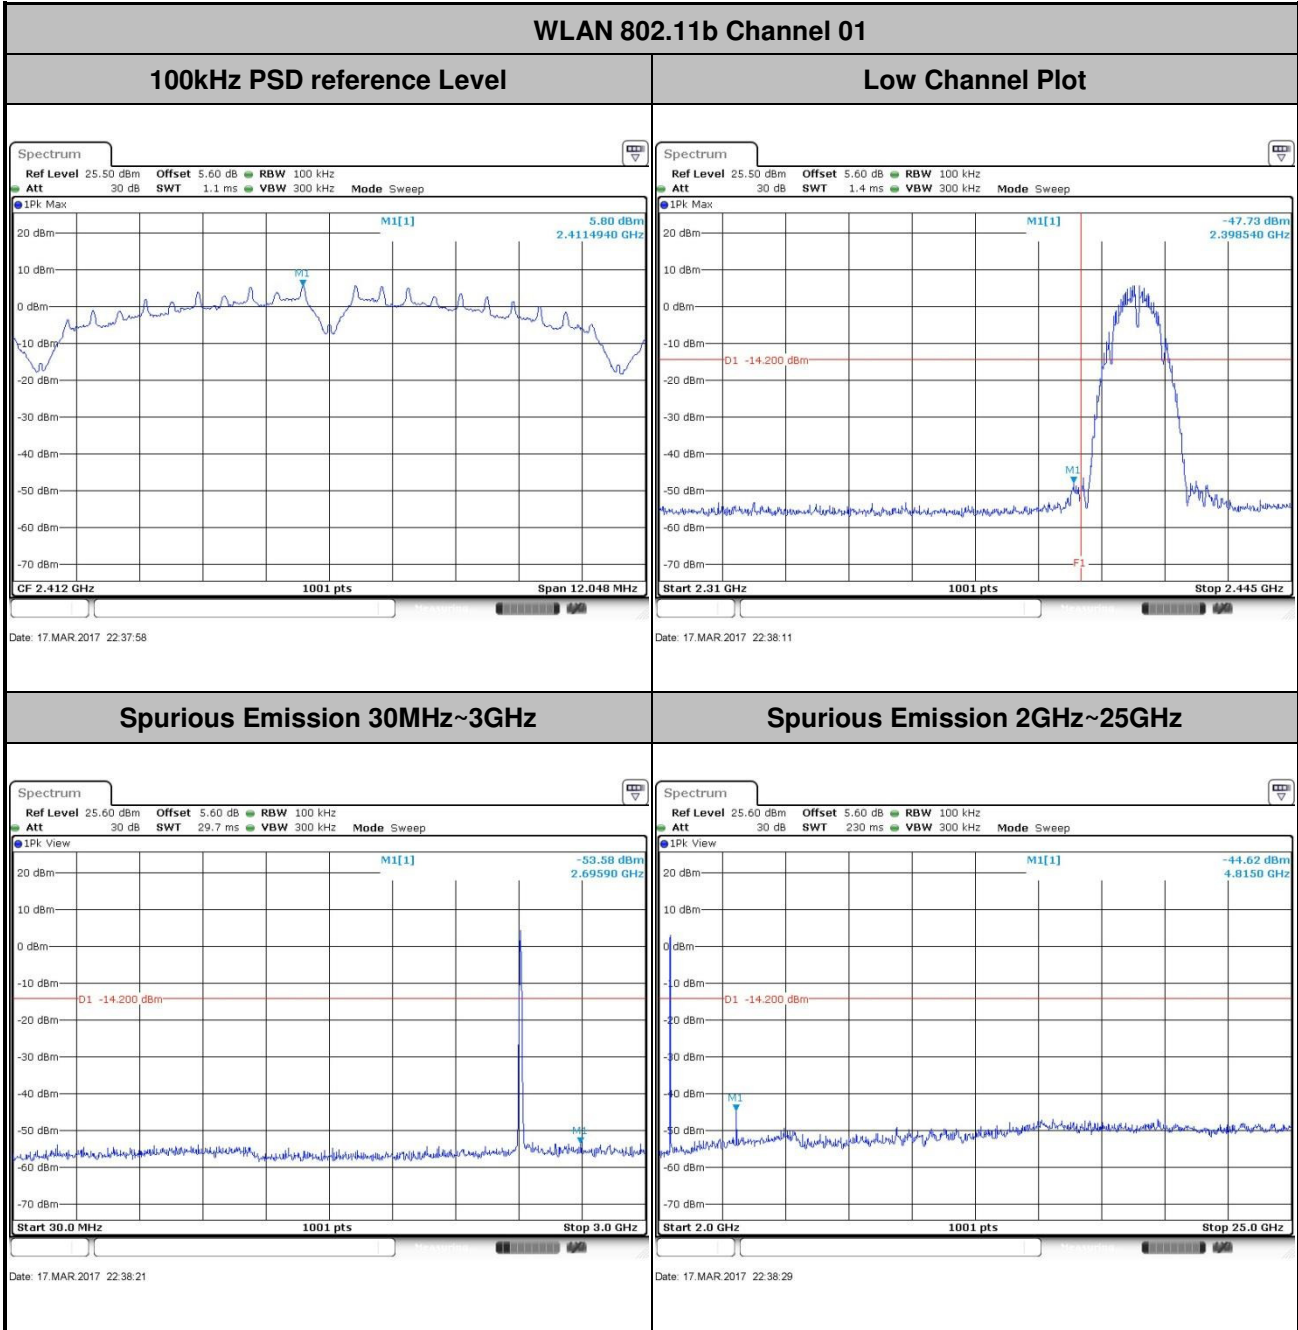




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai


WLAN 802.11b Channel 06

100kHz PSD reference Level

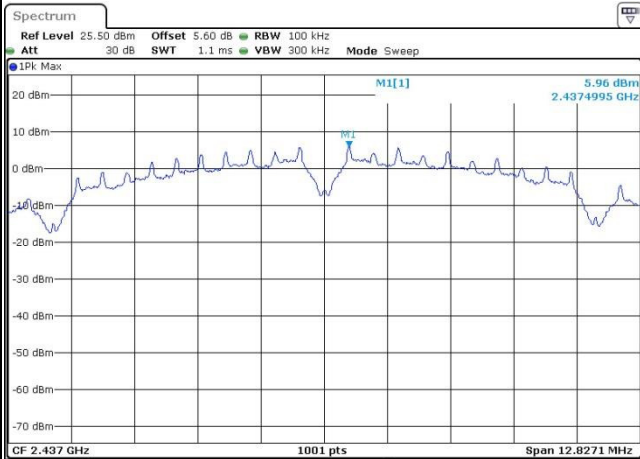


Date: 17.MAR.2017 22:42:35

Spurious Emission 30MHz~3GHz

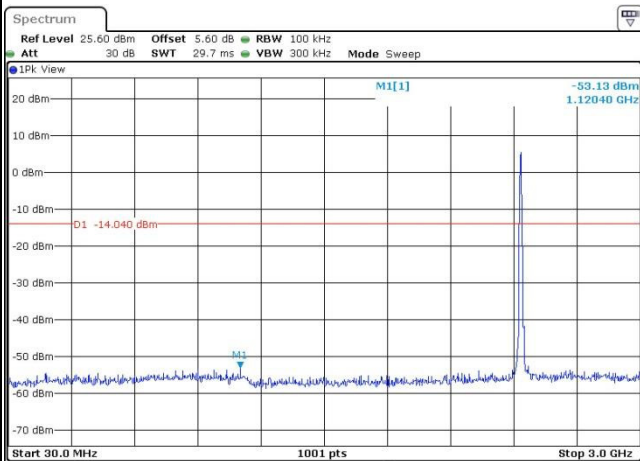

Date: 17.MAR.2017 22:42:45

Spurious Emission 2GHz~25GHz

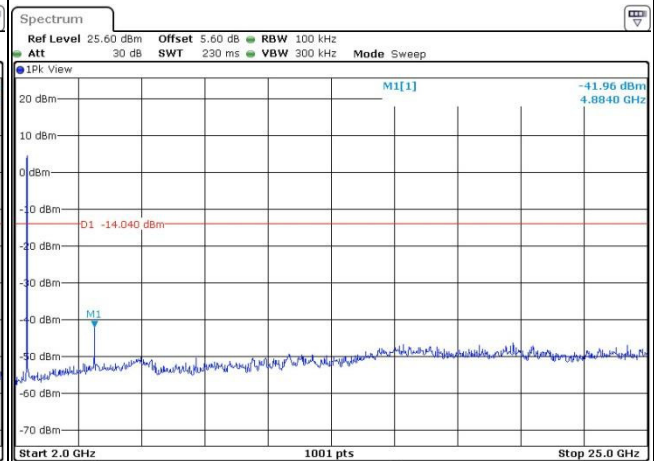


Date: 17.MAR.2017 22:42:54



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11b Channel 11

100kHz PSD reference Level

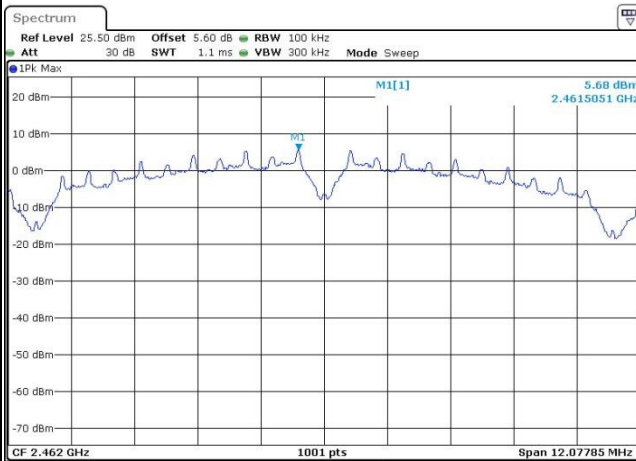


Date: 22.MAR.2017 08:54:13

High Channel Plot

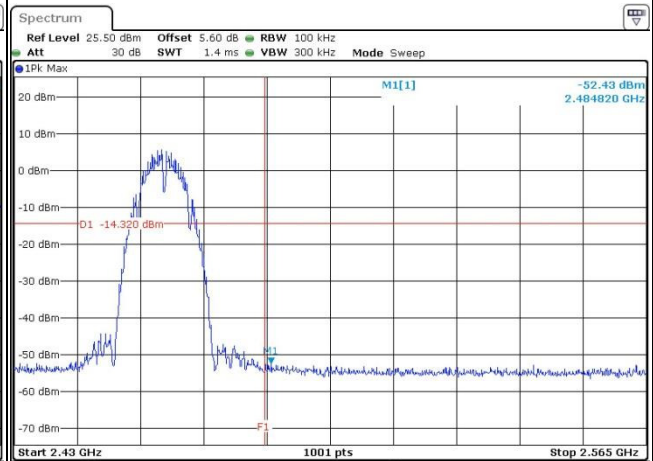


Date: 22.MAR.2017 08:54:51

Spurious Emission 30MHz~3GHz

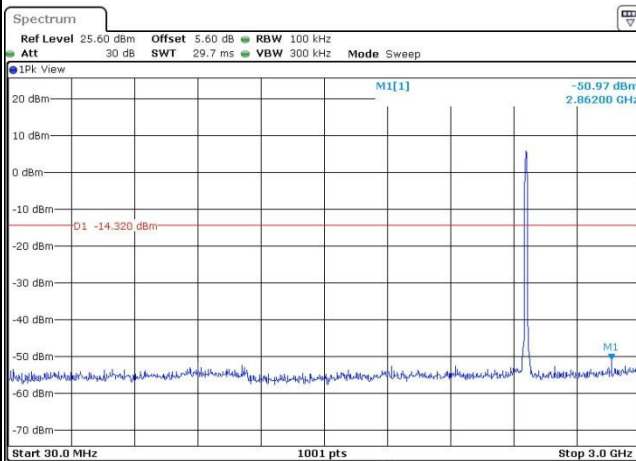

Date: 22.MAR.2017 08:59:37

Spurious Emission 2GHz~25GHz

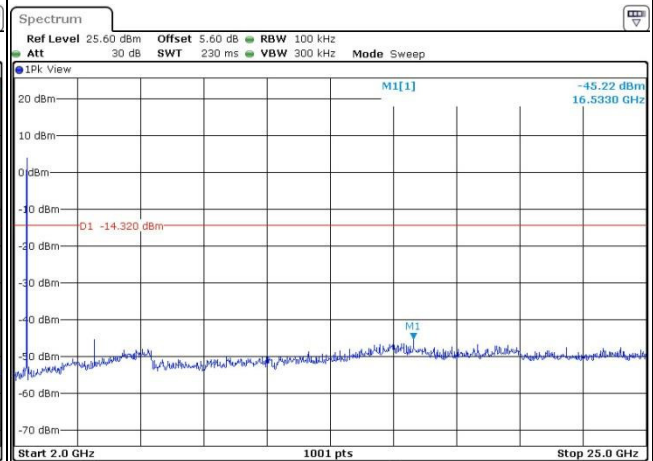


Date: 22.MAR.2017 08:59:46




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

WLAN 802.11g Channel 01


100kHz PSD reference Level

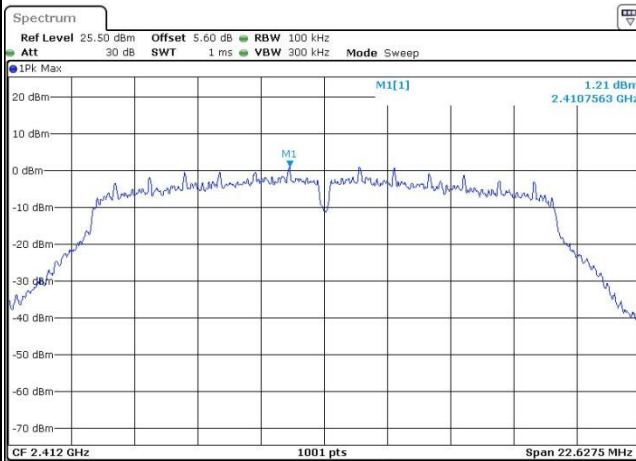


Low Channel Plot

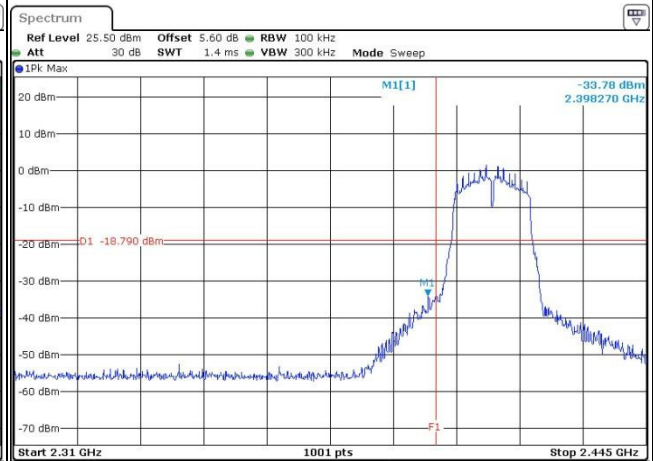

Spurious Emission 30MHz~3GHz

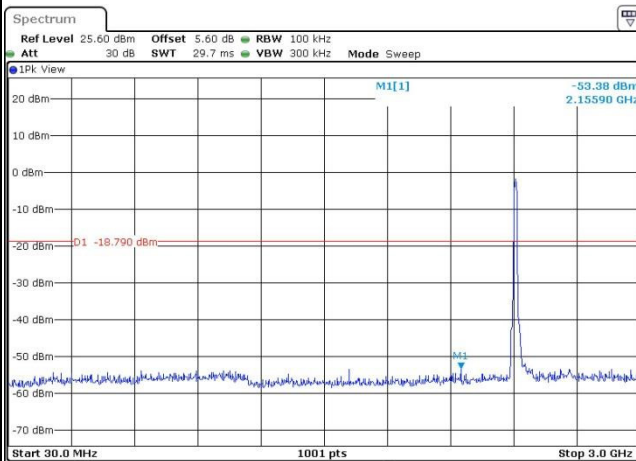

Spurious Emission 2GHz~25GHz

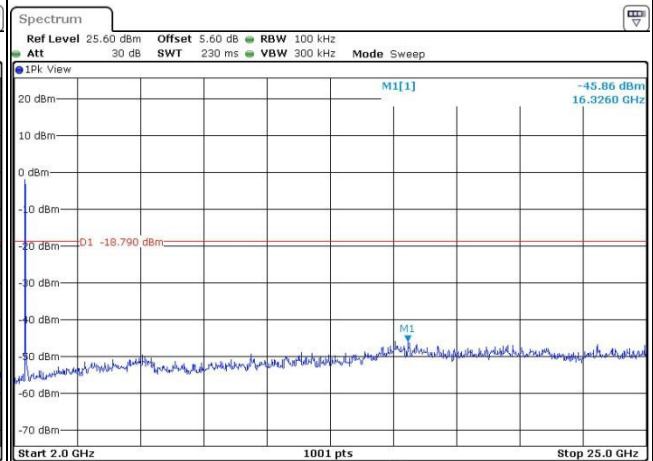




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai


WLAN 802.11g Channel 06

100kHz PSD reference Level

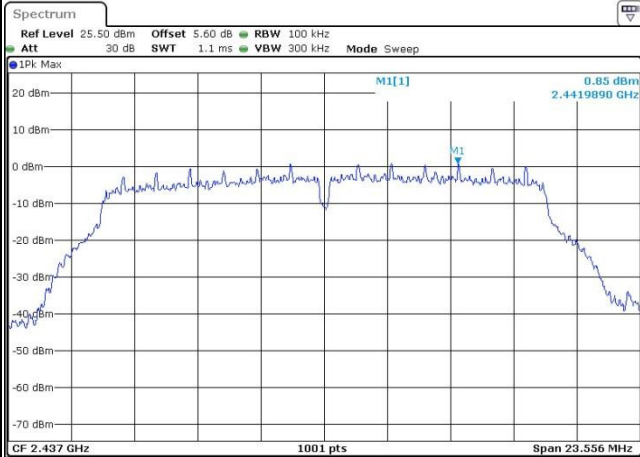


Date: 17.MAR.2017 23:06:22

Spurious Emission 30MHz~3GHz

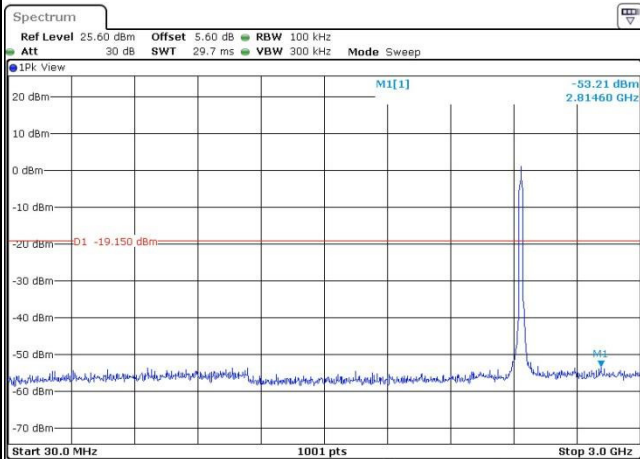

Date: 17.MAR.2017 23:06:33

Spurious Emission 2GHz~25GHz

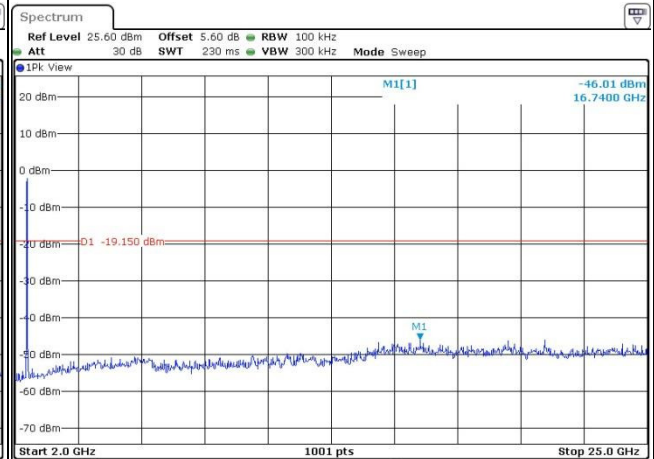

Date: 17.MAR.2017 23:06:41






Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11g Channel 11

100kHz PSD reference Level

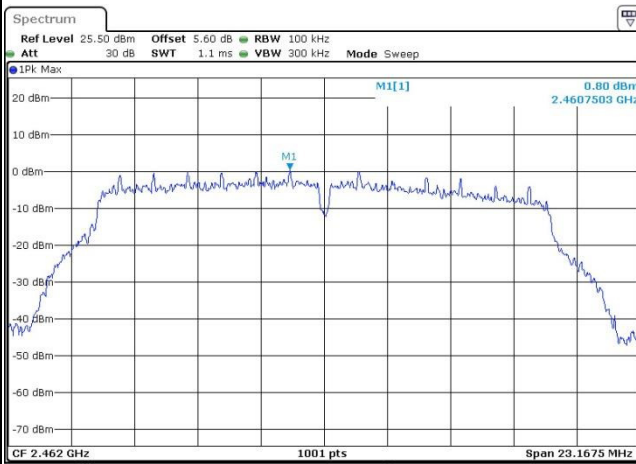


Date: 17.MAR.2017 23:09:01

High Channel Plot

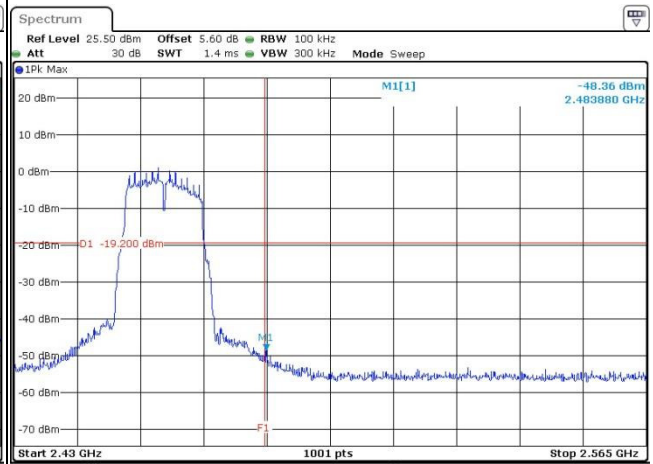


Date: 17.MAR.2017 23:10:07

Spurious Emission 30MHz~3GHz

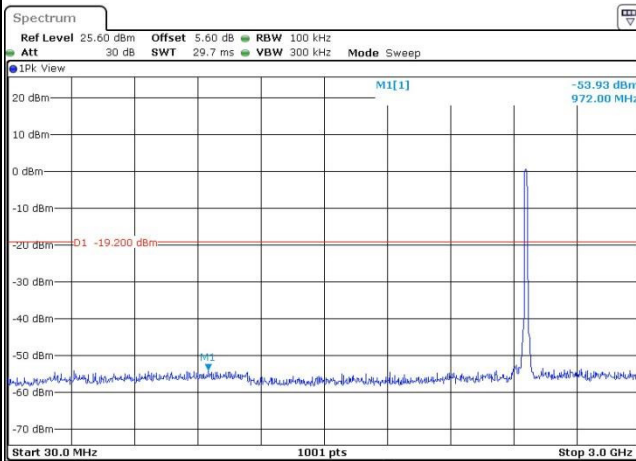

Date: 17.MAR.2017 23:10:19

Spurious Emission 2GHz~25GHz

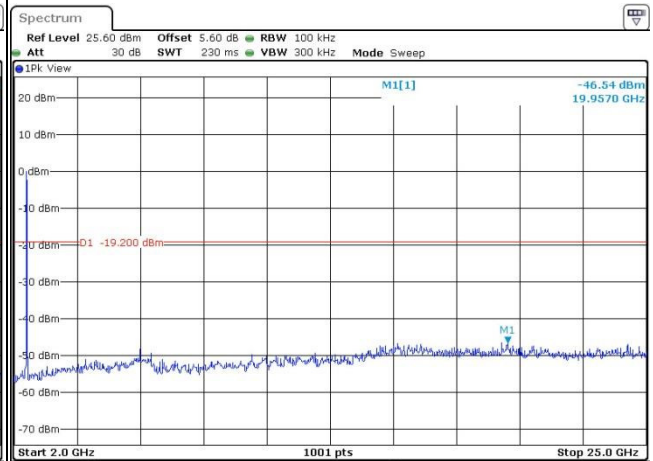


Date: 17.MAR.2017 23:10:27



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

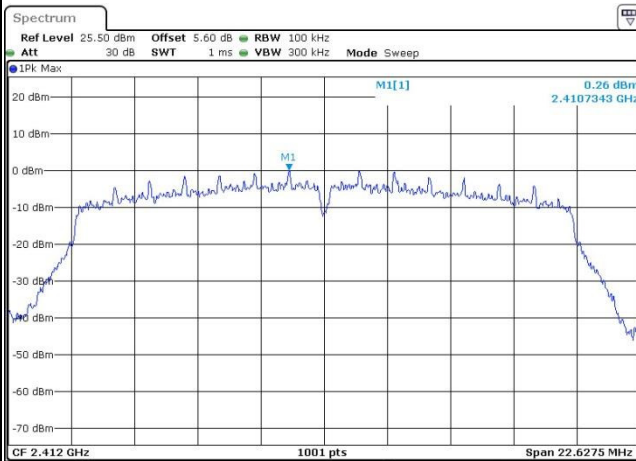


Date: 17.MAR.2017 23:12:52

Low Channel Plot

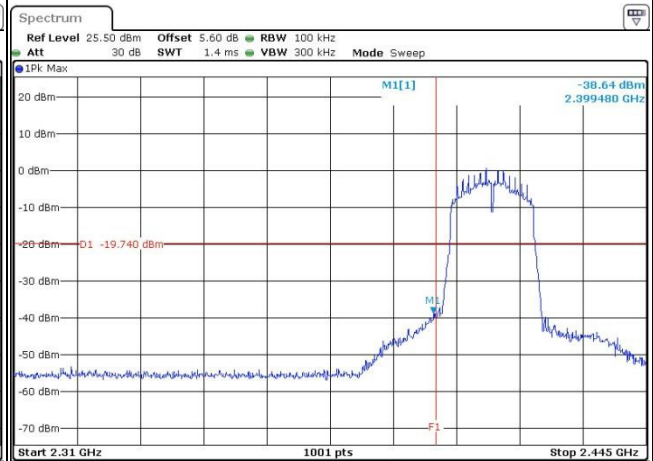


Date: 17.MAR.2017 23:13:26

Spurious Emission 30MHz~3GHz

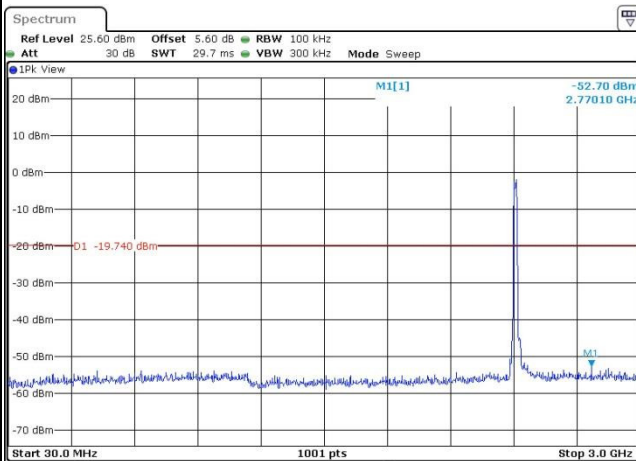

Date: 17.MAR.2017 23:14:17

Spurious Emission 2GHz~25GHz

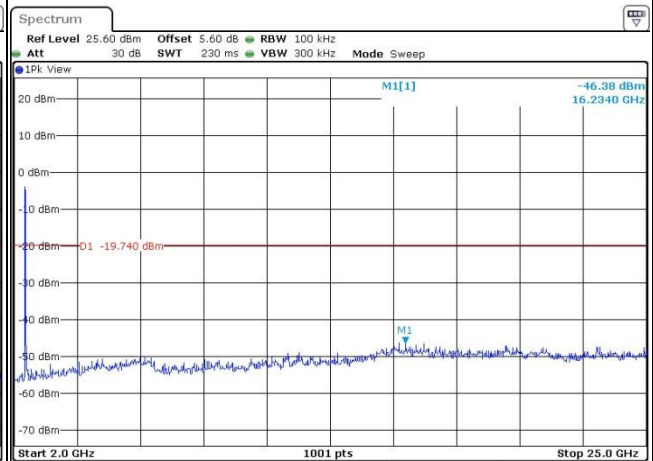


Date: 17.MAR.2017 23:14:26



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

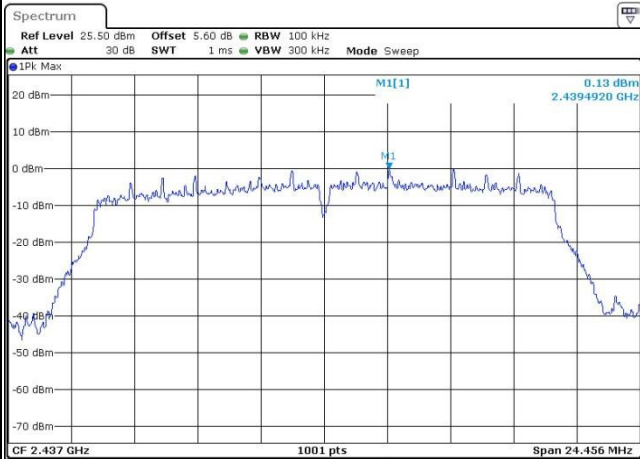


Date: 17.MAR.2017 23:16:30

Spurious Emission 30MHz~3GHz

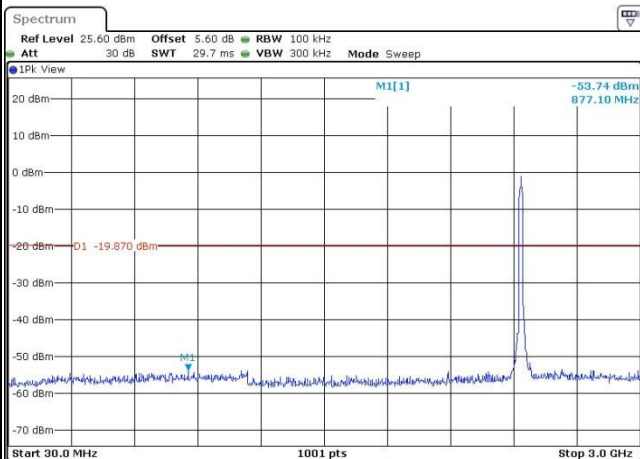

Date: 17.MAR.2017 23:16:50

Spurious Emission 2GHz~25GHz

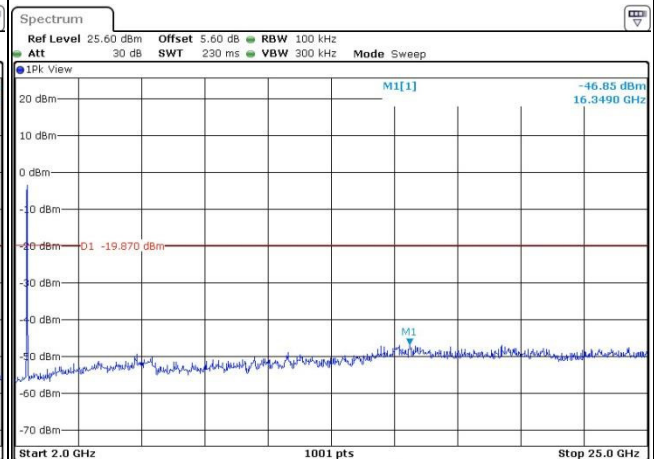


Date: 17.MAR.2017 23:16:59




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai

WLAN 802.11n HT20 Channel 11


100kHz PSD reference Level

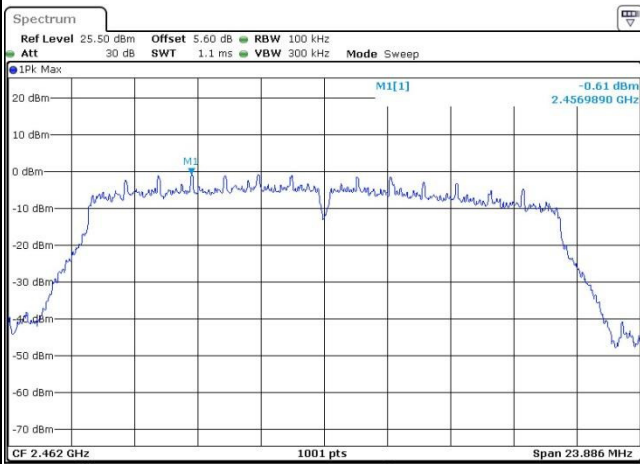


High Channel Plot

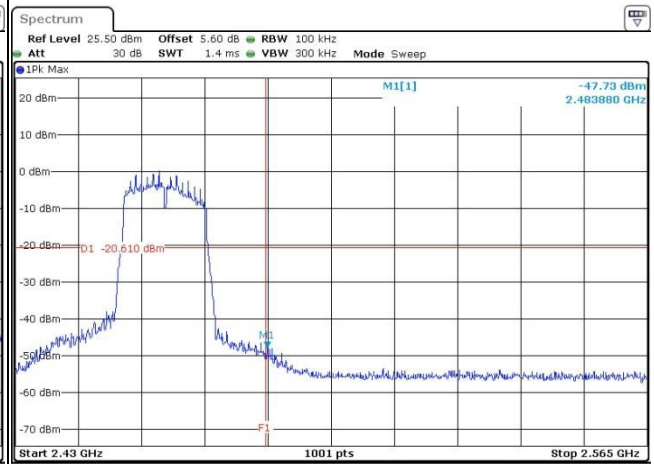

Spurious Emission 30MHz~3GHz

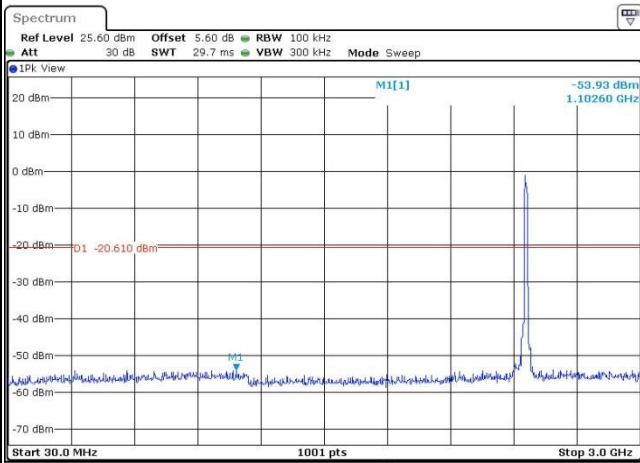

Spurious Emission 2GHz~25GHz

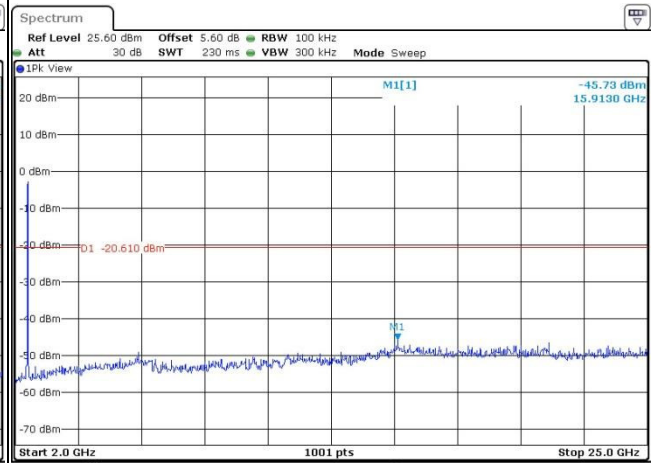




Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	03	Test Engineer :	Silent Hai


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

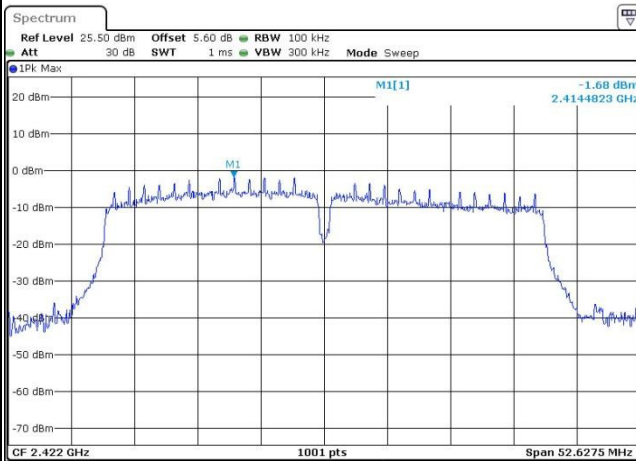


Date: 17.MAR.2017 23:23:58

Low Channel Plot

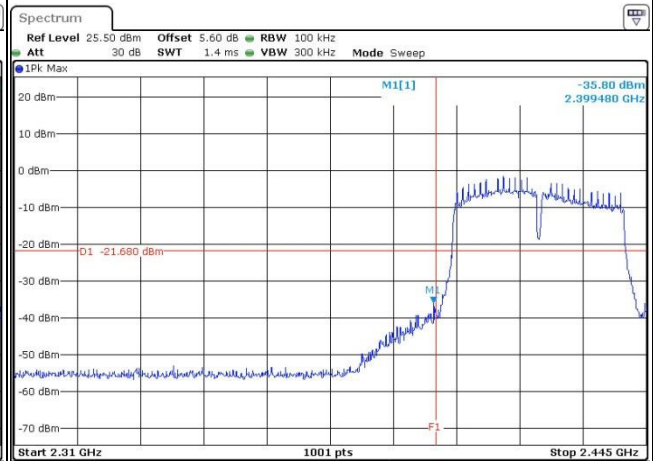


Date: 17.MAR.2017 23:24:16

Spurious Emission 30MHz~3GHz

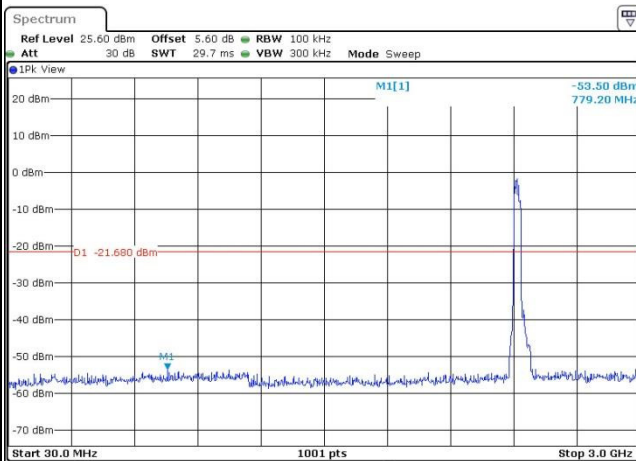

Date: 17.MAR.2017 23:24:50

Spurious Emission 2GHz~25GHz

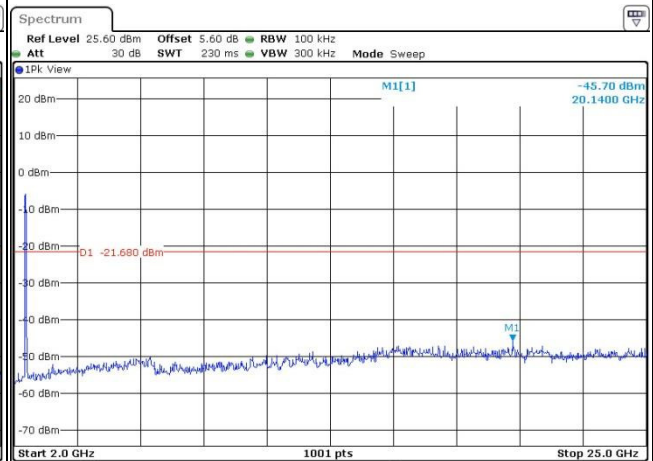


Date: 17.MAR.2017 23:24:59




Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11n HT40 Channel 06


100kHz PSD reference Level

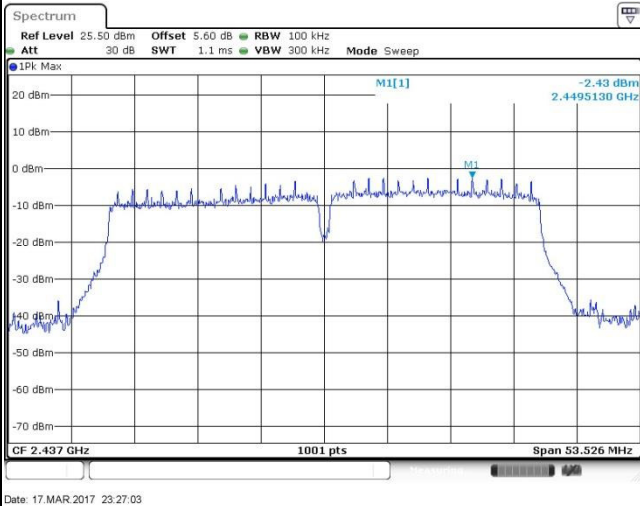

Spurious Emission 30MHz~3GHz

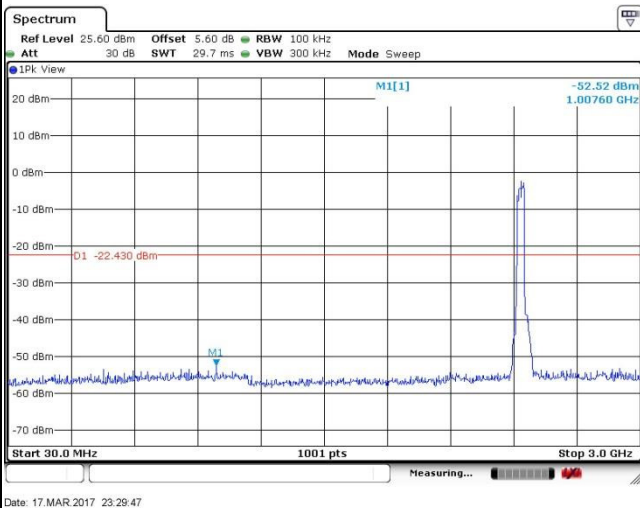

Spurious Emission 2GHz~25GHz

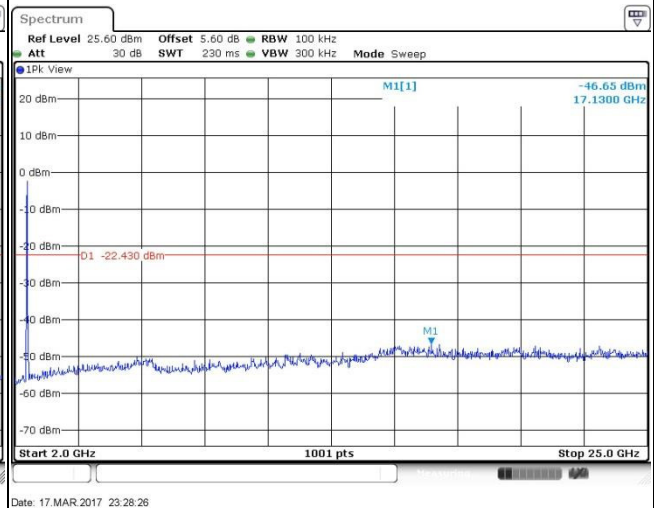




Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	09	Test Engineer :	Silent Hai


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

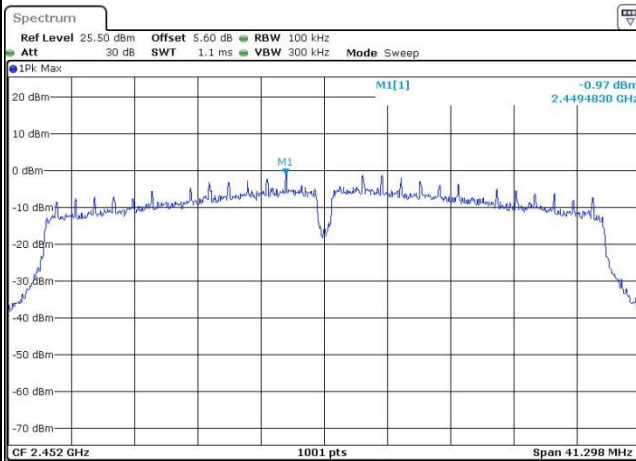


Date: 17.MAR.2017 23:32:04

High Channel Plot

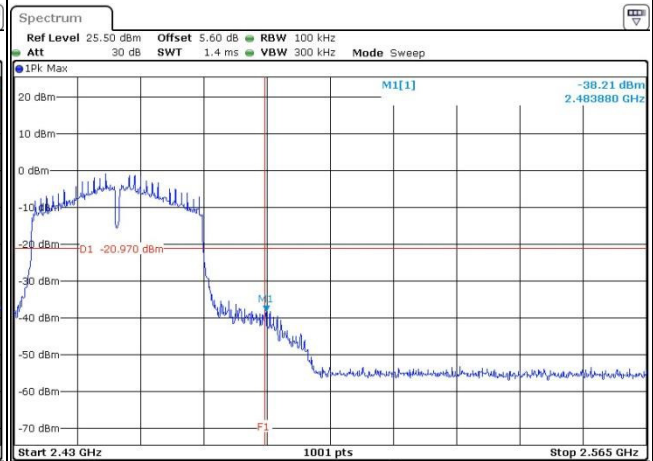


Date: 17.MAR.2017 23:32:18

Spurious Emission 30MHz~3GHz

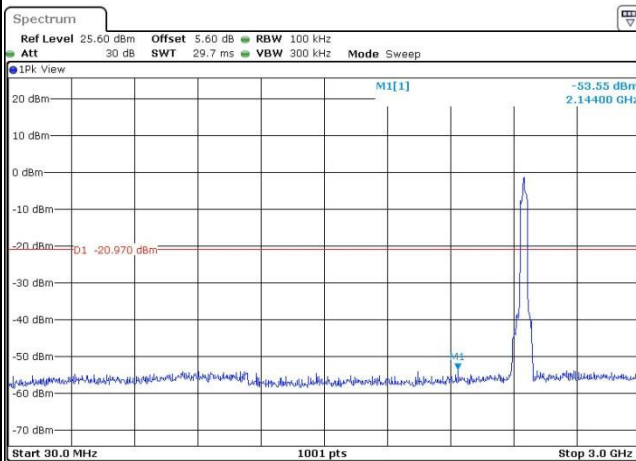

Date: 17.MAR.2017 23:33:22

Spurious Emission 2GHz~25GHz

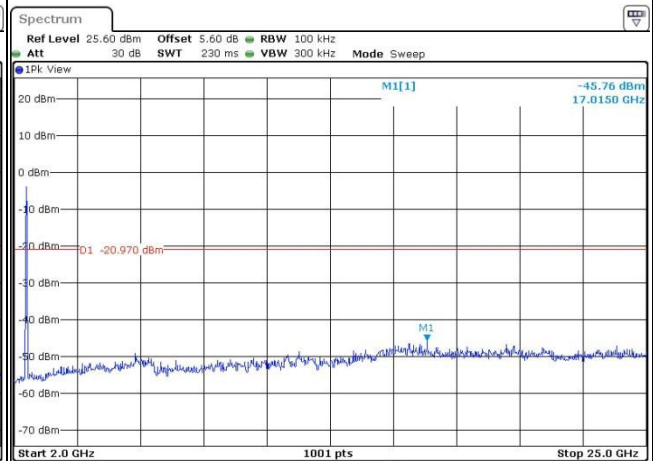

Date: 17.MAR.2017 23:33:30



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.






### **3.5.3 Test Procedures**


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

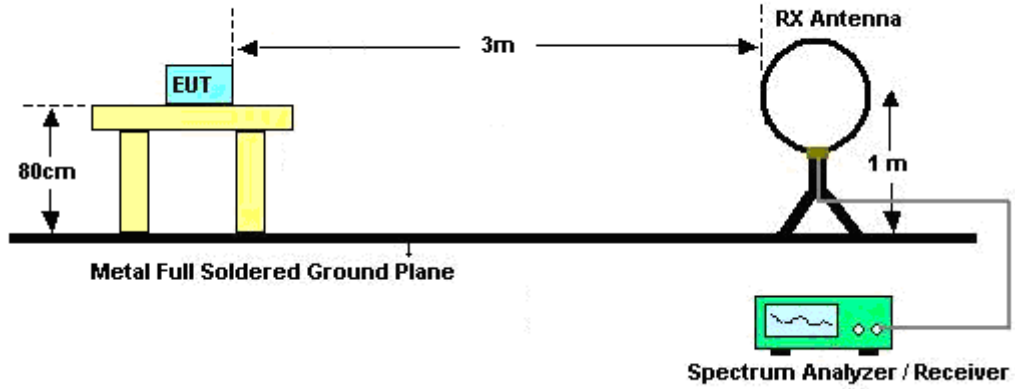

For radiated emissions from 30MHz to 1GHz

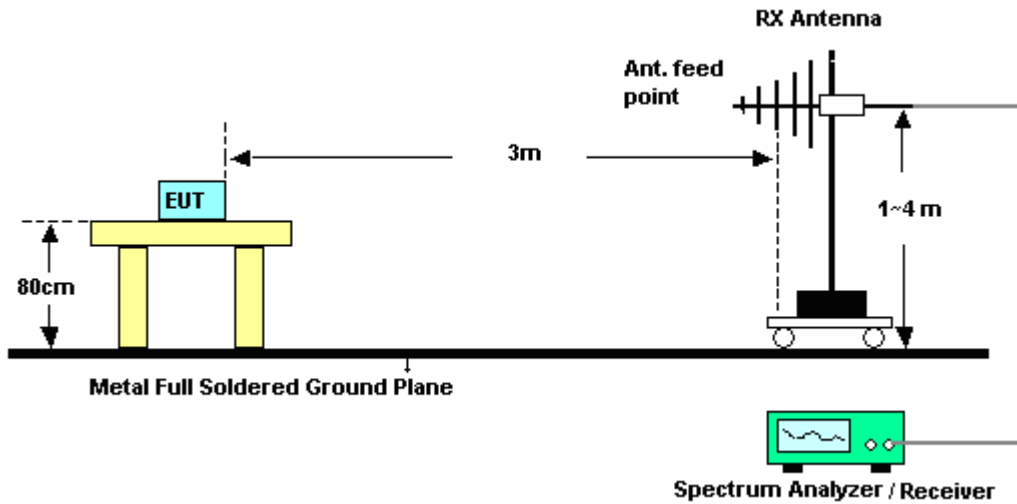

For radiated emissions above 1GHz

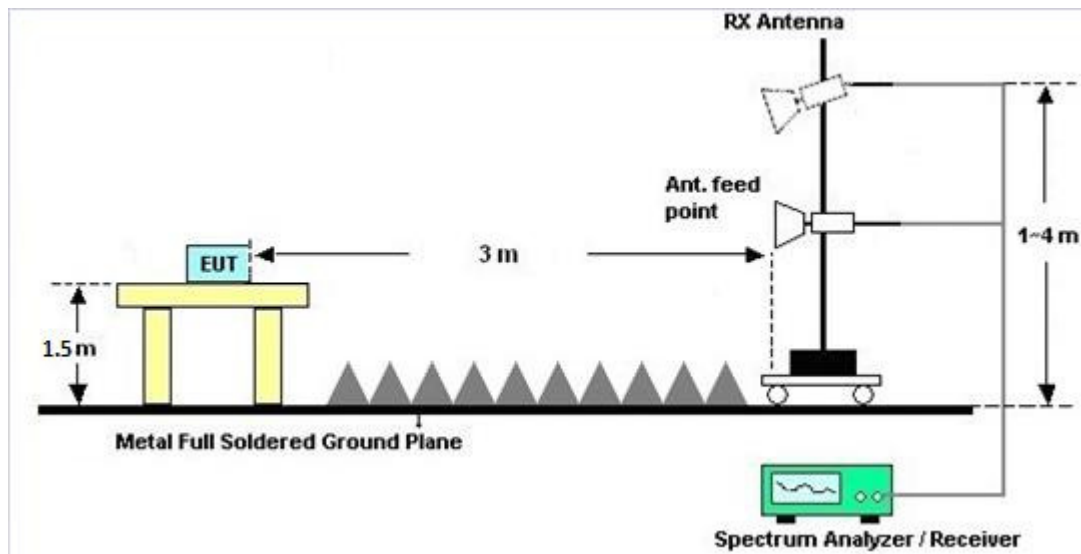

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.5.7 Duty Cycle

Please refer to Appendix C.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


### 3.6.4 Test Setup

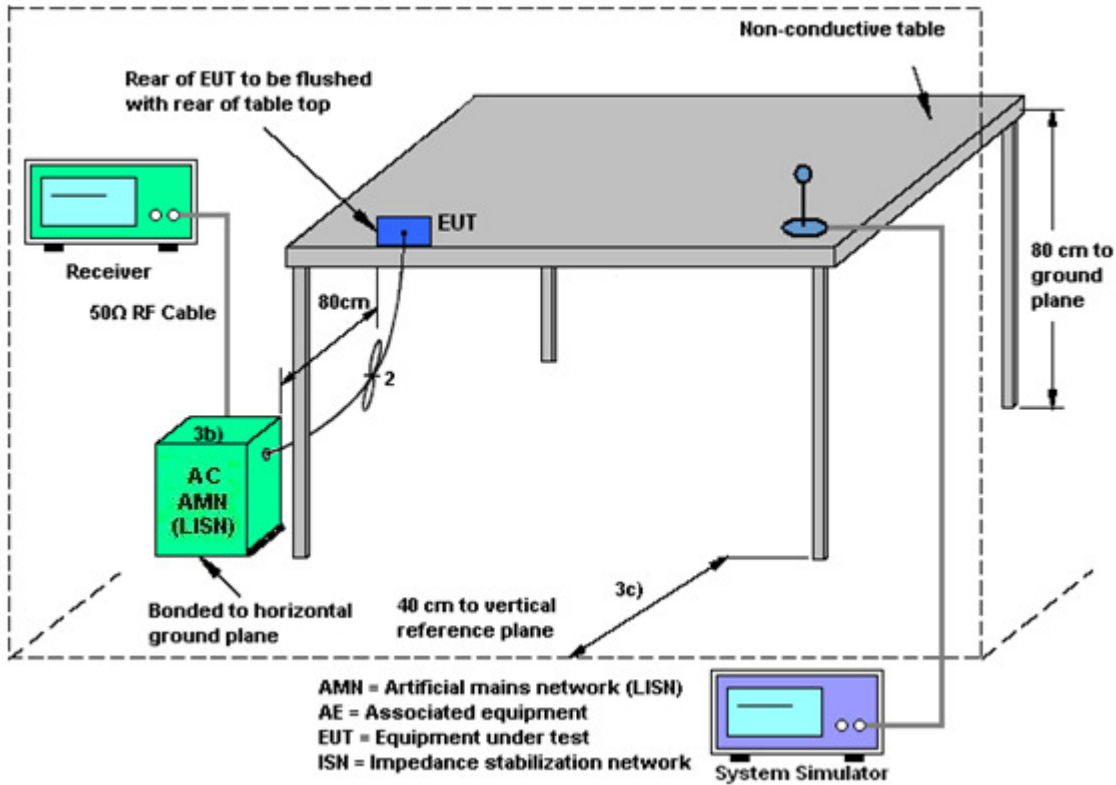



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + USB Cable (Charging from Adapter)		

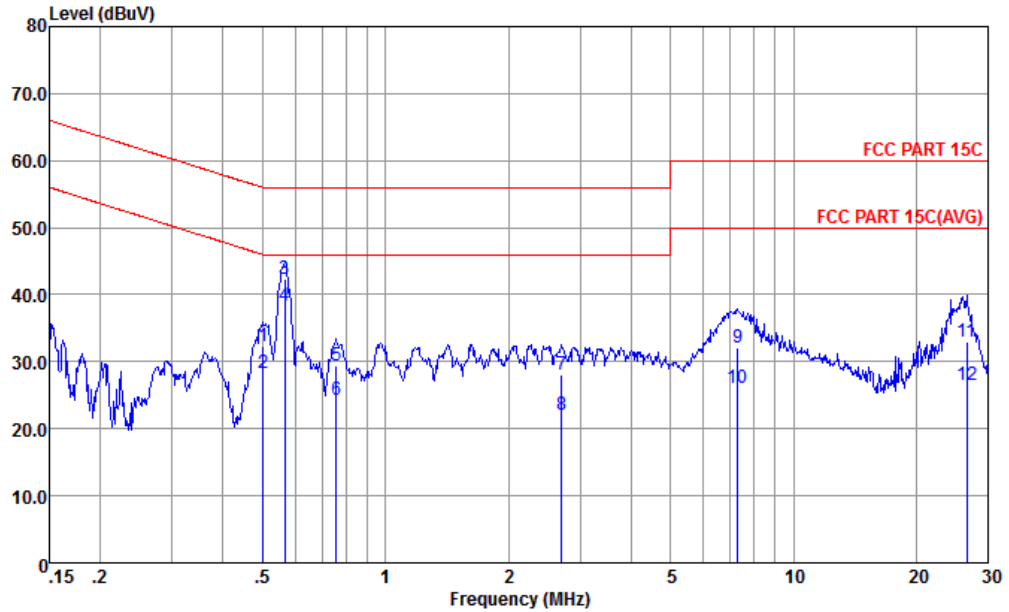


Site : CO01-KS  
Condition : FCC PART 15C LISN-L-20151024 LINE

mode : Mode 1  
IMEI : 357682080000874

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.502	32.22	-23.78	56.00	21.80	0.23	10.19	QP
2	0.502	28.32	-17.68	46.00	17.90	0.23	10.19	Average
3	0.567	42.32	-13.68	56.00	31.91	0.23	10.18	QP
4 *	0.567	38.32	-7.68	46.00	27.91	0.23	10.18	Average
5	0.759	29.32	-26.68	56.00	18.91	0.24	10.17	QP
6	0.759	24.32	-21.68	46.00	13.91	0.24	10.17	Average
7	2.707	27.99	-28.01	56.00	17.60	0.18	10.21	QP
8	2.707	21.99	-24.01	46.00	11.60	0.18	10.21	Average
9	7.290	32.12	-27.88	60.00	21.60	0.23	10.29	QP
10	7.290	26.12	-23.88	50.00	15.60	0.23	10.29	Average
11	26.558	32.90	-27.10	60.00	21.90	0.22	10.78	QP
12	26.558	26.60	-23.40	50.00	15.60	0.22	10.78	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (2.4G) Link + Earphone + USB Cable (Charging from Adapter)		

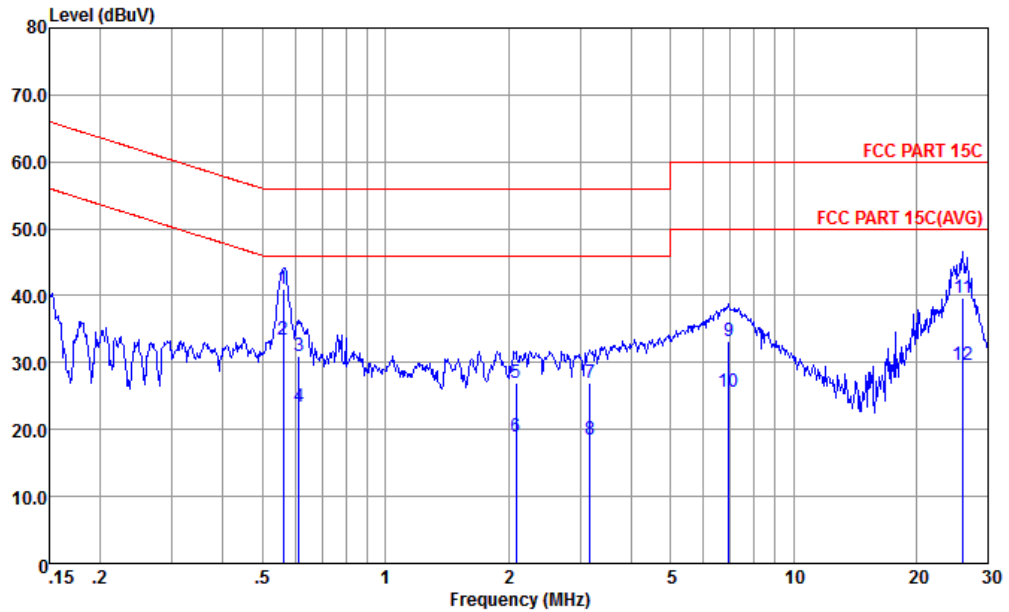

Site : CO01-KS  
Condition : FCC PART 15C LISN-N-20151024 NEUTRAL

mode : Mode 1  
IMEI : 357682080000874

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.561	41.11	-14.89	56.00	30.60	0.33	10.18	QP
2 *	0.561	33.41	-12.59	46.00	22.90	0.33	10.18	Average
3	0.614	31.01	-24.99	56.00	20.50	0.33	10.18	QP
4	0.614	23.41	-22.59	46.00	12.90	0.33	10.18	Average
5	2.088	26.87	-29.13	56.00	16.30	0.38	10.19	QP
6	2.088	18.87	-27.13	46.00	8.30	0.38	10.19	Average
7	3.173	26.89	-29.11	56.00	16.30	0.37	10.22	QP
8	3.173	18.49	-27.51	46.00	7.90	0.37	10.22	Average
9	6.951	33.17	-26.83	60.00	22.60	0.29	10.28	QP
10	6.951	25.67	-24.33	50.00	15.10	0.29	10.28	Average
11	26.001	39.60	-20.40	60.00	28.60	0.24	10.76	QP
12	26.001	29.60	-20.40	50.00	18.60	0.24	10.76	Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Mar. 17, 2017~ Mar. 22, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Mar. 17, 2017~ Mar. 22, 2017	Jan. 18, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Mar. 17, 2017~ Mar. 22, 2017	Jan. 18, 2018	Conducted (TH01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	May 07, 2016	Apr. 13, 2017	May 06, 2017	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz	May 07, 2016	Apr. 13, 2017	May 06, 2017	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 07, 2016	Apr. 13, 2017	May 06, 2017	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	May 21, 2016	Apr. 13, 2017	May 20, 2017	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	May 07, 2016	Apr. 13, 2017	May 06, 2017	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Aug. 10, 2016	Apr. 13, 2017	Aug. 09, 2017	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz~3000MHz	Oct. 11, 2016	Apr. 13, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 06, 2017	Apr. 13, 2017	Jan. 05, 2018	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 16, 2016	Apr. 13, 2017	Jul. 15, 2017	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Apr. 13, 2017	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 13, 2017	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 13, 2017	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz	Apr. 29, 2016	Apr. 12, 2017	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Apr. 12, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Apr. 12, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Apr. 12, 2017	Oct. 12, 2017	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0dB
---	-------



## Appendix A. Conducted Test Results

**A1 - DTS Part**

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2017/3/17 ~ 2017/3/22	Relative Humidity:	51~55	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.54	8.03	0.50	Pass
11b	1Mbps	1	6	2437	13.19	8.55	0.50	Pass
11b	1Mbps	1	11	2462	12.94	8.05	0.50	Pass
11g	6Mbps	1	1	2412	17.63	15.09	0.50	Pass
11g	6Mbps	1	6	2437	18.18	15.70	0.50	Pass
11g	6Mbps	1	11	2462	17.93	15.45	0.50	Pass
HT20	MCS0	1	1	2412	17.78	15.09	0.50	Pass
HT20	MCS0	1	6	2437	18.28	16.30	0.50	Pass
HT20	MCS0	1	11	2462	18.03	15.92	0.50	Pass
HT40	MCS0	1	3	2422	36.26	35.09	0.50	Pass
HT40	MCS0	1	6	2437	36.76	35.68	0.50	Pass
HT40	MCS0	1	9	2452	35.76	27.53	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

2.4GHz Band										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	17.13	30.00	-0.12	17.01	36.00	Pass
11b	1Mbps	1	6	2437	17.34	30.00	-0.12	17.22	36.00	Pass
11b	1Mbps	1	11	2462	16.90	30.00	-0.12	16.78	36.00	Pass
11g	6Mbps	1	1	2412	23.53	30.00	-0.12	23.41	36.00	Pass
11g	6Mbps	1	6	2437	23.91	30.00	-0.12	23.79	36.00	Pass
11g	6Mbps	1	11	2462	22.77	30.00	-0.12	22.65	36.00	Pass
HT20	MCS0	1	1	2412	23.67	30.00	-0.12	23.55	36.00	Pass
HT20	MCS0	1	6	2437	23.94	30.00	-0.12	23.82	36.00	Pass
HT20	MCS0	1	11	2462	23.02	30.00	-0.12	22.90	36.00	Pass
HT40	MCS0	1	3	2422	23.94	30.00	-0.12	23.82	36.00	Pass
HT40	MCS0	1	6	2437	23.95	30.00	-0.12	23.83	36.00	Pass
HT40	MCS0	1	9	2452	23.71	30.00	-0.12	23.59	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

2.4GHz Band						
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	14.58
11b	1Mbps	1	6	2437	0.00	15.01
11b	1Mbps	1	11	2462	0.00	14.51
11g	6Mbps	1	1	2412	0.11	12.45
11g	6Mbps	1	6	2437	0.11	12.87
11g	6Mbps	1	11	2462	0.11	12.42
HT20	MCS0	1	1	2412	0.12	11.28
HT20	MCS0	1	6	2437	0.12	11.80
HT20	MCS0	1	11	2462	0.12	11.23
HT40	MCS0	1	3	2422	0.23	11.87
HT40	MCS0	1	6	2437	0.23	11.94
HT40	MCS0	1	9	2452	0.23	12.10

**TEST RESULTS DATA**  
**Peak Power Density**

2.4GHz Band								
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-12.45	-0.12	8.00	Pass
11b	1Mbps	1	6	2437	-12.42	-0.12	8.00	Pass
11b	1Mbps	1	11	2462	-12.73	-0.12	8.00	Pass
11g	6Mbps	1	1	2412	-14.01	-0.12	8.00	Pass
11g	6Mbps	1	6	2437	-15.02	-0.12	8.00	Pass
11g	6Mbps	1	11	2462	-14.12	-0.12	8.00	Pass
HT20	MCS0	1	1	2412	-15.35	-0.12	8.00	Pass
HT20	MCS0	1	6	2437	-15.53	-0.12	8.00	Pass
HT20	MCS0	1	11	2462	-15.34	-0.12	8.00	Pass
HT40	MCS0	1	3	2422	-17.68	-0.12	8.00	Pass
HT40	MCS0	1	6	2437	-17.38	-0.12	8.00	Pass
HT40	MCS0	1	9	2452	-16.75	-0.12	8.00	Pass





# Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		2331.105	48.5	-25.5	74	49.76	27.16	5.84	34.26	167	94	P	H
		2389.38	37.72	-16.28	54	38.73	27.29	5.92	34.22	167	94	A	H
	*	2412	95.44	-	-	96.39	27.33	5.92	34.2	167	94	P	H
	*	2412	93.08	-	-	94.03	27.33	5.92	34.2	167	94	A	H
		2379.93	48.08	-25.92	74	49.16	27.26	5.88	34.22	151	197	P	V
		2388.12	37.58	-16.42	54	38.59	27.29	5.92	34.22	151	197	A	V
	*	2412	85.29	-	-	86.24	27.33	5.92	34.2	151	197	P	V
	*	2412	83.88	-	-	84.83	27.33	5.92	34.2	151	197	A	V
802.11b CH 06 2437MHz		2325.12	49.05	-24.95	74	50.31	27.16	5.84	34.26	190	92	P	H
		2388.4	37.66	-16.34	54	38.67	27.29	5.92	34.22	190	92	A	H
	*	2437	95.47	-	-	96.32	27.4	5.93	34.18	190	92	P	H
	*	2437	93.25	-	-	94.1	27.4	5.93	34.18	190	92	A	H
		2495.24	48.71	-25.29	74	49.37	27.5	5.95	34.11	190	92	P	H
		2483.9	38.21	-15.79	54	38.92	27.47	5.95	34.13	190	92	A	H
		2312.38	48.47	-25.53	74	49.8	27.12	5.84	34.29	241	302	P	V
		2386.58	37.61	-16.39	54	38.62	27.29	5.92	34.22	241	302	A	V
	*	2437	86.39	-	-	87.24	27.4	5.93	34.18	241	302	P	V
	*	2437	84.16	-	-	85.01	27.4	5.93	34.18	241	302	A	V
		2484.46	48.49	-25.51	74	49.2	27.47	5.95	34.13	241	302	P	V
		2499.79	37.93	-16.07	54	38.59	27.5	5.95	34.11	241	302	A	V



802.11b CH 11 2462MHz	*	2462	95.04	-	-	95.83	27.43	5.93	34.15	173	96	P	H
	*	2462	92.63	-	-	93.42	27.43	5.93	34.15	173	96	A	H
		2491.24	49.46	-24.54	74	50.14	27.5	5.95	34.13	173	96	P	H
		2483.64	38.27	-15.73	54	38.98	27.47	5.95	34.13	173	96	A	H
	*	2462	87.54	-	-	88.33	27.43	5.93	34.15	215	268	P	V
	*	2462	85.1	-	-	85.89	27.43	5.93	34.15	215	268	A	V
		2498.84	49.04	-24.96	74	49.7	27.5	5.95	34.11	215	268	P	V
		2499.96	37.93	-16.07	54	38.59	27.5	5.95	34.11	215	268	A	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11b CH 01 2412MHz		4824	47.2	-26.8	74	64.11	32.56	8.87	58.34	150	360	P	H
		4824	50.03	-23.97	74	66.94	32.56	8.87	58.34	150	360	P	V
802.11b CH 06 2437MHz		4874	46.34	-27.66	74	63.16	32.66	8.85	58.33	150	360	P	H
		7311	49.55	-24.45	74	60.27	37.66	11.02	59.4	174	100	P	H
		4874	49.74	-24.26	74	66.56	32.66	8.85	58.33	150	360	P	V
802.11b CH 11 2462MHz		7311	50.11	-23.89	74	60.83	37.66	11.02	59.4	174	100	P	V
		4924	45.89	-28.11	74	62.67	32.76	8.79	58.33	150	347	P	H
		7386	48.69	-25.31	74	59.49	37.68	10.96	59.44	150	274	P	H
		4924	48.57	-25.43	74	65.35	32.76	8.79	58.33	150	347	P	V
802.11b CH 11 2462MHz		7386	50.11	-23.89	74	60.91	37.68	10.96	59.44	150	274	P	V
	<b>Remark</b> 1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11g CH 01 (2412MHz) and 802.11g CH 06 (2437MHz).



802.11g CH 11 2462MHz	*	2462	93.95	-	-	94.74	27.43	5.93	34.15	165	125	P	H
	*	2462	87.56	-	-	88.35	27.43	5.93	34.15	165	125	A	H
		2484	50.37	-23.63	74	51.08	27.47	5.95	34.13	165	125	P	H
		2483.56	40.86	-13.14	54	41.57	27.47	5.95	34.13	165	125	A	H
	*	2462	85.46	-	-	86.25	27.43	5.93	34.15	150	38	P	V
	*	2462	78.74	-	-	79.53	27.43	5.93	34.15	150	38	A	V
		2486.28	48.62	-25.38	74	49.33	27.47	5.95	34.13	150	38	P	V
		2484.16	39.03	-14.97	54	39.74	27.47	5.95	34.13	150	38	A	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		4824	42.99	-31.01	74	59.9	32.56	8.87	58.34	150	360	P	H
		4824	45.08	-28.92	74	61.99	32.56	8.87	58.34	150	360	P	V
802.11g CH 06 2437MHz		4874	44.95	-29.05	74	61.77	32.66	8.85	58.33	150	360	P	H
		7311	50.41	-23.59	74	61.13	37.66	11.02	59.4	174	100	P	H
		4874	45.01	-28.99	74	61.83	32.66	8.85	58.33	150	360	P	V
802.11g CH 11 2462MHz		7311	49.91	-24.09	74	60.63	37.66	11.02	59.4	174	100	P	V
		4924	43.88	-30.12	74	60.66	32.76	8.79	58.33	150	347	P	H
		7386	49.29	-24.71	74	60.09	37.68	10.96	59.44	150	274	P	H
		4924	43.67	-30.33	74	60.45	32.76	8.79	58.33	150	347	P	V
		7386	49.2	-24.8	74	60	37.68	10.96	59.44	150	274	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		2389.8	53.24	-20.76	74	54.23	27.29	5.92	34.2	173	321	P	H
		2389.17	40.16	-13.84	54	41.17	27.29	5.92	34.22	173	321	A	H
		2412	95.24	-	-	96.19	27.33	5.92	34.2	173	321	P	H
	*	2412	87.99	-	-	88.94	27.33	5.92	34.2	173	321	A	H
		2351.16	49.42	-24.58	74	50.59	27.19	5.88	34.24	172	223	P	V
		2357.355	39.6	-14.4	54	40.74	27.22	5.88	34.24	172	223	A	V
	*	2412	86.11	-	-	87.06	27.33	5.92	34.2	172	223	P	V
	*	2412	79.26	-	-	80.21	27.33	5.92	34.2	172	223	A	V
802.11n HT20 CH 06 2437MHz		2346.4	49.64	-24.36	74	50.81	27.19	5.88	34.24	220	322	P	H
		2314.9	39.74	-14.26	54	41.04	27.12	5.84	34.26	220	322	A	H
	*	2437	95	-	-	95.85	27.4	5.93	34.18	220	322	P	H
	*	2437	88.3	-	-	89.15	27.4	5.93	34.18	220	322	A	H
		2483.55	52.9	-21.1	74	53.61	27.47	5.95	34.13	220	322	P	H
		2483.5	40.47	-13.53	54	41.18	27.47	5.95	34.13	220	322	A	H
		2379.58	50.48	-23.52	74	51.56	27.26	5.88	34.22	239	339	P	V
		2337.44	39.45	-14.55	54	40.68	27.19	5.84	34.26	239	339	A	V
	*	2437	88.46	-	-	89.31	27.4	5.93	34.18	239	339	P	V
	*	2437	81.8	-	-	82.65	27.4	5.93	34.18	239	339	A	V
	2497.27	49.34	-24.66	74	50	27.5	5.95	34.11	239	339	P	V	
	2487.68	39.79	-14.21	54	40.47	27.5	5.95	34.13	239	339	A	V	



802.11n HT20 CH 11 2462MHz	*	2462	94.37	-	-	95.16	27.43	5.93	34.15	221	321	P	H
	*	2462	87.92	-	-	88.71	27.43	5.93	34.15	221	321	A	H
		2483.8	51.22	-22.78	74	51.93	27.47	5.95	34.13	221	321	P	H
		2483.68	41.54	-12.46	54	42.25	27.47	5.95	34.13	221	321	A	H
	*	2462	85.03	-	-	85.82	27.43	5.93	34.15	160	354	P	V
		2462	78.14	-	-	78.93	27.43	5.93	34.15	160	354	A	V
		2490.72	50.1	-23.9	74	50.78	27.5	5.95	34.13	160	354	P	V
		2490.48	39.66	-14.34	54	40.34	27.5	5.95	34.13	160	354	A	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												





**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		4824	43	-31	74	59.91	32.56	8.87	58.34	150	360	P	H
		4824	43.57	-30.43	74	60.48	32.56	8.87	58.34	150	360	P	V
802.11n HT20 CH 06 2437MHz		4874	44.56	-29.44	74	61.38	32.66	8.85	58.33	150	360	P	H
		7311	49.71	-24.29	74	60.43	37.66	11.02	59.4	174	100	P	H
		4874	45.07	-28.93	74	61.89	32.66	8.85	58.33	150	360	P	V
		7311	49.7	-24.3	74	60.42	37.66	11.02	59.4	174	100	P	V
802.11n HT20 CH 11 2462MHz		4924	43.94	-30.06	74	60.72	32.76	8.79	58.33	150	347	P	H
		7386	48.66	-25.34	74	59.46	37.68	10.96	59.44	150	274	P	H
		4924	44.95	-29.05	74	61.73	32.76	8.79	58.33	150	347	P	V
		7386	48.92	-25.08	74	59.72	37.68	10.96	59.44	150	274	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 03 2422MHz		2389.94	52.1	-21.9	74	53.09	27.29	5.92	34.2	169	322	P	H
		2389.8	41.85	-12.15	54	42.84	27.29	5.92	34.2	169	322	A	H
	*	2422	92.57	-	-	93.47	27.36	5.92	34.18	169	322	P	H
	*	2422	86.32	-	-	87.22	27.36	5.92	34.18	169	322	A	H
		2483.83	50.92	-23.08	74	51.63	27.47	5.95	34.13	169	322	P	H
		2483.83	40.46	-13.54	54	41.17	27.47	5.95	34.13	169	322	A	H
		2332.54	49.02	-24.98	74	50.28	27.16	5.84	34.26	250	337	P	V
		2385.88	39.77	-14.23	54	40.78	27.29	5.92	34.22	250	337	A	V
	*	2422	84.48	-	-	85.38	27.36	5.92	34.18	250	337	P	V
	*	2422	77.92	-	-	78.82	27.36	5.92	34.18	250	337	A	V
		2492.23	49.11	-24.89	74	49.77	27.5	5.95	34.11	250	337	P	V
		2484.88	39.84	-14.16	54	40.55	27.47	5.95	34.13	250	337	A	V
802.11n HT40 CH 06 2437MHz		2312.1	48.73	-25.27	74	50.06	27.12	5.84	34.29	196	319	P	H
		2383.36	39.77	-14.23	54	40.85	27.26	5.88	34.22	196	319	A	H
		2437	94.02	-	-	94.87	27.4	5.93	34.18	196	319	P	H
	*	2437	87.5	-	-	88.35	27.4	5.93	34.18	196	319	A	H
		2483.55	51.52	-22.48	74	52.23	27.47	5.95	34.13	196	319	P	H
		2483.55	41.68	-12.32	54	42.39	27.47	5.95	34.13	196	319	A	H
		2318.96	48.51	-25.49	74	49.77	27.16	5.84	34.26	232	221	P	V
		2360.68	39.54	-14.46	54	40.68	27.22	5.88	34.24	232	221	A	V
	*	2437	84.35	-	-	85.2	27.4	5.93	34.18	232	221	P	V
	*	2437	77.56	-	-	78.41	27.4	5.93	34.18	232	221	A	V
	2495.03	50.14	-23.86	74	50.8	27.5	5.95	34.11	232	221	P	V	
	2495.24	40.11	-13.89	54	40.77	27.5	5.95	34.11	232	221	A	V	



<b>802.11n</b> <b>HT40</b> <b>CH 09</b> <b>2452MHz</b>		2381.4	49.94	-24.06	74	51.02	27.26	5.88	34.22	166	320	P	H
		2376.5	40.09	-13.91	54	41.17	27.26	5.88	34.22	166	320	A	H
	*	2452	96.36	-	-	97.18	27.4	5.93	34.15	166	320	P	H
	*	2452	89.5	-	-	90.32	27.4	5.93	34.15	166	320	A	H
		2483.55	62.35	-11.65	74	63.06	27.47	5.95	34.13	166	320	P	H
		2483.5	48.89	-5.11	54	49.6	27.47	5.95	34.13	166	320	A	H
		2344.3	49.2	-24.8	74	50.41	27.19	5.84	34.24	239	337	P	V
		2378.46	39.76	-14.24	54	40.84	27.26	5.88	34.22	239	337	A	V
	*	2452	88.04	-	-	88.86	27.4	5.93	34.15	239	337	P	V
	*	2452	81.67	-	-	82.49	27.4	5.93	34.15	239	337	A	V
		2483.5	54.47	-19.53	74	55.18	27.47	5.95	34.13	239	337	P	V
		2483.5	42.82	-11.18	54	43.53	27.47	5.95	34.13	239	337	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n		4844	42.57	-31.43	74	59.47	32.59	8.85	58.34	150	360	P	H
HT40		7266	50.03	-23.97	74	60.69	37.66	11.06	59.38	200	360	P	H
CH 03		4844	43.34	-30.66	74	60.24	32.59	8.85	58.34	150	360	P	V
2422MHz		7266	50.72	-23.28	74	61.38	37.66	11.06	59.38	200	360	P	V
802.11n		4874	42.89	-31.11	74	59.71	32.66	8.85	58.33	150	163	P	H
HT40		7311	50.01	-23.99	74	60.73	37.66	11.02	59.4	150	360	P	H
CH 06		4874	44.02	-29.98	74	60.84	32.66	8.85	58.33	150	163	P	V
2437MHz		7311	49.51	-24.49	74	60.23	37.66	11.02	59.4	150	360	P	V
802.11n		4904	44	-30	74	60.78	32.73	8.82	58.33	150	360	P	H
HT40		7356	50.7	-23.3	74	61.47	37.67	10.99	59.43	150	320	P	H
CH 09		4904	43.55	-30.45	74	60.33	32.73	8.82	58.33	150	360	P	V
2452MHz		7356	49.7	-24.3	74	60.47	37.67	10.99	59.43	150	320	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11n HT40 LF		30.97	28.37	-11.63	40	33.75	26.28	0.34	32	-	-	P	H
		116.33	27.03	-16.47	43.5	39.33	18.47	0.9	31.67	-	-	P	H
		203.63	34.7	-8.8	43.5	48.98	15.78	1.27	31.33	100	550	P	H
		369.5	29.01	-16.99	46	35.82	22.6	1.85	31.26	-	-	P	H
		695.42	31.9	-14.1	46	33.07	27.47	2.61	31.25	-	-	P	H
		912.7	32.47	-13.53	46	31.9	28.73	3.02	31.18	-	-	P	H
		30	29.93	-10.07	40	34.9	26.7	0.33	32	120	30	P	V
		100.81	29.75	-13.75	43.5	41.91	18.78	0.8	31.74	-	-	P	V
		199.75	29.5	-14	43.5	43.98	15.6	1.25	31.33	-	-	P	V
		432.55	29.15	-16.85	46	33.05	25.28	2	31.18	-	-	P	V
		701.24	30.96	-15.04	46	31.9	27.69	2.62	31.25	-	-	P	V
	913.67	32.43	-13.57	46	31.85	28.75	3.02	31.19	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	97.47	1.399	0.715	1kHz
802.11n HT20	97.28	1.297	0.771	1kHz
802.11n HT40	94.90	0.648	1.544	3kHz








802.11g

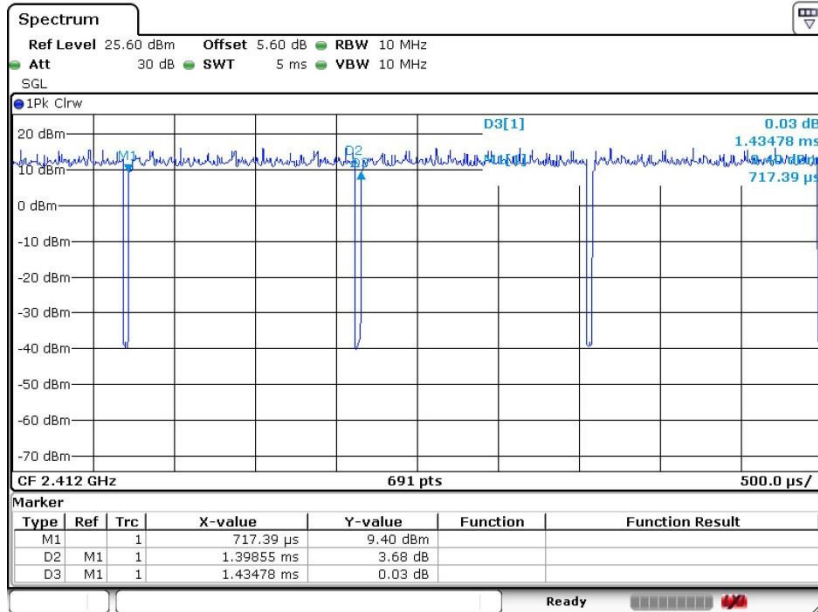

802.11n20

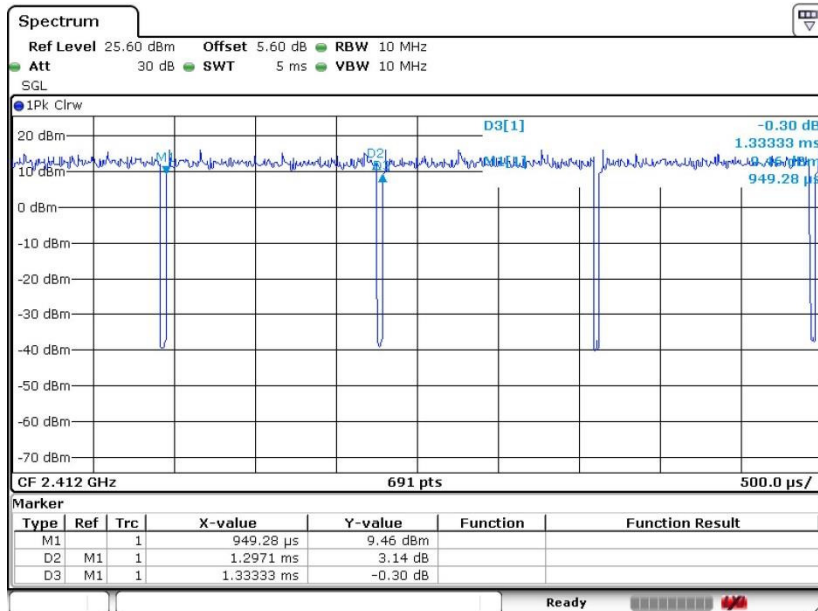



802.11n40

