

# FCC SAR Test Report

APPLICANT : Bullitt Group  
EQUIPMENT : Smartphone  
BRAND NAME : KODAK  
MODEL NAME : EKTRA  
MARKETING NAME : KODAK EKTRA Smartphone  
FCC ID : ZL5EKTRA  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.



Prepared by: Mark Qu / Manager



Approved by: Jones Tsai / Manager



**Sporton International (KunShan) INC.**  
**No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China**



**Table of Contents**

**1. Statement of Compliance ..... 4**

**2. Administration Data ..... 5**

**3. Guidance Applied..... 5**

**4. Equipment Under Test (EUT) Information..... 6**

    4.1 General Information ..... 6

    4.2 General LTE SAR Test and Reporting Considerations ..... 7

**5. RF Exposure Limits..... 9**

    5.1 Uncontrolled Environment..... 9

    5.2 Controlled Environment..... 9

**6. Specific Absorption Rate (SAR).....10**

    6.1 Introduction .....10

    6.2 SAR Definition.....10

**7. System Description and Setup .....11**

    7.1 E-Field Probe .....12

    7.2 Data Acquisition Electronics (DAE) .....12

    7.3 Phantom.....13

    7.4 Device Holder.....14

**8. Measurement Procedures .....15**

    8.1 Spatial Peak SAR Evaluation.....15

    8.2 Power Reference Measurement.....16

    8.3 Area Scan .....16

    8.4 Zoom Scan.....17

    8.5 Volume Scan Procedures.....17

    8.6 Power Drift Monitoring.....17

**9. Test Equipment List.....18**

**10. System Verification .....19**

    10.1 Tissue Simulating Liquids.....19

    10.2 Tissue Verification .....20

    10.3 System Performance Check Results.....21

**11. RF Exposure Positions .....22**

    11.1 Ear and handset reference point .....22

    11.2 Definition of the cheek position.....23

    11.3 Definition of the tilt position.....24

    11.4 Body Worn Accessory .....25

    11.5 Wireless Router.....25

**12. Conducted RF Output Power (Unit: dBm).....26**

**13. Bluetooth Exclusions Applied .....50**

**14. Antenna Location .....51**

**15. SAR Test Results .....52**

    15.1 Head SAR .....54

    15.2 Hotspot SAR .....58

    15.3 Body Worn Accessory SAR.....63

    15.4 Repeated SAR Measurement .....66

**16. Simultaneous Transmission Analysis.....67**

    16.1 Head Exposure Conditions .....68

    16.2 Hotspot Exposure Conditions.....69

    16.3 Body-Worn Accessory Exposure Conditions .....71

**17. Uncertainty Assessment .....72**

**18. References .....74**

**Appendix A. Plots of System Performance Check**

**Appendix B. Plots of High SAR Measurement**

**Appendix C. DASYS Calibration Certificate**

**Appendix D. Test Setup Photos**



### Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA730704	Rev. 01	Initial issue of report	Apr. 14, 2017



**1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for **Bullitt Group, Smartphone, EKTRA, KODAK EKTRA Smartphone**, are as follows.

Equipment Class	Frequency Band		Highest SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)
			Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 10mm)	
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.44	0.93	0.93	1.42
		GSM1900	0.61	1.01	1.01	
	WCDMA	Band V	0.21	0.50	0.47	
		Band IV	0.50	1.14	1.14	
		Band II	<b>0.64</b>	1.06	1.06	
	LTE	Band 12	0.13	0.34	0.34	
		Band 5	0.18	0.46	0.46	
		Band 4	0.28	0.79	0.79	
		Band 2	0.60	1.12	1.12	
		Band 7	0.29	<b>1.16</b>	<b>1.16</b>	
DTS	WLAN	2.4GHz WLAN	0.34	0.10	0.10	1.25
NII		5GHz WLAN	0.21	0.26	0.26	1.42
Date of Testing:			2017/3/20~2017/4/10			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



## 2. Administration Data

Testing Laboratory	
Test Site	Sporton International (KunShan) INC.
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958

Applicant	
Company Name	Bullitt Group
Address	One Valpy, Valpy Street, Reading, Berkshire, RG1 1AR, UK

Manufacturer	
Company Name	Shanghai Sunrise Simcom Limited
Address	No. 888, Shengli Rd., Qingpu, Shanghai, P.R.China 201700

## 3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



**4. Equipment Under Test (EUT) Information**

**4.1 General Information**

Product Feature & Specification	
Equipment Name	Smartphone
Brand Name	KODAK
Model Name	EKTRA
Marketing Name	KODAK EKTRA Smartphone
FCC ID	ZL5EKTRA
IMEI Code	357682080000841
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	<ul style="list-style-type: none"> <li>· GSM/GPRS/EGPRS</li> <li>· RMC/AMR 12.2Kbps</li> <li>· HSDPA</li> <li>· HSUPA</li> <li>· DC-HSDPA</li> <li>· HSPA+</li> <li>· LTE</li> <li>· WLAN 2.4GHz 802.11b/g/n HT20/HT40</li> <li>· WLAN 5GHz 802.11a/n HT20/HT40</li> <li>· WLAN 5GHz 802.11ac VHT20/VHT40/VHT80</li> <li>· Bluetooth v3.0 + EDR, Bluetooth v4.0 LE, Bluetooth v4.1 LE</li> <li>· NFC</li> </ul>
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
<b>Remark:</b> <ol style="list-style-type: none"> <li>1. WLAN operation in 5600 MHz ~ 5650 MHz is notched.</li> <li>2. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP).</li> <li>3. This device supports GRPS/EGRPS mode up to multi-slot class 12</li> <li>4. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).</li> </ol>	



**4.2 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05																																							
FCC ID	ZL5EKTRA																																						
Equipment Name	Smart HandHeld																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz																																						
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz																																						
uplink modulations used	QPSK, and 16QAM																																						
LTE Voice / Data requirements	Data Only																																						
LTE MPR permanently built-in by design	<table border="1"> <caption>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</caption> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI).																																						
Spectrum Plots for RB Configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						
LTE Release Version	R9, Cat 4																																						
CA Support	Not Supported																																						



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					





5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.4, 8.0, 20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Table with 3 columns: Whole-Body, Partial-Body, Hands, Wrists, Feet and Ankles. Values: 0.08, 1.6, 4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

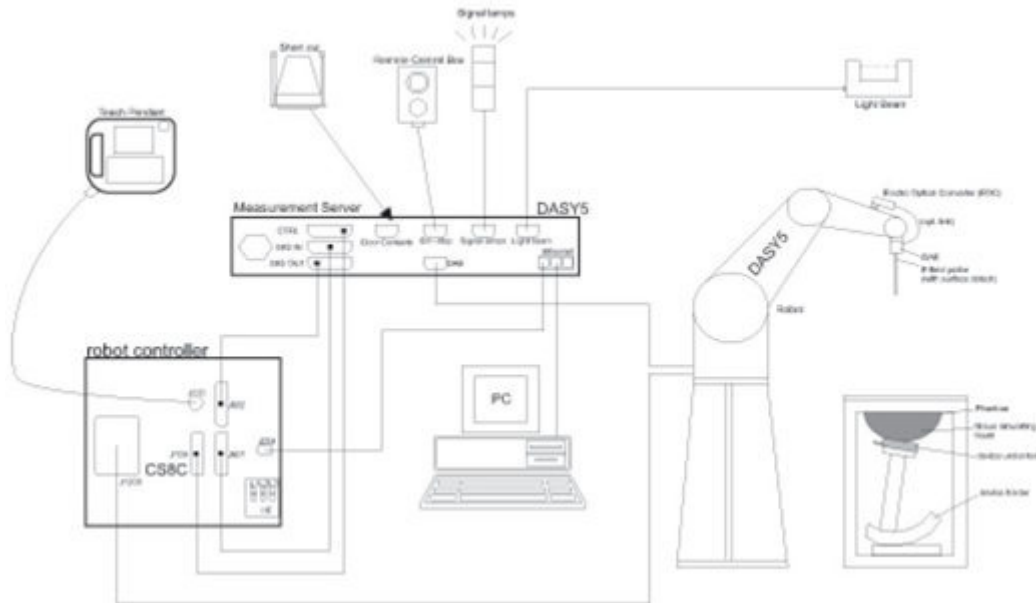


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

**7.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
<b>Directivity</b>	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**7.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**

**7.3 Phantom**

**<SAM Twin Phantom>**


<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)
<b>Filling Volume</b>	Approx. 30 liters
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm

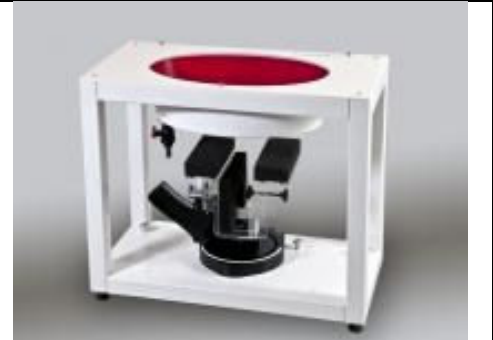

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## 7.4 Device Holder

### <Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### <Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **8. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



### 8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

### 8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



**9. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1065	2016/11/21	2017/11/20
SPEAG	835MHz System Validation Kit	D835V2	4d091	2016/11/22	2017/11/21
SPEAG	1750MHz System Validation Kit	D1750V2	1069	2016/11/23	2017/11/22
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	2016/11/24	2017/11/23
SPEAG	2450MHz System Validation Kit	D2450V2	840	2016/11/25	2017/11/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2016/11/24	2017/11/23
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2016/12/13	2017/12/12
SPEAG	Data Acquisition Electronics	DAE4	1210	2016/5/18	2017/5/17
SPEAG	Data Acquisition Electronics	DAE4	1279	2016/4/4	2017/4/3
SPEAG	Data Acquisition Electronics	DAE4	1437	2016/7/12	2017/7/11
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2016/5/25	2017/5/24
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	2016/11/28	2017/11/27
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1477	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1479	NCR	NCR
SPEAG	ELI4 Phantom	QD OVA 001 BB	TP-1079	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1644	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1542	NCR	NCR
SPEAG	ELI4 Phantom	QD OVA 001 BB	TP-1127	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201563814	2017/1/19	2018/1/18
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2016/4/22	2017/4/21
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2016/4/22	2017/4/21
SPEAG	DAK Kit	DAK3.5	1144	2016/11/23	2017/11/22
R&S	Signal Generator	SMR40	100455	2017/1/19	2018/1/18
Anritsu	Power Sensor	MA2411B	1644003	2016/12/23	2017/12/22
Anritsu	Power Meter	ML2495A	1531197	2016/12/23	2017/12/22
Anritsu	Power Sensor	MA2411B	1644004	2016/12/23	2017/12/22
Anritsu	Power Meter	ML2495A	1531198	2016/12/23	2017/12/22
R&S	Spectrum Analyzer	FSV7	101631	2016/8/8	2017/8/7
ARRA	Power Divider	A3200-2	NA	Note1	
Agilent	Dual Directional Coupler	778D	50422	Note1	
PASTERNAK	Dual Directional Coupler	PE2214-10	N/A	Note1	
AR	Amplifier	5S1G4	333096	Note1	
mini-circuits	Amplifier	ZVE-3W-83+	162601250	Note1	
MCL	Attenuation1	BW-S10W5+	N/A	Note1	
MCL	Attenuation2	BW-S10W5+	N/A	Note1	
MCL	Attenuation3	BW-S10W5+	N/A	Note1	


**Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.


## **10. System Verification**

### **10.1 Tissue Simulating Liquids**

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

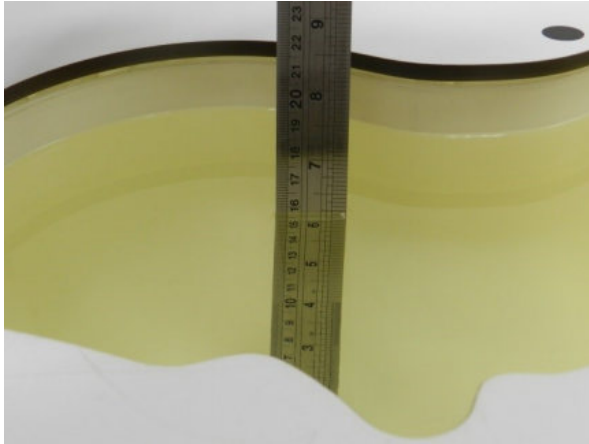

**Fig 10.1** Photo of Liquid Height for Head SAR

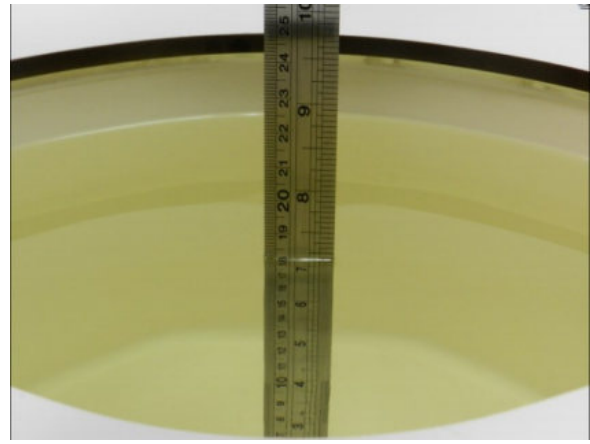

**Fig 10.2** Photo of Liquid Height for Body SAR

## 10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Head</b>								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
<b>For Body</b>								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

### Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%


### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	Head	22.8	0.92	42.933	0.89	41.90	3.37	2.47	±5	2017/3/20
835	Head	22.9	0.927	42.346	0.90	41.50	3.00	2.04	±5	2017/3/20
1750	Head	22.7	1.397	39.621	1.37	40.10	1.97	-1.19	±5	2017/3/31
1900	Head	22.6	1.39	38.154	1.40	40.00	-0.71	-4.61	±5	2017/3/21
2450	Head	22.6	1.882	39.405	1.80	39.20	4.56	0.52	±5	2017/3/23
2600	Head	22.6	1.998	39.312	1.96	39.00	1.94	0.80	±5	2017/3/22
5250	Head	22.7	4.562	35.725	4.71	35.90	-3.14	-0.49	±5	2017/4/10
5600	Head	22.7	4.909	35.286	5.07	35.50	-3.18	-0.60	±5	2017/4/10
5750	Head	22.7	5.055	35.065	5.22	35.40	-3.16	-0.95	±5	2017/4/10
750	Body	22.7	0.967	55.946	0.96	55.50	0.73	0.80	±5	2017/3/20
835	Body	22.8	0.982	54.974	0.97	55.20	1.24	-0.41	±5	2017/3/20
1750	Body	22.8	1.509	52.772	1.49	53.40	1.28	-1.18	±5	2017/3/31
1900	Body	22.6	1.516	52.596	1.52	53.30	-0.26	-1.32	±5	2017/3/21
2450	Body	22.9	2.031	51.733	1.95	52.70	4.15	-1.83	±5	2017/3/23
2600	Body	22.6	2.236	51.156	2.16	52.50	3.52	-2.56	±5	2017/3/22
5250	Body	22.5	5.379	49.115	5.36	48.90	0.35	0.44	±5	2017/4/10
5600	Body	22.5	5.872	48.306	5.77	48.50	1.77	-0.40	±5	2017/4/10
5750	Body	22.5	6.070	47.985	5.94	48.30	2.19	-0.65	±5	2017/4/10


**10.3 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2017/3/20	750	Head	250	1065	3954	1279	2.23	8.32	8.92	7.21
2017/3/20	835	Head	250	4d091	3954	1279	2.51	9.31	10.04	7.84
2017/3/31	1750	Head	250	1069	3857	1210	9.34	37.5	37.36	-0.37
2017/3/21	1900	Head	250	5d118	3857	1210	9.8	40.4	39.2	-2.97
2017/3/23	2450	Head	250	840	3857	1210	13.3	54	53.2	-1.48
2017/3/22	2600	Head	250	1061	3954	1279	13.5	56	54	-3.57
2017/4/10	5250	Head	100	1113	3857	1210	7.62	76.4	76.2	-0.26
2017/4/10	5600	Head	100	1113	3857	1210	7.67	80.8	76.7	-5.07
2017/4/10	5750	Head	100	1113	3857	1210	7.76	80.3	77.6	-3.36
2017/3/20	750	Body	250	1065	3954	1279	2.23	8.71	8.92	2.41
2017/3/20	835	Body	250	4d091	3954	1279	2.37	9.68	9.48	-2.07
2017/3/31	1750	Body	250	1069	3857	1210	9.75	37.7	39	3.45
2017/3/21	1900	Body	250	5d118	3857	1210	9.78	40.8	39.12	-4.12
2017/3/23	2450	Body	250	840	3857	1210	13.2	50.9	52.8	3.73
2017/3/22	2600	Body	250	1061	3954	1279	12.84	55.4	51.36	-7.29
2017/4/10	5250	Body	100	1113	3954	1437	7.1	76.1	71	-6.70
2017/4/10	5600	Body	100	1113	3954	1437	7.71	79.8	77.1	-3.38
2017/4/10	5750	Body	100	1113	3954	1437	7.53	75.2	75.3	0.13

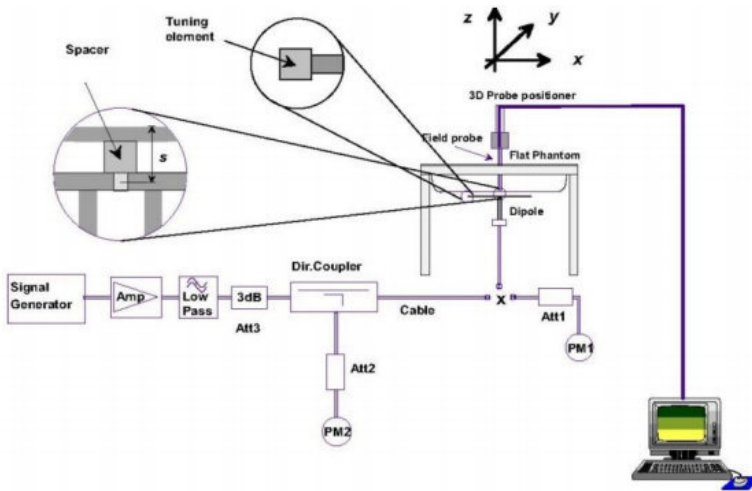

**Fig 8.3.1 System Performance Check Setup**

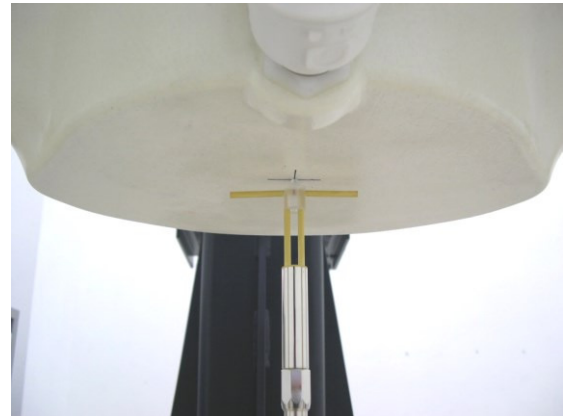

**Fig 8.3.2 Setup Photo**

## 11. RF Exposure Positions

### 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

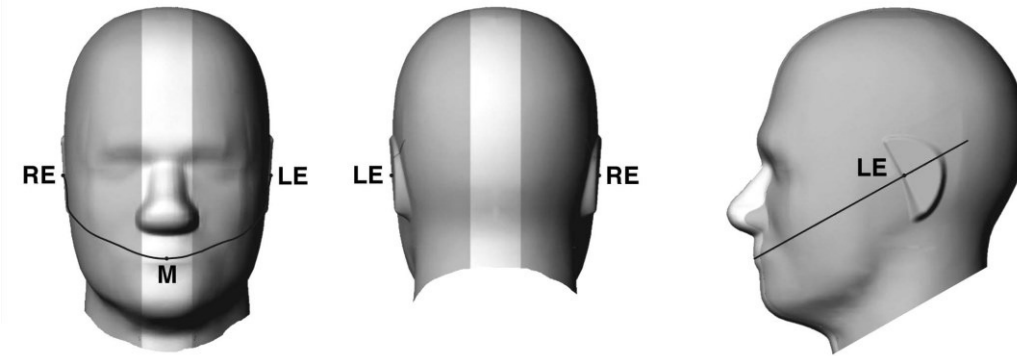


Fig 9.1.1 Front, back, and side views of SAM twin phantom

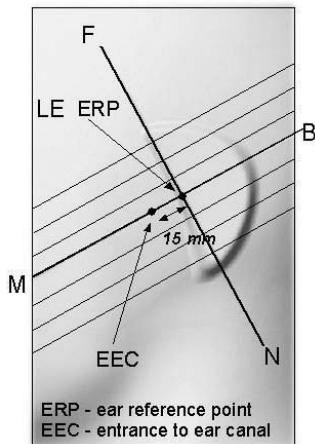


Fig 9.1.2 Close-up side view of phantom showing the ear region.

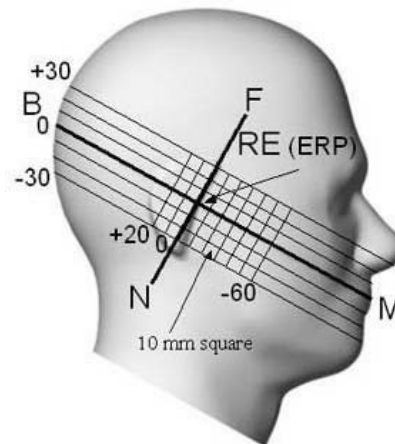


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

### 11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

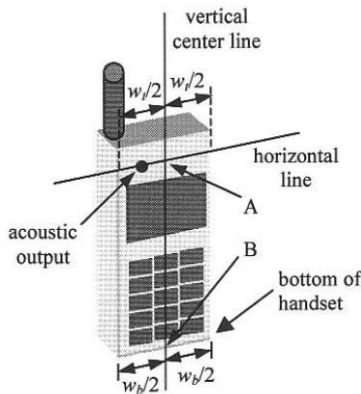


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

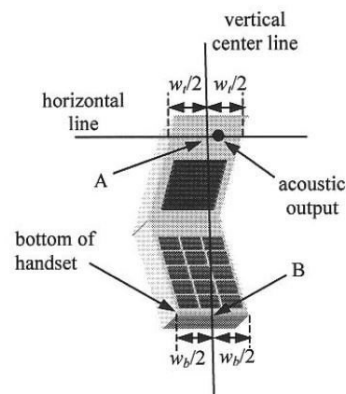


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”


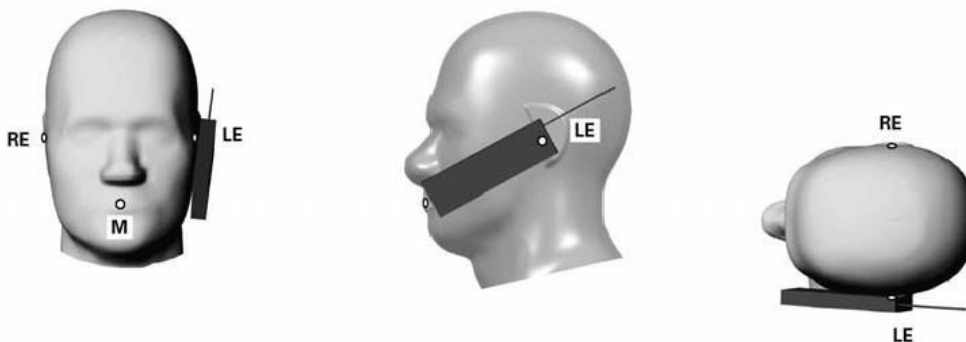


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

### 11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

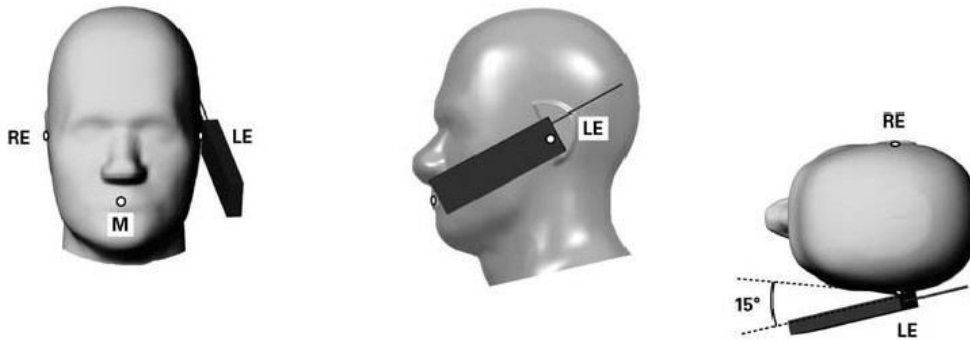

**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**



### 11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

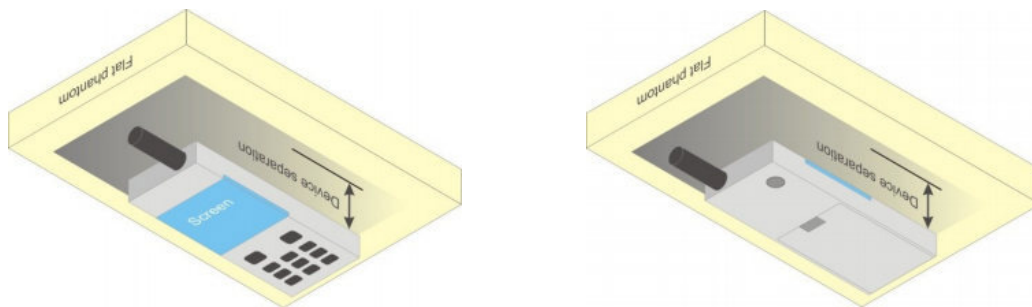


Fig 9.4 Body Worn Position

### 11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 12. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

GSM850 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.15	32.30	32.43	33.00	23.15	23.30	23.43	24.00
GPRS 1 Tx slot	32.14	32.29	32.42	33.00	23.14	23.29	23.42	24.00
GPRS 2 Tx slots	31.51	31.68	31.81	32.50	25.51	25.68	25.81	26.50
GPRS 3 Tx slots	29.91	30.07	30.21	30.50	25.65	25.81	25.95	26.24
GPRS 4 Tx slots	28.76	28.97	29.13	30.00	25.76	25.97	26.13	27.00
EDGE 1 Tx slot	26.86	26.78	26.62	27.00	17.86	17.78	17.62	18.00
EDGE 2 Tx slots	25.93	25.79	25.69	26.00	19.93	19.79	19.69	20.00
EDGE 3 Tx slots	23.96	23.89	23.76	24.00	19.70	19.63	19.50	19.74
EDGE 4 Tx slots	22.79	22.66	22.63	23.00	19.79	19.66	19.63	20.00

**Remark:** The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900 Tx Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.30	29.39	29.35	30.00	20.30	20.39	20.35	21.00
GPRS 1 Tx slot	29.29	29.38	29.34	30.00	20.29	20.38	20.34	21.00
GPRS 2 Tx slots	28.27	28.82	28.77	29.50	22.27	22.82	22.77	23.50
GPRS 3 Tx slots	27.15	27.26	27.21	27.50	22.89	23.00	22.95	23.24
GPRS 4 Tx slots	26.08	26.17	26.13	26.50	23.08	23.17	23.13	23.50
EDGE 1 Tx slot	25.67	25.79	25.81	26.50	16.67	16.79	16.81	17.50
EDGE 2 Tx slots	24.59	24.79	24.62	25.00	18.59	18.79	18.62	19.00
EDGE 3 Tx slots	22.49	22.59	22.54	23.00	18.23	18.33	18.28	18.74
EDGE 4 Tx slots	21.25	21.49	21.43	22.00	18.25	18.49	18.43	19.00

**Remark:** The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

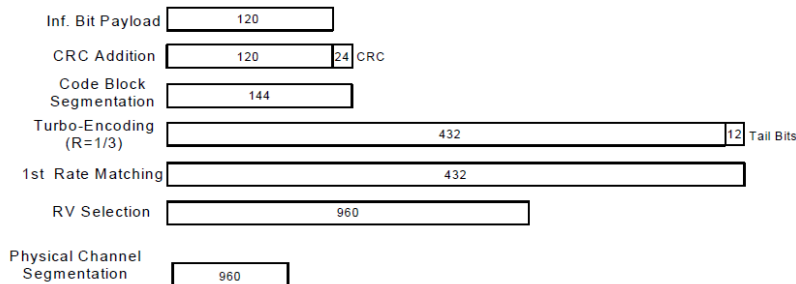

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**

**HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
  - iii. Set Channel Parmes
  - iv. Set Cell Power = -86 dBm
  - v. Set Channel Type = HSPA
  - vi. Set UE Target Power =21 dBm
  - vii. Power Ctrl Mode= All Up Bits
  - viii. Set Manual Uplink DPCH Bc/Bd = Manual
  - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
  - x. Set HSPA Conn DL Channel Levels
  - xi. Set HS-SCCH Configs
  - xii. Set RB Test Mode Setup
  - xiii. Set Common HSUPA Parameters
  - xiv. Set Serving Grant
  - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

**Table C.11.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM**

Sub-test	$\beta_c$ (Note3)	$\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (2xSF2) (Note 4)	$\beta_{ed}$ (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}$ : 30/15 $\beta_{ed2}$ : 30/15	$\beta_{ed3}$ : 24/15 $\beta_{ed4}$ : 24/15	3.5	2.5	14	105	105

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d = 0$  by default.

Note 4:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

**Setup Configuration**



<WCDMA Conducted Power>

General Note:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / HSPA+ / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / HSPA+ / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / HSPA+ / DC-HSDPA.

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	22.57	22.61	22.56	23.00	23.81	23.95	23.80	24.50	22.78	22.81	22.75	23.00
3GPP Rel 99	RMC 12.2Kbps	22.59	22.63	22.58	23.00	23.82	23.96	23.81	24.50	22.80	22.83	22.77	23.00
3GPP Rel 6	HSDPA Subtest-1	21.15	21.35	21.25	21.50	22.76	22.75	22.68	23.00	21.52	21.58	21.48	22.00
3GPP Rel 6	HSDPA Subtest-2	21.18	21.28	21.25	21.50	22.73	22.77	22.74	23.00	21.51	21.55	21.43	22.00
3GPP Rel 6	HSDPA Subtest-3	20.73	20.85	20.75	21.00	22.33	22.28	22.19	22.50	21.03	21.11	20.95	21.50
3GPP Rel 6	HSDPA Subtest-4	20.70	20.84	20.79	21.00	22.32	22.26	22.11	22.50	21.05	21.10	20.99	21.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.30	21.38	21.41	21.50	22.53	22.73	22.64	23.00	21.51	21.60	21.60	22.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.38	21.47	21.40	21.50	22.58	22.81	22.61	23.00	21.57	21.68	21.57	22.00
3GPP Rel 8	DC-HSDPA Subtest-3	20.83	20.92	20.91	21.00	22.06	22.26	22.12	22.50	21.03	21.12	21.09	21.50
3GPP Rel 8	DC-HSDPA Subtest-4	20.86	20.86	20.87	21.00	22.09	22.21	22.10	22.50	21.07	21.08	21.06	21.50
3GPP Rel 6	HSUPA Subtest-1	19.36	19.59	19.48	20.00	20.74	20.79	20.71	21.00	19.53	19.58	19.45	20.00
3GPP Rel 6	HSUPA Subtest-2	19.43	19.52	19.47	20.00	20.82	20.81	20.73	21.00	19.61	19.58	19.48	20.00
3GPP Rel 6	HSUPA Subtest-3	20.39	20.58	20.48	21.00	21.77	21.78	21.69	22.00	20.58	20.56	20.52	21.00
3GPP Rel 6	HSUPA Subtest-4	18.94	19.14	18.99	19.50	20.37	20.33	20.19	20.50	19.16	19.15	19.02	19.50
3GPP Rel 6	HSUPA Subtest-5	20.40	20.50	20.40	21.00	21.81	21.82	21.69	22.00	19.98	20.10	20.03	21.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	19.77	19.88	19.83	20.00	21.00	21.23	21.06	21.50	19.75	19.71	19.85	20.00



**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5 / B4 / B12 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band





<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	21.21	21.17	21.11		
20	QPSK	1	49	21.34	21.39	21.31	22	0
20	QPSK	1	99	21.01	21.06	21.05	21	1
20	QPSK	50	0	20.42	20.49	20.40		
20	QPSK	50	24	20.27	20.45	20.35		
20	QPSK	50	50	20.37	20.44	20.22		
20	QPSK	100	0	20.28	20.45	20.27		
20	16QAM	1	0	20.49	20.43	20.37		
20	16QAM	1	49	20.56	20.66	20.51	21	1
20	16QAM	1	99	20.25	20.36	20.30	20	2
20	16QAM	50	0	19.24	19.46	19.30		
20	16QAM	50	24	19.38	19.42	19.36		
20	16QAM	50	50	19.32	19.42	19.18		
20	16QAM	100	0	19.25	19.42	19.23		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5	22	0
15	QPSK	1	0	21.32	21.29	21.21		
15	QPSK	1	37	21.39	21.42	21.35		
15	QPSK	1	74	21.16	21.22	21.19	21	1
15	QPSK	36	0	20.37	20.47	20.40		
15	QPSK	36	20	20.45	20.46	20.42		
15	QPSK	36	39	20.41	20.42	20.33		
15	QPSK	75	0	20.39	20.44	20.37		
15	16QAM	1	0	20.58	20.54	20.44		
15	16QAM	1	37	20.62	20.70	20.57	21	1
15	16QAM	1	74	20.36	20.46	20.45	20	2
15	16QAM	36	0	19.35	19.44	19.36		
15	16QAM	36	20	19.40	19.45	19.39		
15	16QAM	36	39	19.37	19.39	19.30		
15	16QAM	36	0	19.36	19.42	19.34		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905	22	0
10	QPSK	1	0	21.33	21.31	21.24		
10	QPSK	1	25	21.38	21.40	21.34		
10	QPSK	1	49	21.23	21.28	21.26	21	1
10	QPSK	25	0	20.33	20.42	20.43		
10	QPSK	25	12	20.43	20.43	20.41		
10	QPSK	25	25	20.47	20.39	20.33		
10	QPSK	50	0	20.43	20.42	20.41		
10	16QAM	1	0	20.62	20.59	20.46		
10	16QAM	1	25	20.65	20.70	20.56	21	1
10	16QAM	1	49	20.48	20.58	20.52	20	2
10	16QAM	25	0	19.32	19.41	19.41		
10	16QAM	25	12	19.40	19.42	19.37		
10	16QAM	25	25	19.44	19.38	19.29		
10	16QAM	25	0	19.40	19.40	19.38		
10	16QAM	50	0	19.40	19.40	19.38		



Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	21.35	21.33	21.28	22	0
5	QPSK	1	12	21.48	21.48	21.43		
5	QPSK	1	24	21.29	21.31	21.28		
5	QPSK	12	0	20.38	20.40	20.38	21	1
5	QPSK	12	7	20.47	20.47	20.44		
5	QPSK	12	13	20.46	20.45	20.41		
5	QPSK	25	0	20.43	20.43	20.38		
5	16QAM	1	0	20.61	20.62	20.52	21	1
5	16QAM	1	12	20.73	20.74	20.68		
5	16QAM	1	24	20.54	20.59	20.52		
5	16QAM	12	0	19.37	19.40	19.38	20	2
5	16QAM	12	7	19.45	19.46	19.42		
5	16QAM	12	13	19.46	19.44	19.40		
5	16QAM	25	0	19.41	19.39	19.35		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	21.37	21.33	21.28	22	0
3	QPSK	1	8	21.49	21.47	21.43		
3	QPSK	1	14	21.32	21.31	21.27		
3	QPSK	8	0	20.49	20.45	20.43	21	1
3	QPSK	8	4	20.52	20.48	20.46		
3	QPSK	8	7	20.48	20.43	20.41		
3	QPSK	15	0	20.47	20.45	20.42		
3	16QAM	1	0	20.56	20.53	20.50	21	1
3	16QAM	1	8	20.68	20.71	20.66		
3	16QAM	1	14	20.52	20.52	20.50		
3	16QAM	8	0	19.53	19.49	19.46	20	2
3	16QAM	8	4	19.56	19.51	19.50		
3	16QAM	8	7	19.52	19.48	19.44		
3	16QAM	15	0	19.47	19.44	19.41		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	21.30	21.22	21.23	22	0
1.4	QPSK	1	3	21.31	21.24	21.22		
1.4	QPSK	1	5	21.32	21.24	21.25		
1.4	QPSK	3	0	21.47	21.42	21.39		
1.4	QPSK	3	1	21.48	21.41	21.40		
1.4	QPSK	3	3	21.47	21.42	21.40	21	1
1.4	QPSK	6	0	20.49	20.43	20.42	21	1
1.4	16QAM	1	0	20.64	20.63	20.56		
1.4	16QAM	1	3	20.66	20.65	20.59		
1.4	16QAM	1	5	20.61	20.63	20.58		
1.4	16QAM	3	0	20.51	20.51	20.42		
1.4	16QAM	3	1	20.54	20.52	20.45		
1.4	16QAM	3	3	20.51	20.49	20.42		
1.4	16QAM	6	0	19.55	19.55	19.49	20	2



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	21.48	21.43	21.42	22	0
20	QPSK	1	49	21.60	21.63	21.57		
20	QPSK	1	99	21.25	21.23	21.16		
20	QPSK	50	0	20.67	20.76	20.74	21	1
20	QPSK	50	24	20.65	20.63	20.61		
20	QPSK	50	50	20.34	20.40	20.64		
20	QPSK	100	0	20.51	20.69	20.58	21	1
20	16QAM	1	0	20.76	20.65	20.71		
20	16QAM	1	49	20.87	20.88	20.86		
20	16QAM	1	99	20.51	20.53	20.36	20	2
20	16QAM	50	0	19.31	19.72	19.65		
20	16QAM	50	24	19.61	19.63	19.60		
20	16QAM	50	50	19.64	19.41	19.72		
20	16QAM	100	0	19.49	19.57	19.68		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	21.54	21.49	21.48	22	0
15	QPSK	1	37	21.60	21.60	21.55		
15	QPSK	1	74	21.38	21.35	21.29		
15	QPSK	36	0	20.48	20.68	20.55	21	1
15	QPSK	36	20	20.62	20.63	20.59		
15	QPSK	36	39	20.68	20.49	20.60		
15	QPSK	75	0	20.60	20.59	20.58	21	1
15	16QAM	1	0	20.83	20.73	20.80		
15	16QAM	1	37	20.86	20.90	20.82		
15	16QAM	1	74	20.60	20.68	20.48	20	2
15	16QAM	36	0	19.46	19.67	19.55		
15	16QAM	36	20	19.59	19.63	19.57		
15	16QAM	36	39	19.66	19.50	19.58		
15	16QAM	75	0	19.59	19.58	19.56		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	21.56	21.50	21.48	22	0
10	QPSK	1	25	21.58	21.57	21.51		
10	QPSK	1	49	21.45	21.41	21.37		
10	QPSK	25	0	20.46	20.67	20.44	21	1
10	QPSK	25	12	20.61	20.60	20.56		
10	QPSK	25	25	20.73	20.46	20.62		
10	QPSK	50	0	20.64	20.58	20.55	21	1
10	16QAM	1	0	20.86	20.78	20.79		
10	16QAM	1	25	20.85	20.92	20.76		
10	16QAM	1	49	20.69	20.74	20.57	20	2
10	16QAM	25	0	19.46	19.67	19.43		
10	16QAM	25	12	19.60	19.61	19.53		
10	16QAM	25	25	19.73	19.45	19.58		
10	16QAM	50	0	19.63	19.59	19.53		



Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	21.59	21.52	21.44	22	0
5	QPSK	1	12	21.68	21.64	21.57		
5	QPSK	1	24	21.47	21.47	21.41		
5	QPSK	12	0	20.54	20.63	20.44	21	1
5	QPSK	12	7	20.66	20.64	20.57		
5	QPSK	12	13	20.68	20.57	20.58		
5	QPSK	25	0	20.62	20.58	20.54		
5	16QAM	1	0	20.89	20.82	20.63	21	1
5	16QAM	1	12	20.98	20.96	20.74		
5	16QAM	1	24	20.75	20.80	20.58		
5	16QAM	12	0	19.55	19.65	19.43	20	2
5	16QAM	12	7	19.66	19.66	19.55		
5	16QAM	12	13	19.68	19.58	19.56		
5	16QAM	25	0	19.60	19.59	19.50		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	21.59	21.51	21.44	22	0
3	QPSK	1	8	21.69	21.64	21.57		
3	QPSK	1	14	21.51	21.48	21.41		
3	QPSK	8	0	20.68	20.65	20.56	21	1
3	QPSK	8	4	20.70	20.66	20.59		
3	QPSK	8	7	20.66	20.60	20.56		
3	QPSK	15	0	20.66	20.62	20.58		
3	16QAM	1	0	20.82	20.77	20.61	21	1
3	16QAM	1	8	20.96	20.92	20.72		
3	16QAM	1	14	20.77	20.71	20.57		
3	16QAM	8	0	19.74	19.71	19.58	20	2
3	16QAM	8	4	19.75	19.72	19.61		
3	16QAM	8	7	19.71	19.66	19.57		
3	16QAM	15	0	19.67	19.64	19.54		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	21.51	21.44	21.37	22	0
1.4	QPSK	1	3	21.49	21.44	21.37		
1.4	QPSK	1	5	21.50	21.45	21.38		
1.4	QPSK	3	0	21.67	21.61	21.55		
1.4	QPSK	3	1	21.69	21.62	21.57		
1.4	QPSK	3	3	21.66	21.62	21.57		
1.4	QPSK	6	0	20.67	20.63	20.58	21	1
1.4	16QAM	1	0	20.85	20.79	20.60	21	1
1.4	16QAM	1	3	20.86	20.82	20.64		
1.4	16QAM	1	5	20.81	20.79	20.61		
1.4	16QAM	3	0	20.72	20.67	20.53		
1.4	16QAM	3	1	20.73	20.70	20.56		
1.4	16QAM	3	3	20.72	20.66	20.52		
1.4	16QAM	6	0	19.75	19.74	19.63	20	2



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	21.27	21.26	21.26	22	0
10	QPSK	1	25	21.36	21.37	21.35		
10	QPSK	1	49	21.23	21.20	21.21		
10	QPSK	25	0	20.36	20.41	20.37	21	1
10	QPSK	25	12	20.34	20.29	20.35		
10	QPSK	25	25	20.31	20.29	20.20		
10	QPSK	50	0	20.21	20.34	20.28	21	1
10	16QAM	1	0	20.55	20.56	20.55		
10	16QAM	1	25	20.65	20.64	20.65		
10	16QAM	1	49	20.54	20.48	20.51	20	2
10	16QAM	25	0	19.38	19.30	19.45		
10	16QAM	25	12	19.36	19.36	19.38		
10	16QAM	25	25	19.34	19.32	19.24	20	2
10	16QAM	50	0	19.37	19.32	19.37		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	21.28	21.27	21.27	22	0
5	QPSK	1	12	21.42	21.42	21.41		
5	QPSK	1	24	21.25	21.24	21.26		
5	QPSK	12	0	20.29	20.29	20.39	21	1
5	QPSK	12	7	20.37	20.38	20.39		
5	QPSK	12	13	20.32	20.39	20.35		
5	QPSK	25	0	20.28	20.32	20.36	21	1
5	16QAM	1	0	20.57	20.54	20.58		
5	16QAM	1	12	20.69	20.68	20.72		
5	16QAM	1	24	20.55	20.49	20.53	20	2
5	16QAM	12	0	19.31	19.32	19.42		
5	16QAM	12	7	19.40	19.42	19.42		
5	16QAM	12	13	19.35	19.40	19.39	20	2
5	16QAM	25	0	19.30	19.33	19.37		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	21.28	21.27	21.26	22	0
3	QPSK	1	8	21.35	21.34	21.35		
3	QPSK	1	14	21.25	21.23	21.27		
3	QPSK	8	0	20.37	20.36	20.37	21	1
3	QPSK	8	4	20.41	20.40	20.41		
3	QPSK	8	7	20.36	20.34	20.37		
3	QPSK	15	0	20.34	20.33	20.36		
3	16QAM	1	0	20.58	20.55	20.54	21	1
3	16QAM	1	8	20.65	20.59	20.63		
3	16QAM	1	14	20.56	20.51	20.57		
3	16QAM	8	0	19.45	19.43	19.47	20	2
3	16QAM	8	4	19.48	19.48	19.49		
3	16QAM	8	7	19.44	19.43	19.46		
3	16QAM	15	0	19.38	19.37	19.40		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	21.25	21.19	21.19	22	0
1.4	QPSK	1	3	21.23	21.21	21.21		
1.4	QPSK	1	5	21.28	21.22	21.24		
1.4	QPSK	3	0	21.40	21.37	21.39		
1.4	QPSK	3	1	21.43	21.37	21.38		
1.4	QPSK	3	3	21.42	21.37	21.39		
1.4	QPSK	6	0	20.39	20.34	20.38	21	1
1.4	16QAM	1	0	20.62	20.53	20.62	21	1
1.4	16QAM	1	3	20.59	20.65	20.56		
1.4	16QAM	1	5	20.62	20.55	20.56		
1.4	16QAM	3	0	20.46	20.45	20.45		
1.4	16QAM	3	1	20.47	20.45	20.44		
1.4	16QAM	3	3	20.43	20.42	20.46		
1.4	16QAM	6	0	19.50	19.46	19.51	20	2



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	21.75	21.77	21.71	22.5	0
20	QPSK	1	49	21.95	21.97	21.93		
20	QPSK	1	99	21.73	21.75	21.69		
20	QPSK	50	0	21.03	21.08	21.05	21.5	1
20	QPSK	50	24	21.01	20.89	20.98		
20	QPSK	50	50	20.91	20.96	20.98		
20	QPSK	100	0	20.92	21.01	21.00	21.5	1
20	16QAM	1	0	21.05	21.08	21.01		
20	16QAM	1	49	21.28	21.28	21.21		
20	16QAM	1	99	21.06	21.07	20.95	20.5	2
20	16QAM	50	0	20.09	19.91	19.99		
20	16QAM	50	24	20.04	20.04	19.99		
20	16QAM	50	50	19.93	19.99	20.06	20.5	2
20	16QAM	100	0	20.03	19.92	20.02		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	21.80	21.84	21.77	22.5	0
15	QPSK	1	37	21.95	21.99	21.92		
15	QPSK	1	74	21.80	21.84	21.77		
15	QPSK	36	0	21.00	20.95	20.91	21.5	1
15	QPSK	36	20	21.00	21.03	20.98		
15	QPSK	36	39	20.93	20.99	20.97		
15	QPSK	75	0	20.96	20.98	20.94	21.5	1
15	16QAM	1	0	21.08	21.13	21.08		
15	16QAM	1	37	21.23	21.27	21.20		
15	16QAM	1	74	21.10	21.13	21.05	20.5	2
15	16QAM	36	0	20.03	19.97	19.92		
15	16QAM	36	20	20.05	20.04	19.99		
15	16QAM	36	39	19.96	20.01	19.99	20.5	2
15	16QAM	75	0	19.99	19.98	19.96		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.84	21.87	21.80	22.5	0
10	QPSK	1	25	21.93	21.96	21.88		
10	QPSK	1	49	21.83	21.85	21.78		
10	QPSK	25	0	20.96	20.93	20.85	21.5	1
10	QPSK	25	12	20.96	20.98	20.94		
10	QPSK	25	25	20.89	20.97	20.94		
10	QPSK	50	0	20.93	20.96	20.91	21.5	1
10	16QAM	1	0	21.12	21.16	21.11		
10	16QAM	1	25	21.23	21.25	21.19		
10	16QAM	1	49	21.15	21.16	21.07	20.5	2
10	16QAM	25	0	19.98	19.95	19.87		
10	16QAM	25	12	19.99	20.00	19.96		
10	16QAM	25	25	19.92	19.99	19.96	20.5	2
10	16QAM	50	0	19.97	19.98	19.93		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.85	21.88	21.82	22.5	0
5	QPSK	1	12	22.00	22.03	21.97		
5	QPSK	1	24	21.85	21.87	21.80		
5	QPSK	12	0	20.95	20.95	20.91	21.5	1
5	QPSK	12	7	21.00	21.03	20.98		
5	QPSK	12	13	20.98	21.04	20.97		
5	QPSK	25	0	20.94	20.99	20.93	21.5	1
5	16QAM	1	0	21.13	21.14	21.07		
5	16QAM	1	12	21.28	21.30	21.20		
5	16QAM	1	24	21.16	21.14	21.05	20.5	2
5	16QAM	12	0	19.99	19.99	19.93		
5	16QAM	12	7	20.05	20.07	20.01		
5	16QAM	12	13	20.02	20.07	19.99	20.5	2
5	16QAM	25	0	19.99	20.00	19.93		





<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	21.03	21.04	21.06	22	0
10	QPSK	1	25	21.18	21.24	21.20		
10	QPSK	1	49	21.13	21.13	21.17		
10	QPSK	25	0	20.19	20.30	20.27	21	1
10	QPSK	25	12	19.99	20.27	20.15		
10	QPSK	25	25	20.08	20.22	20.21		
10	QPSK	50	0	20.05	20.32	20.20	21	1
10	16QAM	1	0	20.36	20.34	20.44		
10	16QAM	1	25	20.50	20.62	20.53		
10	16QAM	1	49	20.53	20.44	20.44	20	2
10	16QAM	25	0	19.00	19.27	19.16		
10	16QAM	25	12	19.21	19.24	19.24		
10	16QAM	25	25	19.09	19.31	19.24	20	2
10	16QAM	50	0	19.05	19.32	19.21		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	21.10	21.08	21.08	22	0
5	QPSK	1	12	21.29	21.30	21.30		
5	QPSK	1	24	21.12	21.18	21.19		
5	QPSK	12	0	20.02	20.26	20.14	21	1
5	QPSK	12	7	20.26	20.28	20.29		
5	QPSK	12	13	20.29	20.26	20.24		
5	QPSK	25	0	20.15	20.27	20.15	21	1
5	16QAM	1	0	20.38	20.41	20.37		
5	16QAM	1	12	20.56	20.63	20.53		
5	16QAM	1	24	20.41	20.53	20.43	20	2
5	16QAM	12	0	19.04	19.28	19.15		
5	16QAM	12	7	19.27	19.32	19.29		
5	16QAM	12	13	19.30	19.29	19.24	20	2
5	16QAM	25	0	19.15	19.27	19.13		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	21.11	21.13	21.13	22	0
3	QPSK	1	8	21.19	21.24	21.22		
3	QPSK	1	14	21.14	21.16	21.18		
3	QPSK	8	0	20.21	20.27	20.27	21	1
3	QPSK	8	4	20.28	20.31	20.31		
3	QPSK	8	7	20.27	20.27	20.27		
3	QPSK	15	0	20.24	20.25	20.28		
3	16QAM	1	0	20.44	20.47	20.41	21	1
3	16QAM	1	8	20.52	20.56	20.49		
3	16QAM	1	14	20.45	20.51	20.46		
3	16QAM	8	0	19.27	19.36	19.32	20	2
3	16QAM	8	4	19.36	19.37	19.36		
3	16QAM	8	7	19.32	19.33	19.31		
3	16QAM	15	0	19.26	19.28	19.28		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	21.05	21.09	21.09	22	0
1.4	QPSK	1	3	21.05	21.10	21.11		
1.4	QPSK	1	5	21.07	21.12	21.14		
1.4	QPSK	3	0	21.22	21.26	21.28		
1.4	QPSK	3	1	21.24	21.26	21.29		
1.4	QPSK	3	3	21.23	21.25	21.30		
1.4	QPSK	6	0	20.24	20.25	20.31	21	1
1.4	16QAM	1	0	20.44	20.52	20.43	21	1
1.4	16QAM	1	3	20.46	20.54	20.43		
1.4	16QAM	1	5	20.44	20.51	20.47		
1.4	16QAM	3	0	20.30	20.33	20.31		
1.4	16QAM	3	1	20.33	20.37	20.35		
1.4	16QAM	3	3	20.28	20.33	20.33		
1.4	16QAM	6	0	19.36	19.38	19.39	20	2



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	21.03	21.04	21.05		
10	QPSK	1	25	21.23	21.24	21.22	22	0
10	QPSK	1	49	21.12	21.10	21.14		
10	QPSK	25	0	20.33	20.37	20.25		
10	QPSK	25	12	20.23	20.22	20.23	21	1
10	QPSK	25	25	20.24	20.20	20.13		
10	QPSK	50	0	20.34	20.28	20.20		
10	16QAM	1	0	20.36	20.41	20.43	21	1
10	16QAM	1	25	20.65	20.62	20.59		
10	16QAM	1	49	20.45	20.43	20.43		
10	16QAM	25	0	19.26	19.21	19.16	20	2
10	16QAM	25	12	19.25	19.24	19.24		
10	16QAM	25	25	19.41	19.36	19.24		
10	16QAM	50	0	19.35	19.30	19.20		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	21.09	21.11	21.11		
5	QPSK	1	12	21.28	21.31	21.29	22	0
5	QPSK	1	24	21.18	21.16	21.16		
5	QPSK	12	0	20.24	20.19	20.13		
5	QPSK	12	7	20.25	20.29	20.27	21	1
5	QPSK	12	13	20.24	20.34	20.21		
5	QPSK	25	0	20.23	20.28	20.13		
5	16QAM	1	0	20.42	20.49	20.45	21	1
5	16QAM	1	12	20.64	20.67	20.55		
5	16QAM	1	24	20.57	20.49	20.46		
5	16QAM	12	0	19.27	19.23	19.13	20	2
5	16QAM	12	7	19.29	19.31	19.29		
5	16QAM	12	13	19.26	19.37	19.22		
5	16QAM	25	0	19.24	19.30	19.13		



**<WLAN Conducted Power>**

**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.



<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b	CH 1	2412	1Mbps	14.58	15.50	100.00
		CH 6	2437		15.01	15.50	
		CH 11	2462		14.51	15.50	
	802.11g	CH 1	2412	6Mbps	12.45	13.00	97.47
		CH 6	2437		12.87	13.00	
		CH 11	2462		12.42	13.00	
	802.11n-HT20	CH 1	2412	MCS0	11.28	12.00	97.28
		CH 6	2437		11.80	12.00	
		CH 11	2462		11.23	12.00	
	802.11n-HT40	CH 03	2422	MCS0	11.87	12.50	94.90
		CH 06	2437		11.94	12.50	
		CH 09	2452		12.10	12.50	



<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a	CH 36	5180	6Mbps	12.19	13.00	97.47
		CH 40	5200		12.13	13.00	
		CH 44	5220		12.17	13.00	
		CH 48	5240		12.09	13.00	
	802.11n-HT20	CH 36	5180	MCS0	12.18	12.50	97.30
		CH 40	5200		12.12	12.50	
		CH 44	5220		12.15	12.50	
		CH 48	5240		12.06	12.50	
	802.11n-HT40	CH 38	5190	MCS0	12.31	12.50	94.71
		CH 46	5230		12.25	12.50	
	802.11ac-VHT20	CH 36	5180	MCS0	12.09	12.50	94.52
		CH 40	5200		11.92	12.50	
		CH 44	5220		11.90	12.50	
		CH 48	5240		11.92	12.50	
802.11ac-VHT40	CH 38	5190	MCS0	12.02	12.50	94.74	
	CH 46	5230		11.80	12.50		
802.11ac-VHT80	CH 42	5210	MCS0	8.69	9.00	89.96	



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a	CH 52	5260	6Mbps	12.10	13.00	97.47
		CH 56	5280		12.08	13.00	
		CH 60	5300		12.02	13.00	
		CH 64	5320		11.95	13.00	
	802.11n-HT20	CH 52	5260	MCS0	12.08	12.50	97.30
		CH 56	5280		12.07	12.50	
		CH 60	5300		11.97	12.50	
		CH 64	5320		11.94	12.50	
	802.11n-HT40	CH 54	5270	MCS0	9.70	10.00	94.71
		CH 62	5310		9.35	10.00	
	802.11ac-VHT20	CH 52	5260	MCS0	12.07	12.50	94.52
		CH 56	5280		12.06	12.50	
		CH 60	5300		11.96	12.50	
		CH 64	5320		11.92	12.50	
	802.11ac-VHT40	CH 54	5270	MCS0	10.89	11.00	94.74
		CH 62	5310		10.65	11.00	
802.11ac-VHT80	CH 58	5290	MCS0	4.94	5.00	89.96	



	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a	CH 100	5500	6Mbps	12.03	13.00	97.47
		CH 104	5520		11.76	13.00	
		CH 108	5540		11.63	13.00	
		CH 112	5560		11.97	13.00	
		CH 116	5580		12.02	13.00	
		CH 132	5660		12.20	13.00	
		CH 136	5680		12.29	13.00	
		CH 140	5700		12.32	13.00	
		CH 144	5720		12.15	13.00	
	802.11n-HT20	CH 100	5500	MCS0	11.85	12.50	97.30
		CH 104	5520		11.63	12.50	
		CH 108	5540		11.55	12.50	
		CH 112	5560		11.87	12.50	
		CH 116	5580		11.97	12.50	
		CH 132	5660		12.19	12.50	
		CH 136	5680		12.20	12.50	
		CH 140	5700		12.24	12.50	
		CH 144	5720		12.09	12.50	
	802.11n-HT40	CH 102	5510	MCS0	10.38	11.50	94.71
		CH 110	5550		10.45	11.50	
		CH 134	5670		10.92	11.50	
		CH 142	5710		10.99	11.50	
	802.11ac-VHT20	CH 100	5500	MCS0	11.84	12.50	94.52
		CH 104	5520		11.62	12.50	
		CH 108	5540		11.54	12.50	
		CH 112	5560		11.85	12.50	
		CH 116	5580		11.96	12.50	
		CH 132	5660		12.12	12.50	
		CH 136	5680		12.18	12.50	
		CH 140	5700		12.22	12.50	
	CH 144	5720	12.07	12.50			
	802.11ac-VHT40	CH 102	5510	MCS0	10.85	11.50	94.74
		CH 110	5550		10.94	11.50	
		CH 134	5670		11.25	11.50	
		CH 142	5710		11.36	11.50	
	802.11ac-VHT80	CH 106	5530	MCS0	4.62	5.50	89.96
CH 138		5690	5.19		5.50		





	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a	CH 149	5745	MCS0	12.08	13.00	97.47
		CH 153	5765		12.25	13.00	
		CH 157	5785		12.23	13.00	
		CH 161	5805		12.21	13.00	
		CH 165	5825		12.26	13.00	
	802.11n-HT20	CH 149	5745	MCS0	12.06	12.50	97.30
		CH 153	5765		12.08	12.50	
		CH 157	5785		12.10	12.50	
		CH 161	5805		12.13	12.50	
		CH 165	5825		12.11	12.50	
	802.11n-HT40	CH 151	5755	MCS0	12.06	12.50	94.71
		CH 159	5795		12.19	12.50	
	802.11ac-VHT20	CH 149	5745	MCS0	12.05	12.50	94.52
		CH 153	5765		12.07	12.50	
		CH 157	5785		12.07	12.50	
		CH 161	5805		12.12	12.50	
		CH 165	5825		12.08	12.50	
	802.11ac-VHT40	CH 151	5755	MCS0	12.05	12.50	94.74
		CH 159	5795		12.16	12.50	
	802.11ac-VHT80	CH 155	5775	MCS0	12.08	12.50	89.96



### 13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v3.0+EDR	Bluetooth v4.0/4.1 LE
2.4GHz Bluetooth	7.5	0

**Note:**

Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:


$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
7.5	10	2.48	0.9

**Note:** Per KDB 447498 D01v06, the test exclusion threshold is 0.9 which is ≤ 3, SAR testing is not required.

### 14. Antenna Location

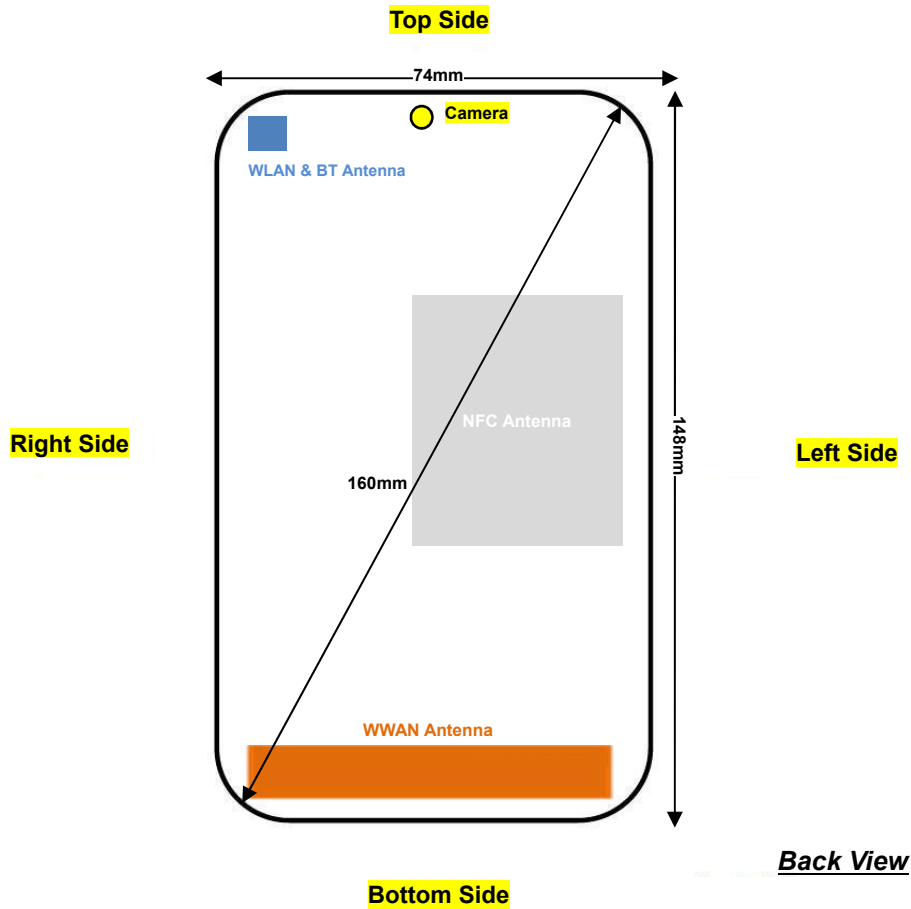

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna	Yes	Yes	No	Yes	Yes	Yes
WLAN & Bluetooth	Yes	Yes	Yes	No	Yes	No

**General Note:**

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.



## **15. SAR Test Results**

### **General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.

### **GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

### **UMTS Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / HSPA+ / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / HSPA+ / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / HSPA+ / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5 / B4 / B12 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - c. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - d. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	251	848.8	29.13	30.00	1.222	0.11	0.340	0.415
	GSM850	GPRS (4 Tx slots)	Right Tilted	251	848.8	29.13	30.00	1.222	0.05	0.248	0.303
	GSM850	GPRS (4 Tx slots)	Left Cheek	251	848.8	29.13	30.00	1.222	0.1	0.257	0.314
	GSM850	GPRS (4 Tx slots)	Left Tilted	251	848.8	29.13	30.00	1.222	0.15	0.183	0.224
	GSM850	GPRS (4 Tx slots)	Right Cheek	128	824.2	28.76	30.00	1.330	0.03	0.280	0.373
#01	GSM850	GPRS (4 Tx slots)	Right Cheek	189	836.4	28.97	30.00	1.268	0.06	0.347	0.440
	GSM1900	GPRS (4 Tx slots)	Right Cheek	661	1880	26.17	26.50	1.079	0.07	0.289	0.312
	GSM1900	GPRS (4 Tx slots)	Right Tilted	661	1880	26.17	26.50	1.079	0.1	0.252	0.272
	GSM1900	GPRS (4 Tx slots)	Left Cheek	661	1880	26.17	26.50	1.079	0.14	0.450	0.486
	GSM1900	GPRS (4 Tx slots)	Left Tilted	661	1880	26.17	26.50	1.079	0.02	0.232	0.250
	GSM1900	GPRS (4 Tx slots)	Left Cheek	512	1850.2	26.08	26.50	1.102	0.17	0.468	0.516
#02	GSM1900	GPRS (4 Tx slots)	Left Cheek	810	1909.8	26.13	26.50	1.089	0.07	0.559	0.609



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4182	836.4	22.83	23.00	1.040	0.12	0.176	0.183
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4132	826.4	22.80	23.00	1.047	0.01	0.183	0.192
#03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4233	846.6	22.77	23.00	1.054	0.05	0.195	0.206
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	4182	836.4	22.83	23.00	1.040	0.03	0.149	0.155
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	4182	836.4	22.83	23.00	1.040	0.01	0.138	0.144
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	4182	836.4	22.83	23.00	1.040	0.07	0.109	0.113
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	1413	1732.6	23.96	24.50	1.132	-0.01	0.192	0.217
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	1413	1732.6	23.96	24.50	1.132	0.02	0.166	0.188
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1413	1732.6	23.96	24.50	1.132	0.01	0.341	0.386
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1312	1712.4	23.82	24.50	1.169	0.09	0.268	0.313
#04	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1513	1752.6	23.81	24.50	1.172	0.12	0.422	0.495
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	1413	1732.6	23.96	24.50	1.132	0.1	0.168	0.190
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	9400	1880	22.63	23.00	1.089	-0.02	0.310	0.338
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	9400	1880	22.63	23.00	1.089	0.04	0.303	0.330
#05	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9400	1880	22.63	23.00	1.089	0.18	0.583	0.635
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9262	1852.4	22.59	23.00	1.099	0.02	0.428	0.470
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9538	1907.6	22.58	23.00	1.102	0.15	0.522	0.575
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	9400	1880	22.63	23.00	1.089	0.07	0.261	0.284



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	25Offset	Right Cheek	23095	707.5	21.24	22.00	1.191	0.01	0.092	0.110
	LTE Band 12	10M	QPSK	25RB	0Offset	Right Cheek	23095	707.5	20.30	21.00	1.175	0.02	0.068	0.080
	LTE Band 12	10M	QPSK	1RB	25Offset	Right Tilted	23095	707.5	21.24	22.00	1.191	0.02	0.061	0.073
	LTE Band 12	10M	QPSK	25RB	0Offset	Right Tilted	23095	707.5	20.30	21.00	1.175	0.01	0.044	0.052
#06	LTE Band 12	10M	QPSK	1RB	25Offset	Left Cheek	23095	707.5	21.24	22.00	1.191	0.03	0.110	0.131
	LTE Band 12	10M	QPSK	25RB	0Offset	Left Cheek	23095	707.5	20.30	21.00	1.175	0.02	0.081	0.095
	LTE Band 12	10M	QPSK	1RB	25Offset	Left Tilted	23095	707.5	21.24	22.00	1.191	0.01	0.097	0.116
	LTE Band 12	10M	QPSK	25RB	0Offset	Left Tilted	23095	707.5	20.30	21.00	1.175	0.03	0.056	0.066
#07	LTE Band 5	10M	QPSK	1RB	25Offset	Right Cheek	20525	836.5	21.37	22.00	1.156	0.02	0.156	0.180
	LTE Band 5	10M	QPSK	25RB	0Offset	Right Cheek	20525	836.5	20.41	21.00	1.146	0.02	0.151	0.173
	LTE Band 5	10M	QPSK	1RB	25Offset	Right Tilted	20525	836.5	21.37	22.00	1.156	0.02	0.118	0.136
	LTE Band 5	10M	QPSK	25RB	0Offset	Right Tilted	20525	836.5	20.41	21.00	1.146	0.1	0.121	0.139
	LTE Band 5	10M	QPSK	1RB	25Offset	Left Cheek	20525	836.5	21.37	22.00	1.156	0.03	0.124	0.143
	LTE Band 5	10M	QPSK	25RB	0Offset	Left Cheek	20525	836.5	20.41	21.00	1.146	0.13	0.128	0.147
	LTE Band 5	10M	QPSK	1RB	25Offset	Left Tilted	20525	836.5	21.37	22.00	1.156	0.12	0.122	0.141
	LTE Band 5	10M	QPSK	25RB	0Offset	Left Tilted	20525	836.5	20.41	21.00	1.146	0.1	0.124	0.142
	LTE Band 4	20M	QPSK	1RB	49Offset	Right Cheek	20175	1732.5	21.63	22.00	1.089	0.04	0.132	0.144
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Cheek	20175	1732.5	20.76	21.00	1.057	0.08	0.108	0.114
	LTE Band 4	20M	QPSK	1RB	49Offset	Right Tilted	20175	1732.5	21.63	22.00	1.089	0.13	0.122	0.133
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Tilted	20175	1732.5	20.76	21.00	1.057	0.08	0.100	0.106
#08	LTE Band 4	20M	QPSK	1RB	49Offset	Left Cheek	20175	1732.5	21.63	22.00	1.089	0.19	0.257	0.280
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Cheek	20175	1732.5	20.76	21.00	1.057	0.07	0.208	0.220
	LTE Band 4	20M	QPSK	1RB	49Offset	Left Tilted	20175	1732.5	21.63	22.00	1.089	0.15	0.104	0.113
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Tilted	20175	1732.5	20.76	21.00	1.057	0.14	0.083	0.088
	LTE Band 2	20M	QPSK	1RB	49Offset	Right Cheek	18900	1880	21.39	22.00	1.151	0.06	0.298	0.343
	LTE Band 2	20M	QPSK	50RB	0Offset	Right Cheek	18900	1880	20.49	21.00	1.125	0.17	0.236	0.265
	LTE Band 2	20M	QPSK	1RB	49Offset	Right Tilted	18900	1880	21.39	22.00	1.151	0.02	0.285	0.328
	LTE Band 2	20M	QPSK	50RB	0Offset	Right Tilted	18900	1880	20.49	21.00	1.125	0.02	0.235	0.264
#09	LTE Band 2	20M	QPSK	1RB	49Offset	Left Cheek	18900	1880	21.39	22.00	1.151	-0.07	0.519	0.597
	LTE Band 2	20M	QPSK	50RB	0Offset	Left Cheek	18900	1880	20.49	21.00	1.125	-0.09	0.415	0.467
	LTE Band 2	20M	QPSK	1RB	49Offset	Left Tilted	18900	1880	21.39	22.00	1.151	0.11	0.230	0.265
	LTE Band 2	20M	QPSK	50RB	0Offset	Left Tilted	18900	1880	20.49	21.00	1.125	0.08	0.190	0.214
	LTE Band 2	20M	QPSK	1RB	49Offset	Left Cheek	18700	1860	21.34	22.00	1.164	0.08	0.436	0.508
	LTE Band 2	20M	QPSK	1RB	49Offset	Left Cheek	19100	1900	21.31	22.00	1.172	0.03	0.498	0.584
	LTE Band 7	20M	QPSK	1RB	49Offset	Right Cheek	21100	2535	21.97	22.50	1.130	0.01	0.141	0.159
	LTE Band 7	20M	QPSK	50RB	0Offset	Right Cheek	21100	2535	21.08	21.50	1.102	0.01	0.141	0.155
	LTE Band 7	20M	QPSK	1RB	49Offset	Right Tilted	21100	2535	21.97	22.50	1.130	0.02	0.102	0.115
	LTE Band 7	20M	QPSK	50RB	0Offset	Right Tilted	21100	2535	21.08	21.50	1.102	0.02	0.101	0.111
#10	LTE Band 7	20M	QPSK	1RB	49Offset	Left Cheek	21100	2535	21.97	22.50	1.130	0.08	0.252	0.285
	LTE Band 7	20M	QPSK	50RB	0Offset	Left Cheek	21100	2535	21.08	21.50	1.102	0.01	0.249	0.274
	LTE Band 7	20M	QPSK	1RB	49Offset	Left Tilted	21100	2535	21.97	22.50	1.130	0.04	0.151	0.171
	LTE Band 7	20M	QPSK	50RB	0Offset	Left Tilted	21100	2535	21.08	21.50	1.102	0.08	0.134	0.148
	LTE Band 7	20M	QPSK	1RB	49Offset	Left Cheek	20850	2510	21.95	22.50	1.135	0.06	0.239	0.271
	LTE Band 7	20M	QPSK	1RB	49Offset	Left Cheek	21350	2560	21.93	22.50	1.140	0.1	0.248	0.283





<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Peak SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Right Cheek	6	2437	15.01	15.50	1.119	100.00	1.000		0.077		
	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	6	2437	15.01	15.50	1.119	100.00	1.000		0.120		
	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	6	2437	15.01	15.50	1.119	100.00	1.000	0.17	0.350	0.202	0.226
	WLAN 2.4GHz	802.11b 1Mbps	Left Tilted	6	2437	15.01	15.50	1.119	100.00	1.000		0.325		
	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	1	2412	14.58	15.50	1.236	100.00	1.000	0.02		0.217	0.268
#11	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	11	2462	14.51	15.50	1.256	100.00	1.000	0.04		0.271	0.340

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Peak SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.3GHz	802.11a 6Mbps	Right Cheek	52	5260	12.10	13.00	1.230	97.47	1.026		0.049		
	WLAN 5.3GHz	802.11a 6Mbps	Right Tilted	52	5260	12.10	13.00	1.230	97.47	1.026		0.051		
#12	WLAN 5.3GHz	802.11a 6Mbps	Left Cheek	52	5260	12.10	13.00	1.230	97.47	1.026	0.05	0.320	0.160	0.202
	WLAN 5.3GHz	802.11a 6Mbps	Left Tilted	52	5260	12.10	13.00	1.230	97.47	1.026		0.279		
	WLAN 5.3GHz	802.11a 6Mbps	Left Cheek	56	5280	12.08	13.00	1.236	97.47	1.026	0.06		0.148	0.188
	WLAN 5.3GHz	802.11a 6Mbps	Left Cheek	64	5320	11.95	13.00	1.274	97.47	1.026	0.02		0.137	0.179
	WLAN 5.5GHz	802.11a 6Mbps	Right Cheek	140	5700	12.32	13.00	1.169	97.47	1.026		0.137		
	WLAN 5.5GHz	802.11a 6Mbps	Right Tilted	140	5700	12.32	13.00	1.169	97.47	1.026		0.181		
	WLAN 5.5GHz	802.11a 6Mbps	Left Cheek	140	5700	12.32	13.00	1.169	97.47	1.026	0.01	0.350	0.142	0.170
	WLAN 5.5GHz	802.11a 6Mbps	Left Tilted	140	5700	12.32	13.00	1.169	97.47	1.026		0.310		
	WLAN 5.5GHz	802.11a 6Mbps	Left Cheek	100	5500	12.03	13.00	1.250	97.47	1.026	0.07		0.108	0.139
#13	WLAN 5.5GHz	802.11a 6Mbps	Left Cheek	144	5720	12.15	13.00	1.216	97.47	1.026	0.05		0.145	0.181
	WLAN 5.8GHz	802.11a 6Mbps	Right Cheek	165	5825	12.26	13.00	1.186	97.47	1.026		0.179		
	WLAN 5.8GHz	802.11a 6Mbps	Right Tilted	165	5825	12.26	13.00	1.186	97.47	1.026		0.16		
#14	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	165	5825	12.26	13.00	1.186	97.47	1.026	0.05	0.467	0.172	0.209
	WLAN 5.8GHz	802.11a 6Mbps	Left Tilted	165	5825	12.26	13.00	1.186	97.47	1.026		0.328		
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	149	5745	12.08	13.00	1.236	97.47	1.026	-0.08		0.141	0.179
	WLAN 5.8GHz	802.11a 6Mbps	Left Cheek	157	5785	12.23	13.00	1.194	97.47	1.026	0.16		0.164	0.201



**15.2 Hotspot SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10	251	848.8	29.13	30.00	1.222	-0.01	0.312	0.381
	GSM850	GPRS (4 Tx slots)	Back	10	251	848.8	29.13	30.00	1.222	0.01	0.732	0.894
	GSM850	GPRS (4 Tx slots)	Back	10	128	824.2	28.76	30.00	1.330	-0.01	0.673	0.895
#15	GSM850	GPRS (4 Tx slots)	Back	10	189	836.4	28.97	30.00	1.268	-0.08	0.732	<b>0.928</b>
	GSM850	GPRS (4 Tx slots)	Left side	10	251	848.8	29.13	30.00	1.222	0.01	0.228	0.279
	GSM850	GPRS (4 Tx slots)	Right Side	10	251	848.8	29.13	30.00	1.222	-0.02	0.696	0.850
	GSM850	GPRS (4 Tx slots)	Right Side	10	128	824.2	28.76	30.00	1.330	0.15	0.608	0.809
	GSM850	GPRS (4 Tx slots)	Right Side	10	189	836.4	28.97	30.00	1.268	0.01	0.633	0.802
	GSM850	GPRS (4 Tx slots)	Bottom Side	10	251	848.8	29.13	30.00	1.222	0.03	0.281	0.343
	GSM1900	GPRS (4 Tx slots)	Front	10	661	1880	26.17	26.50	1.079	0.03	0.326	0.352
#16	GSM1900	GPRS (4 Tx slots)	Back	10	661	1880	26.17	26.50	1.079	-0.06	0.932	<b>1.006</b>
	GSM1900	GPRS (4 Tx slots)	Back	10	512	1850.2	26.08	26.50	1.102	-0.17	0.908	1.000
	GSM1900	GPRS (4 Tx slots)	Back	10	810	1909.8	26.13	26.50	1.089	-0.02	0.900	0.980
	GSM1900	GPRS (4 Tx slots)	Left side	10	661	1880	26.17	26.50	1.079	0.03	0.469	0.506
	GSM1900	GPRS (4 Tx slots)	Right Side	10	661	1880	26.17	26.50	1.079	0.19	0.119	0.128
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10	661	1880	26.17	26.50	1.079	0.01	0.635	0.685



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	4182	836.4	22.83	23.00	1.040	-0.05	0.246	0.256
	WCDMA Band V	RMC 12.2Kbps	Back	10	4182	836.4	22.83	23.00	1.040	0.05	0.453	0.471
	WCDMA Band V	RMC 12.2Kbps	Back	10	4132	826.4	22.80	23.00	1.047	0.01	0.366	0.383
	WCDMA Band V	RMC 12.2Kbps	Back	10	4233	846.6	22.77	23.00	1.054	0.01	0.433	0.457
	WCDMA Band V	RMC 12.2Kbps	Left side	10	4182	836.4	22.83	23.00	1.040	0.04	0.228	0.237
#17	WCDMA Band V	RMC 12.2Kbps	Right Side	10	4182	836.4	22.83	23.00	1.040	0.02	0.484	0.503
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	4132	826.4	22.80	23.00	1.047	-0.04	0.418	0.438
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	4233	846.6	22.77	23.00	1.054	-0.06	0.415	0.438
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	10	4182	836.4	22.83	23.00	1.040	0.1	0.204	0.212
	WCDMA Band IV	RMC 12.2Kbps	Front	10	1413	1732.6	23.96	24.50	1.132	0.11	0.360	0.408
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1413	1732.6	23.96	24.50	1.132	-0.01	0.884	1.001
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1312	1712.4	23.82	24.50	1.169	-0.08	0.729	0.853
#18	WCDMA Band IV	RMC 12.2Kbps	Back	10	1513	1752.6	23.81	24.50	1.172	0.08	0.971	1.138
	WCDMA Band IV	RMC 12.2Kbps	Left side	10	1413	1732.6	23.96	24.50	1.132	0.03	0.346	0.392
	WCDMA Band IV	RMC 12.2Kbps	Right Side	10	1413	1732.6	23.96	24.50	1.132	0.03	0.083	0.094
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	1413	1752.6	23.96	24.50	1.132	0.05	0.573	0.649
	WCDMA Band II	RMC 12.2Kbps	Front	10	9400	1880	22.63	23.00	1.089	0.04	0.381	0.415
#19	WCDMA Band II	RMC 12.2Kbps	Back	10	9400	1880	22.63	23.00	1.089	-0.03	0.970	1.056
	WCDMA Band II	RMC 12.2Kbps	Back	10	9262	1852.4	22.59	23.00	1.099	-0.04	0.845	0.929
	WCDMA Band II	RMC 12.2Kbps	Back	10	9538	1907.6	22.58	23.00	1.102	-0.13	0.860	0.947
	WCDMA Band II	RMC 12.2Kbps	Left side	10	9400	1880	22.63	23.00	1.089	-0.03	0.521	0.567
	WCDMA Band II	RMC 12.2Kbps	Right Side	10	9400	1880	22.63	23.00	1.089	0.08	0.123	0.134
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	9400	1880	22.63	23.00	1.089	0.13	0.694	0.756



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	25Offset	Front	10	23095	707.5	21.24	22.00	1.191	-0.17	0.118	0.141
	LTE Band 12	10M	QPSK	25RB	0Offset	Front	10	23095	707.5	20.30	21.00	1.175	0.01	0.086	0.101
#20	LTE Band 12	10M	QPSK	1RB	25Offset	Back	10	23095	707.5	21.24	22.00	1.191	0.02	0.284	0.338
	LTE Band 12	10M	QPSK	25RB	0Offset	Back	10	23095	707.5	20.30	21.00	1.175	-0.17	0.212	0.249
	LTE Band 12	10M	QPSK	1RB	25Offset	Left side	10	23095	707.5	21.24	22.00	1.191	-0.01	0.076	0.091
	LTE Band 12	10M	QPSK	25RB	0Offset	Left side	10	23095	707.5	20.30	21.00	1.175	0.04	0.099	0.116
	LTE Band 12	10M	QPSK	1RB	25Offset	Right Side	10	23095	707.5	21.24	22.00	1.191	0.02	0.237	0.282
	LTE Band 12	10M	QPSK	25RB	0Offset	Right Side	10	23095	707.5	20.30	21.00	1.175	0.13	0.180	0.211
	LTE Band 12	10M	QPSK	1RB	25Offset	Bottom Side	10	23095	707.5	21.24	22.00	1.191	0.11	0.054	0.064
	LTE Band 12	10M	QPSK	25RB	0Offset	Bottom Side	10	23095	707.5	20.30	21.00	1.175	0.01	0.038	0.045
	LTE Band 5	10M	QPSK	1RB	25Offset	Front	10	20525	836.5	21.37	22.00	1.156	0.03	0.150	0.173
	LTE Band 5	10M	QPSK	25RB	0Offset	Front	10	20525	836.5	20.41	21.00	1.146	0.06	0.156	0.179
#21	LTE Band 5	10M	QPSK	1RB	25Offset	Back	10	20525	836.5	21.37	22.00	1.156	-0.19	0.397	0.459
	LTE Band 5	10M	QPSK	25RB	0Offset	Back	10	20525	836.5	20.41	21.00	1.146	0.09	0.334	0.383
	LTE Band 5	10M	QPSK	1RB	25Offset	Left side	10	20525	836.5	21.37	22.00	1.156	-0.02	0.144	0.166
	LTE Band 5	10M	QPSK	25RB	0Offset	Left side	10	20525	836.5	20.41	21.00	1.146	0.02	0.144	0.165
	LTE Band 5	10M	QPSK	1RB	25Offset	Right Side	10	20525	836.5	21.37	22.00	1.156	-0.16	0.379	0.438
	LTE Band 5	10M	QPSK	25RB	0Offset	Right Side	10	20525	836.5	20.41	21.00	1.146	-0.04	0.389	0.446
	LTE Band 5	10M	QPSK	1RB	25Offset	Bottom Side	10	20525	836.5	21.37	22.00	1.156	0.02	0.132	0.153
	LTE Band 5	10M	QPSK	25RB	0Offset	Bottom Side	10	20525	836.5	20.41	21.00	1.146	0.01	0.128	0.147
	LTE Band 4	20M	QPSK	1RB	49Offset	Front	10	20175	1732.5	21.63	22.00	1.089	-0.16	0.202	0.220
	LTE Band 4	20M	QPSK	50RB	0Offset	Front	10	20175	1732.5	20.76	21.00	1.057	-0.08	0.168	0.178
#22	LTE Band 4	20M	QPSK	1RB	49Offset	Back	10	20175	1732.5	21.63	22.50	1.222	-0.01	0.643	0.786
	LTE Band 4	20M	QPSK	50RB	0Offset	Back	10	20175	1732.5	20.76	21.00	1.057	-0.08	0.487	0.515
	LTE Band 4	20M	QPSK	1RB	49Offset	Left side	10	20175	1732.5	21.63	22.00	1.089	-0.06	0.234	0.255
	LTE Band 4	20M	QPSK	50RB	0Offset	Left side	10	20175	1732.5	20.76	21.00	1.057	-0.03	0.189	0.200
	LTE Band 4	20M	QPSK	1RB	49Offset	Right Side	10	20175	1732.5	21.63	22.00	1.089	0.04	0.068	0.074
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Side	10	20175	1732.5	20.76	21.00	1.057	-0.12	0.055	0.058
	LTE Band 4	20M	QPSK	1RB	49Offset	Bottom Side	10	20175	1732.5	21.63	22.00	1.089	0.02	0.391	0.426
	LTE Band 4	20M	QPSK	50RB	0Offset	Bottom Side	10	20175	1732.5	20.76	21.00	1.057	0.19	0.371	0.392



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1RB	49Offset	Front	10	18900	1880	21.39	22.00	1.151	0.03	0.366	0.421
	LTE Band 2	20M	QPSK	50RB	0Offset	Front	10	18900	1880	20.49	21.00	1.125	-0.08	0.299	0.336
	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	18900	1880	21.39	22.00	1.151	-0.04	0.955	1.099
	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	18700	1860	21.34	22.00	1.164	-0.08	0.954	1.111
#23	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	19100	1900	21.31	22.00	1.172	0.05	0.958	1.123
	LTE Band 2	20M	QPSK	50RB	0Offset	Back	10	18900	1880	20.49	21.00	1.125	-0.12	0.791	0.890
	LTE Band 2	20M	QPSK	50RB	0Offset	Back	10	18700	1860	20.42	21.00	1.143	-0.07	0.732	0.837
	LTE Band 2	20M	QPSK	50RB	0Offset	Back	10	19100	1900	20.40	21.00	1.148	-0.03	0.733	0.842
	LTE Band 2	20M	QPSK	100RB	0Offset	Back	10	18900	1880	20.45	21.00	1.135	-0.04	0.780	0.885
	LTE Band 2	20M	QPSK	1RB	49Offset	Left side	10	18900	1880	21.39	22.00	1.151	-0.07	0.451	0.519
	LTE Band 2	20M	QPSK	50RB	0Offset	Left side	10	18900	1880	20.49	21.00	1.125	-0.04	0.370	0.416
	LTE Band 2	20M	QPSK	1RB	49Offset	Right Side	10	18900	1880	21.39	22.00	1.151	-0.05	0.135	0.155
	LTE Band 2	20M	QPSK	50RB	0Offset	Right Side	10	18900	1880	20.49	21.00	1.125	0.02	0.109	0.123
	LTE Band 2	20M	QPSK	1RB	49Offset	Bottom Side	10	18900	1880	21.39	22.00	1.151	0.16	0.612	0.704
	LTE Band 2	20M	QPSK	50RB	0Offset	Bottom Side	10	18900	1880	20.49	21.00	1.125	0.16	0.498	0.560
	LTE Band 7	20M	QPSK	1RB	49Offset	Front	10	21100	2535	21.97	22.50	1.130	0.04	0.354	0.400
	LTE Band 7	20M	QPSK	50RB	0Offset	Front	10	21100	2535	21.08	21.50	1.102	0.11	0.315	0.347
	LTE Band 7	20M	QPSK	1RB	49Offset	Back	10	21100	2535	21.97	22.50	1.130	0.03	0.868	0.981
#24	LTE Band 7	20M	QPSK	1RB	49Offset	Back	10	20850	2510	21.95	22.50	1.135	-0.03	1.020	1.158
	LTE Band 7	20M	QPSK	1RB	49Offset	Back	10	21350	2560	21.93	22.50	1.140	-0.13	0.808	0.921
	LTE Band 7	20M	QPSK	50RB	0Offset	Back	10	21100	2535	21.08	21.50	1.102	0.02	0.782	0.861
	LTE Band 7	20M	QPSK	50RB	0Offset	Back	10	20850	2510	21.03	21.50	1.114	-0.05	0.737	0.821
	LTE Band 7	20M	QPSK	50RB	0Offset	Back	10	21350	2560	21.05	21.50	1.109	-0.09	0.820	0.910
	LTE Band 7	20M	QPSK	100RB	0Offset	Back	10	21100	2535	21.01	21.50	1.119	-0.05	0.811	0.908
	LTE Band 7	20M	QPSK	1RB	49Offset	Left side	10	21100	2535	21.97	22.50	1.130	-0.02	0.297	0.336
	LTE Band 7	20M	QPSK	50RB	0Offset	Left side	10	21100	2535	21.08	21.50	1.102	0.1	0.269	0.296
	LTE Band 7	20M	QPSK	1RB	49Offset	Right Side	10	21100	2535	21.97	22.50	1.130	0.12	0.206	0.233
	LTE Band 7	20M	QPSK	50RB	0Offset	Right Side	10	21100	2535	21.08	21.50	1.102	0.16	0.203	0.224
	LTE Band 7	20M	QPSK	1RB	49Offset	Bottom Side	10	21100	2535	21.97	22.50	1.130	0.08	0.498	0.563
	LTE Band 7	20M	QPSK	50RB	0Offset	Bottom Side	10	21100	2535	21.08	21.50	1.102	0.04	0.505	0.556

<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Peak SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	6	2437	15.01	15.5	1.119	100.00	1.000		0.056		
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	6	2437	15.01	15.5	1.119	100.00	1.000	0.04	0.121	0.058	0.065
	WLAN 2.4GHz	802.11b 1Mbps	Right Side	10	6	2437	15.01	15.5	1.119	100.00	1.000		0.046		
	WLAN 2.4GHz	802.11b 1Mbps	Top Side	10	6	2437	15.01	15.5	1.119	100.00	1.000		0.023		
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	1	2412	14.58	15.5	1.236	100.00	1.000	-0.07		0.075	0.093
#25	WLAN 2.4GHz	802.11b 1Mbps	Back	10	11	2462	14.51	15.5	1.256	100.00	1.000	-0.16		0.076	0.095



<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Peak SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.2GHz	802.11a 6Mbps	Front	10	36	5180	12.19	13.00	1.205	97.47	1.026		0.073		
	WLAN 5.2GHz	802.11a 6Mbps	Back	10	36	5180	12.19	13.00	1.205	97.47	1.026	0.03	0.257	0.059	0.073
	WLAN 5.2GHz	802.11a 6Mbps	Right Side	10	36	5180	12.19	13.00	1.205	97.47	1.026		0.230		
	WLAN 5.2GHz	802.11a 6Mbps	Top Side	10	36	5180	12.19	13.00	1.205	97.47	1.026		0.184		
#26	WLAN 5.2GHz	802.11a 6Mbps	Back	10	44	5220	12.17	13.00	1.211	97.47	1.026	0.05		0.066	0.082
	WLAN 5.2GHz	802.11a 6Mbps	Back	10	48	5240	12.09	13.00	1.233	97.47	1.026	0.12		0.061	0.077
	WLAN 5.8GHz	802.11a 6Mbps	Front	10	165	5825	12.26	13.00	1.186	97.47	1.026		0.446		
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	165	5825	12.26	13.00	1.186	97.47	1.026	0.06	0.452	0.203	0.247
	WLAN 5.8GHz	802.11a 6Mbps	Right Side	10	165	5825	12.26	13.00	1.186	97.47	1.026		0.313		
	WLAN 5.8GHz	802.11a 6Mbps	Top Side	10	165	5825	12.26	13.00	1.186	97.47	1.026		0.355		
#27	WLAN 5.8GHz	802.11a 6Mbps	Back	10	149	5745	12.08	13.00	1.236	97.47	1.026	0.05		0.208	0.264
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	157	5785	12.23	13.00	1.194	97.47	1.026	0.12		0.167	0.205



**15.3 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10	251	848.8	29.13	30.00	1.222	-0.01	0.312	0.381
	GSM850	GPRS (4 Tx slots)	Back	10	251	848.8	29.13	30.00	1.222	0.01	0.732	0.894
	GSM850	GPRS (4 Tx slots)	Back	10	128	824.2	28.76	30.00	1.330	-0.01	0.673	0.895
#15	GSM850	GPRS (4 Tx slots)	Back	10	189	836.4	28.97	30.00	1.268	-0.08	0.732	<b>0.928</b>
	GSM1900	GPRS (4 Tx slots)	Front	10	661	1880	26.17	26.50	1.079	0.03	0.326	0.352
#16	GSM1900	GPRS (4 Tx slots)	Back	10	661	1880	26.17	26.50	1.079	-0.06	0.932	<b>1.006</b>
	GSM1900	GPRS (4 Tx slots)	Back	10	512	1850.2	26.08	26.50	1.102	-0.17	0.908	1.000
	GSM1900	GPRS (4 Tx slots)	Back	10	810	1909.8	26.13	26.50	1.089	-0.02	0.900	0.980

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	4182	836.4	22.83	23.00	1.040	-0.05	0.246	0.256
#28	WCDMA Band V	RMC 12.2Kbps	Back	10	4182	836.4	22.83	23.00	1.040	0.05	0.453	<b>0.471</b>
	WCDMA Band V	RMC 12.2Kbps	Back	10	4132	826.4	22.80	23.00	1.047	0.01	0.366	0.383
	WCDMA Band V	RMC 12.2Kbps	Back	10	4233	846.6	22.77	23.00	1.054	0.01	0.433	0.457
	WCDMA Band IV	RMC 12.2Kbps	Front	10	1413	1732.6	23.96	24.50	1.132	0.11	0.360	0.408
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1413	1732.6	23.96	24.50	1.132	-0.01	0.884	1.001
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1312	1712.4	23.82	24.50	1.169	-0.08	0.729	0.853
#18	WCDMA Band IV	RMC 12.2Kbps	Back	10	1513	1752.6	23.81	24.50	1.172	0.08	0.971	<b>1.138</b>
	WCDMA Band II	RMC 12.2Kbps	Front	10	9400	1880	22.63	23.00	1.089	0.04	0.381	0.415
#19	WCDMA Band II	RMC 12.2Kbps	Back	10	9400	1880	22.63	23.00	1.089	-0.03	0.970	<b>1.056</b>
	WCDMA Band II	RMC 12.2Kbps	Back	10	9262	1852.4	22.59	23.00	1.099	-0.04	0.845	0.929
	WCDMA Band II	RMC 12.2Kbps	Back	10	9538	1907.6	22.58	23.00	1.102	-0.13	0.860	0.947



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	25Offset	Front	10	23095	707.5	21.24	22.00	1.191	-0.17	0.118	0.141
	LTE Band 12	10M	QPSK	25RB	0Offset	Front	10	23095	707.5	20.30	21.00	1.175	0.01	0.086	0.101
#20	LTE Band 12	10M	QPSK	1RB	25Offset	Back	10	23095	707.5	21.24	22.00	1.191	0.02	0.284	0.338
	LTE Band 12	10M	QPSK	25RB	0Offset	Back	10	23095	707.5	20.30	21.00	1.175	-0.17	0.212	0.249
	LTE Band 5	10M	QPSK	1RB	25Offset	Front	10	20525	836.5	21.37	22.00	1.156	0.03	0.150	0.173
	LTE Band 5	10M	QPSK	25RB	0Offset	Front	10	20525	836.5	20.41	21.00	1.146	0.06	0.156	0.179
#21	LTE Band 5	10M	QPSK	1RB	25Offset	Back	10	20525	836.5	21.37	22.00	1.156	-0.19	0.397	0.459
	LTE Band 5	10M	QPSK	25RB	0Offset	Back	10	20525	836.5	20.41	21.00	1.146	0.09	0.334	0.383
	LTE Band 4	20M	QPSK	1RB	49Offset	Front	10	20175	1732.5	21.63	22.00	1.089	-0.16	0.202	0.220
	LTE Band 4	20M	QPSK	50RB	0Offset	Front	10	20175	1732.5	20.76	21.00	1.057	-0.08	0.168	0.178
#22	LTE Band 4	20M	QPSK	1RB	49Offset	Back	10	20175	1732.5	21.63	22.50	1.222	-0.01	0.643	0.786
	LTE Band 4	20M	QPSK	50RB	0Offset	Back	10	20175	1732.5	20.76	21.00	1.057	-0.08	0.487	0.515
	LTE Band 2	20M	QPSK	1RB	49Offset	Front	10	18900	1880	21.39	22.00	1.151	0.03	0.366	0.421
	LTE Band 2	20M	QPSK	50RB	0Offset	Front	10	18900	1880	20.49	21.00	1.125	-0.08	0.299	0.336
	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	18900	1880	21.39	22.00	1.151	-0.04	0.955	1.099
	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	18700	1860	21.34	22.00	1.164	-0.08	0.954	1.111
#23	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	19100	1900	21.31	22.00	1.172	0.05	0.958	1.123
	LTE Band 2	20M	QPSK	50RB	0Offset	Back	10	18900	1880	20.49	21.00	1.125	-0.12	0.791	0.890
	LTE Band 2	20M	QPSK	50RB	0Offset	Back	10	18700	1860	20.42	21.00	1.143	-0.07	0.732	0.837
	LTE Band 2	20M	QPSK	50RB	0Offset	Back	10	19100	1900	20.40	21.00	1.148	-0.03	0.733	0.842
	LTE Band 2	20M	QPSK	100RB	0Offset	Back	10	18900	1880	20.45	21.00	1.135	-0.04	0.780	0.885
	LTE Band 7	20M	QPSK	1RB	49Offset	Front	10	21100	2535	21.97	22.50	1.130	0.04	0.354	0.400
	LTE Band 7	20M	QPSK	50RB	0Offset	Front	10	21100	2535	21.08	21.50	1.102	0.11	0.315	0.347
	LTE Band 7	20M	QPSK	1RB	49Offset	Back	10	21100	2535	21.97	22.50	1.130	0.03	0.868	0.981
#24	LTE Band 7	20M	QPSK	1RB	49Offset	Back	10	20850	2510	21.95	22.50	1.135	-0.03	1.020	1.158
	LTE Band 7	20M	QPSK	1RB	49Offset	Back	10	21350	2560	21.93	22.50	1.140	-0.13	0.808	0.921
	LTE Band 7	20M	QPSK	50RB	0Offset	Back	10	21100	2535	21.08	21.50	1.102	0.02	0.782	0.861
	LTE Band 7	20M	QPSK	50RB	0Offset	Back	10	20850	2510	21.03	21.50	1.114	-0.05	0.737	0.821
	LTE Band 7	20M	QPSK	50RB	0Offset	Back	10	21350	2560	21.05	21.50	1.109	-0.09	0.820	0.910
	LTE Band 7	20M	QPSK	100RB	0Offset	Back	10	21100	2535	21.01	21.50	1.119	-0.05	0.811	0.908





<WLAN 2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Peak SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	6	2437	15.01	15.50	1.119	100.00	1.000		0.056		
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	6	2437	15.01	15.50	1.119	100.00	1.000	0.04	0.121	0.058	0.065
	WLAN 2.4GHz	802.11b 1Mbps	Back	10	1	2412	14.58	15.50	1.236	100.00	1.000	-0.07		0.075	0.093
#25	WLAN 2.4GHz	802.11b 1Mbps	Back	10	11	2462	14.51	15.50	1.256	100.00	1.000	-0.16		0.076	0.095

<WLAN 5GHz SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Peak SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.2GHz	802.11a 6Mbps	Front	10	36	5180	12.19	13.00	1.205	97.47	1.026		0.073		
	WLAN 5.2GHz	802.11a 6Mbps	Back	10	36	5180	12.19	13.00	1.205	97.47	1.026	0.03	0.257	0.059	0.073
#26	WLAN 5.2GHz	802.11a 6Mbps	Back	10	44	5220	12.17	13.00	1.211	97.47	1.026	0.05		0.066	0.082
	WLAN 5.2GHz	802.11a 6Mbps	Back	10	48	5240	12.09	13.00	1.233	97.47	1.026	0.12		0.061	0.077
	WLAN 5.3GHz	802.11a 6Mbps	Front	10	52	5260	12.10	13.00	1.230	97.47	1.026		0.132		
	WLAN 5.3GHz	802.11a 6Mbps	Back	10	52	5260	12.10	13.00	1.230	97.47	1.026	0.09	0.214	0.067	0.085
#29	WLAN 5.3GHz	802.11a 6Mbps	Back	10	56	5280	12.08	13.00	1.236	97.47	1.026	0.01		0.067	0.085
	WLAN 5.3GHz	802.11a 6Mbps	Back	10	64	5320	11.95	13.00	1.274	97.47	1.026	-0.12		0.039	0.051
	WLAN 5.5GHz	802.11a 6Mbps	Front	10	140	5700	12.32	13.00	1.169	97.47	1.026		0.036		
	WLAN 5.5GHz	802.11a 6Mbps	Back	10	140	5700	12.32	13.00	1.169	97.47	1.026	0.09	0.226	0.099	0.119
	WLAN 5.5GHz	802.11a 6Mbps	Back	10	100	5500	12.03	13.00	1.250	97.47	1.026	0.01		0.063	0.081
#30	WLAN 5.5GHz	802.11a 6Mbps	Back	10	144	5720	12.15	13.00	1.216	97.47	1.026	-0.06		0.153	0.191
	WLAN 5.8GHz	802.11a 6Mbps	Front	10	165	5825	12.26	13.00	1.186	97.47	1.026		0.446		
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	165	5825	12.26	13.00	1.186	97.47	1.026	0.06	0.452	0.203	0.247
#27	WLAN 5.8GHz	802.11a 6Mbps	Back	10	149	5745	12.08	13.00	1.236	97.47	1.026	0.05		0.208	0.264
	WLAN 5.8GHz	802.11a 6Mbps	Back	10	157	5785	12.23	13.00	1.194	97.47	1.026	0.12		0.167	0.205



15.4 Repeated SAR Measurement

Table with 18 columns: No., Band, Mode, BW (MHz), Modulation, RB Size, RB Offset, Test Position, Gap (mm), Ch., Freq. (MHz), Average Power (dBm), Tune-Up Limit (dBm), Tune-up Scaling Factor, Power Drift (dB), Measured 1g SAR (W/kg), Ratio, Reported 1g SAR (W/kg). It contains 10 rows of test data for WCDMA and LTE bands.

General Note:

- 1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated measured SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

### 16. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	WWAN VoIP
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	WWAN VoIP
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	WWAN VoIP
5.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes		
6.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		WWAN VoIP
7.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		WWAN VoIP
8.	LTE + WLAN5.3/5.5GHz	Yes	Yes		WWAN VoIP
9.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes		
10.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	WWAN VoIP
11.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	WWAN VoIP
12.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	WWAN VoIP
13.	GSM Voice + Bluetooth		Yes		
14.	GPRS/EDGE + Bluetooth		Yes		WWAN VoIP
15.	WCDMA+ Bluetooth		Yes		WWAN VoIP
16.	LTE + Bluetooth		Yes		WWAN VoIP

**General Note:**

- This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP).
- This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
- EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
- WLAN 5GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- Chose the worst zoom scan SAR of WLAN SAR correspondingly for co-located with WWAN analysis.
- The reported SAR summation is calculated based on the same configuration and test position
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - Scalar SAR summation < 1.6W/kg.
  - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power (dBm)	Exposure Position	
	Test separation	Body worn
7.5	Estimated SAR (W/kg)	0.126



**16.1 Head Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)		
GSM	GSM850	Right Cheek	0.440	0.340	0.209	0.78	0.65
		Right Tilted	0.303	0.340	0.209	0.64	0.51
		Left Cheek	0.314	0.340	0.209	0.65	0.52
		Left Tilted	0.224	0.340	0.209	0.56	0.43
	GSM1900	Right Cheek	0.312	0.340	0.209	0.65	0.52
		Right Tilted	0.272	0.340	0.209	0.61	0.48
		Left Cheek	0.609	0.340	0.209	0.95	0.82
		Left Tilted	0.250	0.340	0.209	0.59	0.46
WCDMA	Band V	Right Cheek	0.206	0.340	0.209	0.55	0.42
		Right Tilted	0.155	0.340	0.209	0.50	0.36
		Left Cheek	0.144	0.340	0.209	0.48	0.35
		Left Tilted	0.113	0.340	0.209	0.45	0.32
	Band IV	Right Cheek	0.217	0.340	0.209	0.56	0.43
		Right Tilted	0.188	0.340	0.209	0.53	0.40
		Left Cheek	0.495	0.340	0.209	0.84	0.70
		Left Tilted	0.190	0.340	0.209	0.53	0.40
	Band II	Right Cheek	0.338	0.340	0.209	0.68	0.55
		Right Tilted	0.330	0.340	0.209	0.67	0.54
		Left Cheek	0.635	0.340	0.209	0.98	0.84
		Left Tilted	0.284	0.340	0.209	0.62	0.49
LTE	Band 12	Right Cheek	0.110	0.340	0.209	0.45	0.32
		Right Tilted	0.073	0.340	0.209	0.41	0.28
		Left Cheek	0.131	0.340	0.209	0.47	0.34
		Left Tilted	0.116	0.340	0.209	0.46	0.33
	Band 5	Right Cheek	0.180	0.340	0.209	0.52	0.39
		Right Tilted	0.139	0.340	0.209	0.48	0.35
		Left Cheek	0.147	0.340	0.209	0.49	0.36
		Left Tilted	0.142	0.340	0.209	0.48	0.35
	Band 4	Right Cheek	0.144	0.340	0.209	0.48	0.35
		Right Tilted	0.133	0.340	0.209	0.47	0.34
		Left Cheek	0.280	0.340	0.209	0.62	0.49
		Left Tilted	0.113	0.340	0.209	0.45	0.32
	Band 2	Right Cheek	0.343	0.340	0.209	0.68	0.55
		Right Tilted	0.328	0.340	0.209	0.67	0.54
		Left Cheek	0.597	0.340	0.209	0.94	0.81
		Left Tilted	0.265	0.340	0.209	0.61	0.47
	Band 7	Right Cheek	0.159	0.340	0.209	0.50	0.37
		Right Tilted	0.115	0.340	0.209	0.46	0.32
		Left Cheek	0.285	0.340	0.209	0.63	0.49
		Left Tilted	0.171	0.340	0.209	0.51	0.38



**16.2 Hotspot Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)		
GSM	GSM850	Front	0.381	0.095	0.264	0.48	0.65
		Back	0.928	0.095	0.264	1.02	1.19
		Left side	0.279			0.28	0.28
		Right side	0.850	0.095	0.264	0.95	1.11
		Top side		0.095	0.264	0.10	0.26
		Bottom side	0.343			0.34	0.34
	GSM1900	Front	0.352	0.095	0.264	0.45	0.62
		Back	1.006	0.095	0.264	1.10	1.27
		Left side	0.506			0.51	0.51
		Right side	0.128	0.095	0.264	0.22	0.39
		Top side		0.095	0.264	0.10	0.26
		Bottom side	0.685			0.69	0.69
WCDMA	Band V	Front	0.256	0.095	0.264	0.35	0.52
		Back	0.471	0.095	0.264	0.57	0.74
		Left side	0.237			0.24	0.24
		Right side	0.503	0.095	0.264	0.60	0.77
		Top side		0.095	0.264	0.10	0.26
		Bottom side	0.212			0.21	0.21
	Band IV	Front	0.408	0.095	0.264	0.50	0.67
		Back	1.138	0.095	0.264	1.23	1.40
		Left side	0.392			0.39	0.39
		Right side	0.094	0.095	0.264	0.19	0.36
		Top side		0.095	0.264	0.10	0.26
		Bottom side	0.649			0.65	0.65
	Band II	Front	0.415	0.095	0.264	0.51	0.68
		Back	1.056	0.095	0.264	1.15	1.32
		Left side	0.567			0.57	0.57
		Right side	0.134	0.095	0.264	0.23	0.40
		Top side		0.095	0.264	0.10	0.26
		Bottom side	0.756			0.76	0.76



WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	
		WWAN	2.4GHz WLAN	5GHz WLAN			
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE	Band 12	Front	0.141	0.095	0.264	0.24	0.41
		Back	0.338	0.095	0.264	0.43	0.60
		Left side	0.116			0.12	0.12
		Right side	0.282	0.095	0.264	0.38	0.55
		Top side		0.095	0.264	0.10	0.26
		Bottom side	0.064			0.06	0.06
	Band 5	Front	0.179	0.095	0.264	0.27	0.44
		Back	0.459	0.095	0.264	0.55	0.72
		Left side	0.166			0.17	0.17
		Right side	0.446	0.095	0.264	0.54	0.71
		Top side		0.095	0.264	0.10	0.26
		Bottom side	0.153			0.15	0.15
	Band 4	Front	0.220	0.095	0.264	0.32	0.48
		Back	0.786	0.095	0.264	0.88	1.05
		Left side	0.255			0.26	0.26
		Right side	0.074	0.095	0.264	0.17	0.34
		Top side		0.095	0.264	0.10	0.26
		Bottom side	0.426			0.43	0.43
	Band 2	Front	0.421	0.095	0.264	0.52	0.69
		Back	1.123	0.095	0.264	1.22	1.39
		Left side	0.519			0.52	0.52
		Right side	0.155	0.095	0.264	0.25	0.42
		Top side		0.095	0.264	0.10	0.26
		Bottom side	0.704			0.70	0.70
	Band 7	Front	0.400	0.095	0.264	0.50	0.66
		Back	1.158	0.095	0.264	<b>1.25</b>	<b>1.42</b>
		Left side	0.336			0.34	0.34
		Right side	0.233	0.095	0.264	0.33	0.50
		Top side		0.095	0.264	0.10	0.26
		Bottom side	0.563			0.56	0.56



**16.3 Body-Worn Accessory Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)			
GSM	GSM850	Front	0.381	0.095	0.264	0.126	0.48	0.65	0.51
		Back	0.928	0.095	0.264	0.126	1.02	1.19	1.05
	GSM1900	Front	0.352	0.095	0.264	0.126	0.45	0.62	0.48
		Back	1.006	0.095	0.264	0.126	1.10	1.27	1.13
WCDMA	Band V	Front	0.256	0.095	0.264	0.126	0.35	0.52	0.38
		Back	0.471	0.095	0.264	0.126	0.57	0.74	0.60
	Band IV	Front	0.408	0.095	0.264	0.126	0.50	0.67	0.53
		Back	1.138	0.095	0.264	0.126	1.23	1.40	1.26
	Band II	Front	0.415	0.095	0.264	0.126	0.51	0.68	0.54
		Back	1.056	0.095	0.264	0.126	1.15	1.32	1.18
LTE	Band 12	Front	0.141	0.095	0.264	0.126	0.24	0.41	0.27
		Back	0.338	0.095	0.264	0.126	0.43	0.60	0.46
	Band 5	Front	0.179	0.095	0.264	0.126	0.27	0.44	0.31
		Back	0.459	0.095	0.264	0.126	0.55	0.72	0.59
	Band 4	Front	0.22	0.095	0.264	0.126	0.32	0.48	0.35
		Back	0.786	0.095	0.264	0.126	0.88	1.05	0.91
	Band 2	Front	0.421	0.095	0.264	0.126	0.52	0.69	0.55
		Back	1.123	0.095	0.264	0.126	1.22	1.39	1.25
	Band 7	Front	0.4	0.095	0.264	0.126	0.50	0.66	0.53
		Back	1.158	0.095	0.264	0.126	1.25	1.42	1.28

Test Engineer: Nick Hu

## **17. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	<b>Normal</b>	<b>Rectangular</b>	<b>Triangular</b>	<b>U-Shape</b>
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 17.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
<b>Test Sample Related</b>							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						11.4%	11.4%
<b>Coverage Factor for 95 %</b>						K=2	K=2
<b>Expanded STD Uncertainty</b>						22.9%	22.7%

**Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz**



## **18. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.



## **Appendix A. Plots of System Performance Check**

The plots are shown as follows.

### System Check\_Head\_750MHz

**DUT: D750V3 - SN:1065**


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1  
Medium: HSL\_750 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 42.933$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.98, 10.98, 10.98); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 2.78 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 49.41 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 3.30 W/kg  
**SAR(1 g) = 2.23 W/kg; SAR(10 g) = 1.49 W/kg**  
Maximum value of SAR (measured) = 2.81 W/kg

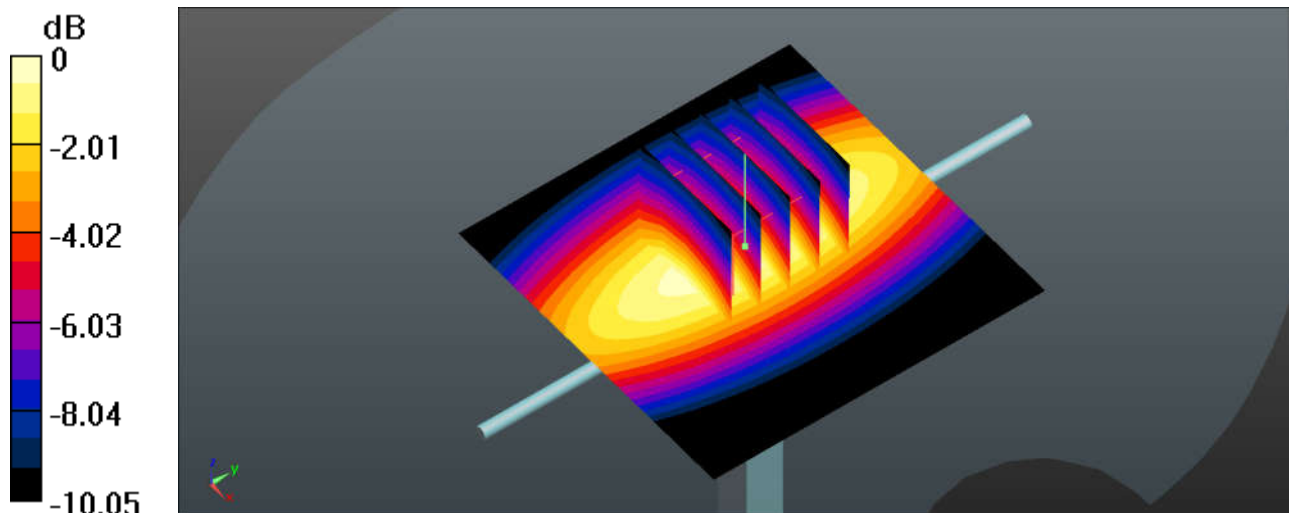

0 dB = 2.81 W/kg = 4.49 dBW/kg

### System Check\_Head\_835MHz

**DUT: D835V2 - SN:4d091**


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1  
Medium: HSL\_850 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.927 \text{ S/m}$ ;  $\epsilon_r = 42.346$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.52, 10.52, 10.52); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 3.12 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 53.28 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 3.71 W/kg  
**SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.66 W/kg**  
Maximum value of SAR (measured) = 3.17 W/kg

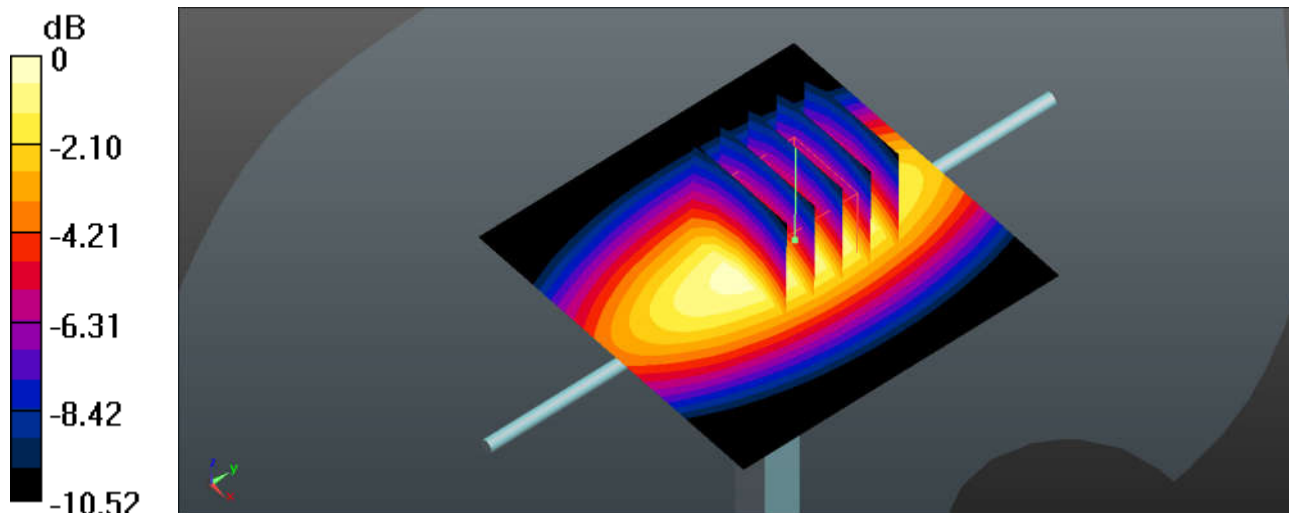

0 dB = 3.17 W/kg = 5.01 dBW/kg

### System Check\_Head\_1750MHz

**DUT: D1750V2 - SN:1069**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL\_1750 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.397$  S/m;  $\epsilon_r = 39.621$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8, 8, 8); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 13.5 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 86.60 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 16.7 W/kg  
**SAR(1 g) = 9.34 W/kg; SAR(10 g) = 5 W/kg**  
Maximum value of SAR (measured) = 13.3 W/kg

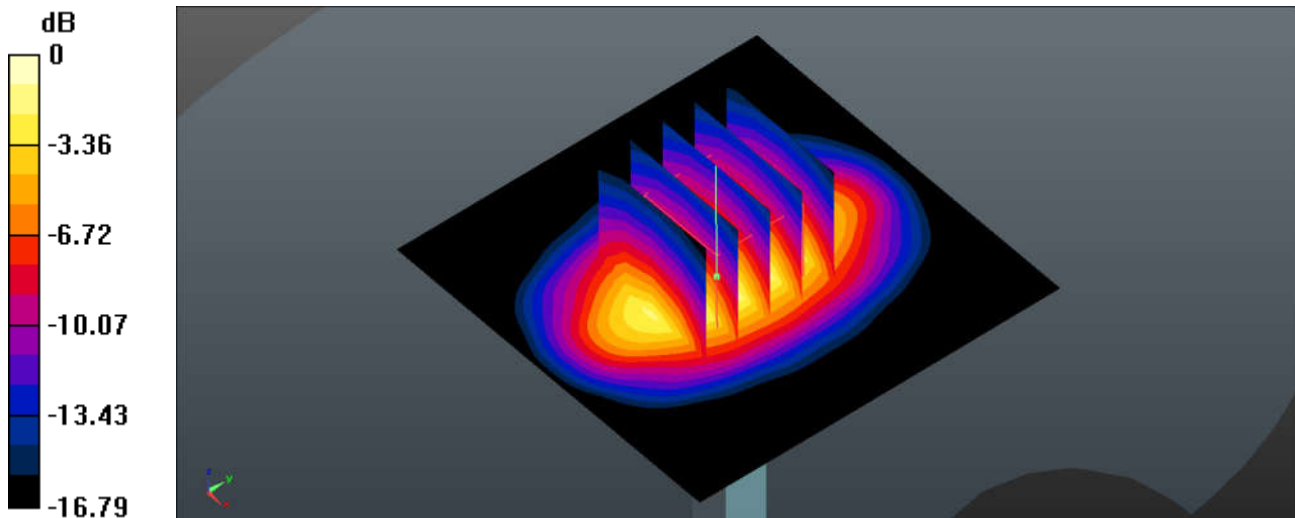

0 dB = 13.3 W/kg = 11.24 dBW/kg

### System Check\_Head\_1900MHz

#### DUT: D1900V2 - SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.39$  S/m;  $\epsilon_r = 38.154$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.85, 7.85, 7.85); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 14.2 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 88.93 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 18.2 W/kg  
**SAR(1 g) = 9.8 W/kg; SAR(10 g) = 5.06 W/kg**  
Maximum value of SAR (measured) = 14.2 W/kg

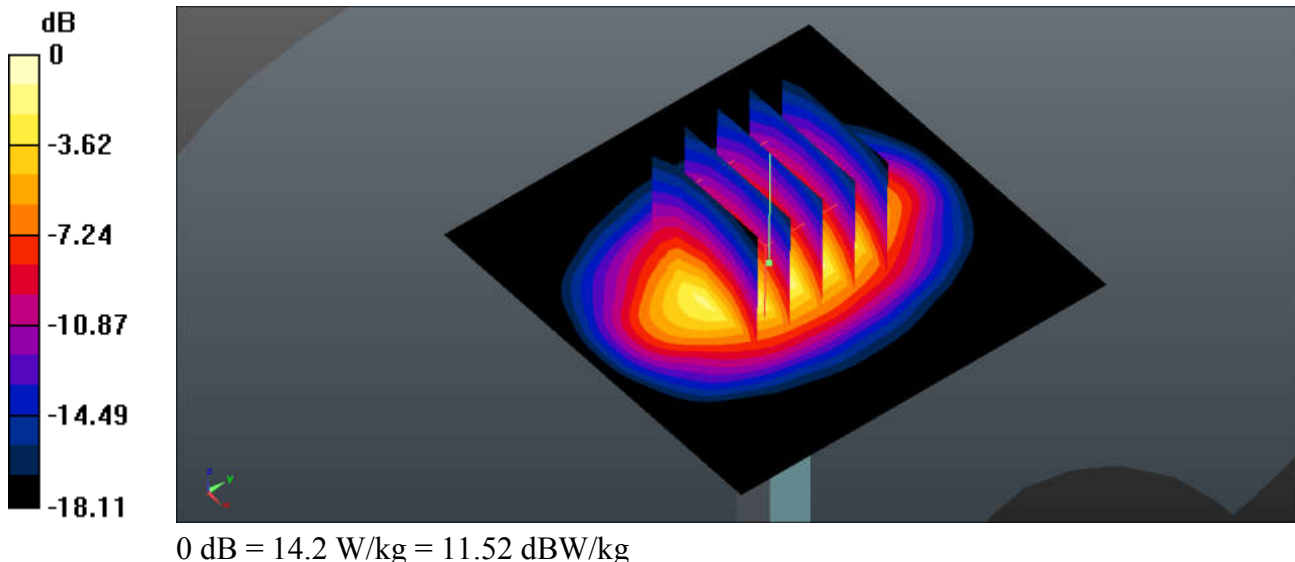

### System Check\_Head\_2450MHz

**DUT: D2450V2 - SN:840**

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.882$  S/m;  $\epsilon_r = 39.405$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.19, 7.19, 7.19); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 20.5 W/kg


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.15 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 27.2 W/kg

**SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.18 W/kg**

Maximum value of SAR (measured) = 20.1 W/kg

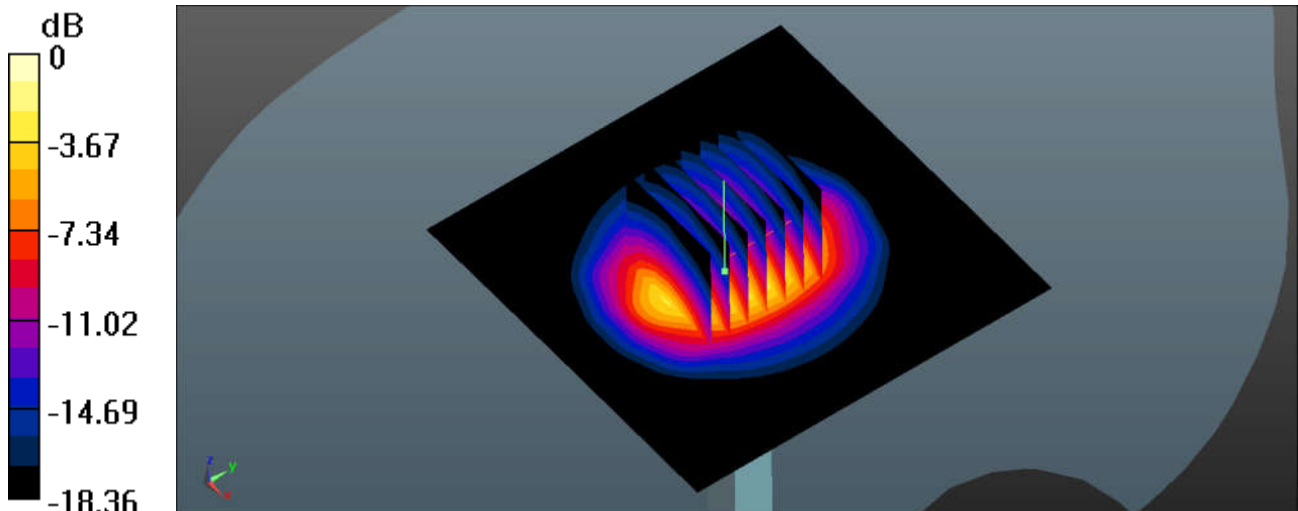

0 dB = 20.1 W/kg = 13.03 dBW/kg



### System Check\_Head\_2600MHz

#### DUT: D2600V2 - SN:1061

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL\_2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.998$  S/m;  $\epsilon_r = 39.312$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(7.27, 7.27, 7.27); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 21.6 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 86.06 V/m; Power Drift = 0.18 dB  
Peak SAR (extrapolated) = 29.9 W/kg  
**SAR(1 g) = 13.5 W/kg; SAR(10 g) = 5.86 W/kg**  
Maximum value of SAR (measured) = 21.5 W/kg

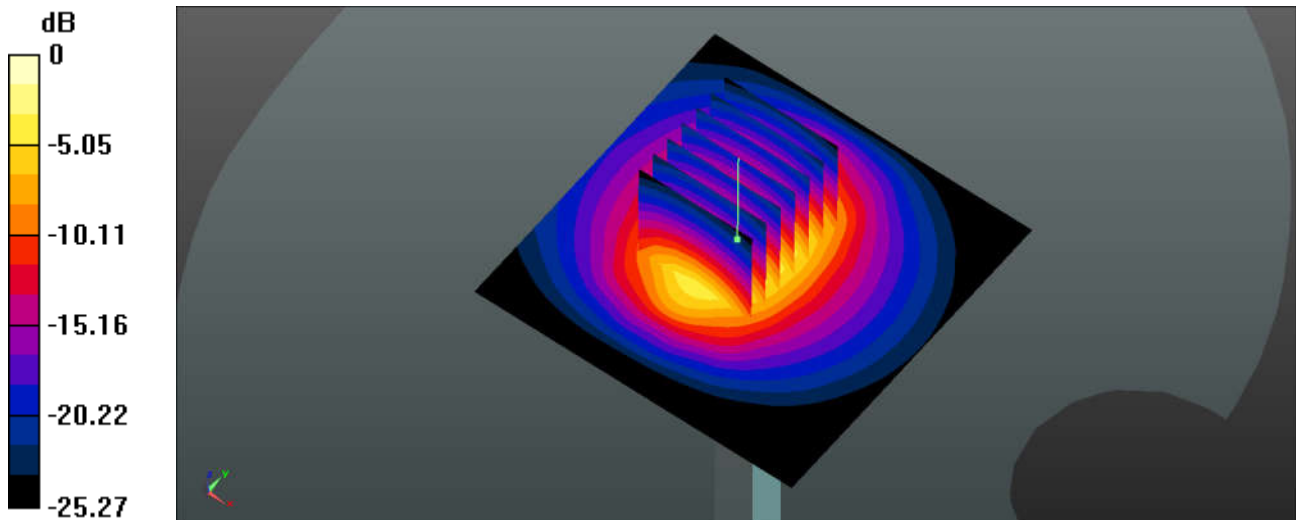

0 dB = 21.5 W/kg = 13.32 dBW/kg

### System Check\_Head\_5250MHz

#### DUT: D5GHzV2-SN:1113

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL\_5000 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.562$  S/m;  $\epsilon_r = 35.725$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.15, 5.15, 5.15); Calibrated: 2016.5.25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.7 W/kg


**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 39.86 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 32.6 W/kg

**SAR(1 g) = 7.62 W/kg; SAR(10 g) = 2.16 W/kg**

Maximum value of SAR (measured) = 18.1 W/kg

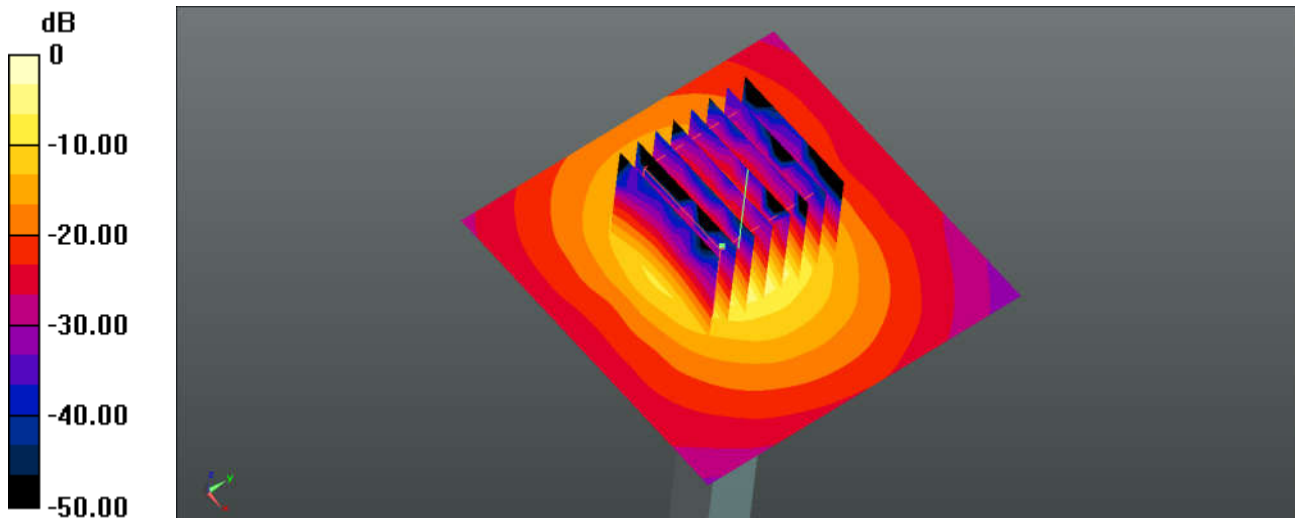

0 dB = 18.1 W/kg = 12.58 dBW/kg

### System Check\_Head\_5600MHz

#### DUT: D5GHzV2-SN:1113

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL\_5000 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.909$  S/m;  $\epsilon_r = 35.286$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.7, 4.7, 4.7); Calibrated: 2016.5.25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.0 W/kg


**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 38.77 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 33.2 W/kg

**SAR(1 g) = 7.67 W/kg; SAR(10 g) = 2.17 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

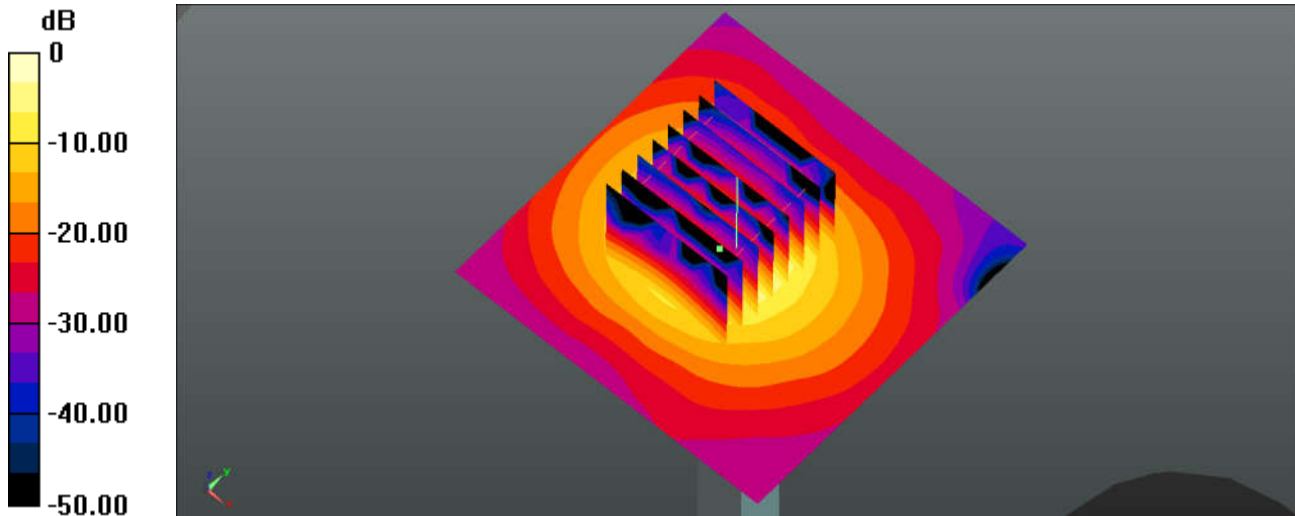

0 dB = 18.5 W/kg = 12.67 dBW/kg

### System Check\_Head\_5750MHz

#### DUT: D5GHzV2-SN:1113

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL\_5000 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.055$  S/m;  $\epsilon_r = 35.065$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5, 5, 5); Calibrated: 2016.5.25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=100mW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.5 W/kg


**Pin=100mW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 38.89 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 33.5 W/kg

**SAR(1 g) = 7.76 W/kg; SAR(10 g) = 2.25 W/kg**

Maximum value of SAR (measured) = 19.0 W/kg

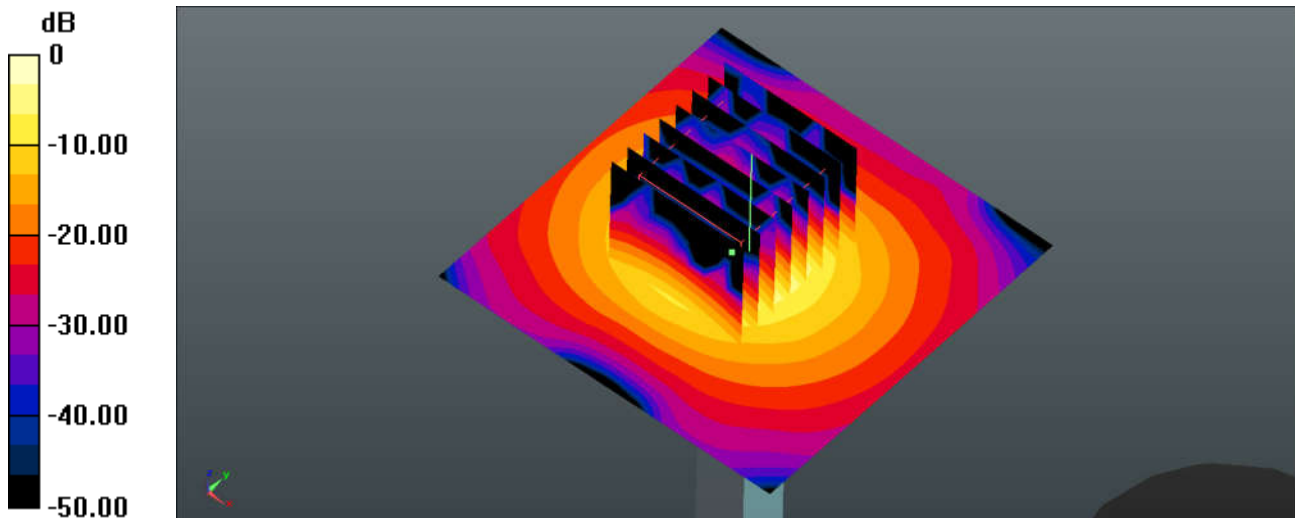

0 dB = 19.0 W/kg = 12.79 dBW/kg

**System Check\_Body\_750MHz**

**DUT: D750V3 - SN:1065**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL\_750 Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.967$  S/m;  $\epsilon_r = 55.946$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.54, 10.54, 10.54); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.83 W/kg



**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.85 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.30 W/kg

**SAR(1 g) = 2.23 W/kg; SAR(10 g) = 1.49 W/kg**

Maximum value of SAR (measured) = 2.80 W/kg

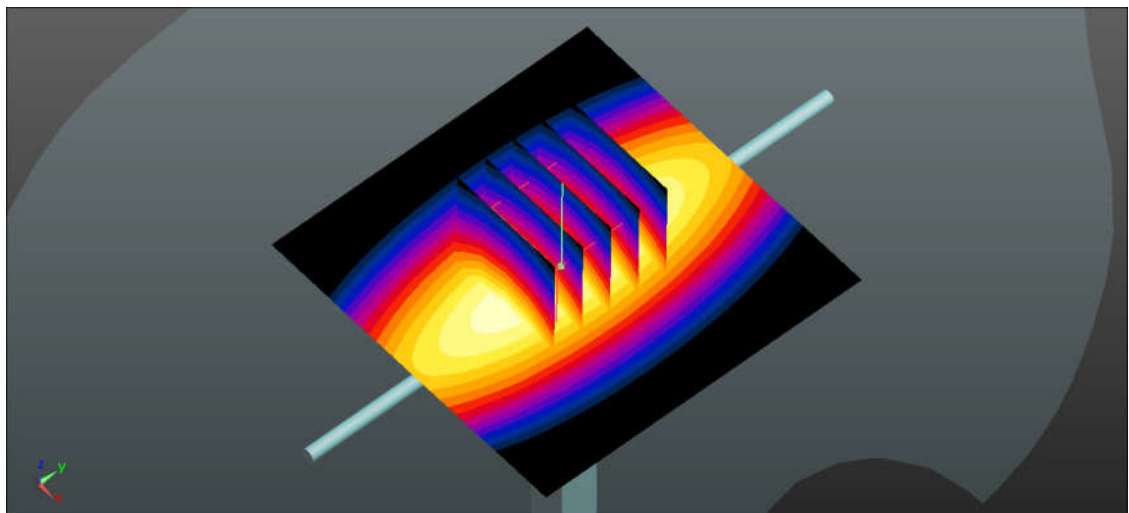

0 dB = 2.80 W/kg = 4.47 dBW/kg

### System Check\_Body\_835MHz

**DUT: D835V2 - SN:4d091**


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1  
Medium: MSL\_850 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.982 \text{ S/m}$ ;  $\epsilon_r = 54.974$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.32, 10.32, 10.32); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $2.94 \text{ W/kg}$

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $47.52 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$   
Peak SAR (extrapolated) =  $3.01 \text{ W/kg}$   
**SAR(1 g) =  $2.37 \text{ W/kg}$ ; SAR(10 g) =  $1.67 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $2.78 \text{ W/kg}$

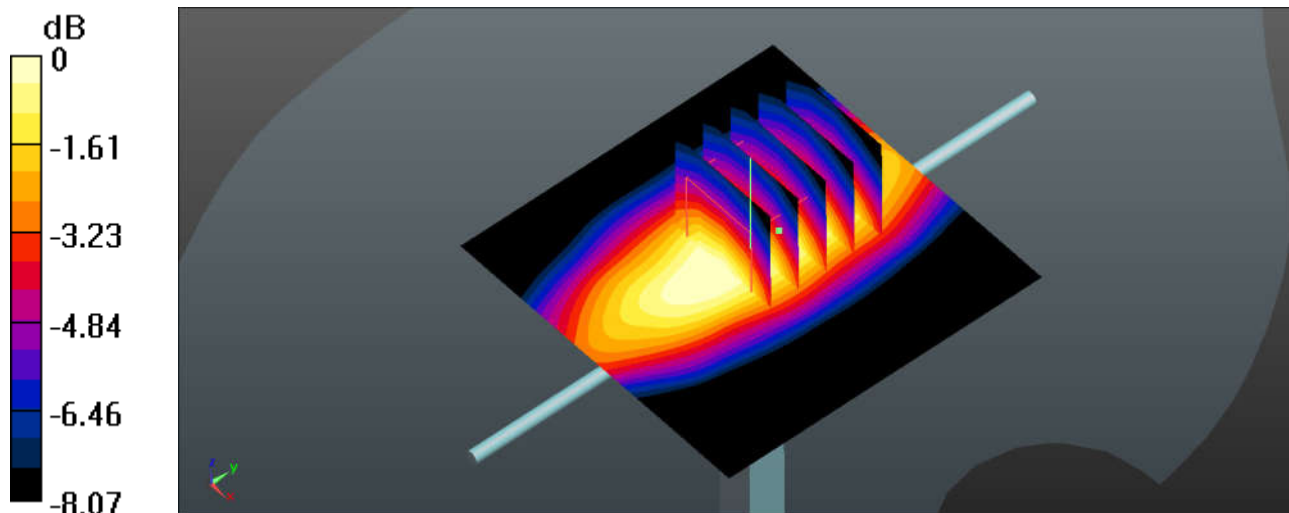

0 dB =  $2.78 \text{ W/kg} = 4.44 \text{ dBW/kg}$

### System Check\_Body\_1750MHz

#### DUT: D1750V2 - SN:1069

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750MSL Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.509$  S/m;  $\epsilon_r = 52.772$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.81, 7.81, 7.81); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 13.5 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 82.49 V/m; Power Drift = 0.13 dB  
Peak SAR (extrapolated) = 16.8 W/kg  
**SAR(1 g) = 9.75 W/kg; SAR(10 g) = 5.3 W/kg**  
Maximum value of SAR (measured) = 13.6 W/kg

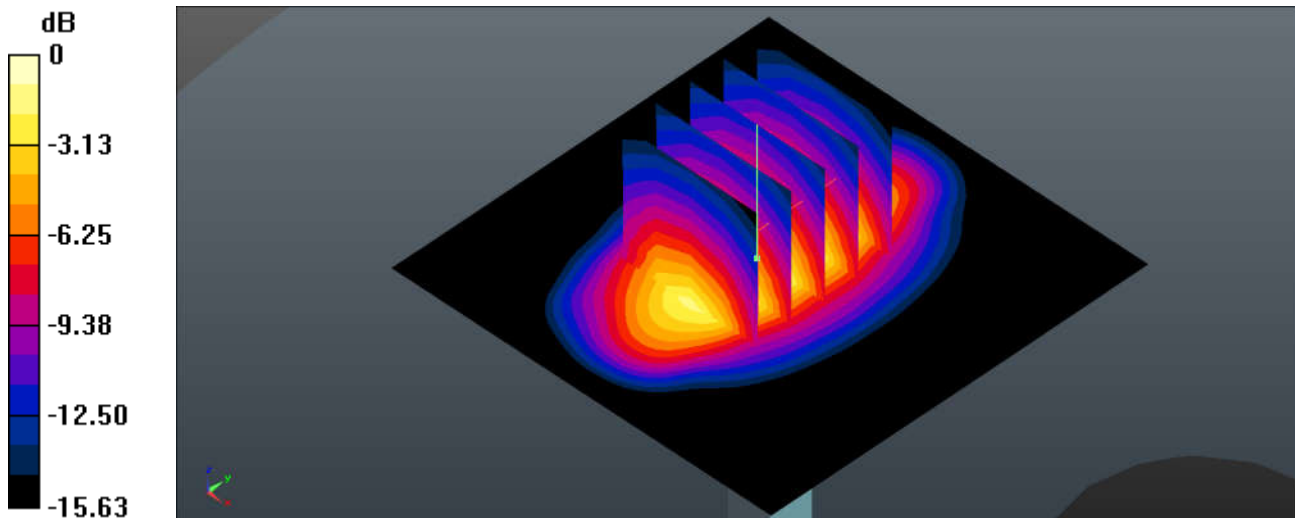

0 dB = 13.6 W/kg = 11.34 dBW/kg

### System Check\_Body\_1900MHz

#### DUT: D1900V2 - SN:5d118

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.516$  S/m;  $\epsilon_r = 52.596$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.55, 7.55, 7.55); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 13.8 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 83.37 V/m; Power Drift = 0.16 dB  
Peak SAR (extrapolated) = 17.4 W/kg  
**SAR(1 g) = 9.78 W/kg; SAR(10 g) = 5.13 W/kg**  
Maximum value of SAR (measured) = 13.9 W/kg

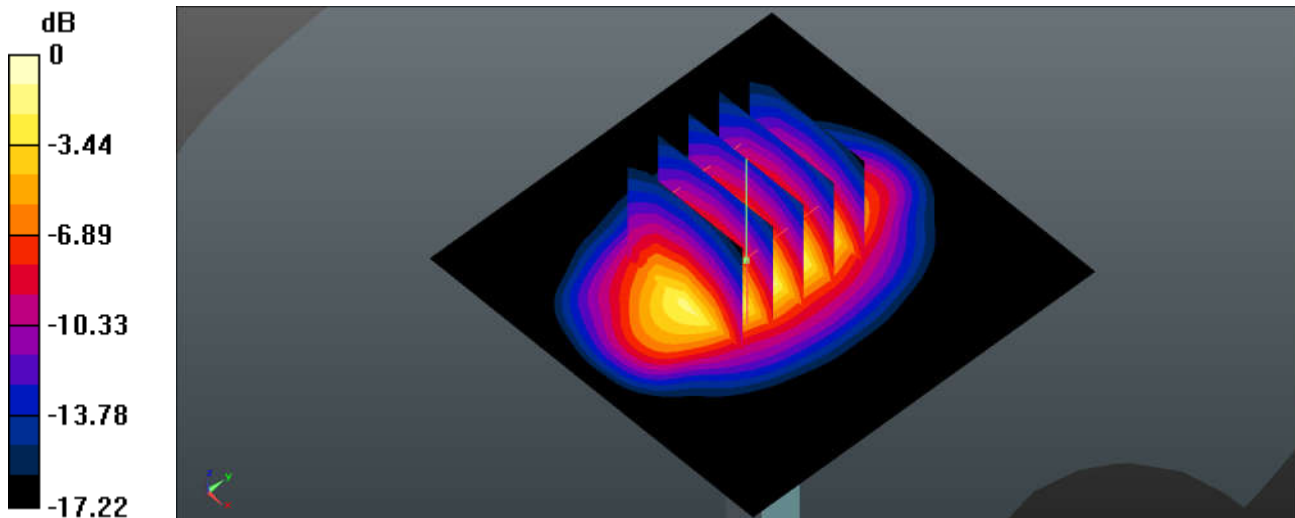

0 dB = 13.9 W/kg = 11.43 dBW/kg



### System Check\_Body\_2450MHz

#### DUT: D2450V2 - SN:840

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.031$  S/m;  $\epsilon_r = 51.733$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.4 °C; Liquid Temperature : 22.9 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.23, 7.23, 7.23); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 20.4 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 85.70 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 26.9 W/kg  
**SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.15 W/kg**  
Maximum value of SAR (measured) = 20.1 W/kg

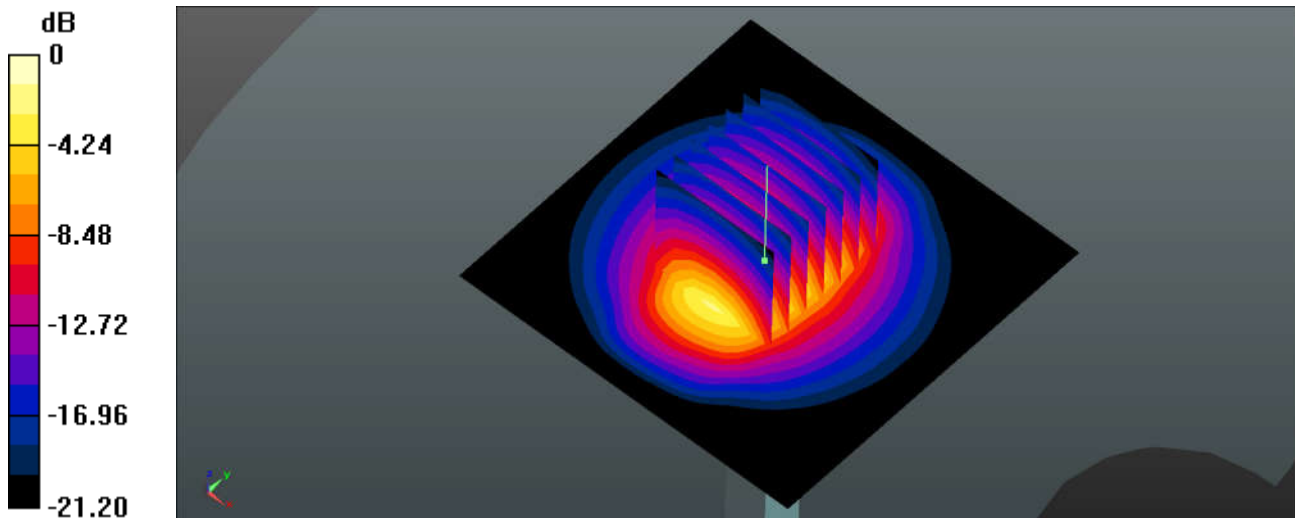

0 dB = 20.1 W/kg = 13.03 dBW/kg

### System Check\_Body\_2600MHz

**DUT: D2600V2 - SN:1061**


Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1  
Medium: MSL\_2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.236$  S/m;  $\epsilon_r = 51.156$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(7.05, 7.05, 7.05); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 17.6 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 77.64 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 21.3 W/kg  
**SAR(1 g) = 12.84 W/kg; SAR(10 g) = 6.33 W/kg**  
Maximum value of SAR (measured) = 19.21 W/kg

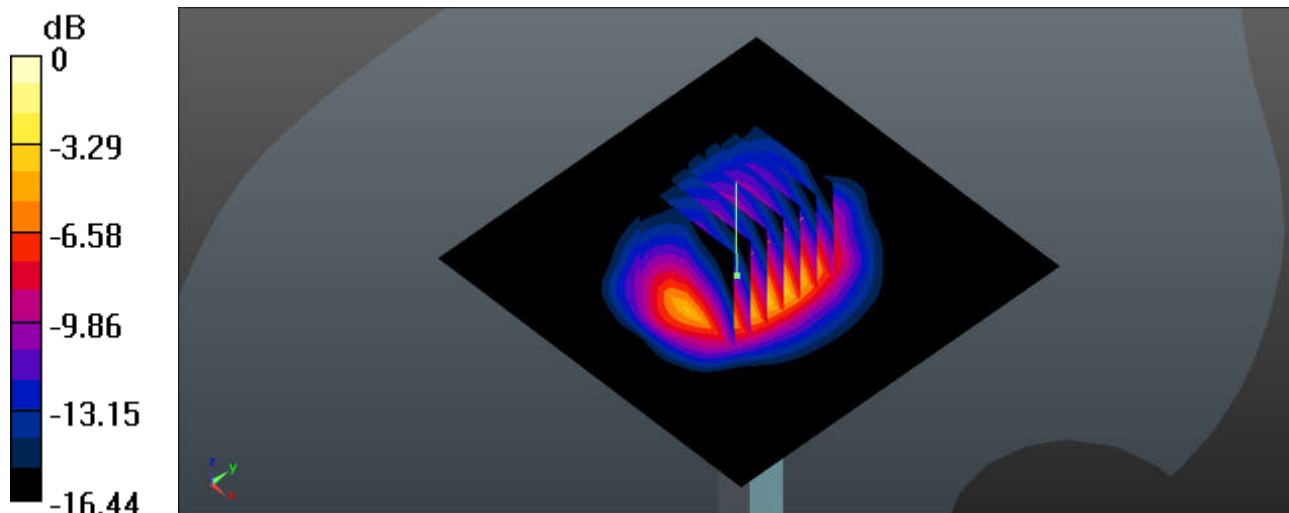

0 dB = 17.1 W/kg = 12.33 dBW/kg

### System Check\_Body\_5250MHz

#### DUT: D5GHzV2-SN:1113


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1  
Medium: MSL\_5000 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 5.379$  S/m;  $\epsilon_r = 49.115$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.5, 4.5, 4.5); Calibrated: 2016.11.28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2016.7.12
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 16.1 W/kg

**CW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 38.37 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 26.4 W/kg  
**SAR(1 g) = 7.1 W/kg; SAR(10 g) = 2.12 W/kg**  
Maximum value of SAR (measured) = 15.7 W/kg

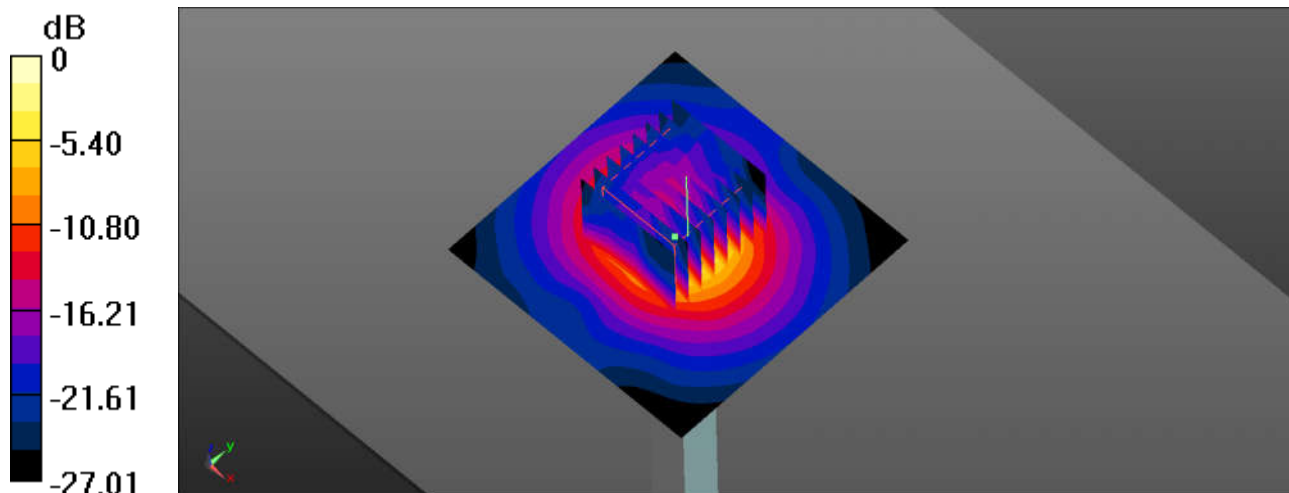

0 dB = 15.7 W/kg = 11.96 dBW/kg

### System Check\_Body\_5600MHz

#### DUT: D5GHzV2-SN:1113


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1  
Medium: MSL\_5000 Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.872$  S/m;  $\epsilon_r = 48.306$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(3.92, 3.92, 3.92); Calibrated: 2016.11.28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2016.7.12
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 19.5 W/kg

**CW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 41.11 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 31.2 W/kg  
**SAR(1 g) = 7.71 W/kg; SAR(10 g) = 2.32 W/kg**  
Maximum value of SAR (measured) = 19.1 W/kg

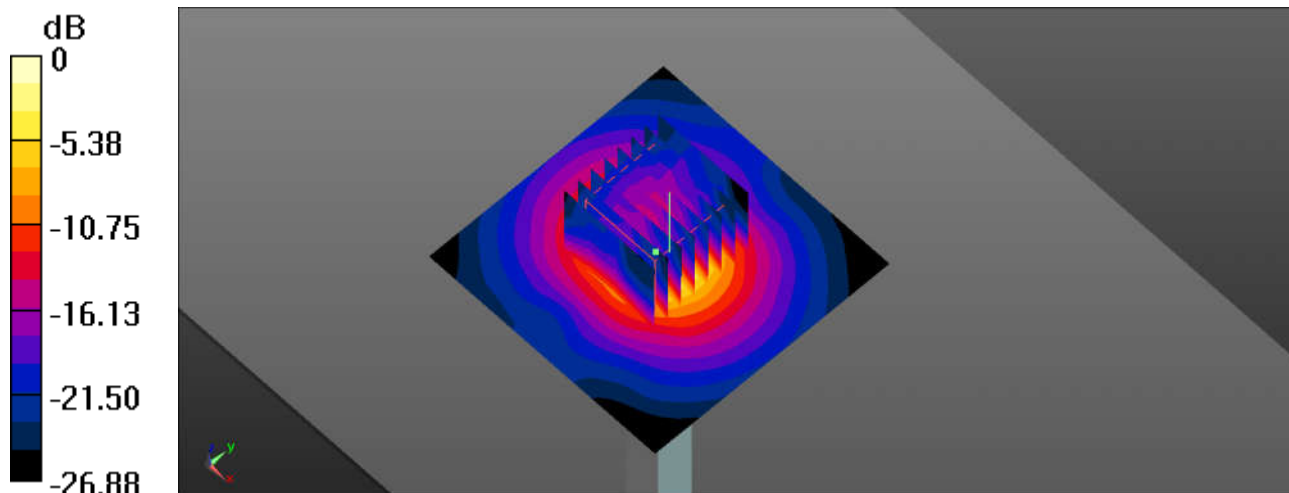

0 dB = 19.1 W/kg = 12.81 dBW/kg

### System Check\_Body\_5750MHz

#### DUT: D5GHzV2-SN:1113

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: MSL\_5000 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.07$  S/m;  $\epsilon_r = 47.985$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(4.05, 4.05, 4.05); Calibrated: 2016.11.28;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1437; Calibrated: 2016.7.12
- Phantom: SAM1; Type: SAM; Serial: TP-1164
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW/Area Scan (71x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.9 W/kg


**CW/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.45 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 29.3 W/kg

**SAR(1 g) = 7.53 W/kg; SAR(10 g) = 2.26 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

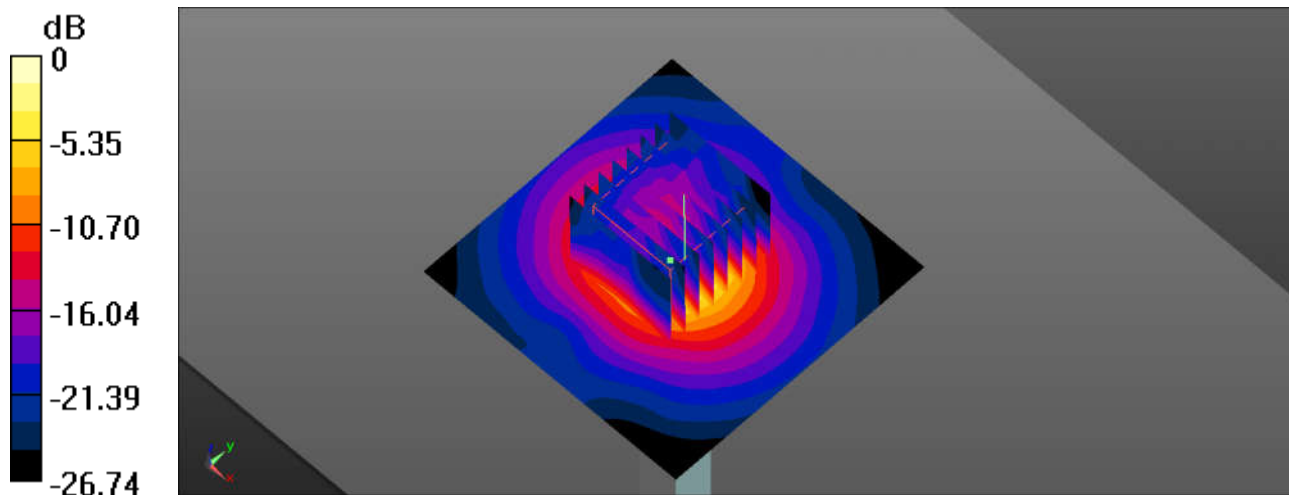

0 dB = 18.5 W/kg = 12.67 dBW/kg



**Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.

**#01\_GSM850\_GPRS 4 Tx slots\_Right Cheek\_0mm\_Ch189**

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz;Duty Cycle: 1:2.08

Medium: HSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.928$  S/m;  $\epsilon_r = 42.33$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.52, 10.52, 10.52); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch189/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.398 W/kg


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.454 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.420 W/kg

**SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.272 W/kg**

Maximum value of SAR (measured) = 0.386 W/kg

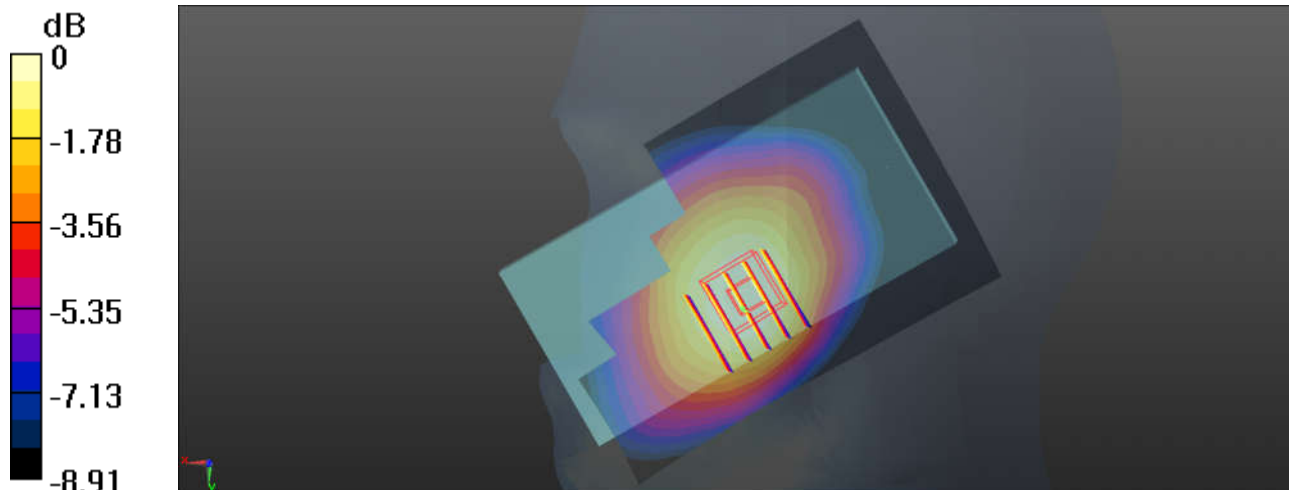

0 dB = 0.386 W/kg = -4.13 dBW/kg

### #02\_GSM1900\_GPRS 4 Tx slots\_Left Cheek\_0mm\_Ch810

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08

Medium: HSL\_1900 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.401$  S/m;  $\epsilon_r = 38.115$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.85, 7.85, 7.85); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.762 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.897 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.864 W/kg

**SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.344 W/kg**

Maximum value of SAR (measured) = 0.723 W/kg

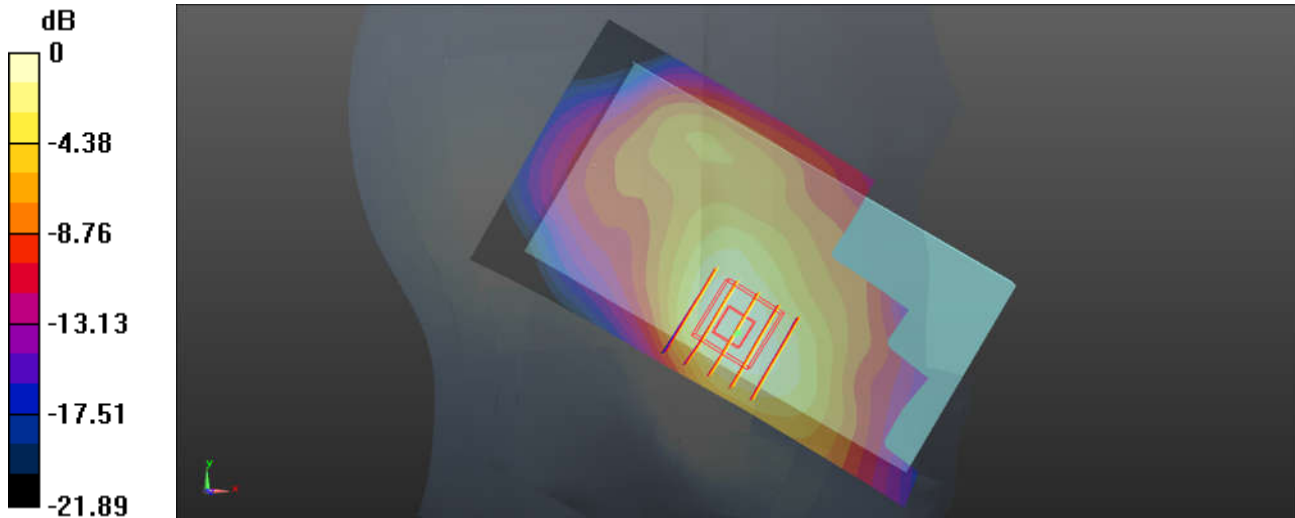

0 dB = 0.723 W/kg = -1.41 dBW/kg



### #03\_WCDMA Band V\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch4233



Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_850 Medium parameters used:  $f = 846.6 \text{ MHz}$ ;  $\sigma = 0.938 \text{ S/m}$ ;  $\epsilon_r = 42.191$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.9 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.52, 10.52, 10.52); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4233/Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.229 \text{ W/kg}$

**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $4.804 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$   
Peak SAR (extrapolated) =  $0.237 \text{ W/kg}$   
**SAR(1 g) =  $0.195 \text{ W/kg}$ ; SAR(10 g) =  $0.153 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.217 \text{ W/kg}$

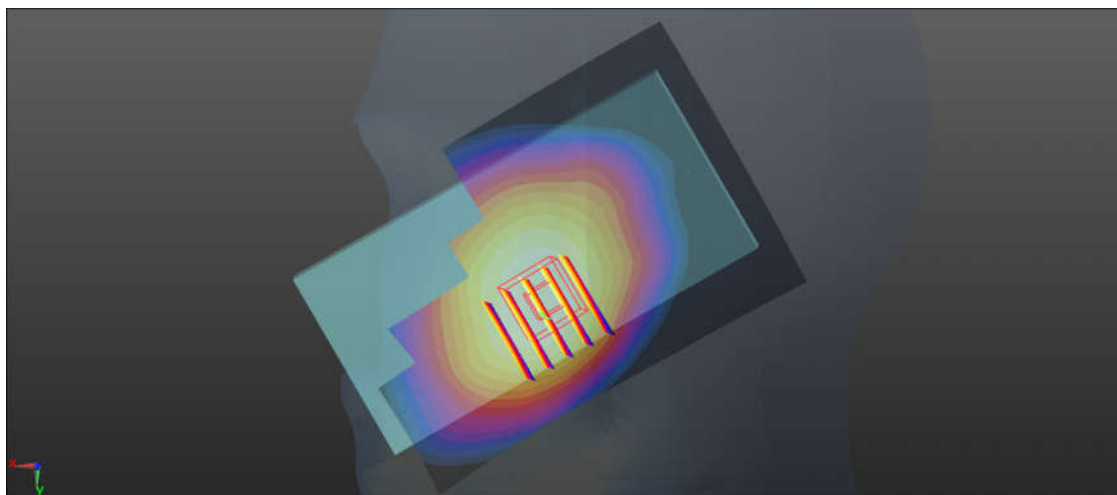

$0 \text{ dB} = 0.217 \text{ W/kg} = -6.64 \text{ dBW/kg}$

### #04\_WCDMA Band IV\_RMC12.2Kbps\_Left Cheek\_Ch\_0mm\_Ch1513

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.4$  S/m;  $\epsilon_r = 39.608$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8, 8, 8); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1513/Area Scan (71x121x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.533 W/kg

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 5.945 V/m; Power Drift = 0.12 dB  
Peak SAR (extrapolated) = 0.616 W/kg  
**SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.276 W/kg**  
Maximum value of SAR (measured) = 0.529 W/kg

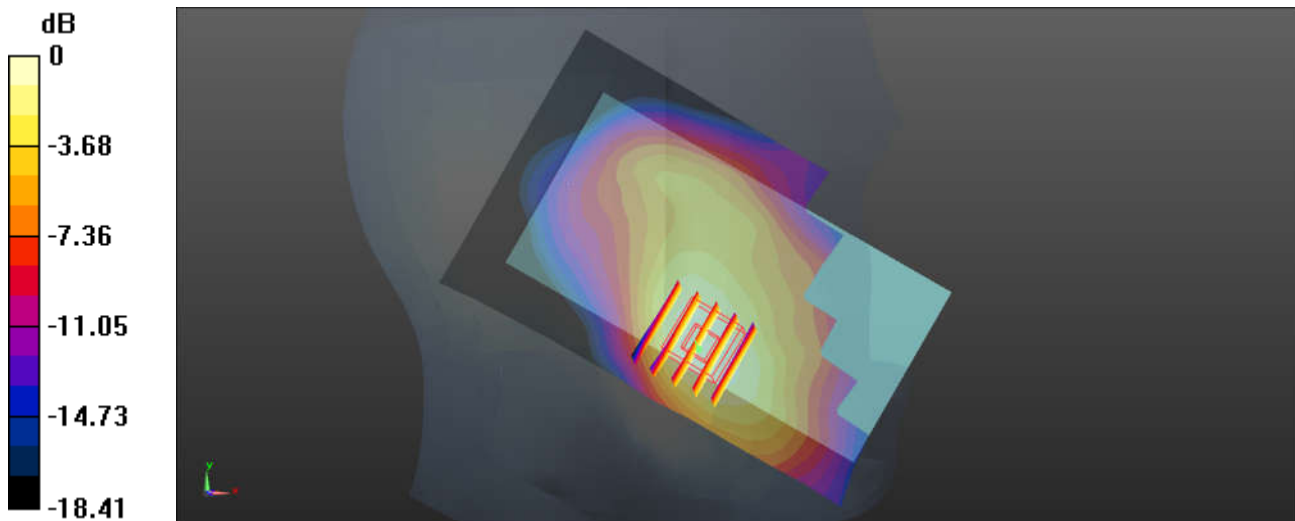

0 dB = 0.529 W/kg = -2.77 dBW/kg

### #05\_WCDMA Band II\_RMC12.2Kbps\_Left Cheek\_0mm\_Ch9400


Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.371$  S/m;  $\epsilon_r = 38.237$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.85, 7.85, 7.85); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9400/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.757 W/kg

**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.243 V/m; Power Drift = 0.18 dB  
Peak SAR (extrapolated) = 0.955 W/kg  
**SAR(1 g) = 0.583 W/kg; SAR(10 g) = 0.342 W/kg**  
Maximum value of SAR (measured) = 0.764 W/kg

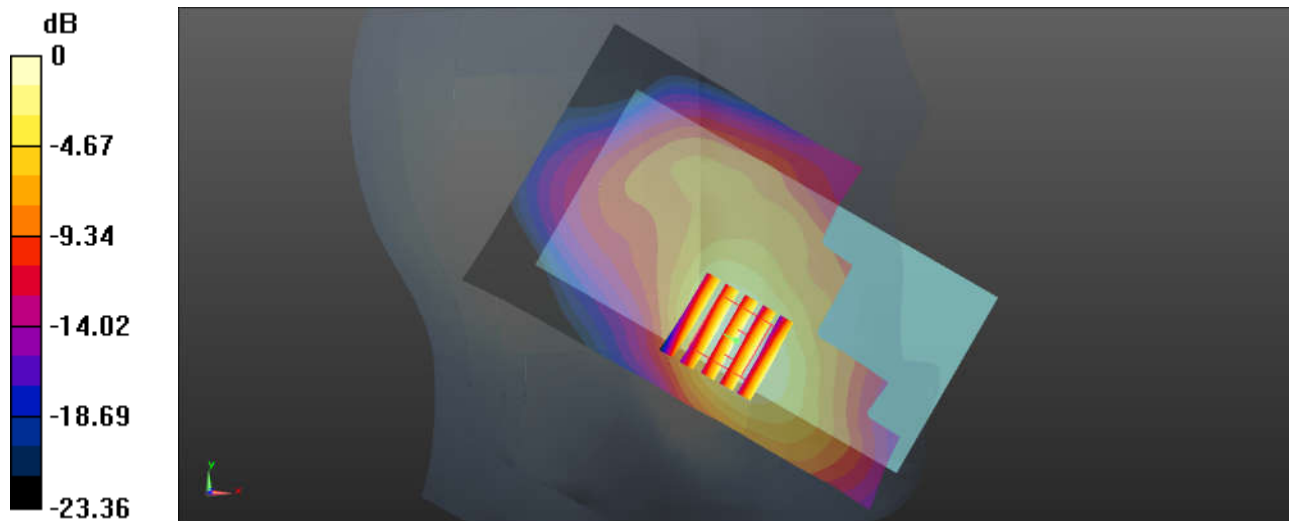

0 dB = 0.764 W/kg = -1.17 dBW/kg

**#06\_LTE Band 12\_10M\_QPSK\_1RB\_25Offset\_Left Cheek\_0mm\_Ch23095**

Communication System: UID 0, FDD\_LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.875$  S/m;  $\epsilon_r = 43.414$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.98, 10.98, 10.98); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch23075/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.121 W/kg



**Ch23075/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.073 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.129 W/kg

**SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.088 W/kg**

Maximum value of SAR (measured) = 0.121 W/kg

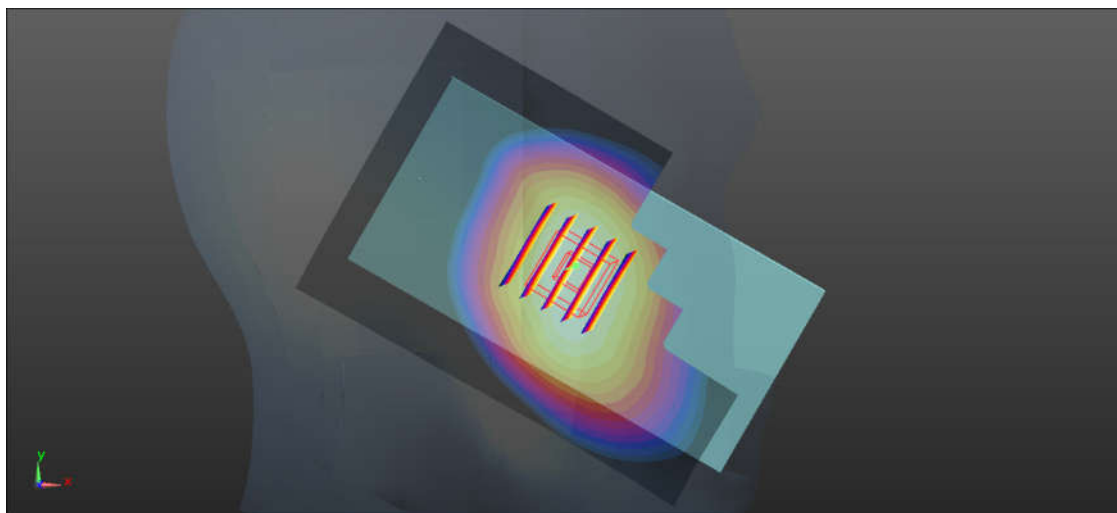

0 dB = 0.121 W/kg = -9.17 dBW/kg

**#07\_LTE Band 5\_10M\_QPSK\_1RB\_25Offset\_Right Cheek\_0mm\_Ch20525**

Communication System: UID 0, FDD\_LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_850 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.928$  S/m;  $\epsilon_r = 42.328$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.52, 10.52, 10.52); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20525/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.181 W/kg



**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.393 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.191 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.121 W/kg**

Maximum value of SAR (measured) = 0.175 W/kg

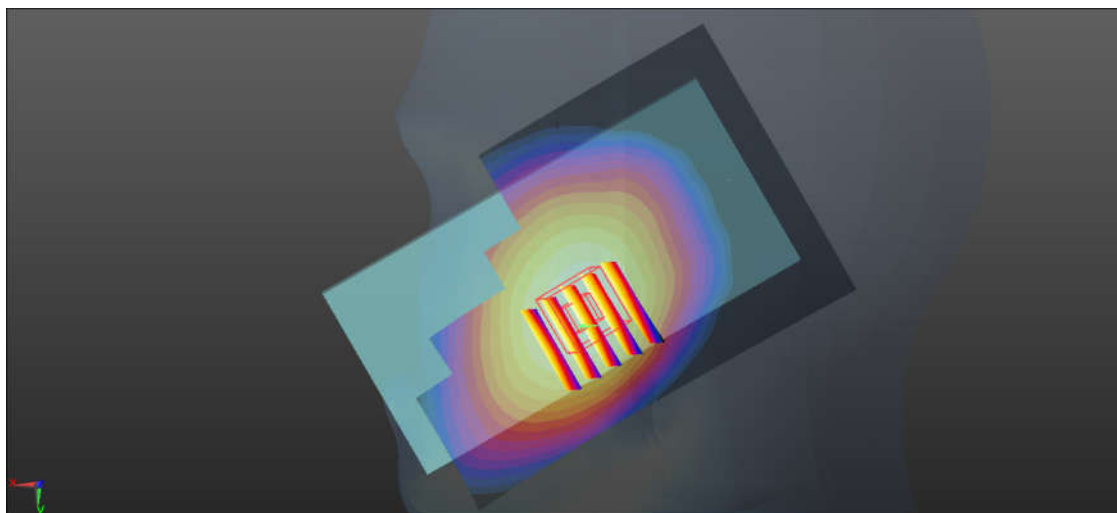

0 dB = 0.175 W/kg = -7.57 dBW/kg

**#08\_LTE Band4\_20M\_QPSK\_1RB\_49Offset\_Left Cheek\_0mm\_Ch20175**


Communication System: UID 0, FDD\_LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.379$  S/m;  $\epsilon_r = 39.698$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8, 8, 8); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.340 W/kg

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 4.607 V/m; Power Drift = 0.19 dB  
Peak SAR (extrapolated) = 0.384 W/kg  
**SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.164 W/kg**  
Maximum value of SAR (measured) = 0.327 W/kg

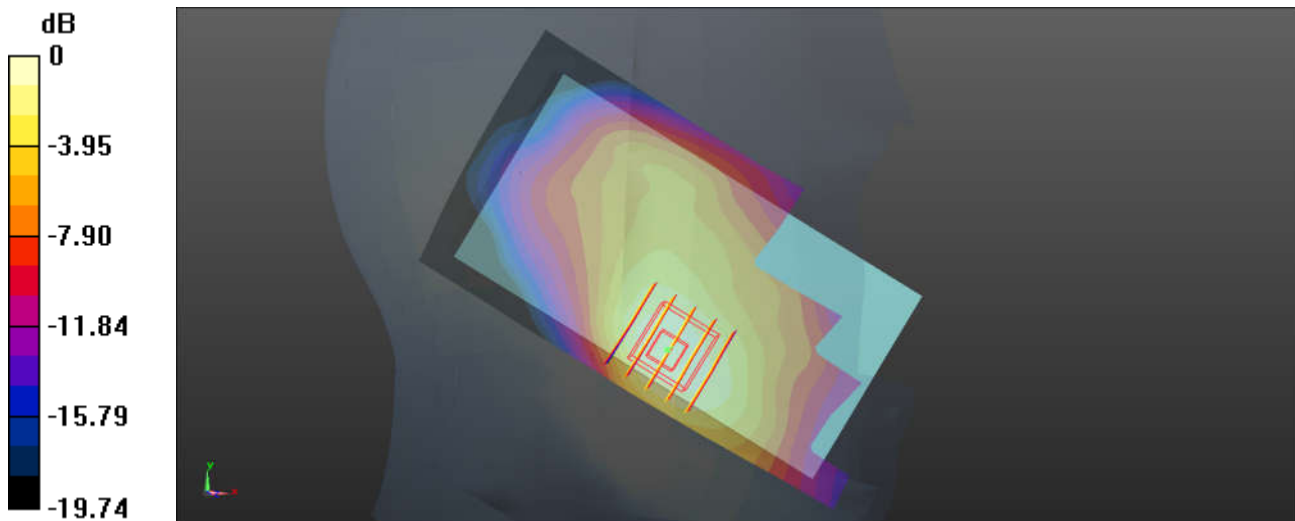

0 dB = 0.327 W/kg = -4.85 dBW/kg

**#09\_LTE Band2\_20M\_QPSK\_1RB\_49Offset\_Left Cheek\_0mm\_Ch18900**


Communication System: UID 0, FDD\_LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.371$  S/m;  $\epsilon_r = 38.237$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.85, 7.85, 7.85); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18900/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.711 W/kg

**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.469 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 0.806 W/kg  
**SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.317 W/kg**  
Maximum value of SAR (measured) = 0.675 W/kg

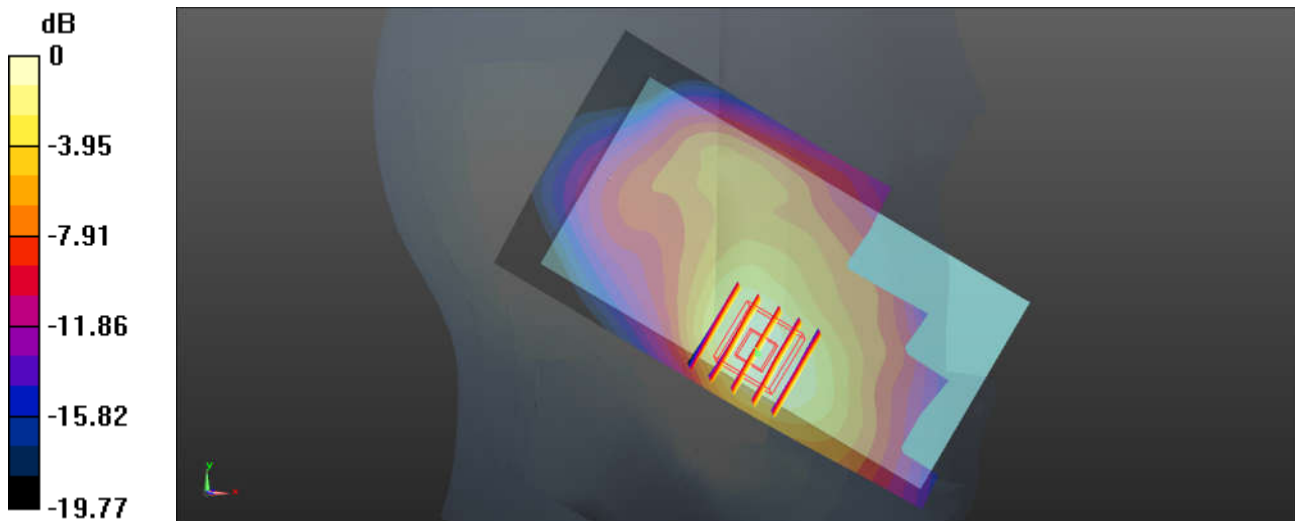

0 dB = 0.675 W/kg = -1.71 dBW/kg

**#10\_LTE Band7\_20M\_QPSK\_1RB\_49Offset\_Left Cheek\_0mm\_Ch21100**

Communication System: UID 0, FDD\_LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1  
Medium: HSL\_2600 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.923$  S/m;  $\epsilon_r = 39.569$ ;  $\rho = 1000$

kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(7.27, 7.27, 7.27); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM2; Type: SAM; Serial: TP-1542
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch21100/Area Scan (91x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.371 W/kg



**Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.354 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.470 W/kg

**SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.130 W/kg**

Maximum value of SAR (measured) = 0.357 W/kg

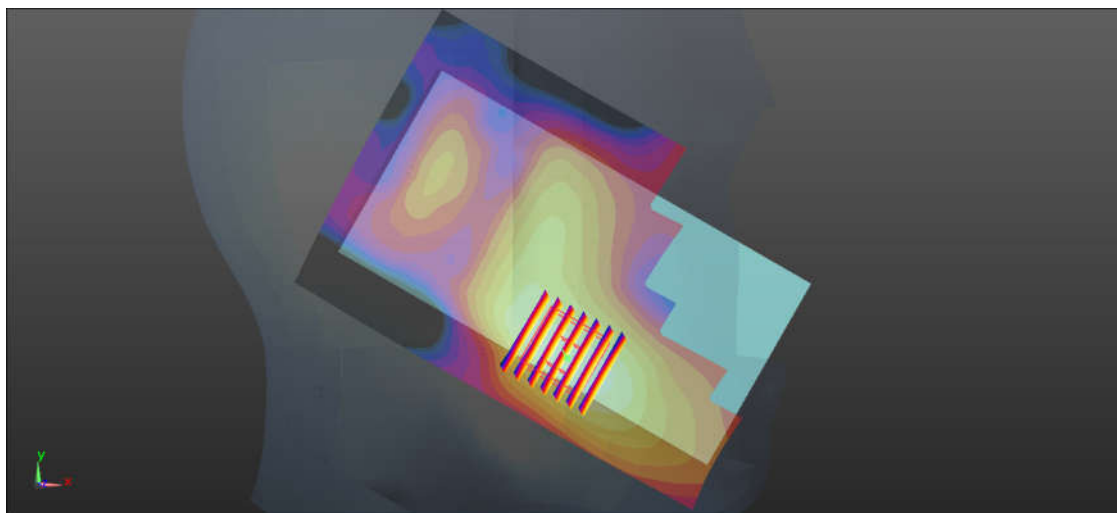

0 dB = 0.357 W/kg = -4.47 dBW/kg



### #11\_WLAN2.4GHz\_802.11b 1Mbps\_Left Cheek\_0mm\_Ch11


Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.9$  S/m;  $\epsilon_r = 38.006$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.19, 7.19, 7.19); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch11/Area Scan (81x151x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.224 W/kg

**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 5.162 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.609 W/kg  
**SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.125 W/kg**  
Maximum value of SAR (measured) = 0.416 W/kg

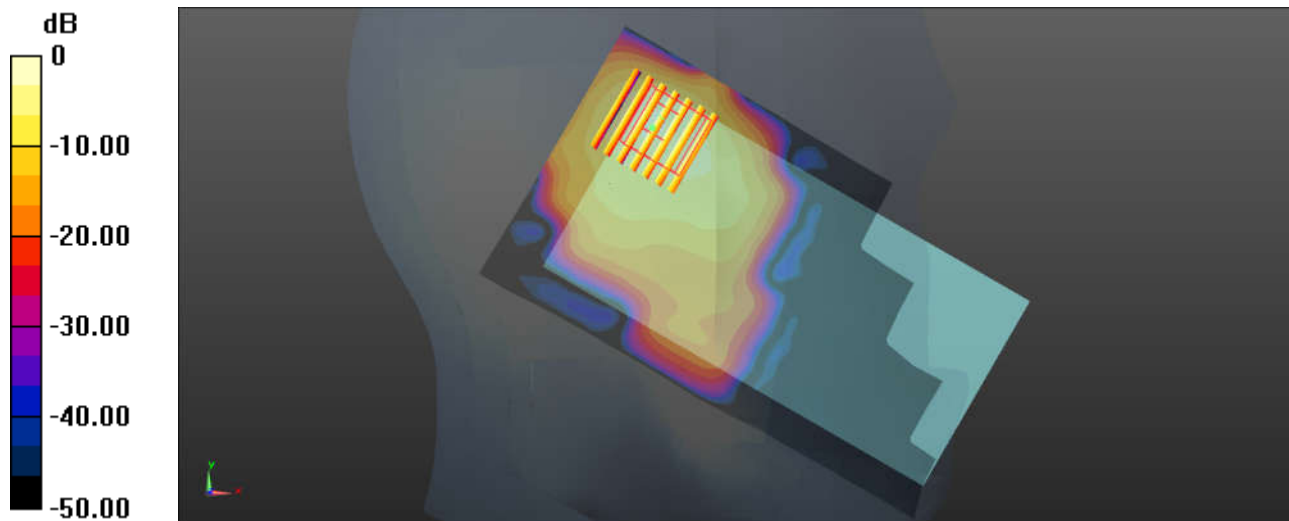

0 dB = 0.416 W/kg = -3.81 dBW/kg

### #12\_WLAN5.3GHz\_802.11a 6Mbps\_Left Cheek\_0mm\_Ch52


Communication System: UID 0, WIFI (0); Frequency: 5260 MHz; Duty Cycle: 1:1.026  
Medium: HSL\_5000 Medium parameters used:  $f = 5260$  MHz;  $\sigma = 4.573$  S/m;  $\epsilon_r = 35.726$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.15, 5.15, 5.15); Calibrated: 2016.5.25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch52/Area Scan (91x171x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.320 W/kg

**Ch52/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 1.295 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.729 W/kg  
**SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.047 W/kg**  
Maximum value of SAR (measured) = 0.439 W/kg

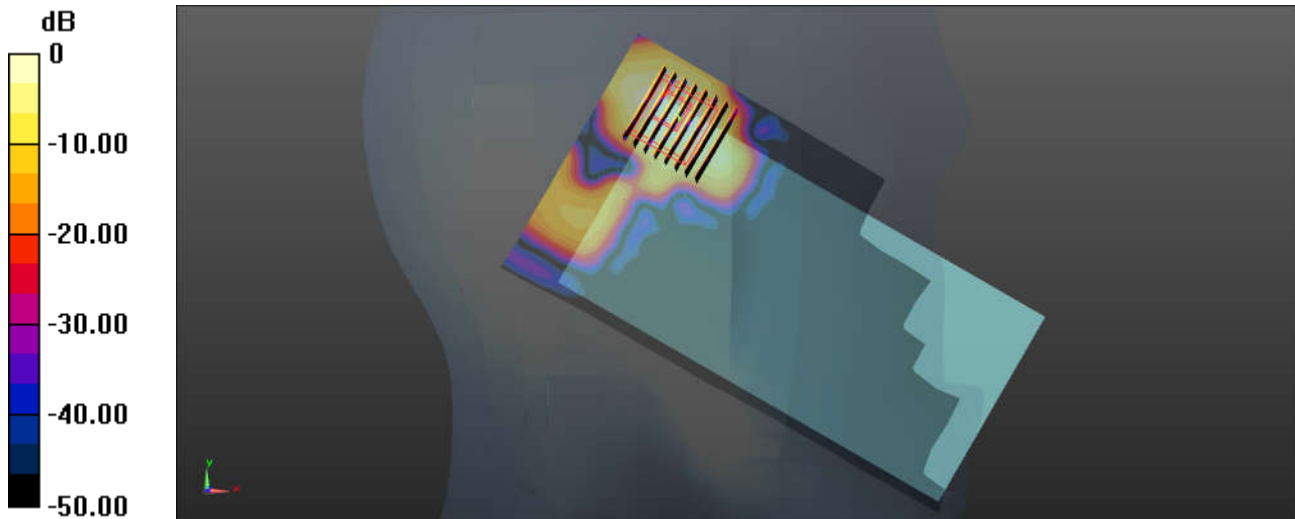

0 dB = 0.439 W/kg = -3.58 dBW/kg

### #13\_WLAN5.5GHz\_802.11a 6Mbps\_Left Cheek\_0mm\_Ch144


Communication System: UID 0, WIFI (0); Frequency: 5720 MHz; Duty Cycle: 1:1.026  
Medium: HSL\_5000 Medium parameters used:  $f = 5720$  MHz;  $\sigma = 5.066$  S/m;  $\epsilon_r = 35.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.7, 4.7, 4.7); Calibrated: 2016.5.25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch144/Area Scan (91x171x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.507 W/kg

**Ch144/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 1.845 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.583 W/kg  
**SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.040 W/kg**  
Maximum value of SAR (measured) = 0.355 W/kg

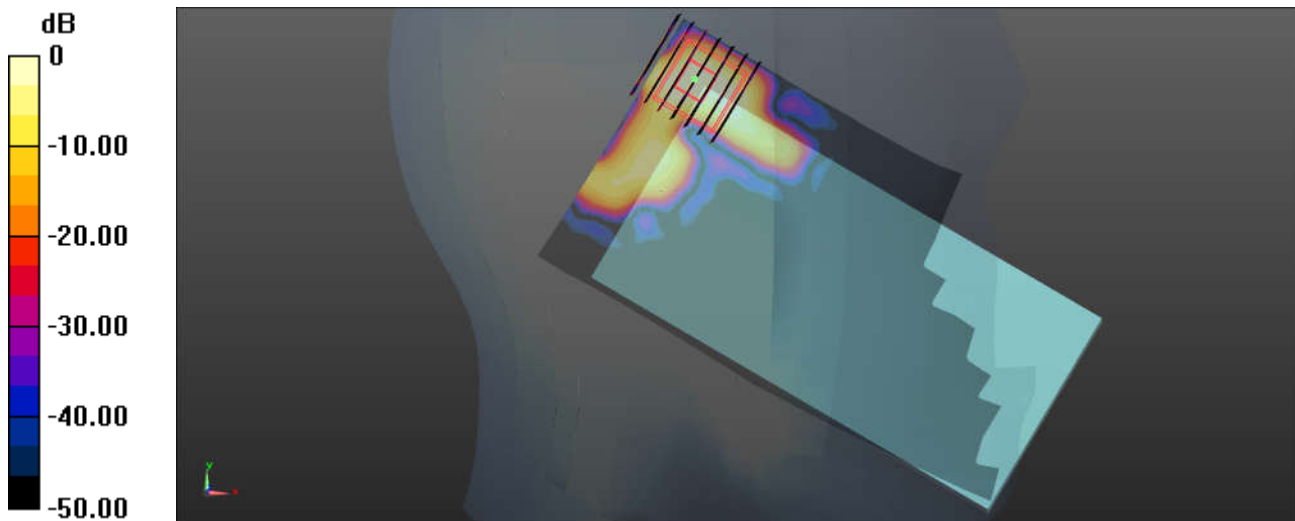

0 dB = 0.355 W/kg = -4.50 dBW/kg

**#14\_WLAN5.8GHz\_802.11a 6Mbps\_Left Cheek\_0mm\_Ch165**


Communication System: UID 0, WIFI (0); Frequency: 5825 MHz; Duty Cycle: 1:1.026  
Medium: HSL\_5000 Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.133$  S/m;  $\epsilon_r = 34.999$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.7 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5, 5, 5); Calibrated: 2016.5.25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch165/Area Scan (91x171x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.467 W/kg

**Ch165/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 2.908 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.804 W/kg  
**SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.045 W/kg**  
Maximum value of SAR (measured) = 0.517 W/kg

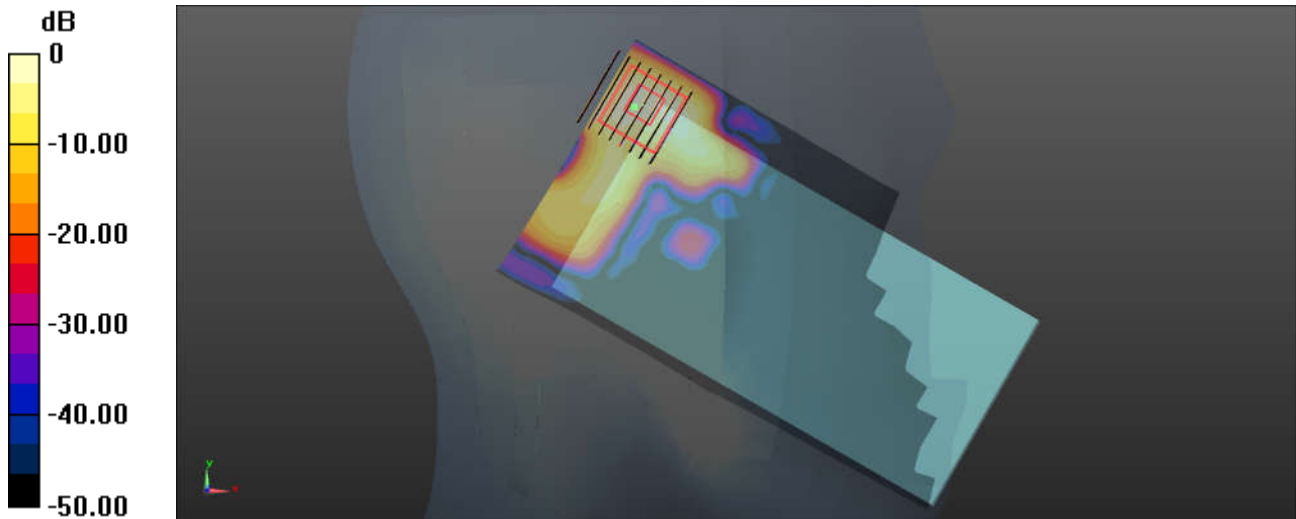

0 dB = 0.517 W/kg = -2.87 dBW/kg

**#15\_GSM850\_GPRS 4 Tx slots\_Back\_10mm\_Ch189**

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08

Medium: MSL\_850 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.983$  S/m;  $\epsilon_r = 54.957$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3954; ConvF(10.32, 10.32, 10.32); Calibrated: 2016.11.28;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2016.4.4
- Phantom: SAM1; Type: SAM; Serial: TP-1644
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch189/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.898 W/kg


**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.06 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.732 W/kg; SAR(10 g) = 0.423 W/kg**

Maximum value of SAR (measured) = 1.01 W/kg

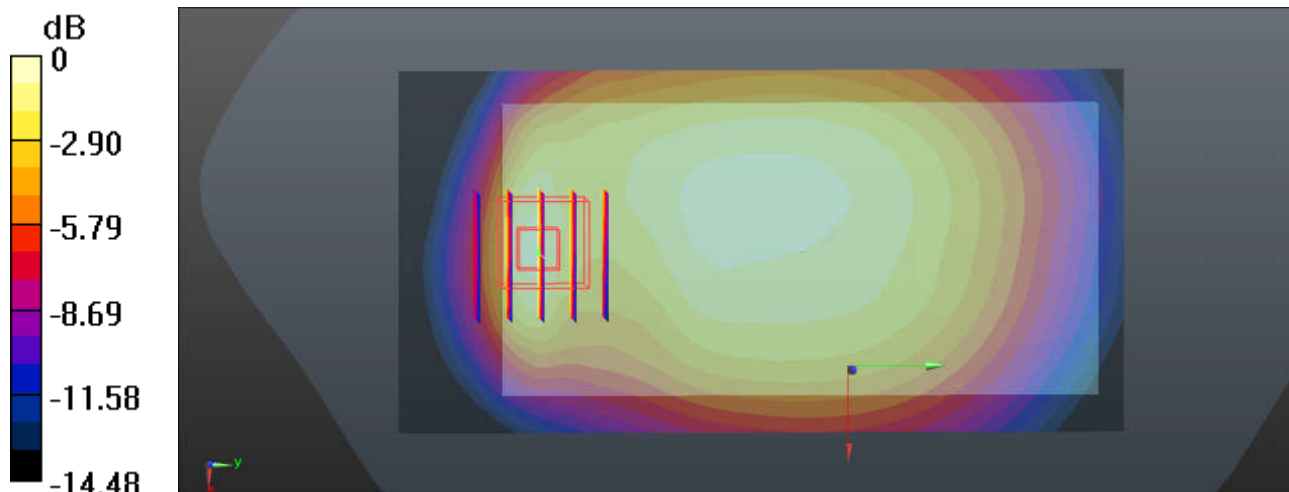

0 dB = 1.01 W/kg = 0.04 dBW/kg

### #16\_GSM1900\_GPRS 4 Tx slots\_Back\_10mm\_Ch661

Communication System: UID 0, GPRS/EDGE (4 Tx slots) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08

Medium: MSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.494$  S/m;  $\epsilon_r = 52.661$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.55, 7.55, 7.55); Calibrated: 2016.5.25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2016.5.18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch661/Area Scan (61x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.33 W/kg


**Ch661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.690 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.511 W/kg**

Maximum value of SAR (measured) = 1.27 W/kg

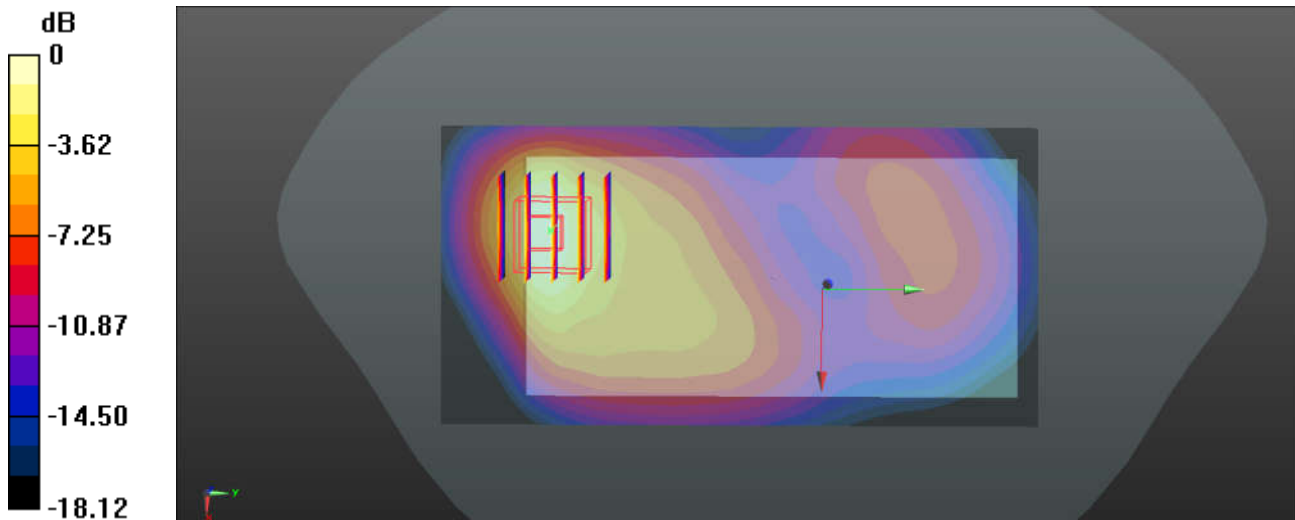

0 dB = 1.27 W/kg = 1.04 dBW/kg