FCC RF Test Report

APPLICANT : Bullitt Group

EQUIPMENT: Rugged Smart Phone

BRAND NAME : CAT MODEL NAME : S31

FCC ID : ZL5S31A

STANDARD : 47 CFR Part 2, 22(H), 24(E), 27

CLASSIFICATION: PCS Licensed Transmitter Held to Ear

The product was received on Aug, 06, 2017 and completely tested on Sep. 28, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-E and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 1 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report No.: FG780604-01B

Report Template No.: BU5-FGLTE Version 2.0

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
SU	MMAF	RY OF TEST RESULT	4
1	GENI	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	5
	1.3	Product Feature of Equipment Under Test	5
	1.4	Modification of EUT	5
	1.5	Testing Location	6
	1.6	Applicable Standards	6
2	TEST	T CONFIGURATION OF EQUIPMENT UNDER TEST	7
	2.1	Test Mode	7
	2.2	Connection Diagram of Test System	9
	2.3	Support Unit used in test configuration and system	9
	2.4	Measurement Results Explanation Example	10
	2.5	Frequency List of Low/Middle/High Channels	11
3	CON	DUCTED TEST ITEMS	13
	3.1	Measuring Instruments	13
	3.2	Test Setup	13
	3.3	Test Result of Conducted Test	13
	3.4	Conducted Output Power and ERP/EIRP	14
	3.5	Peak-to-Average Ratio	15
	3.6	Occupied Bandwidth	16
	3.7	Conducted Band Edge	17
	3.8	Conducted Spurious Emission	19
	3.9	Frequency Stability	20
4	RADI	IATED TEST ITEMS	21
	4.1	Measuring Instruments	21
	4.2	Test Setup	21
	4.3	Test Result of Radiated Test	21
	4.4	Radiated Spurious Emission	22
5	LIST	OF MEASURING EQUIPMENT	23
6	UNC	ERTAINTY OF EVALUATION	24
ΑP	PEND	OIX A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PEND	IX B. TEST RESULTS OF RADIATED TEST	
ΔΡ	PEND	NY C TEST SETUD PHOTOGRAPHS	

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 2 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report No. : FG780604-01B

Report Template No.: BU5-FGLTE Version 2.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG780604-01B	Rev. 01	Initial issue of report	Oct. 17, 2017

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 3 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power (Band 5)	ERP < 7 Watt		
3.4	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2)(Band 7)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt		
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (Band 2) (Band 4) (Band 5)	< 43+10log10(P[Watts])) PASS -	
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)		
3.8	\$2.1051 \$22.917(a) \$24.238(a) \$27.53(h)	Conducted Spurious Emission (Band 2) (Band 4) (Band 5)	< 43+10log10(P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		
	§2.1055 §22.355		< 2.5 ppm for Part 22		
3.9	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (Band 2) (Band 4) (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 7.05 dB at 7578.000
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])		MHz

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 4 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

1 General Description

1.1 Applicant

Bullitt Group

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

1.2 Manufacturer

Compal Electronics, INC.

No. 385, Yangguang St. Neihu District, Taipei City 11491, Taiwan, R.O.C

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, FM Receiver, and GPS

Product Specification subjective to this standard							
	WWAN: Coupling type (LDS) Antenna						
	WLAN: PIFA Antenna						
Antonno Typo	Bluetooth: PIFA Antenna						
Antenna Type	GPS / Glonass / BDS : PIFA Antenna						
	FM: FM: Integral Antenna						
	(Earphone acting as FM antenna deemed as an integral antenna)						

Report No.: FG780604-01B

<Sample Information>

S31 has 2 different Variant								
Sample 1	Dual SIM							
Sample 2	Single SIM							
For Dual-SIM or Single-SIM control by SW, The HW difference is SIM holder.								

Remark: All test items were performed with Sample 1.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

 SPORTON INTERNATIONAL INC.
 Page Number
 : 5 of 24

 TEL: 886-3-327-3456
 Report Issued Date
 : Oct. 17, 2017

 FAX: 886-3-328-4978
 Report Version
 : Rev. 01

FCC ID : ZL5S31A Report Template No.: BU5-FGLTE Version 2.0

1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Report No.: FG780604-01B

Test Site	SPORTON INTERNATIONAL INC.					
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,					
Test Site Location	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.					
rest Site Location	TEL: +886-3-327-3456					
	FAX: +886-3-328-4978					
Test Site No.	Sporton Site No.					
rest site No.	TH05-HY					

Test Site	SPORTON INTERNATIONAL INC.					
	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist,					
Test Site Location	Taoyuan City, Taiwan (R.O.C.)					
rest Site Location	TEL: +886-3-327-0868					
	FAX: +886-3-327-0855					
Test Site No.	Sporton Site No.					
rest site No.	03CH15-HY					

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27
- ANSI / TIA / EIA-603-E
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

- All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIONAL INC.Page Number: 6 of 24TEL: 886-3-327-3456Report Issued Date: Oct. 17, 2017

FAX: 886-3-328-4978 Report Version : Rev. 01
FCC ID: ZL5S31A Report Template No.: BU5-FGLTE Version 2.0

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

-	D1		В	andwid	lth (MH	lz)		Modu	ulation		RB#		Tes	t Chan	nel
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	М	Н
	2	v	V	v	٧	V	V	v	v	V	v	v	V	٧	v
Max. Output	4	V	V	V	V	V	V	v	v	V	v	v	V	V	v
Power	5	v	V	V	V	-	-	v	v	V	v	v	V	V	v
	7	-	-	V	٧	V	V	v	v	V	v	v	٧	V	v
	2						V	v	v	V		v	٧	V	V
Peak-to-Average	4						v	v	v	V		v	V	٧	v
Ratio	5				٧	-	-	v	v	V		v	V	٧	v
	7	-	•				y	V	V	V		v	V	V	V
	2	v	V	V	٧	V	V	v	v			v	٧	V	v
26dB and 99%	4	v	V	V	V	٧	V	V	v			v	V	V	V
Bandwidth	5	V	V	V	V	-	•	v	V			v	V	V	v
	7	-	-	V	V	V	V	V	V			V	V	V	V
	2	v	V	V	v	٧	v	V	v	V		v	V		v
Conducted	4	V	V	V	V	V	V	V	V	V		V	V		V
Band Edge	5	V	V	V	V	•	•	V	V	V		V	V		V
	7	-	-	V	V	V	V	v	V	V		v	V		y

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 7 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0




		Bandwidth (MHz)					Modulation		RB#			Test Channel			
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	М	н
Conducted	2	v	V	v	V	v	V	v	v	V			v	V	v
Spurious	4	v	V	y	V	V	V	v	V	V			V	V	v
Emission	5	v	V	V	V	-	-	v	V	V			v	V	v
Lillission	7	-	-	v	v	v	V	v	V	V			v	V	v
	2				V			v				V		V	
Frequency	4				v			v				٧		V	
Stability	5				V	-	-	v				٧		V	
	7	-	-		V			V				٧		V	
	2	v	V	V	V	V	V	v	V	V	V		v	V	v
E.R.P./ E.I.R.P.	4	V	v	v	v	v	v	v	V	٧	V		V	V	v
L.N.F./ L.I.N.F.	5	V	v	v	v	-	-	v	V	V	V		V	V	v
	7	-	-	y	V	V	V	v	V	V			v	V	v
Radiated	2	V	V	V	V	V	V	v		V			V	V	v
Spurious	4	V	v	v	v	v	v	v		٧			V	V	
Emission	5	v	v	y	V	-	-	v		V			V	V	
Lillioololi	7	-	-	y	V	V	V	v		V			v	V	
Note	 The mark "_v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. 														

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 8 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

2.2 Connection Diagram of Test System

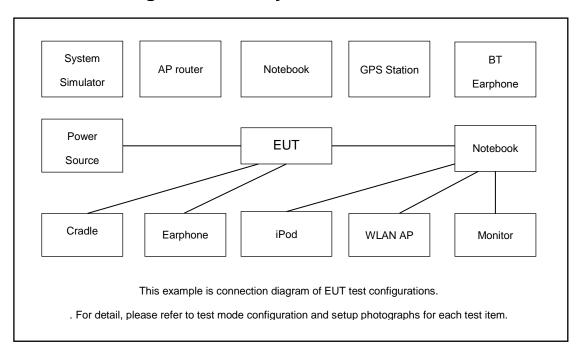

2.3 Support Unit used in test configuration and system

	ltem	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
I	1.	Base Station	Anritsu	8820C	N/A	N/A	Unshielded, 1.8 m

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 9 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example:

$$Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$$

= 4.2 + 10 = 14.2 (dB)

Report Template No.: BU5-FGLTE Version 2.0

2.5 Frequency List of Low/Middle/High Channels

	LTE Band 2 Channel and Frequency List												
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest									
20	Channel	18700	18900	19100									
20	Frequency	1860	1880	1900									
15	Channel	18675	18900	19125									
15	Frequency	1857.5	1880	1902.5									
10	Channel	18650	18900	19150									
10	Frequency	1855	1880	1905									
5	Channel	18625	18900	19175									
5	Frequency	1852.5	1880	1907.5									
3	Channel	18615	18900	19185									
3	Frequency	1851.5	1880	1908.5									
1.4	Channel	18607	18900	19193									
1.4	Frequency	1850.7	1880	1909.3									

	LTE Band 4 Channel and Frequency List												
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest									
20	Channel	20050	20175	20300									
20	Frequency	1720	1732.5	1745									
15	Channel	20025	20175	20325									
15	Frequency	1717.5	1732.5	1747.5									
10	Channel	20000	20175	20350									
10	Frequency	1715	1732.5	1750									
5	Channel	19975	20175	20375									
5	Frequency	1712.5	1732.5	1752.5									
3	Channel	19965	20175	20385									
3	Frequency	1711.5	1732.5	1753.5									
1.4	Channel	19957	20175	20393									
1.4	Frequency	1710.7	1732.5	1754.3									

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 11 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

LTE Band 5 Channel and Frequency List											
BW [MHz] Channel/Frequency(MHz) Lowest Middle Hig											
10	Channel	20450	20525	20600							
10	Frequency	829	836.5	844							
5	Channel	20425	20525	20625							
5	Frequency	826.5	836.5	846.5							
3	Channel	20415	20525	20635							
3	Frequency	825.5	836.5	847.5							
1.4	Channel	20407	20525	20643							
	Frequency	824.7	836.5	848.3							

LTE Band 7 Channel and Frequency List										
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest						
20	Channel	20850	21100	21350						
20	Frequency	2510	2535	2560						
15	Channel	20825	21100	21375						
15	Frequency	2507.5	2535	2562.5						
10	Channel	20800	21100	21400						
10	Frequency	2505	2535	2565						
5	Channel	20775	21100	21425						
5	Frequency	2502.5	2535	2567.5						

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 12 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

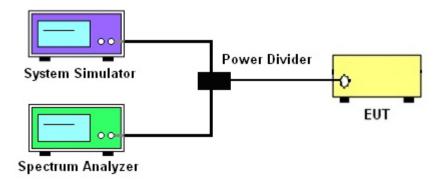

3.2.3 Frequency Stability

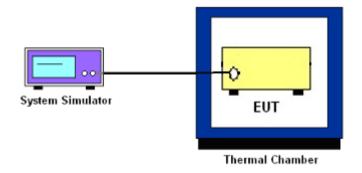

3.3 Test Result of Conducted Test

Please refer to Appendix A.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 13 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report No.: FG780604-01B

Report Template No.: BU5-FGLTE Version 2.0

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2 and Band 7.

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, ERP = EIRP - 2.15, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 14 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
- 2. The EUT was connected to spectrum and system simulator via a power divider.
- 3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 5. Record the deviation as Peak to Average Ratio.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 15 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
 (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

Report Template No.: BU5-FGLTE Version 2.0

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is 43 + 10log₁₀(P[Watts]) dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is 43 + 10log₁₀(P[Watts]) dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 - 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[Watts])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 17 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

3.7.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 3. The band edges of low and high channels for the highest RF powers were measured.
- 4. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
- 6. Set spectrum analyzer with RMS detector.
- 7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- Checked that all the results comply with the emission limit line.
 The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
- 9. For LTE Band 7 the other 40 dB, and 55 dB have additionally applied same calculation above.

SPORTON INTERNATIONAL INC. TEL: 886-3-327-3456

FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 18 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

- 1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 7. Set spectrum analyzer with RMS detector.
- 8. Taking the record of maximum spurious emission.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 10. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
- 11. For Band 7

The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 19 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
- 2. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 4. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 20 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

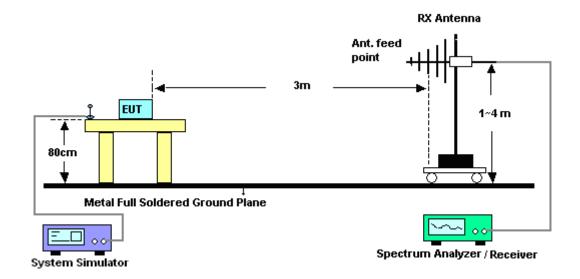

4.2.2 For radiated test above 1GHz

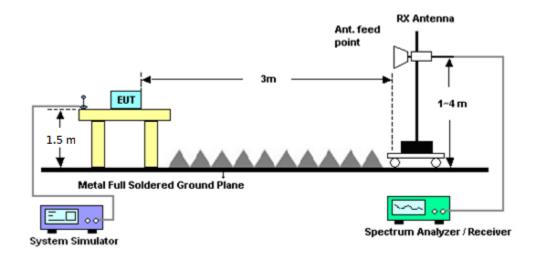

4.3 Test Result of Radiated Test

Please refer to Appendix B.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 21 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0

4.4 Radiated Spurious Emission

4.4.1 **Description of Radiated Spurious Emission**

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 **Test Procedures**

- 1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
- 2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

12. For Band 7

The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15

FAX: 886-3-328-4978 Report Version : Rev. 01 FCC ID: ZL5S31A

Report Template No.: BU5-FGLTE Version 2.0

: 22 of 24

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS /WCDMA/LTE	Oct. 11, 2016	Aug. 06, 2017 ~ Sep. 26, 2017	Oct. 10, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 04, 2016	Aug. 06, 2017 ~ Sep. 26, 2017	Nov. 03, 2017	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SU-241	92003713	-30°C ~95°C	Jun. 05, 2017	Aug. 06, 2017 ~ Sep. 26, 2017	Jun. 04, 2018	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890089	1V~20V 0.5A~5A	Jan. 12, 2017	Aug. 06, 2017 ~ Sep. 26, 2017	Jan. 11, 2018	Conducted (TH05-HY)
Coupler	Warison	1-18GHz 20dB	#B	1G~18GHz	Feb. 20, 2017	Aug. 06, 2017 ~ Sep. 26, 2017	Feb. 19, 2018	Conducted (DF02-HY)
Preamplifier	MITEQ	TTA 1840-35-HG	1887435	18GHz ~ 40GHz	Oct. 13, 2016	Sep. 27, 2017~ Sep. 28, 2017	Oct. 12, 2017	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Nov. 09, 2016	Sep. 27, 2017~ Sep. 28, 2017	Nov. 08, 2017	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D& 00800N1D0 1N-06	41912&05	30MHz to 1GHz	Jan. 07, 2017	Sep. 27, 2017~ Sep. 28, 2017	Jan. 06, 2018	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1620	1G~18GHz	Sep. 30, 2016	Sep. 27, 2017~ Sep. 28, 2017	Sep. 29, 2017	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY53270195	1GHz~26.5GHz	Aug. 21, 2017	Sep. 27, 2017~ Sep. 28, 2017	Aug. 20, 2018	Radiation (03CH15-HY)
Preamplifier	MITEQ	AMF-7D-00 101800	2025787	1GHZ~18GHZ	Feb. 13, 2017	Sep. 27, 2017~ Sep. 28, 2017	Feb. 12, 2018	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 23, 2017	Sep. 27, 2017~ Sep. 28, 2017	Mar. 22, 2018	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Sep. 27, 2017~ Sep. 28, 2017	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Sep. 27, 2017~ Sep. 28, 2017	N/A	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 08, 2016	Sep. 27, 2017~ Sep. 28, 2017	Nov. 07, 2017	Radiation (03CH15-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2017	Sep. 27, 2017~ Sep. 28, 2017	May 21, 2018	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 17, 2017	Sep. 27, 2017~ Sep. 28, 2017	Mar. 16, 2018	Radiation (03CH15-HY)

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 23 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.37
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of	3.67
Confidence of 95% (U = 2Uc(y))	3.07

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S31A Page Number : 24 of 24
Report Issued Date : Oct. 17, 2017
Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 2.0



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
20	1	0		23.84	23.76	23.80				
20	1	49		23.83	23.75	23.79				
20	1	99		23.75	23.68	23.63				
20	50	0	QPSK	22.85	22.82	22.83				
20	50	24		22.79	22.78	22.79				
20	50	50		22.78	22.66	22.76				
20	100	0		22.80	22.71	22.78				
20	1	0		22.83	22.95	22.92				
20	1	49		22.98	22.97	22.85				
20	1	99		22.95	22.91	22.81				
20	50	0	16-QAM	21.81	21.86	21.76				
20	50	24		21.85	21.75	21.82				
20	50	50		21.97	21.68	21.74				
20	100	0		21.83	21.74	21.87				
15	1	0		23.75	23.72	23.69				
15	1	37		23.58	23.59	23.61				
15	1	74		23.66	23.51	23.48				
15	36	0	QPSK	22.70	22.69	22.74				
15	36	20		22.67	22.62	22.63				
15	36	39		22.76	22.60	22.70				
15	75	0		22.76	22.68	22.76				
15	1	0		22.79	22.99	22.92				
15	1	37		22.95	22.93	22.76				
15	1	74		23.00	22.89	22.93				
15	36	0	16-QAM	21.77	21.69	21.78				
15	36	20		21.60	21.63	21.67				
15	36	39		21.73	21.62	21.73				
15	75	0		21.64	21.72	21.70				

LTE Band 2 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
10	1	0		23.67	23.78	23.73				
10	1	25		23.62	23.75	23.77				
10	1	49		23.54	23.70	23.69				
10	25	0	QPSK	22.70	22.85	22.77				
10	25	12		22.76	22.85	22.70				
10	25	25		22.59	22.57	22.64				
10	50	0		22.65	22.79	22.70				
10	1	0		22.78	22.98	22.81				
10	1	25		22.70	22.97	22.97				
10	1	49		22.65	22.71	22.81				
10	25	0	16-QAM	21.93	21.87	21.92				
10	25	12		21.97	21.87	21.94				
10	25	25		21.86	21.82	21.71				
10	50	0		21.86	21.76	21.83				
5	1	0		23.61	23.56	23.46				
5	1	12		23.63	23.55	23.61				
5	1	24		23.48	23.44	23.52				
5	12	0	QPSK	22.60	22.51	22.52				
5	12	7		22.63	22.58	22.60				
5	12	13		22.66	22.59	22.64				
5	25	0		22.64	22.58	22.55				
5	1	0		22.82	22.67	22.55				
5	1	12		22.77	22.78	22.66				
5	1	24		22.79	22.65	22.79				
5	12	0	16-QAM	21.41	21.53	21.55				
5	12	7		21.40	21.54	21.65				
5	12	13		21.63	21.63	21.67				
5	25	0		21.55	21.60	21.79				

LTE Band 2 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
3	1	0		23.54	23.58	23.50				
3	1	8		23.56	23.55	23.50				
3	1	14		23.59	23.45	23.46				
3	8	0	QPSK	22.70	22.47	22.60				
3	8	4		22.74	22.50	22.61				
3	8	7		22.64	22.55	22.62				
3	15	0		22.70	22.50	22.61				
3	1	0		22.75	22.53	22.60				
3	1	8		22.86	22.69	22.52				
3	1	14		22.79	22.66	22.49				
3	8	0	16-QAM	21.71	21.60	21.50				
3	8	4		21.68	21.70	21.53				
3	8	7		21.85	21.72	21.54				
3	15	0		21.81	21.60	21.58				
1.4	1	0		23.50	23.61	23.57				
1.4	1	3		23.67	23.65	23.63				
1.4	1	5		23.69	23.62	23.63				
1.4	3	0	QPSK	23.60	23.68	23.76				
1.4	3	1		23.66	23.65	23.78				
1.4	3	3		23.64	23.65	23.69				
1.4	6	0		22.55	22.58	22.67				
1.4	1	0		22.87	22.86	22.66				
1.4	1	3		22.98	23.00	22.76				
1.4	1	5		22.88	23.00	22.90				
1.4	3	0	16-QAM	22.80	22.81	22.62				
1.4	3	1		22.86	22.87	22.63				
1.4	3	3		22.85	22.87	22.61				
1.4	6	0		21.50	21.23	21.37				

LTE Band 4 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
20	1	0		22.54	22.65	22.42				
20	1	49		22.51	22.64	22.27				
20	1	99		22.19	22.25	22.24				
20	50	0	QPSK	21.55	21.51	21.56				
20	50	24		21.42	21.49	21.45				
20	50	50		21.40	21.46	21.39				
20	100	0		21.43	21.46	21.45				
20	1	0		21.75	21.90	21.75				
20	1	49		21.47	21.76	21.98				
20	1	99		21.38	21.72	21.59				
20	50	0	16-QAM	20.43	20.53	20.50				
20	50	24		20.40	20.52	20.49				
20	50	50		20.41	20.50	20.32				
20	100	0		20.47	20.48	20.49				
15	1	0		22.62	22.64	22.41				
15	1	37		22.40	22.33	22.41				
15	1	74		22.36	22.33	22.35				
15	36	0	QPSK	21.50	21.48	21.46				
15	36	20		21.47	21.45	21.42				
15	36	39		21.38	21.46	21.41				
15	75	0		21.44	21.52	21.43				
15	1	0		21.94	21.87	21.47				
15	1	37		21.46	21.48	21.21				
15	1	74		21.64	21.42	21.29				
15	36	0	16-QAM	20.49	20.41	20.50				
15	36	20		20.46	20.41	20.35				
15	36	39		20.38	20.42	20.33				
15	75	0		20.40	20.44	20.33				

LTE Band 4 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
10	1	0		22.33	22.38	22.29				
10	1	25		22.60	22.56	22.45				
10	1	49		22.45	22.43	22.33				
10	25	0	QPSK	21.50	21.48	21.40				
10	25	12		21.49	21.47	21.39				
10	25	25		21.41	21.42	21.24				
10	50	0		21.53	21.42	21.37				
10	1	0		21.59	21.61	21.22				
10	1	25		22.00	21.87	21.43				
10	1	49		21.75	21.47	21.11				
10	25	0	16-QAM	20.54	20.53	20.58				
10	25	12		20.71	20.40	20.53				
10	25	25		20.44	20.51	20.49				
10	50	0		20.42	20.41	20.38				
5	1	0		22.55	22.54	22.15				
5	1	12		22.57	22.56	22.13				
5	1	24		22.49	22.53	22.28				
5	12	0	QPSK	21.44	21.44	21.20				
5	12	7		21.41	21.35	21.19				
5	12	13		21.52	21.36	21.31				
5	25	0		21.47	21.42	21.21				
5	1	0		21.51	21.67	21.68				
5	1	12		21.51	21.56	21.69				
5	1	24		21.85	21.93	21.57				
5	12	0	16-QAM	20.41	20.29	20.25				
5	12	7		20.30	20.09	20.17				
5	12	13		20.33	20.26	20.19				
5	25	0		20.50	20.38	20.43				

	LTE Band 4 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest					
3	1	0		22.57	22.38	22.31					
3	1	8		22.39	22.43	22.19					
3	1	14		22.50	22.52	22.22					
3	8	0	QPSK	21.50	21.43	21.28					
3	8	4		21.43	21.54	21.34					
3	8	7		21.50	21.44	21.41					
3	15	0		21.34	21.46	21.35					
3	1	0		21.50	21.60	21.43					
3	1	8		21.49	21.55	21.44					
3	1	14		21.71	21.56	21.38					
3	8	0	16-QAM	20.57	20.13	20.22					
3	8	4		20.51	20.14	20.22					
3	8	7		20.58	20.18	20.11					
3	15	0		20.61	20.18	19.97					
1.4	1	0		22.48	22.22	22.32					
1.4	1	3		22.46	22.37	22.40					
1.4	1	5		22.53	22.48	22.30					
1.4	3	0	QPSK	22.60	22.45	22.33					
1.4	3	1		22.52	22.56	22.48					
1.4	3	3		22.52	22.51	22.49					
1.4	6	0		21.34	21.49	21.42					
1.4	1	0		21.85	21.39	21.15					
1.4	1	3		21.95	21.26	21.31					
1.4	1	5		21.86	21.23	21.23					
1.4	3	0	16-QAM	21.63	21.14	21.22					
1.4	3	1		21.70	21.61	21.41					
1.4	3	3		21.65	21.37	21.41					
1.4	6	0		20.95	20.39	19.98					

LTE Band 5 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
10	1	0		23.50	23.62	23.53				
10	1	25		23.39	23.19	23.54				
10	1	49		23.15	23.21	23.38				
10	25	0	QPSK	22.39	22.51	22.33				
10	25	12		22.32	22.39	22.43				
10	25	25		22.30	22.30	22.34				
10	50	0		22.36	22.36	22.40				
10	1	0		22.71	22.71	22.39				
10	1	25		22.63	22.84	22.57				
10	1	49		22.11	22.43	22.50				
10	25	0	16-QAM	21.43	21.43	21.40				
10	25	12		21.37	21.34	21.49				
10	25	25		21.22	21.26	21.40				
10	50	0		21.23	21.20	21.38				
5	1	0		23.23	23.45	23.31				
5	1	12		23.27	23.46	23.24				
5	1	24		23.35	23.23	23.21				
5	12	0	QPSK	22.42	22.38	22.35				
5	12	7		22.37	22.32	22.36				
5	12	13		22.35	22.31	22.38				
5	25	0		22.37	22.39	22.36				
5	1	0		22.57	22.50	22.71				
5	1	12		22.48	22.40	22.71				
5	1	24		22.48	22.38	22.25				
5	12	0	16-QAM	21.19	21.26	21.33				
5	12	7		21.27	21.18	21.31				
5	12	13		21.20	21.16	21.35				
5	25	0		21.26	21.21	21.52				

LTE Band 5 Maximum Average Power [dBm]								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest		
3	1	0		23.27	23.48	23.37		
3	1	8		23.44	23.23	23.30		
3	1	14		23.47	23.35	23.39		
3	8	0	QPSK	22.39	22.42	22.41		
3	8	4		22.41	22.32	22.34		
3	8	7		22.41	22.24	22.36		
3	15	0		22.35	22.33	22.34		
3	1	0		22.58	22.29	22.43		
3	1	8		22.63	22.06	22.58		
3	1	14		22.59	22.54	22.41		
3	8	0	16-QAM	21.62	21.51	21.22		
3	8	4		21.57	21.11	21.24		
3	8	7		21.53	21.21	21.30		
3	15	0		21.47	21.31	21.32		
1.4	1	0		23.30	23.20	23.26		
1.4	1	3		23.23	23.25	23.28		
1.4	1	5		23.40	23.18	23.07		
1.4	3	0	QPSK	23.45	23.31	23.37		
1.4	3	1		23.20	23.28	23.36		
1.4	3	3		23.46	23.22	23.32		
1.4	6	0		22.44	22.20	22.38		
1.4	1	0		22.29	22.31	22.35		
1.4	1	3	16-QAM	22.85	22.38	22.49		
1.4	1	5		22.41	22.40	22.33		
1.4	3	0		22.51	22.30	22.42		
1.4	3	1		22.51	22.33	22.33		
1.4	3	3		22.69	22.19	22.40		
1.4	6	0		21.04	21.00	21.32		

LTE Band 7 Maximum Average Power [dBm]							
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	
20	1	0		22.29	22.30	22.22	
20	1	49		22.09	22.27	22.21	
20	1	99		21.95	22.12	21.95	
20	50	0	QPSK	21.24	21.28	21.27	
20	50	24		21.03	21.23	21.26	
20	50	50		21.03	21.21	21.18	
20	100	0		21.24	21.25	21.22	
20	1	0		21.23	21.27	21.24	
20	1	49		21.18	21.25	21.22	
20	1	99		21.16	21.21	21.09	
20	50	0	16-QAM	20.16	20.22	20.21	
20	50	24		20.05	20.07	20.09	
20	50	50		20.07	20.12	20.25	
20	100	0		20.14	20.22	20.21	
15	1	0		22.28	22.22	22.24	
15	1	37		22.15	22.23	22.07	
15	1	74		22.09	22.18	21.99	
15	36	0	QPSK	21.21	21.28	21.29	
15	36	20		21.14	21.26	21.18	
15	36	39		21.08	21.26	21.18	
15	75	0		21.14	21.27	21.19	
15	1	0		21.25	21.26	21.24	
15	1	37		20.76	21.12	21.20	
15	1	74	16-QAM	21.12	21.26	21.28	
15	36	0		20.16	20.22	20.29	
15	36	20		20.15	20.18	20.17	
15	36	39		20.11	20.18	20.17	
15	75	0		20.17	20.28	20.27	

5

25

0

LTE Band 7 Maximum Average Power [dBm] BW [MHz] **RB Size RB Offset** Mod Lowest Middle Highest 10 0 22.25 22.18 21.86 22.24 10 1 25 22.21 22.16 10 1 49 22.04 22.04 21.82 10 25 0 QPSK 21.18 21.23 21.19 10 25 12 21.17 21.23 21.21 10 25 25 21.20 21.21 21.05 10 50 0 21.20 21.23 21.09 10 1 0 21.24 21.22 20.92 10 1 25 21.27 21.26 21.17 10 1 49 21.22 21.30 21.13 10 25 0 16-QAM 20.24 20.22 20.20 10 25 12 20.19 20.16 20.15 10 25 25 20.24 20.13 20.07 10 50 0 20.23 20.16 20.19 5 1 0 22.26 21.90 22.18 1 5 12 22.21 22.26 22.12 5 1 24 22.17 22.18 21.89 12 **QPSK** 21.23 21.23 5 0 21.27 5 12 7 21.15 21.24 21.06 12 5 13 21.11 21.21 21.00 25 5 0 21.11 21.20 21.12 5 1 0 21.24 21.24 21.26 5 1 12 21.18 21.29 21.08 5 1 24 21.23 21.30 21.26 12 5 0 16-QAM 20.23 20.30 20.18 7 5 12 20.17 20.28 20.18 5 12 13 20.14 20.22 20.14

20.14

20.15

20.12




LTE Band 2


Peak-to-Average Ratio

Mode	Mode LTE Band 2 / 20MHz					
Mod.	QP	SK	16QAM		Limit: 13dB	
RB Size	1RB	Full RB	1RB	Full RB	Result	
Lowest CH	3.3	4.61	4.2	5.62		
Middle CH	4.09	4.64	4.75	5.71	PASS	
Highest CH	3.59	4.75	4.72	5.68		

TEL: 886-3-327-3456 FAX: 886-3-328-4978

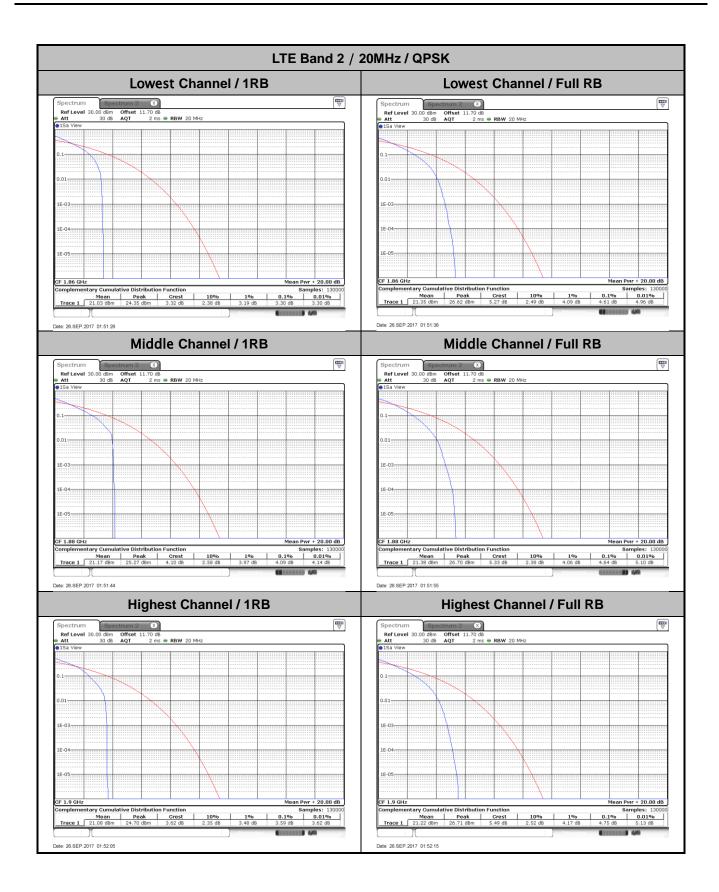

TEL: 886-3-327-3456 FAX: 886-3-328-4978

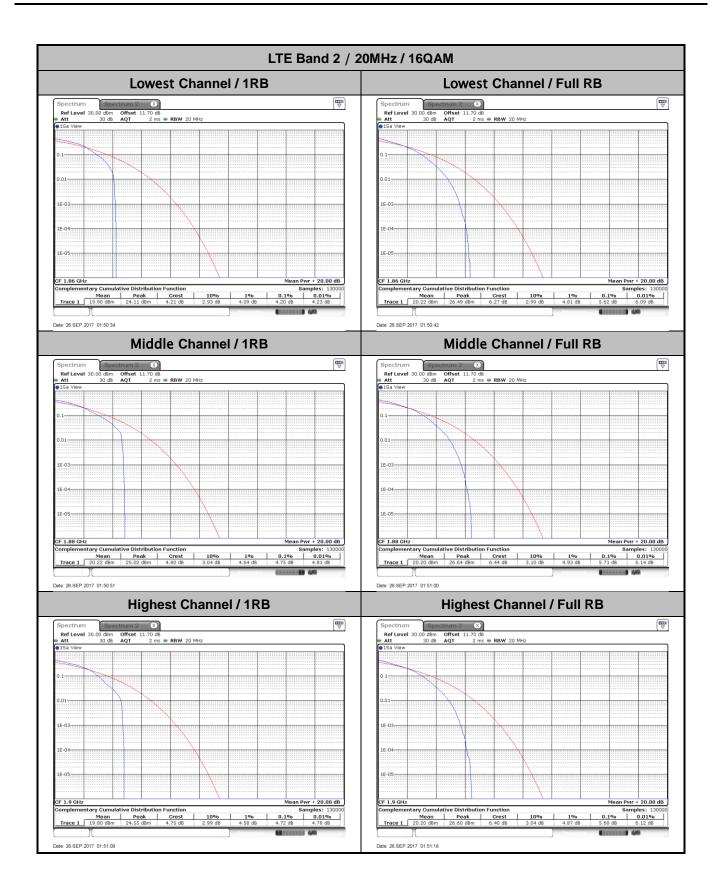


26dB Bandwidth


Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.28	1.28	3.01	2.99	5.01	4.94	9.75	9.71	14.60	14.21	20.18	20.18
Middle CH	1.28	1.29	3.04	3.01	4.97	4.86	9.67	9.71	14.39	14.42	20.34	20.18
Highest CH	1.29	1.29	2.96	3.02	4.93	4.98	10.11	9.65	14.36	14.69	20.22	20.46


Report No. :FG780604-01B


SPORTON INTERNATIONAL INC. Page Number : A2-4 of 41



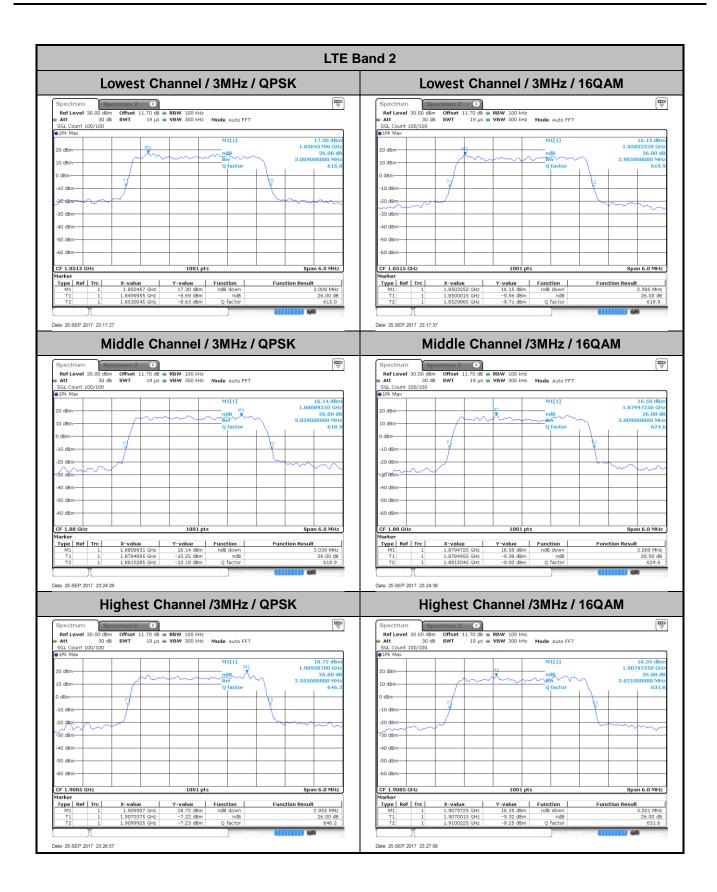

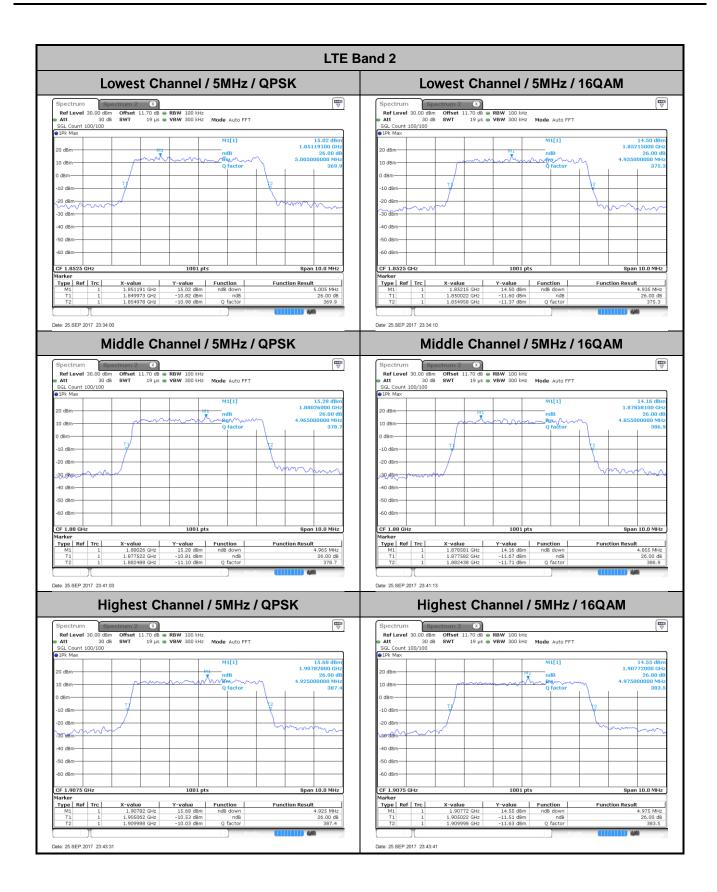

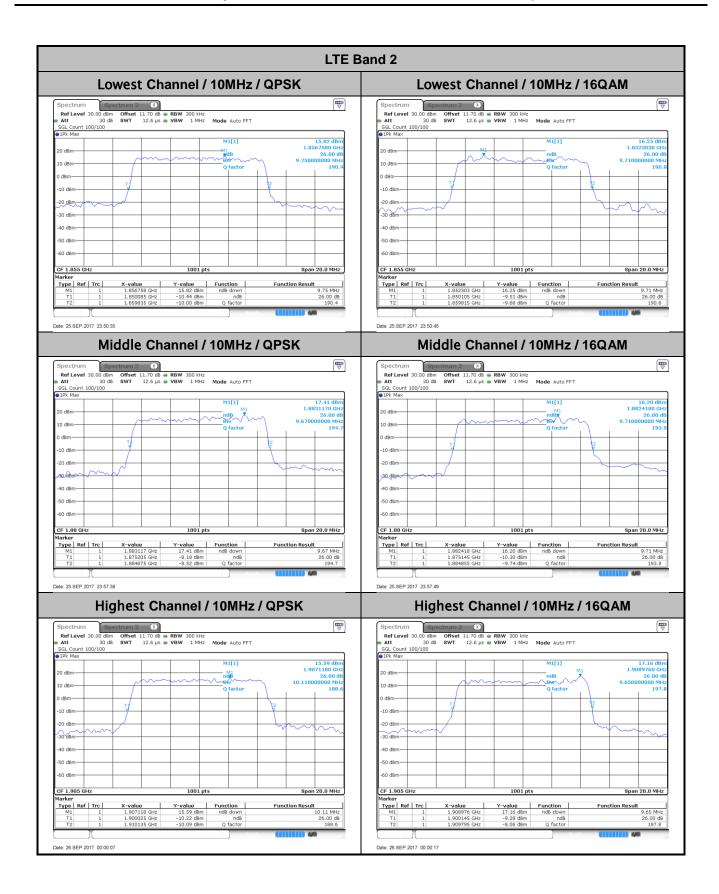

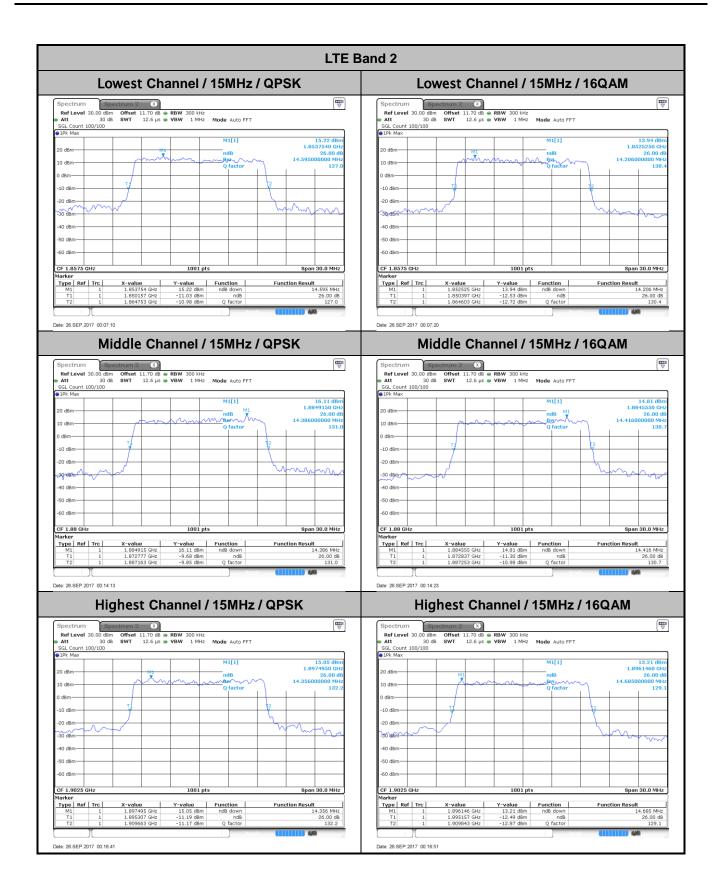





Occupied Bandwidth


Mode	LTE Band 2 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.72	2.72	4.5	4.5	9.01	8.99	13.49	13.4	18.3	18.3
Middle CH	1.09	1.1	2.72	2.74	4.49	4.49	9.03	9.01	13.46	13.43	18.22	18.46
Highest CH	1.09	1.1	2.71	2.72	4.52	4.48	9.03	9.07	13.43	13.46	18.34	18.46


Report No. :FG780604-01B




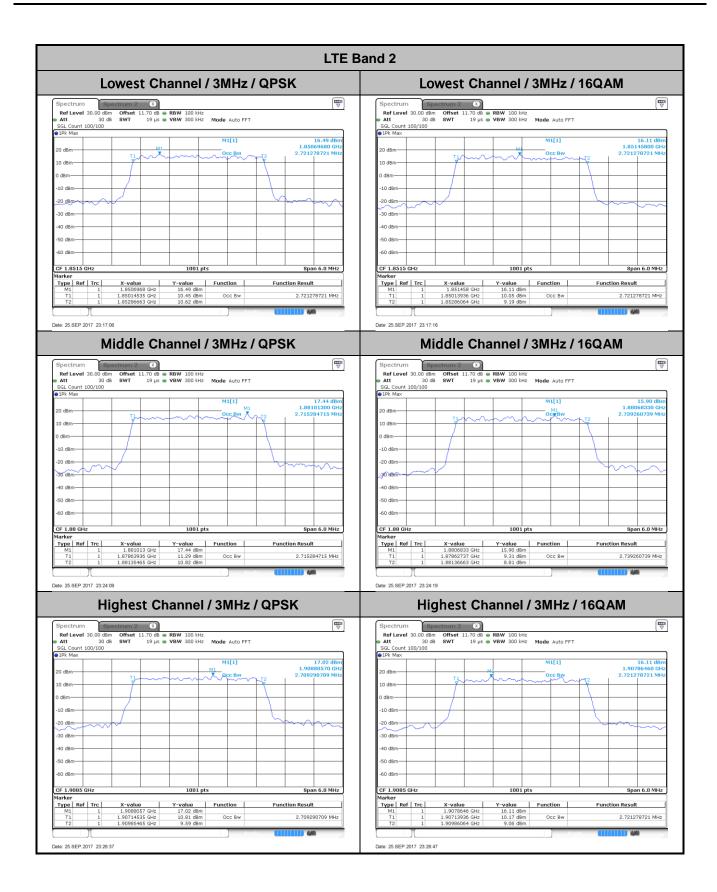

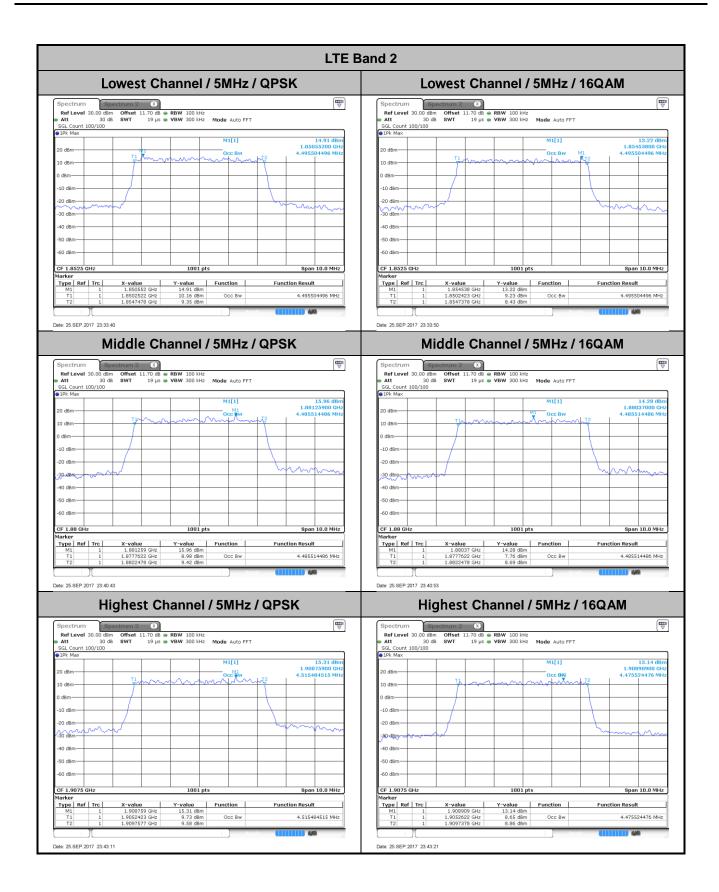

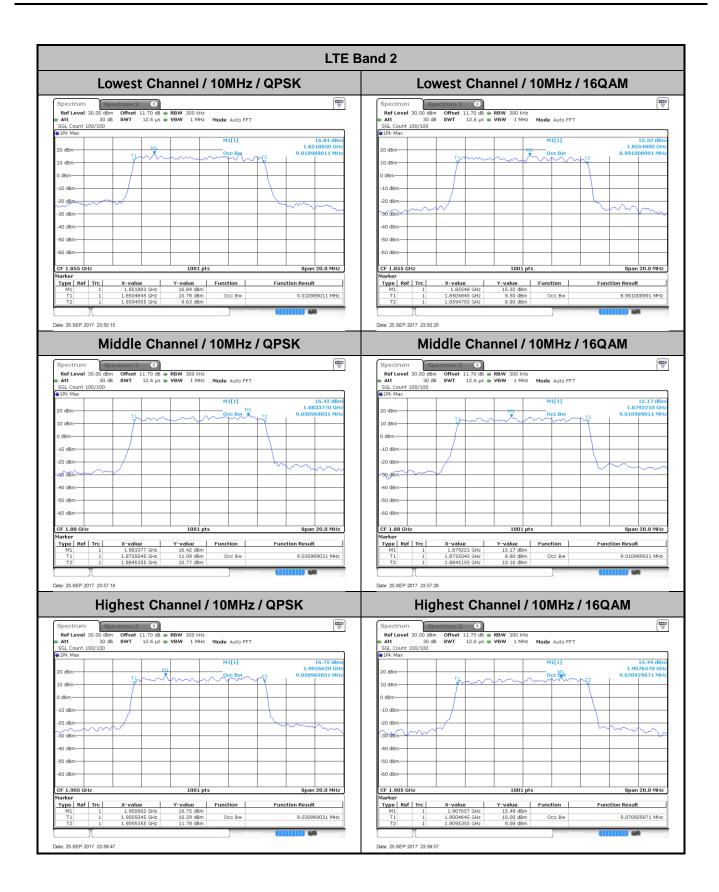

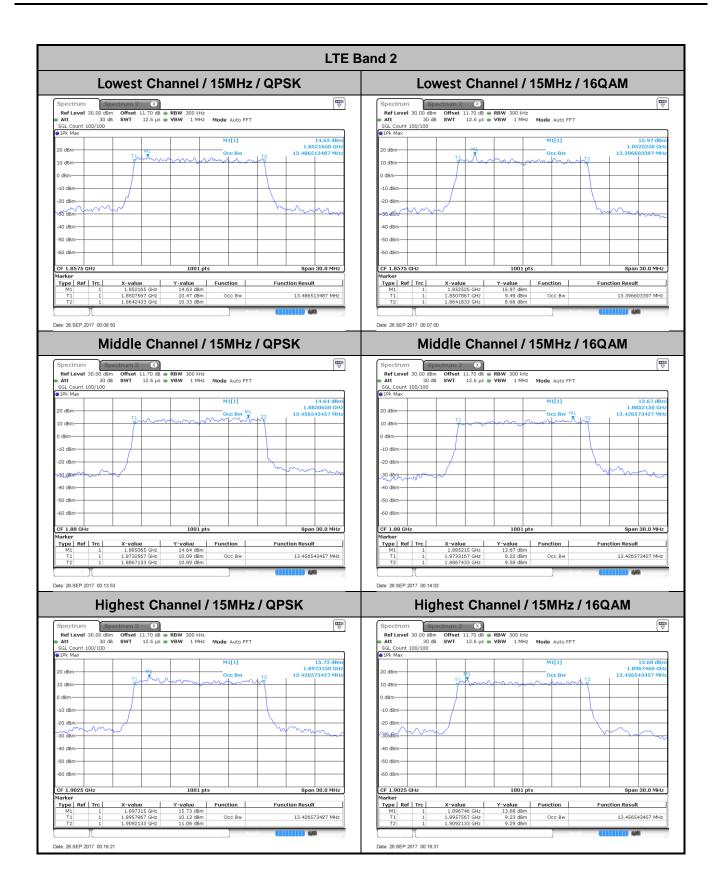

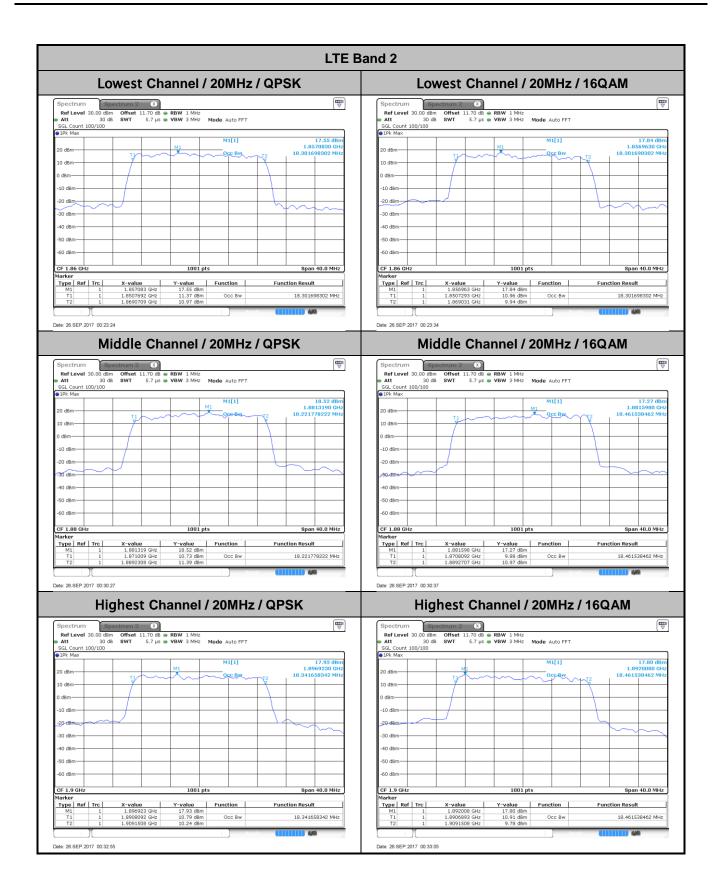


Conducted Band Edge

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 Report No. :FG780604-01B

CC RF Test Report No. :FG780604-01B

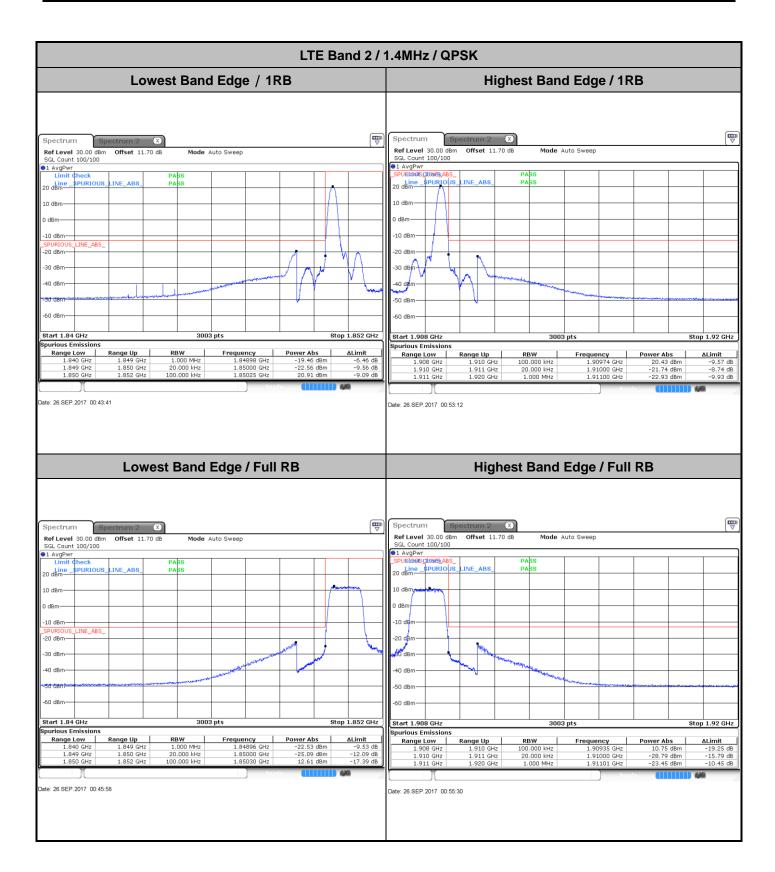

LTE Band 2 / 1.4MHz / 16QAM Lowest Band Edge / 1 RB Highest Band Edge / 1 RB Spectrum Ref Level 30.00 dBm Offset 11.70 dB Mode Auto Sweep Ref Level 30.00 dBm Offset 11.70 dB SGL Count 100/100 Mode Auto Sweep SGL Count 100/100 ●1 AvgPw 10 dBm -20 dBm--30 dB -30 dBm -60 dBm Start 1.84 GHz Spurious Emissio 3003 pts Stop 1.852 GHz purious Emissions Range Low 1.84894 GHz 1.85000 GHz 1.85024 GHz -20.60 dBm -23.55 dBm 19.50 dBm ΔLimit Range Low Range Up 1.849 GHz 1.911 GHz 1.920 GHz Date: 26.SEP.2017 00:44:50 Lowest Band Edge / Full RB **Highest Band Edge / Full RB** Spectrum Spectrum 2 X Mode Auto Sweep Mode Auto Sweep Ref Level 30.00 dBm Offset 11.70 dB SGL Count 100/100 20 dBm— 10 dBm 10 dBn 0 dBm INE_ABS_ -20 dBm--20 d -30 dBn 60 dBm-Stop 1.852 GHz Start 1.84 GHz 3003 Start 1.908 GHz purious Emissions Frequency 1.84895 GHz 1.85000 GHz 1.85096 GHz -26.23 dBm -29.27 dBm 11.44 dBm Range Low Range Up 1.849 GHz ∆Limit 1.90933 GHz 1.91000 GHz 1.91110 GHz -13.23 dB -16.27 dB -18.56 dB 1.850 GHz 1.852 GHz


Date: 26.SEP.2017 01:48:03

TEL: 886-3-327-3456 FAX: 886-3-328-4978


ate: 26.SEP.2017 00:47:07

Report No.: FG780604-01B


CC RF Test Report Report No. :FG780604-01B

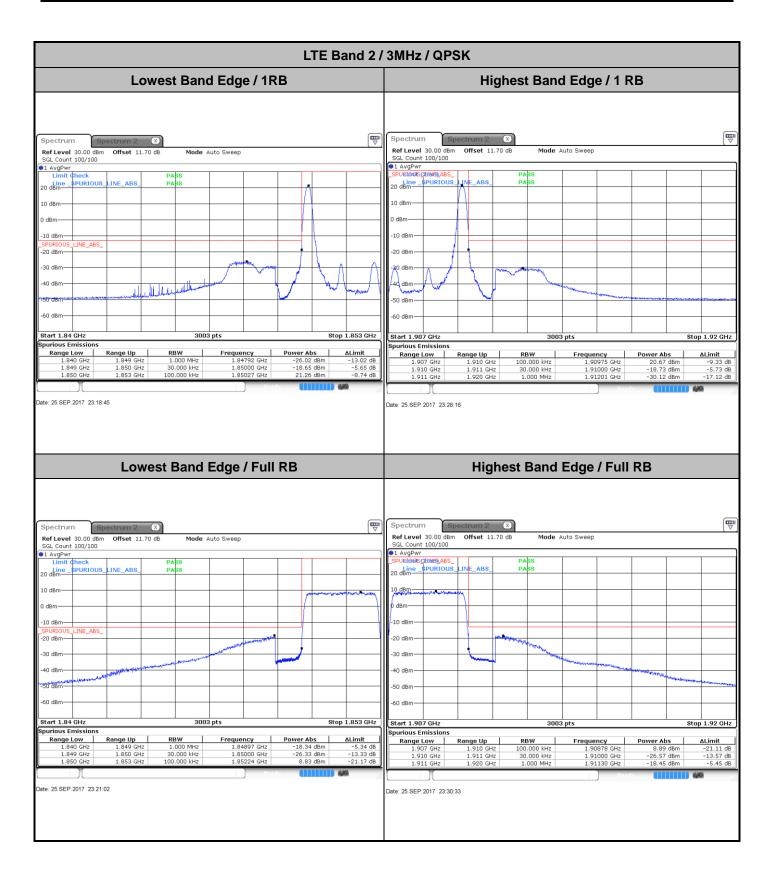

CC RF Test Report No.:FG780604-01B

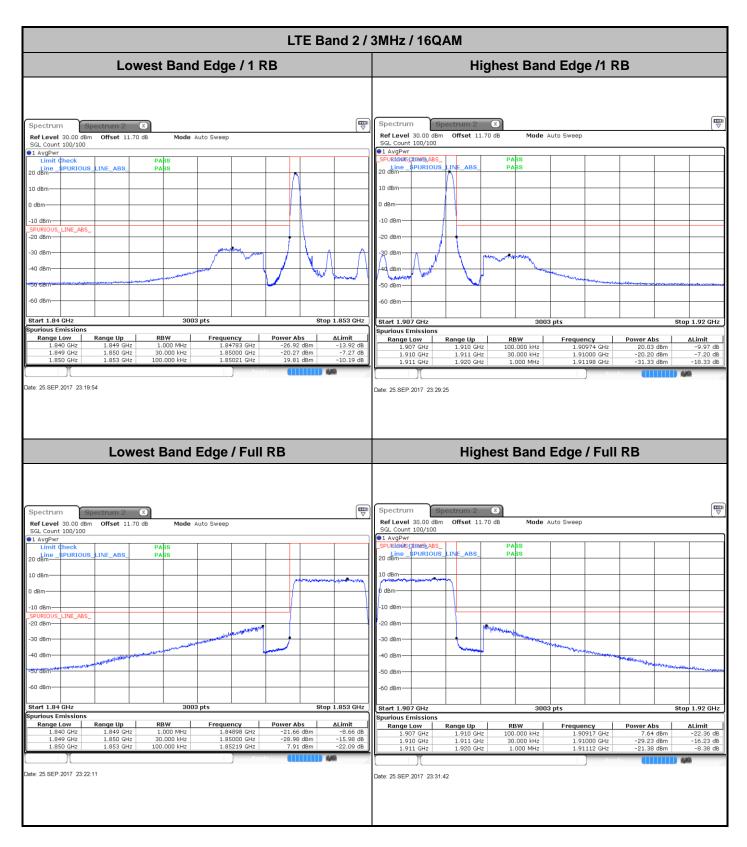

CC RF Test Report No.:FG780604-01B

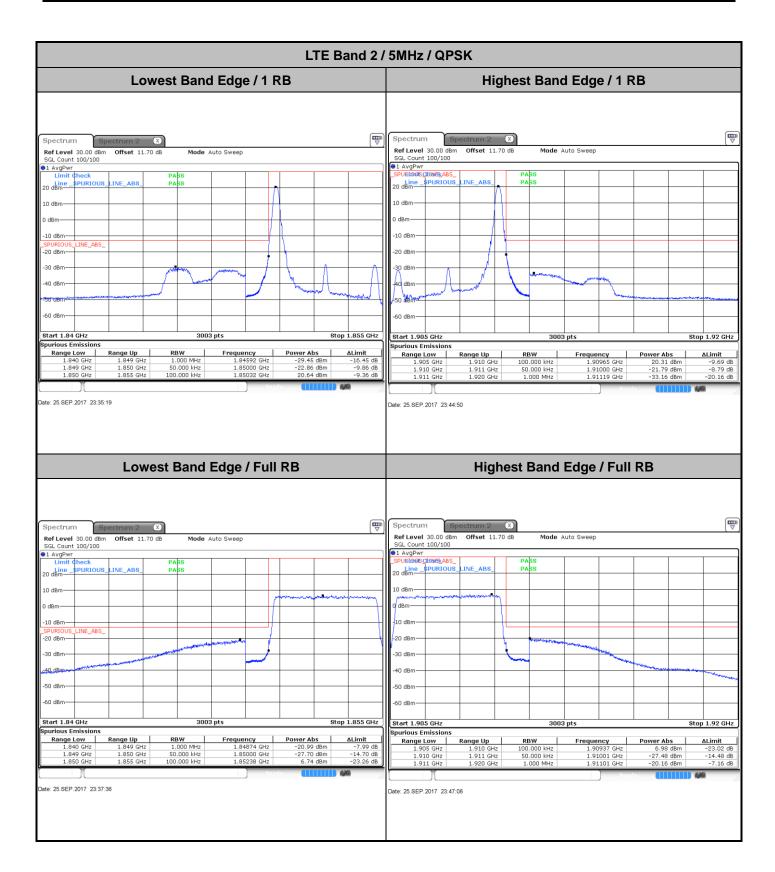

CC RF Test Report No. :FG780604-01B

