



FCC RF Test Report

APPLICANT : Bullitt Group
EQUIPMENT : Rugged Smart Phone
BRAND NAME : CAT
MODEL NAME : S41
MARKETING NAME : S41
FCC ID : ZL5S41A
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Jun. 06, 2017 and testing was completed on Aug. 11, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



Testing Laboratory
1190

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Modification of EUT 5

 1.5 Testing Location 6

 1.6 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example 12

3 TEST RESULT 13

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 13

 3.2 Maximum Conducted Output Power Measurement 16

 3.3 Power Spectral Density Measurement 17

 3.4 Unwanted Emissions Measurement 19

 3.5 AC Conducted Emission Measurement 24

 3.6 Frequency Stability Measurement 26

 3.7 Automatically Discontinue Transmission 27

 3.8 Antenna Requirements 28

4 LIST OF MEASURING EQUIPMENT 29

5 UNCERTAINTY OF EVALUATION 30

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX E. DUTY CYCLE PLOTS

APPENDIX F. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR760506-01F	Rev. 01	Initial issue of report	Aug. 23, 2017



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.73 dB at 17475.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.40 dB at 0.150 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Bullitt Group

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

1.2 Manufacturer

Compal Electronics, INC.

No. 385, Yangguang St. Neihu District, Taipei City 11491, Taiwan, R.O.C

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, FM Receiver, NFC, and GPS

Product Specification subjective to this standard	
Antenna Type	WWAN: PIFA + Coupling type (LDS) Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS / Glonass: PIFA Antenna NFC: Loop Antenna FM: Integral Antenna (Earphone acting as FM antenna deemed as an integral antenna)

<Sample Information>

S41	
Sample 1	Dual SIM
Sample 2	Single SIM
For Dual-SIM or Single-SIM control by SW, the HW difference is SIM holder.	

Remark: All test items were performed with Sample 1.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.



1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	-	-	165	5825

Note: The above Frequency and Channel in "*" were 802.11n HT40.



2.2 Test Mode


Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

AC Conducted Emission	Mode 1 : LTE Band 7 Idle + Bluetooth Link + WLAN (5GHz) Link + NFC on + FM Rx (98MHz) + Earphone + Battery + USB Cable (Charging from Adapter)
------------------------------	---

Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159

2.3 Connection Diagram of Test System

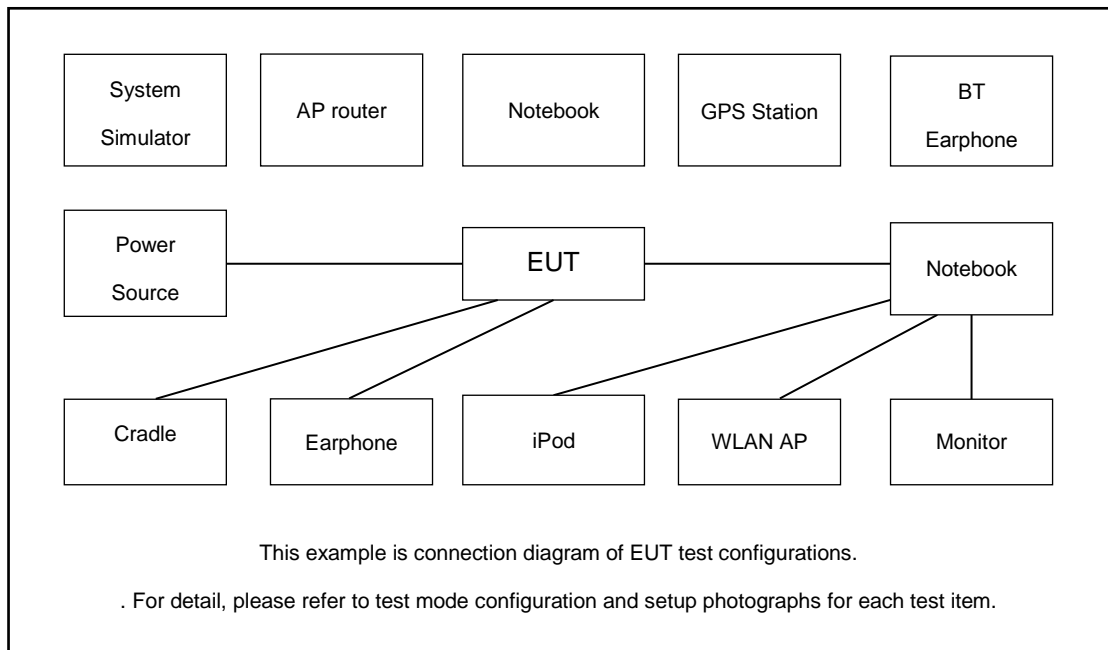



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	SonyEricsson	MW600	PY700A2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,1.8m
4.	NOTE BOOK	Dell	Latitude E6320	FCC DoC	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m	Unshielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN 5GHz test items, an engineering test program was provided and enabled to make EUT transmitting and receiving signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.



3.1.4 Test Setup

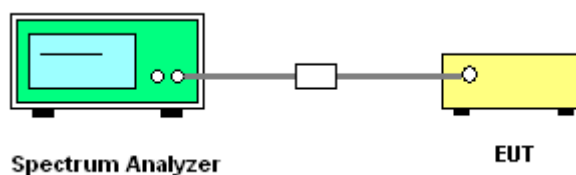




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

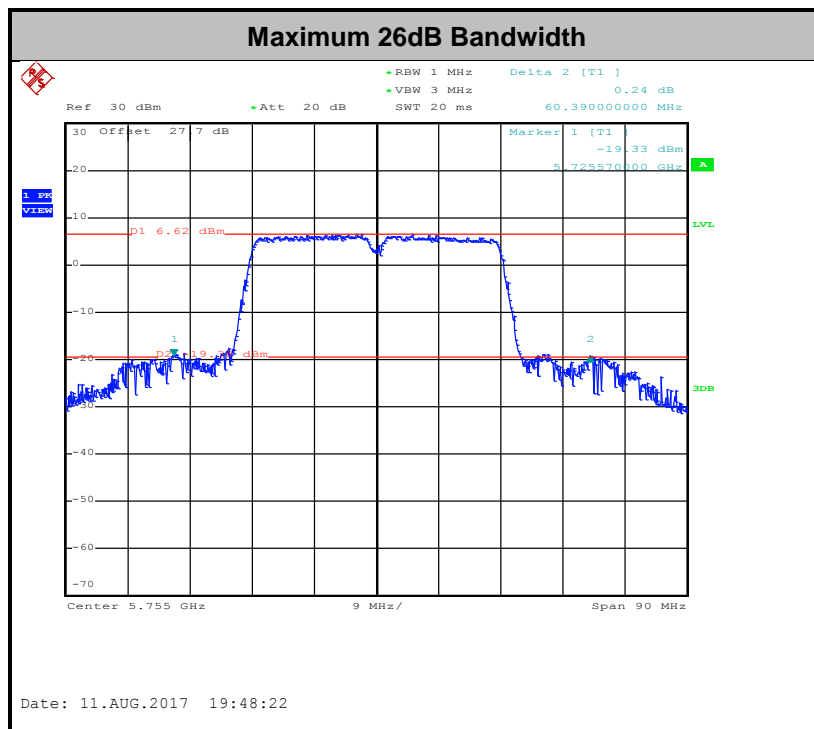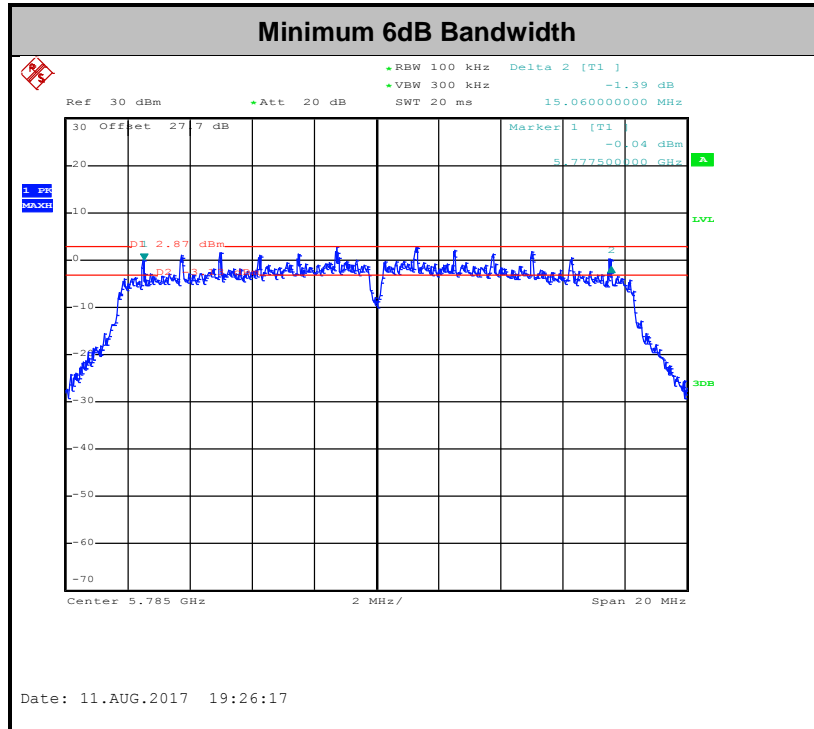

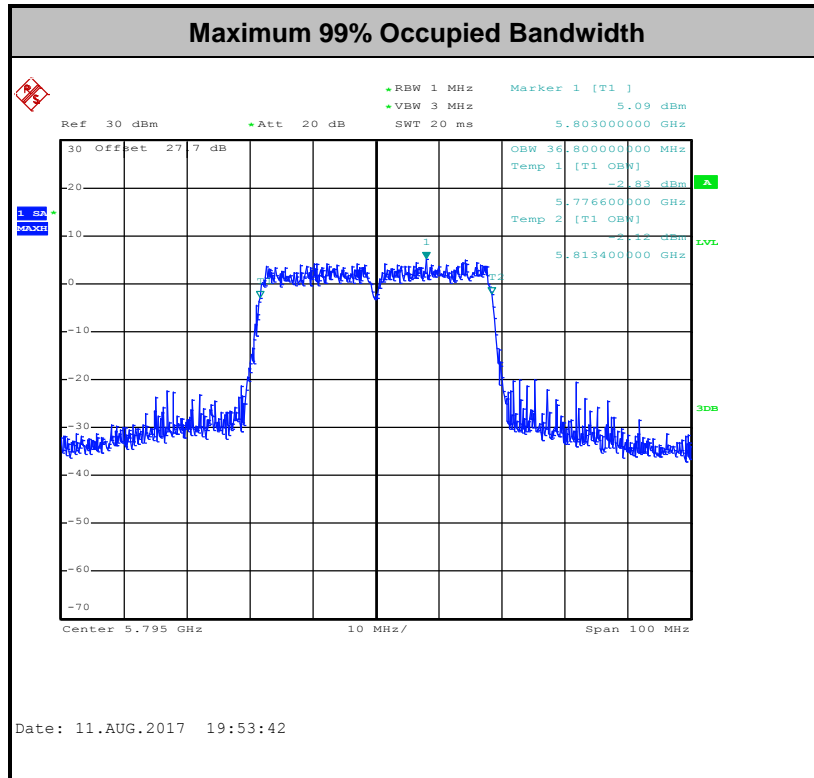

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

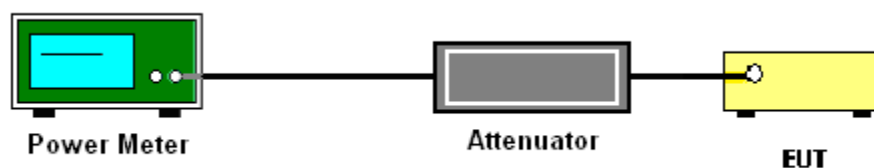

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

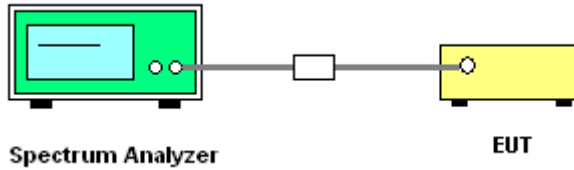

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

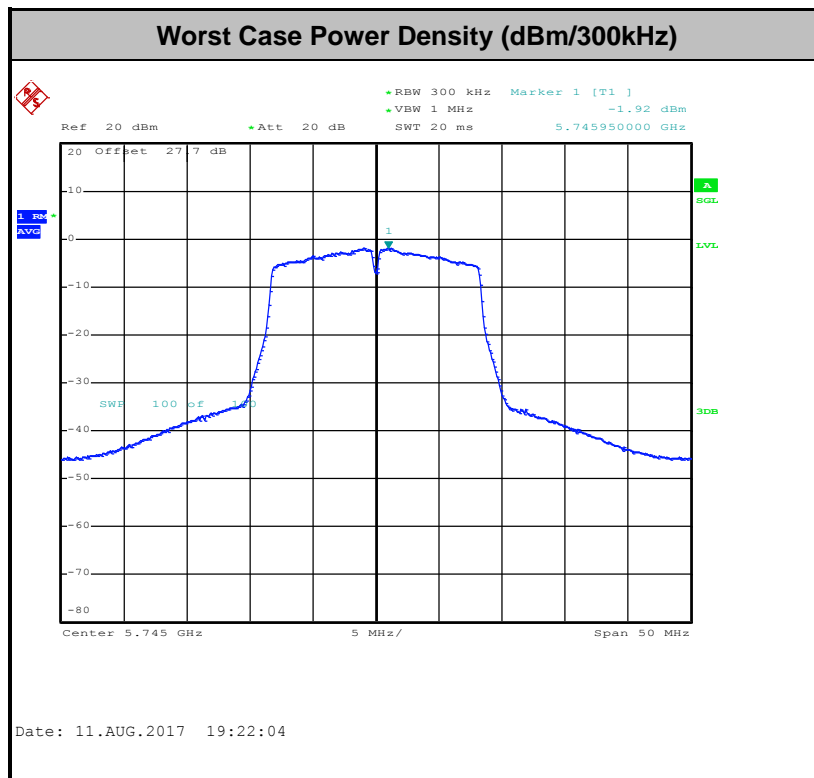



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBµV/m)
-17	78.3
- 27	68.3

(3) KDB789033 D01 v01r04 G)2)c)

- (i) Section 15.407(b)(1) to (b)(3) specify the unwanted emission limits for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³
- (ii) Section 15.407(b)(4) specifies the unwanted emission limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are in terms of a Peak detector. An alternative to the band emissions mask is specified in Section 15.407(b)(4)(ii). The alternative limits are based on the highest antenna gain specified in the filing. There are also marketing and importation restrictions for the devices using the alternative limit.⁴

Note 3: An out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

Note 4: Only devices with antenna gains of 10 dBi or less may be approved using the emission limits specified in Section 15.247(d) till March 2, 2018; all other devices operating in this band must use the mask specified in Section 15.407(b)(4)(i).



3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

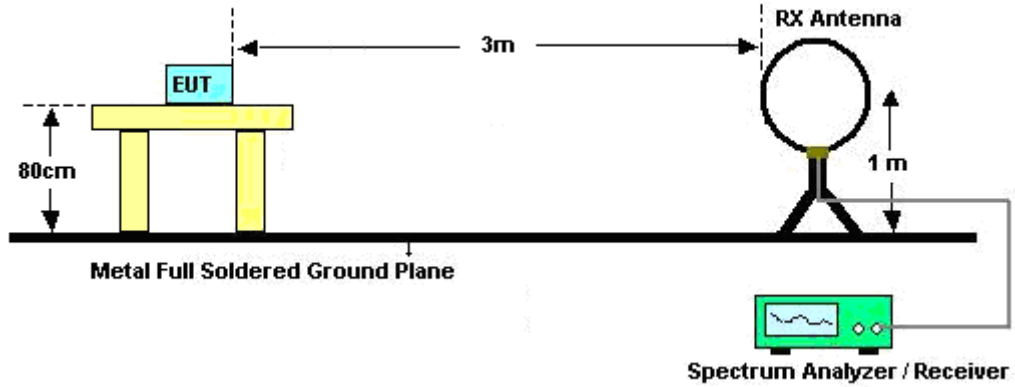

For radiated emissions from 30MHz to 1GHz

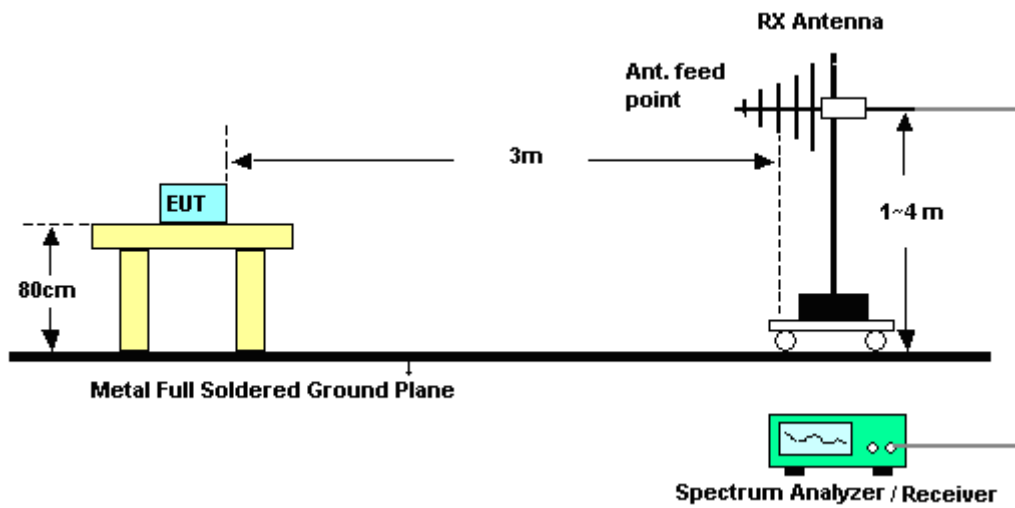

For radiated emissions above 1GHz

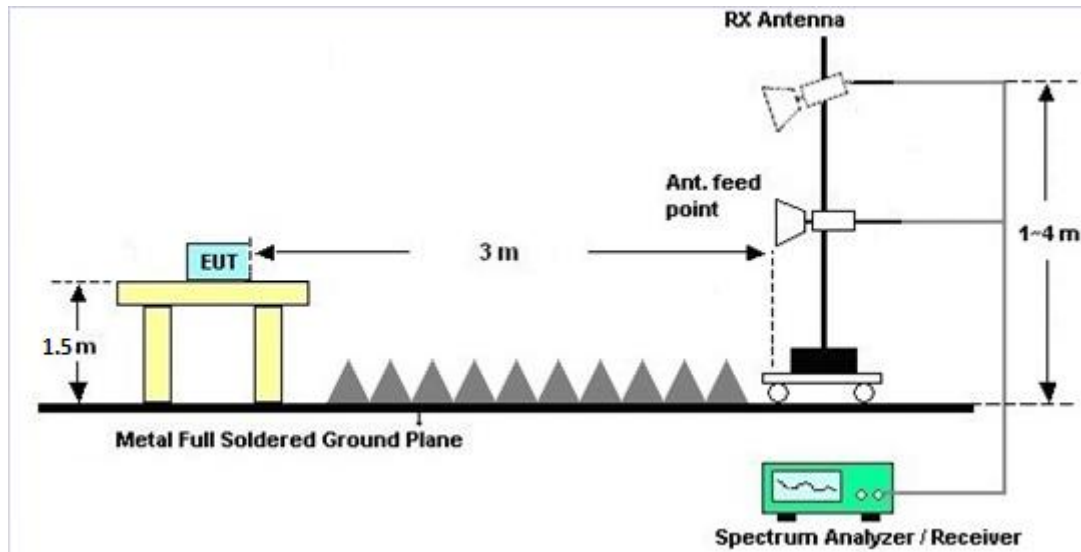

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup



3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

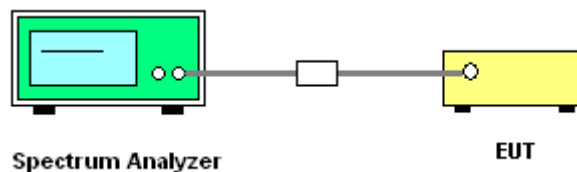

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	300MHz~40GHz	Sep. 29, 2016	Jul. 26, 2017 ~ Aug. 11, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz	Sep. 29, 2016	Jul. 26, 2017 ~ Aug. 11, 2017	Sep. 28, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 25, 2016	Jul. 26, 2017 ~ Aug. 11, 2017	Nov. 24, 2017	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40°C ~90°C	Sep. 01, 2016	Jul. 26, 2017 ~ Aug. 11, 2017	Aug. 31, 2017	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 11, 2016	Jul. 26, 2017 ~ Aug. 11, 2017	Oct. 10, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 03, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Aug. 03, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Aug. 03, 2017	Nov. 28, 2017	Conduction (CO05-HY)
Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 21, 2017	Aug. 01, 2017 ~ Aug. 02, 2017	Jul. 20, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Aug. 01, 2017 ~ Aug. 02, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N 0602	30MHz~1GHz	Oct. 15, 2016	Aug. 01, 2017 ~ Aug. 02, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 07, 2016	Aug. 01, 2017 ~ Aug. 02, 2017	Oct. 06, 2017	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Oct. 20, 2016	Aug. 01, 2017 ~ Aug. 02, 2017	Oct. 19, 2018	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2016	Aug. 01, 2017 ~ Aug. 02, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1902247	1GHz~18GHz	Jun. 23, 2017	Aug. 01, 2017 ~ Aug. 02, 2017	Jun. 22, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 12, 2016	Aug. 01, 2017 ~ Aug. 02, 2017	Oct. 11, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Aug. 01, 2017 ~ Aug. 02, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Aug. 01, 2017 ~ Aug. 02, 2017	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290053	20Hz to 26.5GHz	Jan. 12, 2017	Aug. 01, 2017 ~ Aug. 02, 2017	Jan. 11, 2018	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Nov. 08, 2016	Aug. 01, 2017 ~ Aug. 02, 2017	Nov. 07, 2017	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.70
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
---	------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50
---	------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
---	------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2017/7/26~2017/08/11	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	17.3	23.4	15.38	0.5	Pass
11a	6Mbps	1	157	5785	17.5	26.6	15.06	0.5	Pass
11a	6Mbps	1	165	5825	17.2	25.2	15.06	0.5	Pass
HT20	MCS 0	1	149	5745	18.45	23.5	17.54	0.5	Pass
HT20	MCS 0	1	157	5785	18.4	25.25	17.52	0.5	Pass
HT20	MCS 0	1	165	5825	18.4	29.05	17.58	0.5	Pass
HT40	MCS 0	1	151	5755	36.7	60.39	35.8	0.5	Pass
HT40	MCS 0	1	159	5795	36.8	54.63	36.04	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.12	13.73	30.00	-1.69		Pass
11a	6Mbps	1	157	5785	0.12	13.97	30.00	-1.69		Pass
11a	6Mbps	1	165	5825	0.12	13.72	30.00	-1.69		Pass
HT20	MCS 0	1	149	5745	0.16	12.67	30.00	-1.69		Pass
HT20	MCS 0	1	157	5785	0.16	12.72	30.00	-1.69		Pass
HT20	MCS 0	1	165	5825	0.16	12.99	30.00	-1.69		Pass
HT40	MCS 0	1	151	5755	0.26	12.82	30.00	-1.69		Pass
HT40	MCS 0	1	159	5795	0.26	12.60	30.00	-1.69		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.12	2.22	0.42	30.00	-1.69	Pass
11a	6Mbps	1	157	5785	0.12	2.22	0.16	30.00	-1.69	Pass
11a	6Mbps	1	165	5825	0.12	2.22	0.29	30.00	-1.69	Pass
HT20	MCS 0	1	149	5745	0.16	2.22	-2.47	30.00	-1.69	Pass
HT20	MCS 0	1	157	5785	0.16	2.22	-2.40	30.00	-1.69	Pass
HT20	MCS 0	1	165	5825	0.16	2.22	-1.88	30.00	-1.69	Pass
HT40	MCS 0	1	151	5755	0.26	2.22	-4.78	30.00	-1.69	Pass
HT40	MCS 0	1	159	5795	0.26	2.22	-5.35	30.00	-1.69	Pass

TEST RESULTS DATA
Frequency Stability

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6M bps	1	149	5745	5745.050	0.050	8.70	50	4	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	-30	4	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	4.4	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	3.6	
11a	6M bps	1	149	5745	5745.000	0.000	0.00	20	4	




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Shareef Yu	Temperature :	26~27°C
		Relative Humidity :	50~56%

EUT Information

Report NO : 760506-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

ENV216 Auto Test FCC Power Bar - L

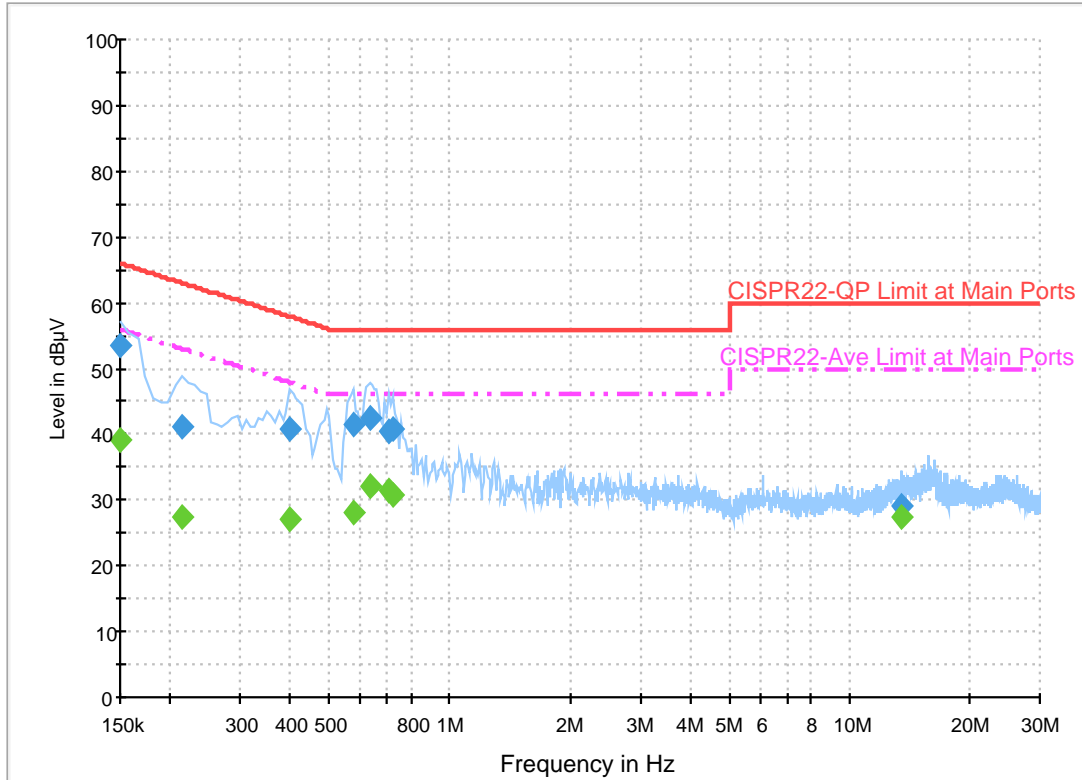

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	53.6	Off	L1	19.6	12.4	66.0
0.214000	41.2	Off	L1	19.6	21.8	63.0
0.398000	40.7	Off	L1	19.6	17.2	57.9
0.574000	41.5	Off	L1	19.6	14.5	56.0
0.630000	42.5	Off	L1	19.6	13.5	56.0
0.702000	40.3	Off	L1	19.6	15.7	56.0
0.718000	40.8	Off	L1	19.6	15.2	56.0
13.558000	29.0	Off	L1	20.2	31.0	60.0


Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	39.1	Off	L1	19.6	16.9	56.0
0.214000	27.4	Off	L1	19.6	25.6	53.0
0.398000	27.0	Off	L1	19.6	20.9	47.9
0.574000	28.1	Off	L1	19.6	17.9	46.0
0.630000	32.3	Off	L1	19.6	13.7	46.0
0.702000	31.4	Off	L1	19.6	14.6	46.0
0.718000	30.8	Off	L1	19.6	15.2	46.0
13.558000	27.4	Off	L1	20.2	22.6	50.0

EUT Information

Report NO : 760506-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

ENV216 Auto Test FCC Power Bar - N

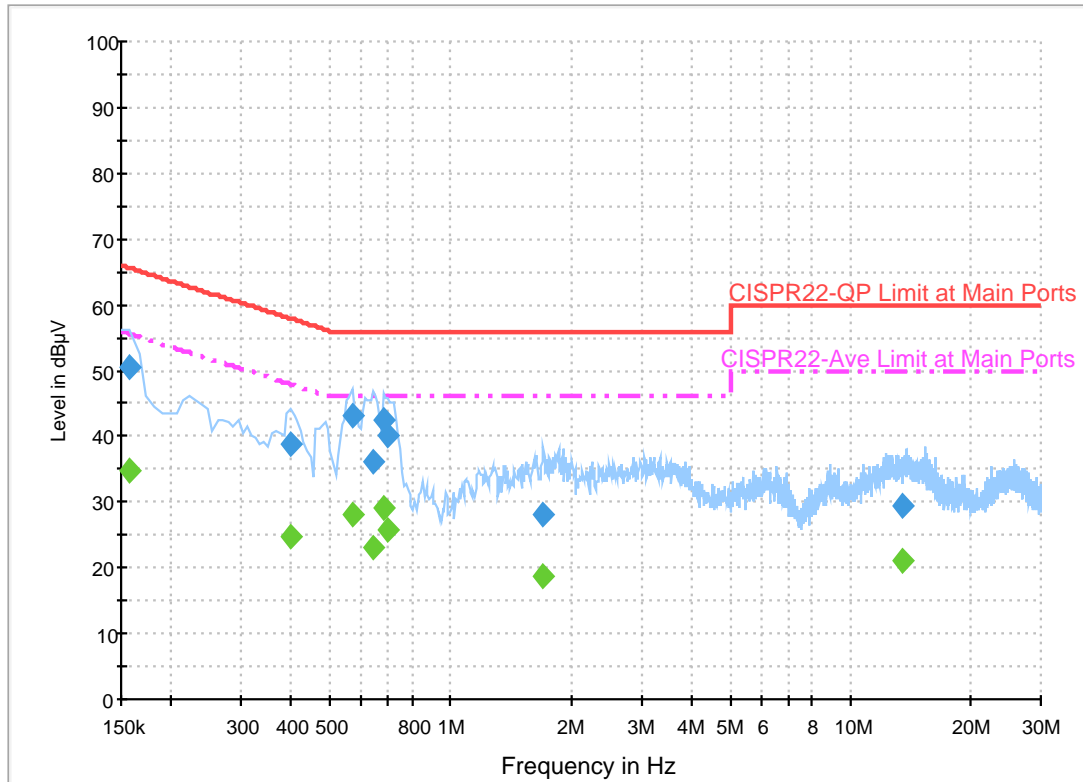

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	50.6	Off	N	19.5	15.0	65.6
0.398000	38.9	Off	N	19.5	19.0	57.9
0.566000	43.0	Off	N	19.5	13.0	56.0
0.638000	36.2	Off	N	19.5	19.8	56.0
0.678000	42.5	Off	N	19.5	13.5	56.0
0.694000	40.2	Off	N	19.5	15.8	56.0
1.710000	28.0	Off	N	19.6	28.0	56.0
13.558000	29.5	Off	N	20.2	30.5	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.158000	34.8	Off	N	19.5	20.8	55.6
0.398000	24.8	Off	N	19.5	23.1	47.9
0.566000	28.0	Off	N	19.5	18.0	46.0
0.638000	23.2	Off	N	19.5	22.8	46.0
0.678000	29.0	Off	N	19.5	17.0	46.0
0.694000	25.8	Off	N	19.5	20.2	46.0
1.710000	18.8	Off	N	19.6	27.2	46.0
13.558000	21.0	Off	N	20.2	29.0	50.0



Appendix C. Radiated Spurious Emission

Test Engineer :	J.C. Liang, Jacky Huang and Ken Wu	Temperature :	24~26°C
		Relative Humidity :	50~55%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 149 5745MHz		5635.8	49.96	-18.24	68.2	40.72	32.73	9.61	33.1	100	4	P	H	
		5686.8	53.35	-42.11	95.46	43.86	32.86	9.75	33.12	100	4	P	H	
		5716.6	54.64	-55.21	109.85	45.06	32.9	9.81	33.13	100	4	P	H	
		5724.6	63.88	-57.41	121.29	54.26	32.94	9.81	33.13	100	4	P	H	
	*	5745	105.06	-	-	95.35	32.98	9.88	33.15	100	4	P	H	
	*	5745	97.99	-	-	88.28	32.98	9.88	33.15	100	4	A	H	
														H
														H
			5646.8	52.13	-16.07	68.2	42.89	32.73	9.61	33.1	102	245	P	V
			5691	56.72	-41.84	98.56	47.23	32.86	9.75	33.12	102	245	P	V
			5717.4	59.15	-50.92	110.07	49.57	32.9	9.81	33.13	102	245	P	V
			5725	75.28	-46.92	122.2	65.66	32.94	9.81	33.13	102	245	P	V
	*	5745	109.94	-	-	100.23	32.98	9.88	33.15	102	245	P	V	
	*	5745	102.39	-	-	92.68	32.98	9.88	33.15	102	245	A	V	
														V
													V	



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5624.4	50.64	-17.56	68.2	41.48	32.69	9.55	33.08	100	2	P	H
		5698	51.24	-52.49	103.73	41.75	32.86	9.75	33.12	100	2	P	H
		5705	53.74	-52.86	106.6	44.16	32.9	9.81	33.13	100	2	P	H
		5723.6	52.93	-66.08	119.01	43.31	32.94	9.81	33.13	100	2	P	H
	*	5785	105.93	-	-	96.03	33.06	10.01	33.17	100	2	P	H
	*	5785	98.89	-	-	88.99	33.06	10.01	33.17	100	2	A	H
		5853	50.9	-64.46	115.36	40.84	33.23	10.02	33.19	100	2	P	H
		5867.8	50.6	-56.61	107.21	40.52	33.27	10.02	33.21	100	2	P	H
		5883	50.99	-48.27	99.26	40.87	33.31	10.02	33.21	100	2	P	H
		5935	50.09	-18.11	68.2	39.88	33.43	10.02	33.24	100	2	P	H
													H
													H
802.11a													
CH 157													
5785MHz		5628.8	52.45	-15.75	68.2	43.25	32.69	9.61	33.1	102	239	P	V
		5693.2	54	-46.19	100.19	44.51	32.86	9.75	33.12	102	239	P	V
		5716.8	56.16	-53.75	109.91	46.58	32.9	9.81	33.13	102	239	P	V
		5723.6	54.99	-64.02	119.01	45.37	32.94	9.81	33.13	102	239	P	V
	*	5785	109.9	-	-	100	33.06	10.01	33.17	102	239	P	V
	*	5785	102.5	-	-	92.6	33.06	10.01	33.17	102	239	A	V
		5853.8	51.37	-62.17	113.54	41.27	33.27	10.02	33.19	102	239	P	V
		5858.2	54.73	-55.17	109.9	44.65	33.27	10.02	33.21	102	239	P	V
		5885.8	53.18	-44	97.18	43.07	33.31	10.02	33.22	102	239	P	V
		5936.6	50.1	-18.1	68.2	39.89	33.43	10.02	33.24	102	239	P	V
													V
													V



WiFi Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 165 5825MHz	*	5825	105.53	-	-	95.5	33.19	10.02	33.18	102	1	P	H	
	*	5825	98.38	-	-	88.35	33.19	10.02	33.18	102	1	A	H	
		5850.6	56.69	-64.14	120.83	46.63	33.23	10.02	33.19	102	1	P	H	
		5869.8	54.49	-52.16	106.65	44.41	33.27	10.02	33.21	102	1	P	H	
		5883.8	51.74	-46.93	98.67	41.63	33.31	10.02	33.22	102	1	P	H	
		5930.8	49.8	-18.4	68.2	39.58	33.43	10.02	33.23	102	1	P	H	
														H
														H
	*	5825	109.59	-	-	99.56	33.19	10.02	33.18	110	241	P	V	
	*	5825	102.12	-	-	92.09	33.19	10.02	33.18	110	241	A	V	
		5850.6	56.22	-64.61	120.83	46.16	33.23	10.02	33.19	110	241	P	V	
		5869.4	54.7	-52.07	106.77	44.62	33.27	10.02	33.21	110	241	P	V	
		5877.6	54.18	-49.09	103.27	44.06	33.31	10.02	33.21	110	241	P	V	
		5932.8	50.03	-18.17	68.2	39.81	33.43	10.02	33.23	110	241	P	V	
														V
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	47.34	-26.66	74	56.13	38.52	15.44	63.03	100	0	P	H
		17235	62.54	-5.66	68.2	63.25	40.76	19.24	61.07	100	0	P	H
													H
													H
		11490	46.76	-27.24	74	55.55	38.52	15.44	63.03	100	0	P	V
		17235	62.48	-5.72	68.2	63.19	40.76	19.24	61.07	100	0	P	V
													V
													V
802.11a CH 157 5785MHz		11570	45.86	-28.14	74	54.45	38.56	15.49	62.92	100	0	P	H
		17355	63.6	-4.6	68.2	63.48	40.69	19.31	60.25	100	0	P	H
													H
													H
		11570	46.34	-27.66	74	54.93	38.56	15.49	62.92	100	0	P	V
		17355	63.55	-4.65	68.2	63.43	40.69	19.31	60.25	100	0	P	V
													V
													V
802.11a CH 165 5825MHz		11650	45.79	-28.21	74	54.17	38.61	15.56	62.83	100	0	P	H
		17475	64.47	-3.73	68.2	63.53	40.62	19.37	59.43	100	0	P	H
													H
													H
		11650	45.93	-28.07	74	54.31	38.61	15.56	62.83	100	0	P	V
		17475	63.48	-4.72	68.2	62.54	40.62	19.37	59.43	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 149 5745MHz		5628	49.4	-18.8	68.2	40.18	32.69	9.61	33.08	100	2	P	H	
		5693.4	51.3	-49.03	100.33	41.81	32.86	9.75	33.12	100	2	P	H	
		5715	52.57	-56.83	109.4	42.99	32.9	9.81	33.13	100	2	P	H	
		5722.6	62.3	-54.43	116.73	52.68	32.94	9.81	33.13	100	2	P	H	
	*	5745	102.49	-	-	92.78	32.98	9.88	33.15	100	2	P	H	
	*	5745	94.95	-	-	85.24	32.98	9.88	33.15	100	2	A	H	
														H
														H
			5627.6	49.85	-18.35	68.2	40.63	32.69	9.61	33.08	104	238	P	V
			5676.8	53.62	-34.45	88.07	44.24	32.81	9.68	33.11	104	238	P	V
			5719.6	58.52	-52.17	110.69	48.9	32.94	9.81	33.13	104	238	P	V
			5723.8	68.66	-50.8	119.46	59.04	32.94	9.81	33.13	104	238	P	V
	*		5745	106.38	-	-	96.67	32.98	9.88	33.15	104	238	P	V
	*		5745	99.1	-	-	89.39	32.98	9.88	33.15	104	238	A	V
														V
													V	



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5630.6	49.43	-18.77	68.2	40.23	32.69	9.61	33.1	100	2	P	H
		5692.6	51.05	-48.69	99.74	41.56	32.86	9.75	33.12	100	2	P	H
		5715	52.07	-57.33	109.4	42.49	32.9	9.81	33.13	100	2	P	H
		5723.4	50.95	-67.6	118.55	41.33	32.94	9.81	33.13	100	2	P	H
	*	5785	102.63	-	-	92.73	33.06	10.01	33.17	100	2	P	H
	*	5785	95.24	-	-	85.34	33.06	10.01	33.17	100	2	A	H
		5852.4	49.36	-67.37	116.73	39.3	33.23	10.02	33.19	100	2	P	H
		5875	51.28	-53.92	105.2	41.16	33.31	10.02	33.21	100	2	P	H
		5875	51.28	-53.92	105.2	41.16	33.31	10.02	33.21	100	2	P	H
		5943.4	50.43	-17.77	68.2	40.17	33.48	10.02	33.24	100	2	P	H
802.11n													H
HT20													H
CH 157		5632.2	52.96	-15.24	68.2	43.76	32.69	9.61	33.1	106	239	P	V
5785MHz		5689.2	52.88	-44.36	97.24	43.39	32.86	9.75	33.12	106	239	P	V
		5714.8	53.55	-55.8	109.35	43.97	32.9	9.81	33.13	106	239	P	V
		5720.6	53.9	-58.27	112.17	44.28	32.94	9.81	33.13	106	239	P	V
	*	5785	106.64	-	-	96.74	33.06	10.01	33.17	106	239	P	V
	*	5785	99.36	-	-	89.46	33.06	10.01	33.17	106	239	A	V
		5854.2	50.95	-61.67	112.62	40.85	33.27	10.02	33.19	106	239	P	V
		5860.8	53.38	-55.79	109.17	43.3	33.27	10.02	33.21	106	239	P	V
		5886.8	51.5	-44.94	96.44	41.39	33.31	10.02	33.22	106	239	P	V
		5926.2	50.36	-17.84	68.2	40.14	33.43	10.02	33.23	106	239	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11n HT20 CH 165 5825MHz	*	5825	102.65	-	-	92.62	33.19	10.02	33.18	100	1	P	H	
	*	5825	94.83	-	-	84.8	33.19	10.02	33.18	100	1	A	H	
		5851	54.16	-65.76	119.92	44.1	33.23	10.02	33.19	100	1	P	H	
		5861.6	52.42	-56.53	108.95	42.34	33.27	10.02	33.21	100	1	P	H	
		5895.2	52.33	-37.88	90.21	42.18	33.35	10.02	33.22	100	1	P	H	
		5939.4	50.45	-17.75	68.2	40.19	33.48	10.02	33.24	100	1	P	H	
														H
														H
	*	5825	106.61	-	-	96.58	33.19	10.02	33.18	108	241	P	V	
	*	5825	99.1	-	-	89.07	33.19	10.02	33.18	108	241	A	V	
		5850.6	54.99	-65.84	120.83	44.93	33.23	10.02	33.19	108	241	P	V	
		5870	54.11	-52.49	106.6	44.03	33.27	10.02	33.21	108	241	P	V	
		5875.4	52.46	-52.44	104.9	42.34	33.31	10.02	33.21	108	241	P	V	
		5931	51.23	-16.97	68.2	41.01	33.43	10.02	33.23	108	241	P	V	
														V
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5622.6	50.29	-17.91	68.2	41.13	32.69	9.55	33.08	100	2	P	H
		5671.6	51.2	-33.02	84.22	41.82	32.81	9.68	33.11	100	2	P	H
		5718	68.85	-41.39	110.24	59.23	32.94	9.81	33.13	100	2	P	H
		5721.8	65.6	-49.3	114.9	55.98	32.94	9.81	33.13	100	2	P	H
	*	5755	99.79	-	-	90.04	33.02	9.88	33.15	100	2	P	H
	*	5755	92.34	-	-	82.59	33.02	9.88	33.15	100	2	A	H
		5854	50.08	-63	113.08	39.98	33.27	10.02	33.19	100	2	P	H
		5859.6	50.67	-58.84	109.51	40.59	33.27	10.02	33.21	100	2	P	H
		5907.2	50.88	-30.46	81.34	40.69	33.39	10.02	33.22	100	2	P	H
		5947	50.45	-17.75	68.2	40.19	33.48	10.02	33.24	100	2	P	H
													H
													H
802.11n HT40 CH 151 5755MHz		5607	50.83	-17.37	68.2	41.71	32.65	9.55	33.08	102	240	P	V
		5694	59.13	-41.65	100.78	49.64	32.86	9.75	33.12	102	240	P	V
		5718.6	72.99	-37.42	110.41	63.37	32.94	9.81	33.13	102	240	P	V
		5724	72.12	-47.8	119.92	62.5	32.94	9.81	33.13	102	240	P	V
	*	5755	104.74	-	-	94.99	33.02	9.88	33.15	102	240	P	V
	*	5755	97.04	-	-	87.29	33.02	9.88	33.15	102	240	A	V
		5850.4	50.39	-70.9	121.29	40.33	33.23	10.02	33.19	102	240	P	V
		5868	50.7	-56.46	107.16	40.62	33.27	10.02	33.21	102	240	P	V
		5915.2	52.02	-23.41	75.43	41.84	33.39	10.02	33.23	102	240	P	V
		5929.4	50.35	-17.85	68.2	40.13	33.43	10.02	33.23	102	240	P	V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		5635.8	50.92	-17.28	68.2	41.68	32.73	9.61	33.1	100	3	P	H
		5656	50.98	-21.68	72.66	41.64	32.77	9.68	33.11	100	3	P	H
		5717.4	51.42	-58.65	110.07	41.84	32.9	9.81	33.13	100	3	P	H
		5723	51.91	-65.73	117.64	42.29	32.94	9.81	33.13	100	3	P	H
	*	5795	99.79	-	-	89.85	33.1	10.01	33.17	100	3	P	H
	*	5795	92.41	-	-	82.47	33.1	10.01	33.17	100	3	A	H
		5854.6	50.94	-60.77	111.71	40.84	33.27	10.02	33.19	100	3	P	H
		5862	52.11	-56.73	108.84	42.03	33.27	10.02	33.21	100	3	P	H
		5886.2	51.53	-45.35	96.88	41.42	33.31	10.02	33.22	100	3	P	H
		5942	49.93	-18.27	68.2	39.67	33.48	10.02	33.24	100	3	P	H
802.11n													H
HT40													H
CH 159		5640	50.66	-17.54	68.2	41.42	32.73	9.61	33.1	100	240	P	V
5795MHz		5661.2	51.96	-24.56	76.52	42.62	32.77	9.68	33.11	100	240	P	V
		5705.8	53.04	-53.79	106.83	43.46	32.9	9.81	33.13	100	240	P	V
		5725	53.59	-68.61	122.2	43.97	32.94	9.81	33.13	100	240	P	V
	*	5795	104.6	-	-	94.66	33.1	10.01	33.17	100	240	P	V
	*	5795	96.67	-	-	86.73	33.1	10.01	33.17	100	240	A	V
		5855	52.46	-58.34	110.8	42.36	33.27	10.02	33.19	100	240	P	V
		5857.8	53.27	-56.74	110.01	43.19	33.27	10.02	33.21	100	240	P	V
		5911.2	51.26	-27.12	78.38	41.08	33.39	10.02	33.23	100	240	P	V
		5943.2	50.38	-17.82	68.2	40.12	33.48	10.02	33.24	100	240	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Emission below 1GHz
5GHz WIFI 802.11a (LF @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
5GHz 802.11a LF		62.94	23.6	-16.4	40	43.28	11.78	1.02	32.49	-	-	P	H	
		121.8	24.14	-19.36	43.5	37.54	17.51	1.51	32.46	-	-	P	H	
		164.46	29.27	-14.23	43.5	44.01	15.97	1.61	32.42	-	-	P	H	
		425.3	25.13	-20.87	46	31.95	22.84	2.63	32.34	-	-	P	H	
		736.8	30.22	-15.78	46	31.14	27.91	3.4	32.36	-	-	P	H	
		930	32.47	-13.53	46	29.88	29.98	3.82	31.38	100	0	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			45.39	32.53	-7.47	40	47.77	16.23	1.02	32.49	100	0	P	V
			62.67	28.29	-11.71	40	47.97	11.78	1.02	32.49	-	-	P	V
			130.44	25.68	-17.82	43.5	38.97	17.6	1.51	32.45	-	-	P	V
			617.8	27.81	-18.19	46	31.01	26.02	3.15	32.46	-	-	P	V
			741.7	29.75	-16.25	46	30.52	28.05	3.4	32.35	-	-	P	V
			946.8	33.65	-12.35	46	30.24	30.65	3.82	31.23	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	J.C. Liang, Jacky Huang and Ken Wu	Temperature :	24~26°C
		Relative Humidity :	50~55%

Note symbol



-L	Low channel location
-R	High channel location



Band 4 - 5725~5850MHz
WIFI 802.11a (Band Edge @ 3m)

Table with 2 columns: WIFI (Band 4 5725~5850MHz Band Edge @ 3m), ANT (802.11a CH149 5745MHz). Row 1: 1, Horizontal, Fundamental. Includes two spectral plots and technical details like Site, Condition, Detector, Project.

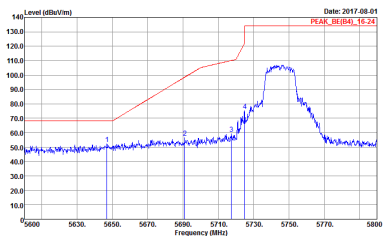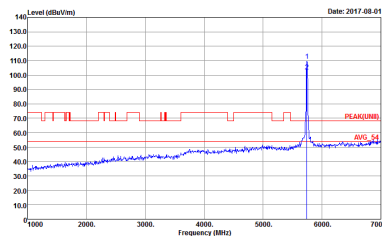

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_8E(84)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	 <p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 760506-01</p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(84)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>



**Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(U)1 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 760506-01</p>

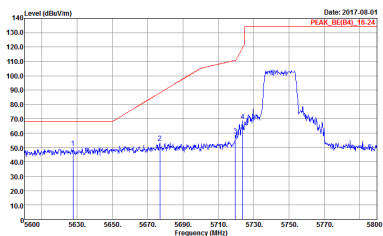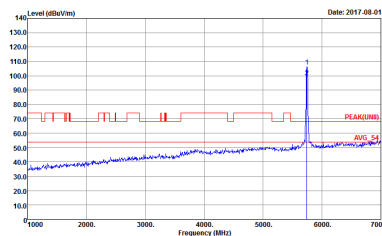

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	 <p>Date: 2017.08.01 PEAK_BE(B4)_16-24</p> <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	 <p>Date: 2017.08.01 PEAK_UNI</p> <p>Site : 03CH11-HY Condition : PEAK_UNI 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	Left blank





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>

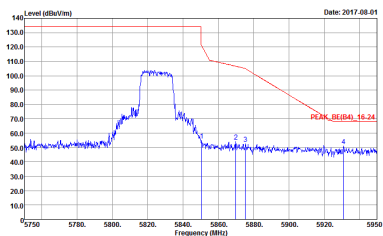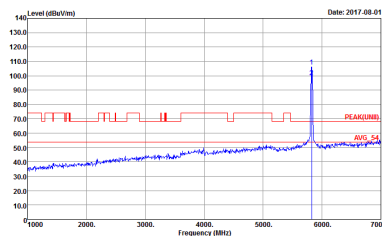

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	 <p>Site : 03CH11-HY Condition : PEAKUNIB 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>



**Band 4 5725~5850MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(LIN1) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 760506-01</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 760506-01</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	Left blank



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE(B4)_16-24 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 760506-01</p>	Left blank



Band 4 - 5725~5850MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNII) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 760506-01</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 91200-HF VERTICAL Detector : Peak Project : 760506-01</p>



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-HY Condition : PEAK(UNED) 3m HORN 9120D-HF VERTICAL Detector : Peak Project : 760506-01</p>



Emission below 1GHz
5GHz WIFI 802.11a (LF)


WIFI	5GHz 5725~5850MHz	
ANT	802.11a LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-4FY Condition : QP 3m BT-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 760506-01</p>	<p>Site : 03CH11-4FY Condition : QP 3m BT-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 760506-01</p>

Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11a	97.22	1400	0.71	1kHz
1	5GHz 802.11n HT20	96.3	1300	0.77	1kHz
1	5GHz 802.11n HT40	94.2	650	1.54	3kHz

<Ant. 1>


802.11a

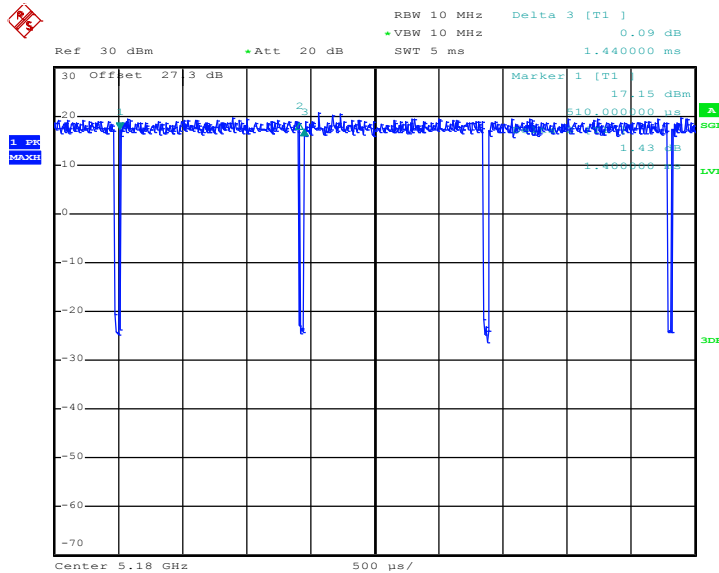

Date: 26.JUL.2017 22:29:35




802.11n HT20

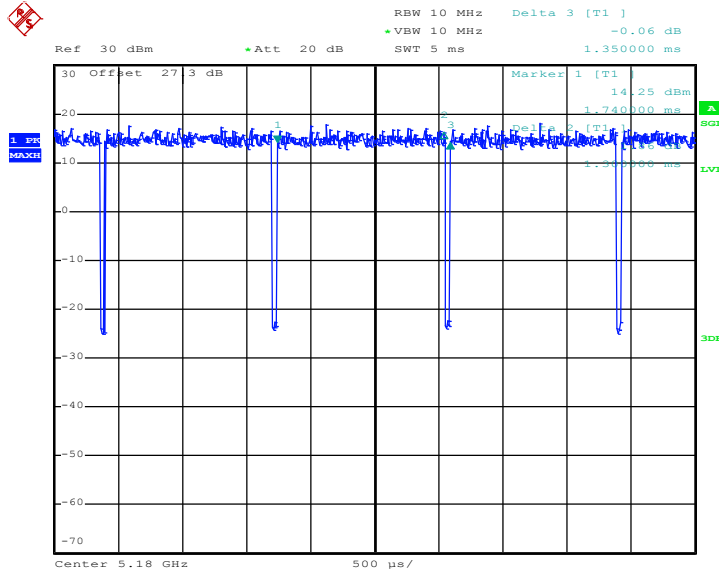

Date: 26.JUL.2017 23:12:13

802.11n HT40

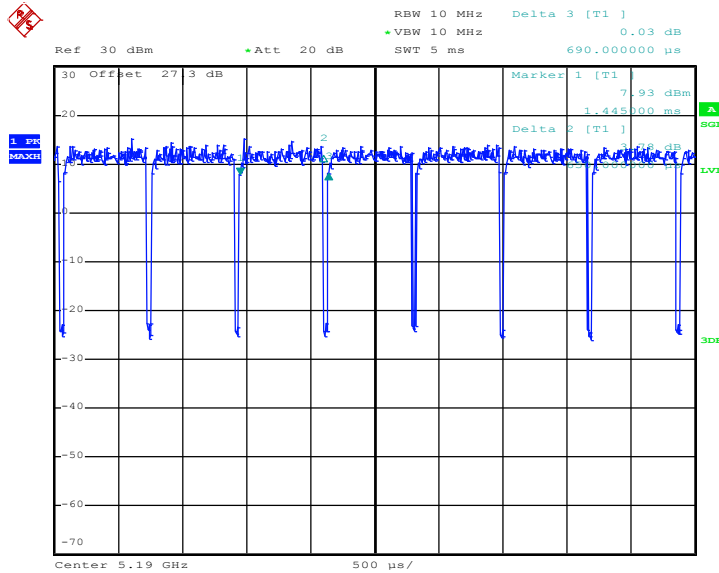

Date: 26.JUL.2017 23:48:35