

07_LTE Band 12_10M_QPSK_1RB_25Offset_Right Cheek_Ch23095


Communication System: UID 0, FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_200605 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 41.795$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23095/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.920 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 27.73 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.28 W/kg
SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.503 W/kg
Maximum value of SAR (measured) = 0.870 W/kg

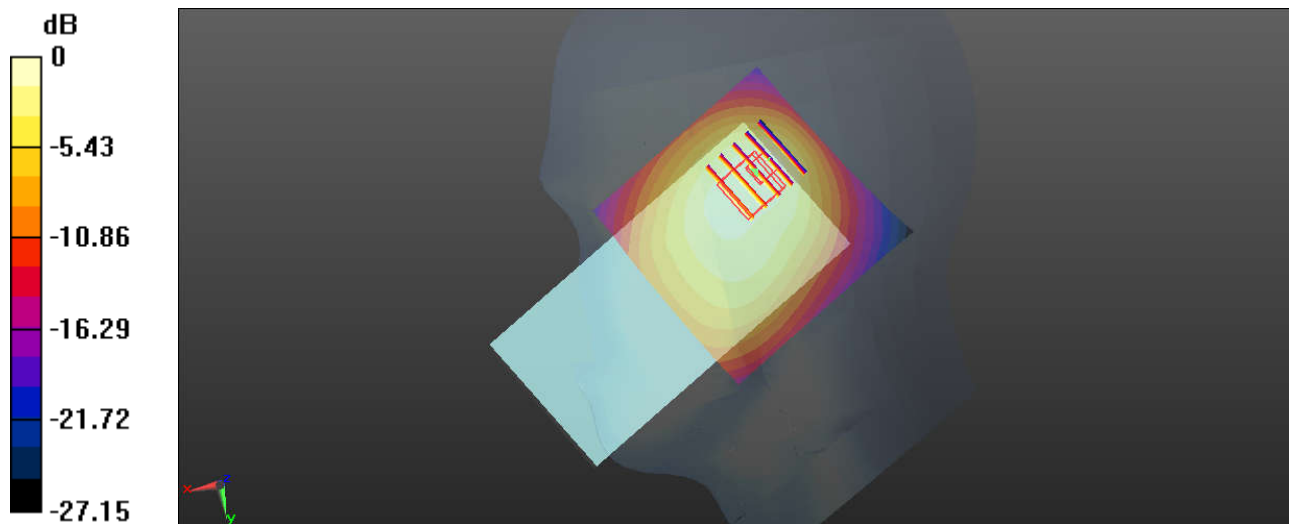

0 dB = 0.920 W/kg

08_LTE Band 13_10M_QPSK_1RB_0Offset_Right Cheek_Ch23230


Communication System: UID 0, FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750_200605 Medium parameters used: $f = 782$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23230/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.606 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.63 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.813 W/kg
SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.308 W/kg
Maximum value of SAR (measured) = 0.545 W/kg

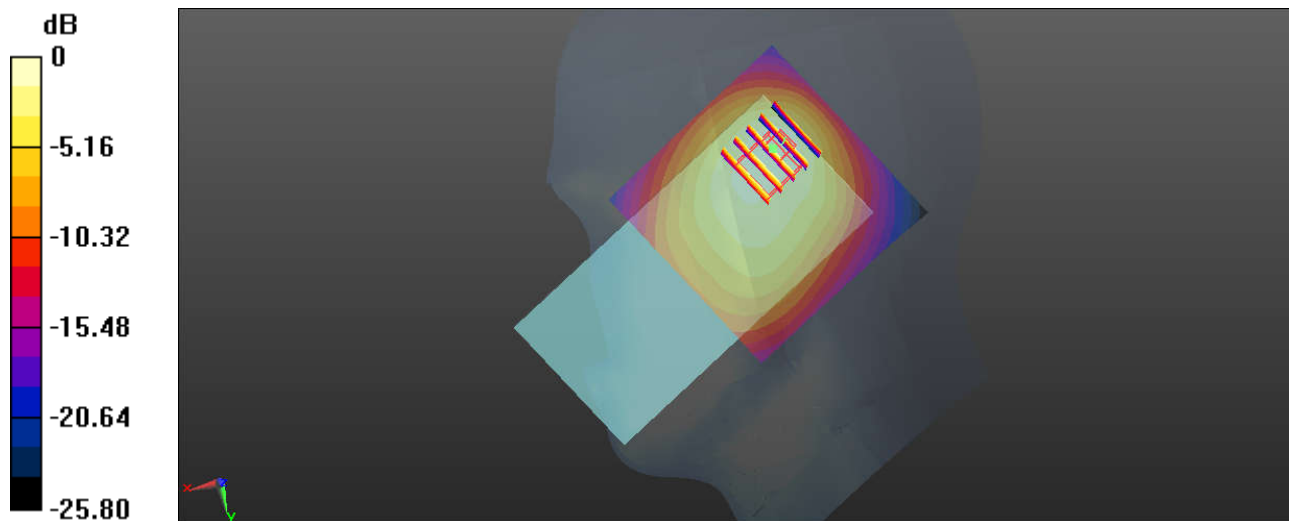

0 dB = 0.606 W/kg

09_LTE Band 14_10M_QPSK_1RB_25Offset_Right Cheek_Ch23330


Communication System: UID 0, FDD-LTE (0); Frequency: 793 MHz;Duty Cycle: 1:1
Medium: HSL_750_200605 Medium parameters used: $f = 793$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 39.972$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23330/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.539 W/kg

Ch23330/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.32 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.713 W/kg
SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.273 W/kg
Maximum value of SAR (measured) = 0.478 W/kg

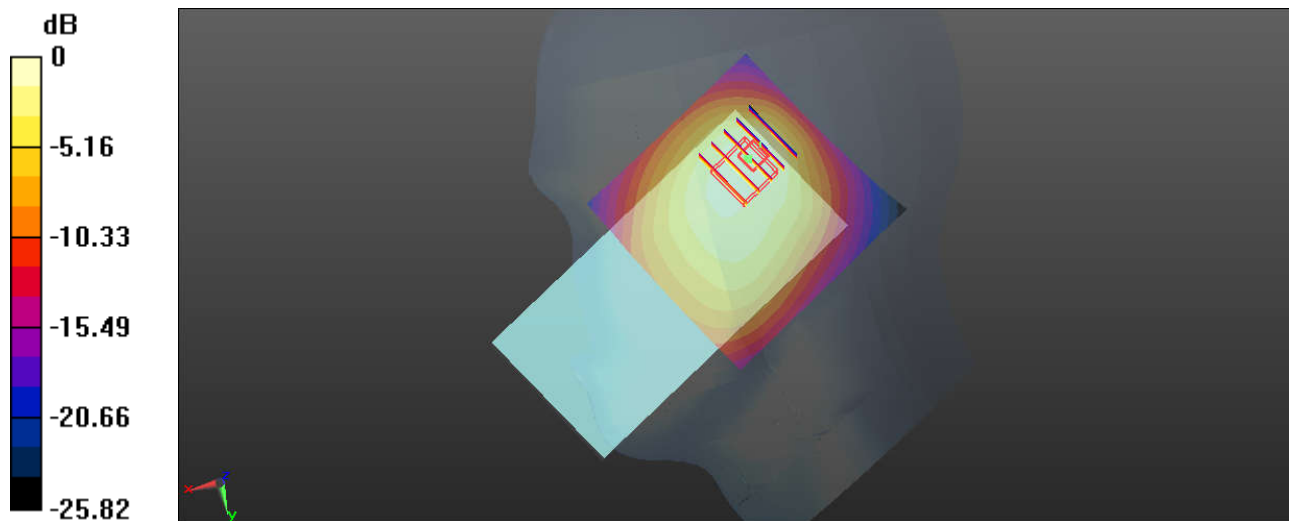

0 dB = 0.539 W/kg

10_LTE Band 26_15M_QPSK_1RB_37Offset_Right Cheek_Ch26965


Communication System: UID 0, FDD-LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_200606 Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.877$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.69, 9.69, 9.69); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26965/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.891 W/kg

Ch26965/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.02 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.407 W/kg
Maximum value of SAR (measured) = 0.766 W/kg

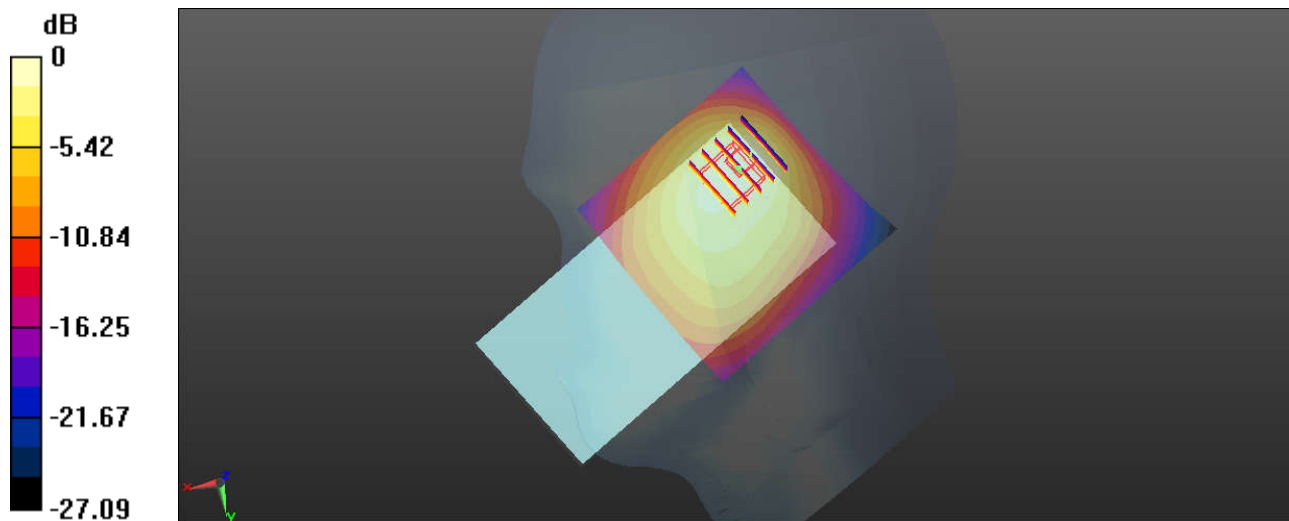

0 dB = 0.891 W/kg

11_LTE Band 5_10M_QPSK_1RB_25Offset_Right Cheek_Ch20525


Communication System: UID 0, FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_200606 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.974$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.69, 9.69, 9.69); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20525/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.748 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.71 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.01 W/kg
SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.357 W/kg
Maximum value of SAR (measured) = 0.658 W/kg

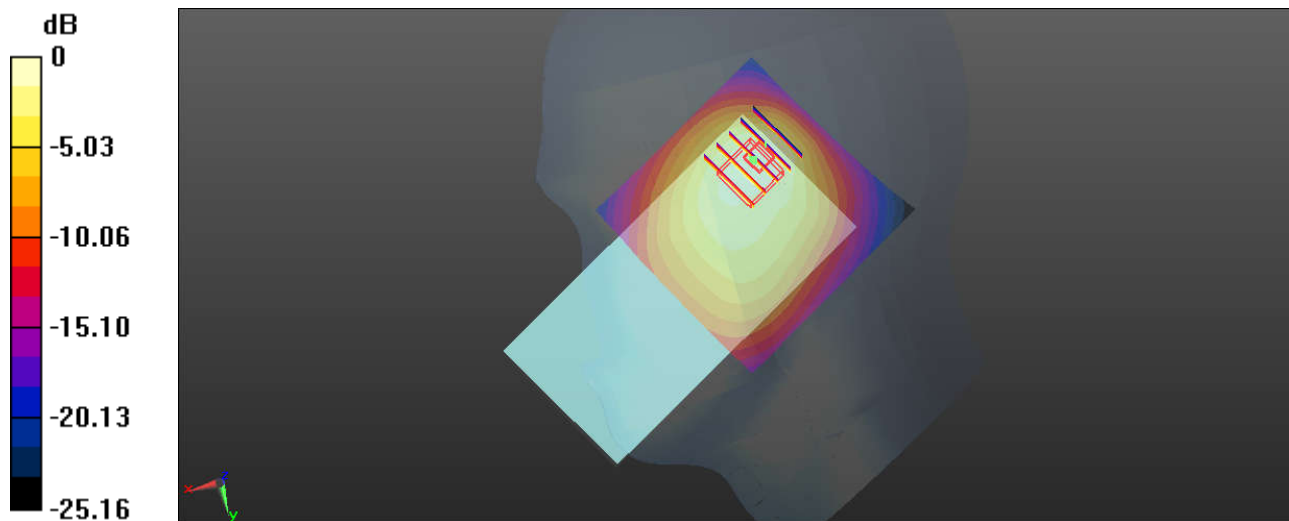

0 dB = 0.748 W/kg

12_LTE Band 66_20M_QPSK_1RB_49Offset_Right Cheek_Ch132572


Communication System: UID 0, FDD-LTE(0); Frequency: 1770 MHz; Duty Cycle: 1:1
Medium: HSL_1750_200618 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 40.464$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.62, 8.62, 8.62); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132572/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.03 W/kg

Ch132572/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.51 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.49 W/kg
SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.433 W/kg
Maximum value of SAR (measured) = 1.08 W/kg

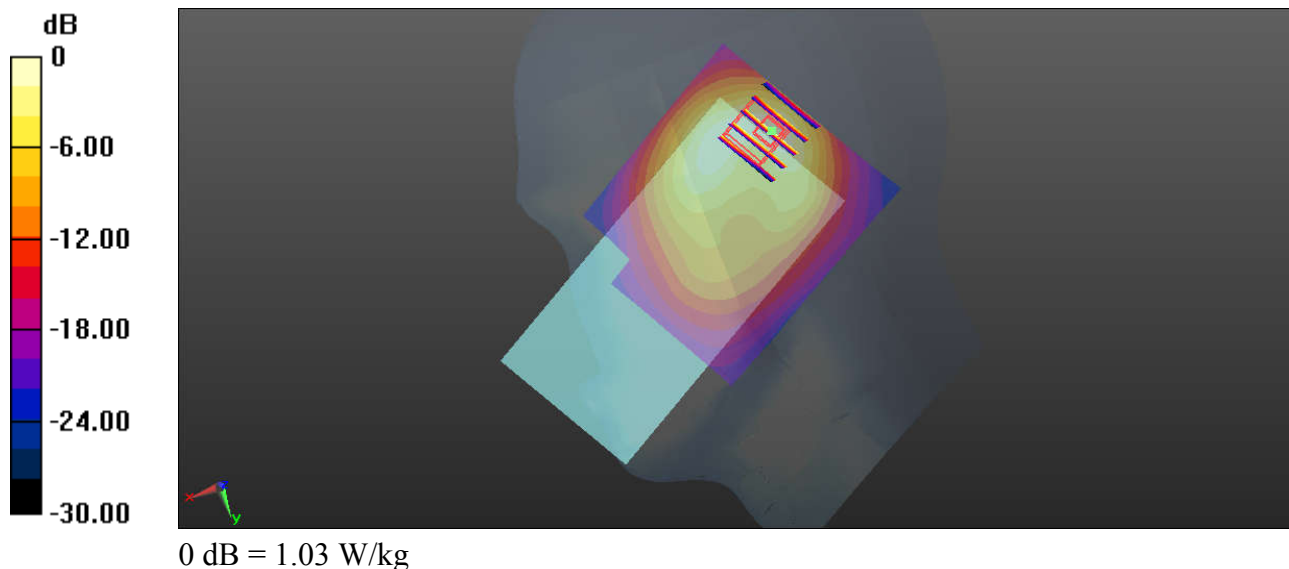

13_LTE Band 25_20M_QPSK_1RB_49Offset_Right Cheek_Ch26590


Communication System: UID 0, FDD-LTE(0); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium: HSL_1900_200617 Medium parameters used: $f = 1905$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 41.116$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.34, 8.34, 8.34); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26590/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.17 W/kg

Ch26590/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.59 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.69 W/kg
SAR(1 g) = 0.889 W/kg; SAR(10 g) = 0.432 W/kg
Maximum value of SAR (measured) = 1.17 W/kg

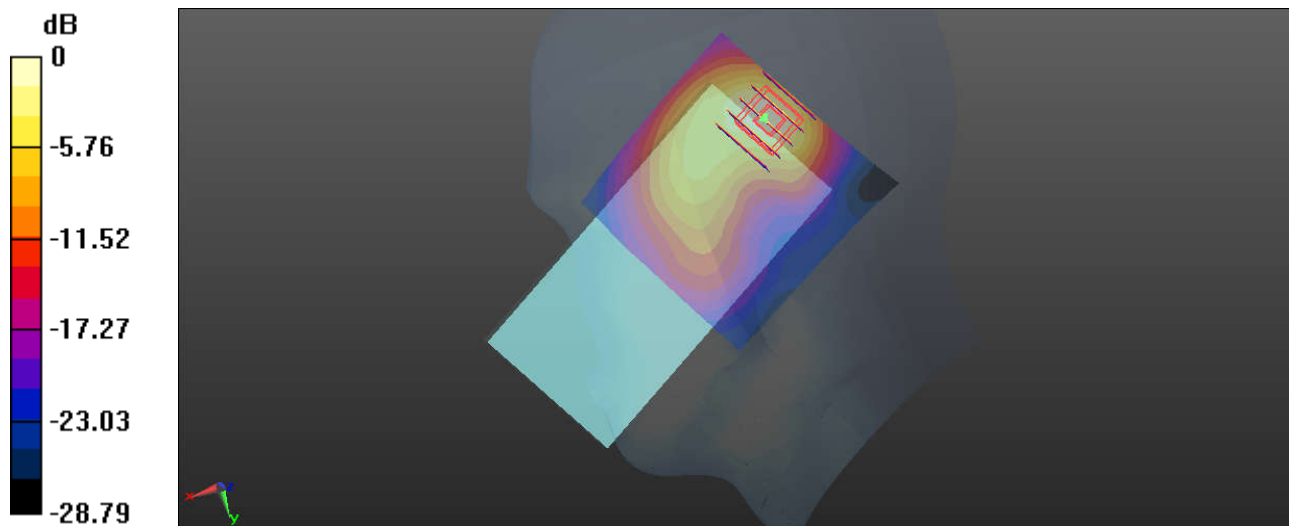

0 dB = 1.17 W/kg

14_LTE Band 7_20M_QPSK_1RB_49Offset_Right Cheek_Ch21350


Communication System: UID 0, FDD-LTE(0); Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: HSL_2600_200616 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.008$ S/m; $\epsilon_r = 37.791$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.51, 7.51, 7.51); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch21350/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.08 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.257 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 2.03 W/kg
SAR(1 g) = 0.921 W/kg; SAR(10 g) = 0.395 W/kg
Maximum value of SAR (measured) = 1.23 W/kg

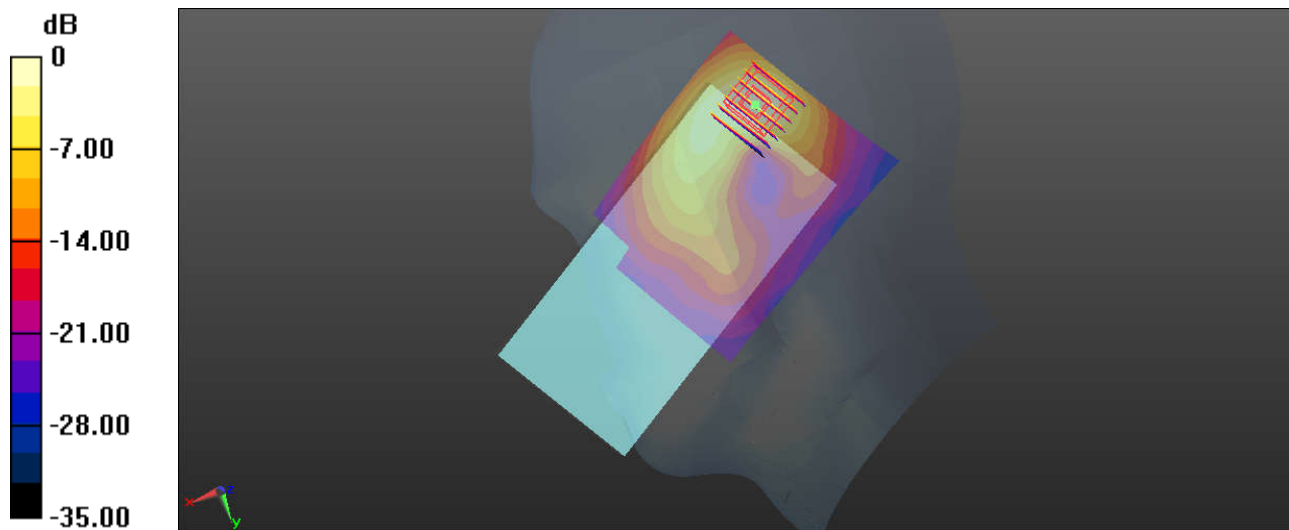

0 dB = 1.08 W/kg

15_LTE Band 41_20M_QPSK_1RB_49Offset_Right Cheek_Ch41055_HPUE


Communication System: UID 0, TDD-LTE(0); Frequency: 2636.5 MHz; Duty Cycle: 1:2.331.
Medium: HSL_2600_200616 Medium parameters used: $f = 2636.5$ MHz; $\sigma = 2.1$ S/m; $\epsilon_r = 37.443$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.51, 7.51, 7.51); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch41055/Area Scan (81x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.914 W/kg

Ch41055/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.307 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 0.787 W/kg; SAR(10 g) = 0.302 W/kg
Maximum value of SAR (measured) = 1.01 W/kg

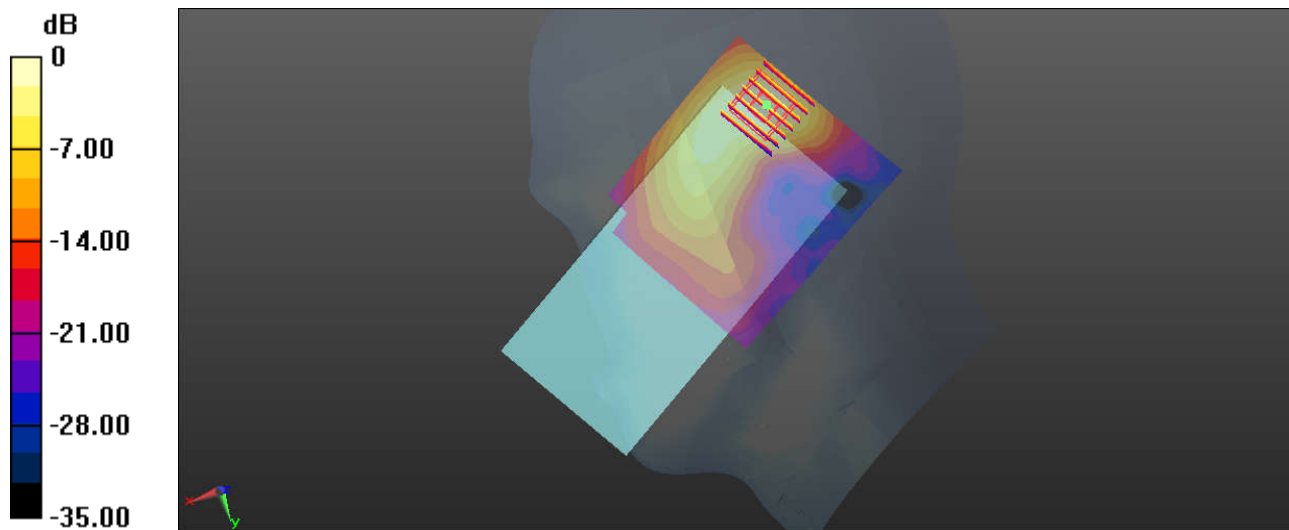

0 dB = 0.914 W/kg

16_Bluetooth_DH5 1Mbps_Left Cheek_Ch78

Communication System: UID 0, BT (0); Frequency: 2480 MHz; Duty Cycle: 1:1.304

Medium: HSL_2450_200609 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.858$ S/m; $\epsilon_r = 39.539$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.80, 7.80, 7.80); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch78/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.158 W/kg


Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.072 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.240 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.142 W/kg

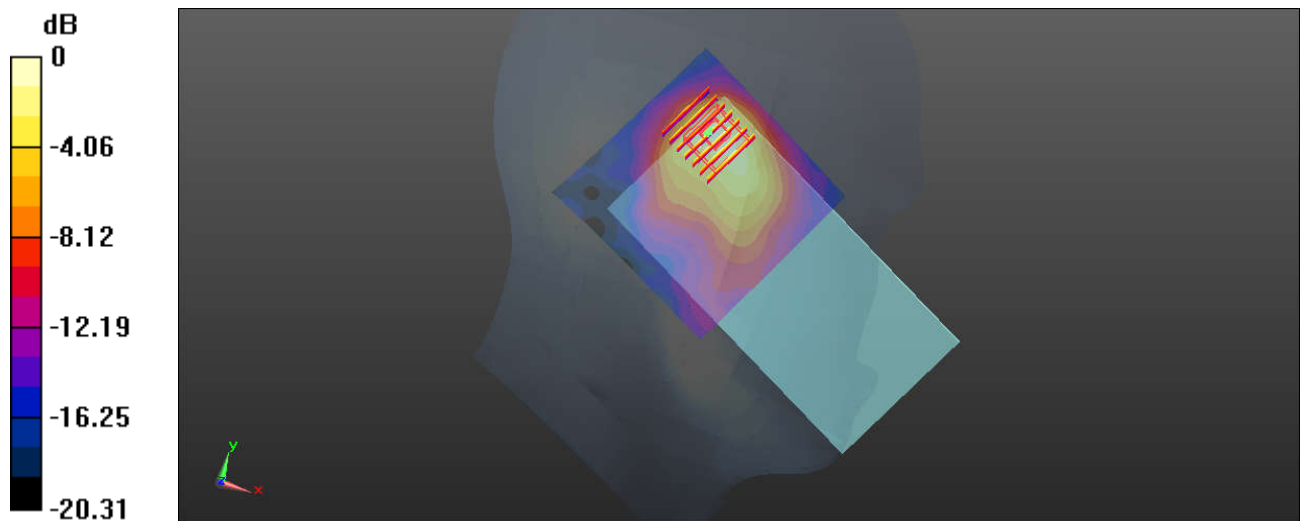

0 dB = 0.158 W/kg

17_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_Ch6


Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: HSL_2450_200609 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.811$ S/m; $\epsilon_r = 39.709$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.80, 7.80, 7.80); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.760 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.58 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.241 W/kg
Maximum value of SAR (measured) = 0.679 W/kg

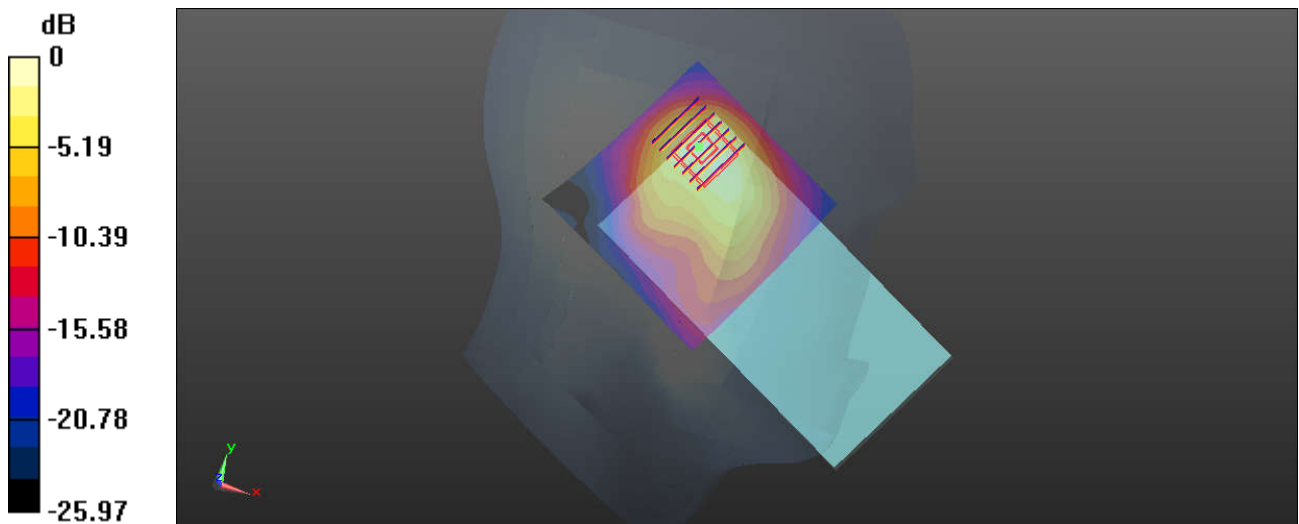

0 dB = 0.760 W/kg

18_WLAN5GHz_802.11a_6Mbps_Left Cheek_Ch64

Communication System: UID 0, WIFI (0); Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: HSL_5250_200620 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.687$ S/m; $\epsilon_r = 36.18$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(5.14, 5.14, 5.14); Calibrated: 03/02/2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch64/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.01 W/kg


Ch64/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.26 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.463 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

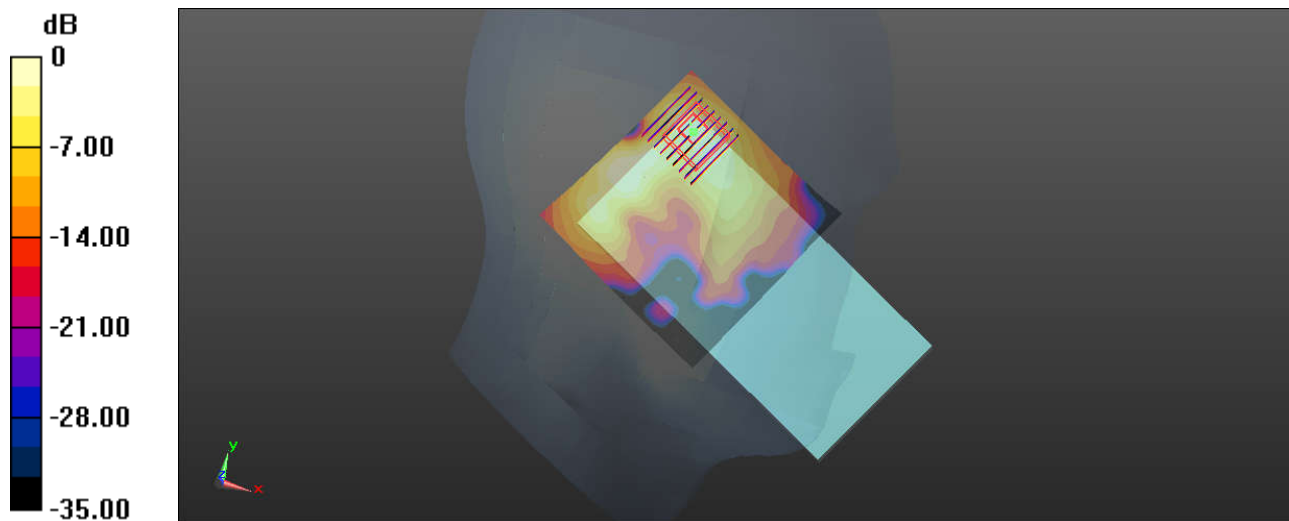

0 dB = 1.01 W/kg

19_WLAN5GHz_802.11a_6Mbps_Left Cheek_Ch140

Communication System: UID 0, WIFI (0); Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: HSL_5600_200621 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 35.666$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(4.56, 4.56, 4.56); Calibrated: 03/02/2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch140/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.22 W/kg


Ch140/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.433 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 1.28 W/kg

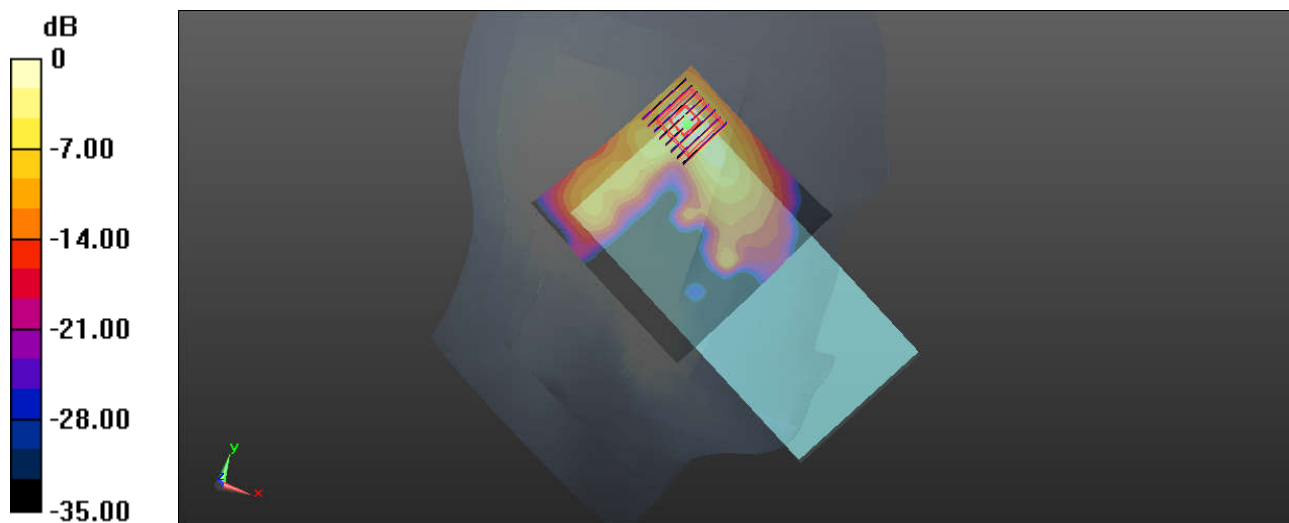

20_WLAN5GHz_802.11a_6Mbps_Left Cheek_Ch157

Communication System: UID 0, WIFI (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium: HSL_5750_200622 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.113$ S/m; $\epsilon_r = 35.513$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(4.78, 4.78, 4.78); Calibrated: 03/02/2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch157/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.17 W/kg


Ch157/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.266 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

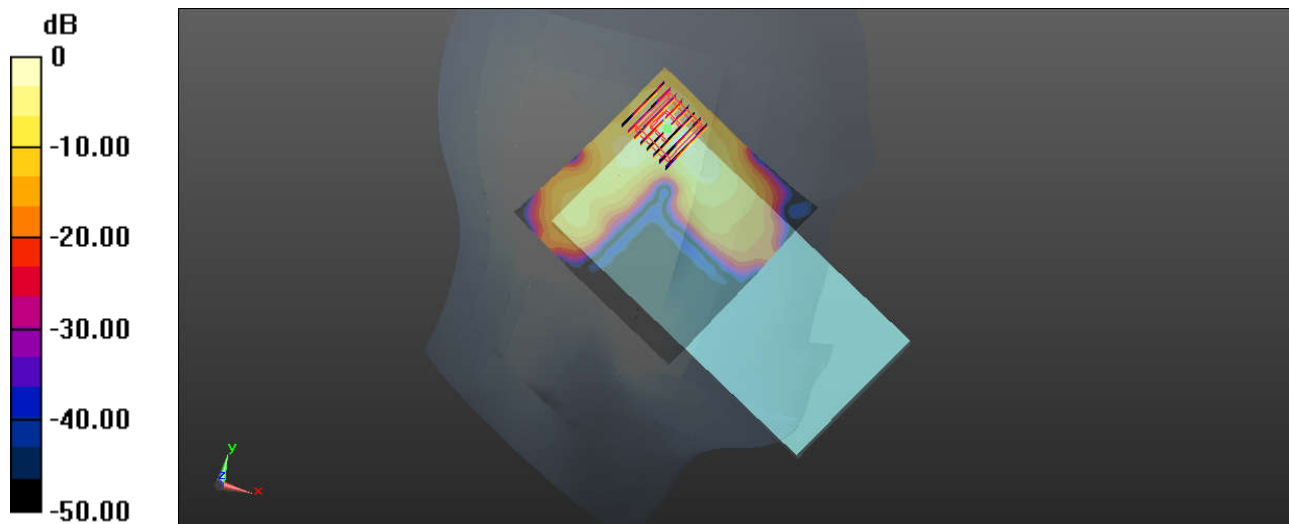

0 dB = 1.17 W/kg

21_GSM850_GPRS(4 Tx slots)_Back_10mm_Ch251


Communication System: UID 0, GPRS/EGPRS(0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08
 Medium: HSL_835_200606 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 41.879$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.69, 9.69, 9.69); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.717 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 23.63 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.333 W/kg
 Maximum value of SAR (measured) = 0.712 W/kg

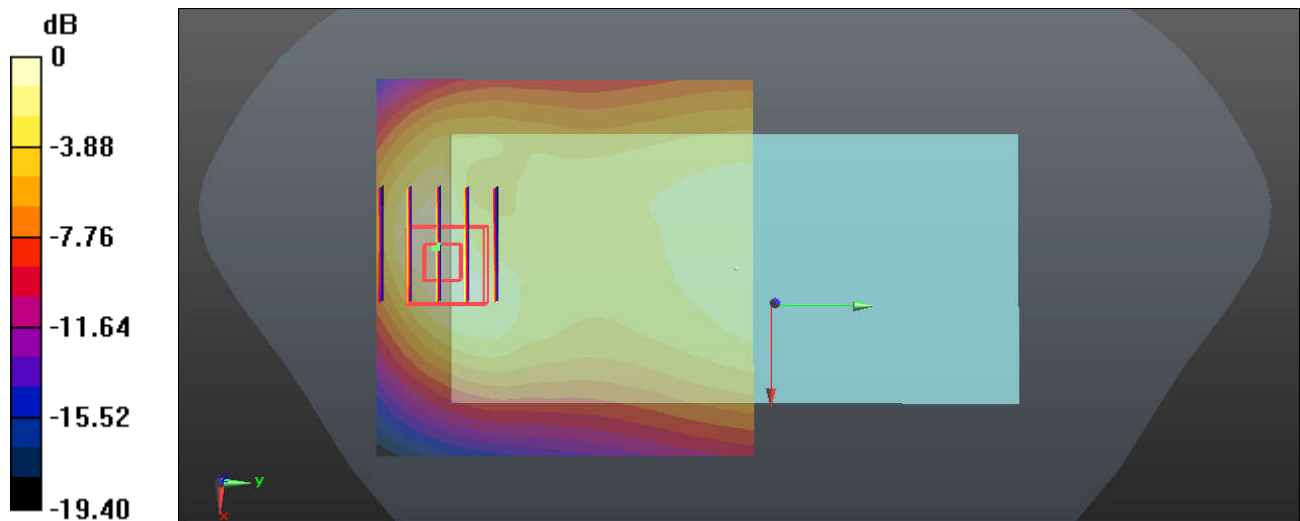

0 dB = 0.717 W/kg

22_GSM1900_GPRS(4 Tx slots)_Top Side_10mm_Ch810


Communication System: UID 0, GPRS/EGPRS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_200603 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.457 \text{ S/m}$; $\epsilon_r = 39.975$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.34, 8.34, 8.34); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch810/Area Scan (41x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.816 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 22.34 V/m ; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.647 W/kg ; SAR(10 g) = 0.345 W/kg
Maximum value of SAR (measured) = 0.813 W/kg

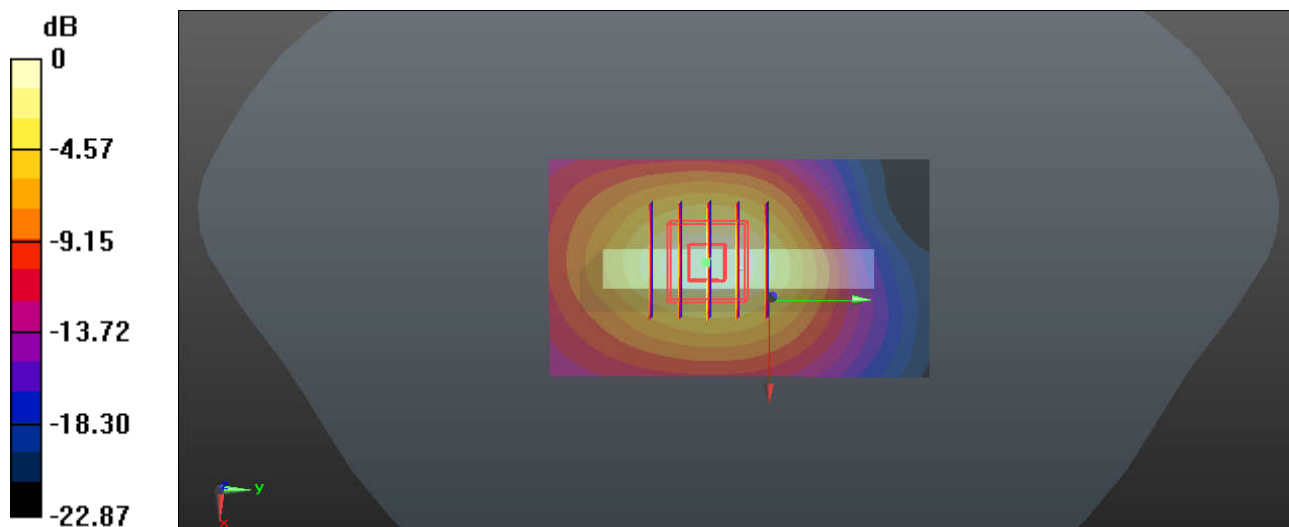

0 dB = 0.816 W/kg

23_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4233


Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
 Medium: HSL_835_200606 Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.879$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.69, 9.69, 9.69); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4233/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.325 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 16.95 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.455 W/kg
SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.155 W/kg
 Maximum value of SAR (measured) = 0.321 W/kg

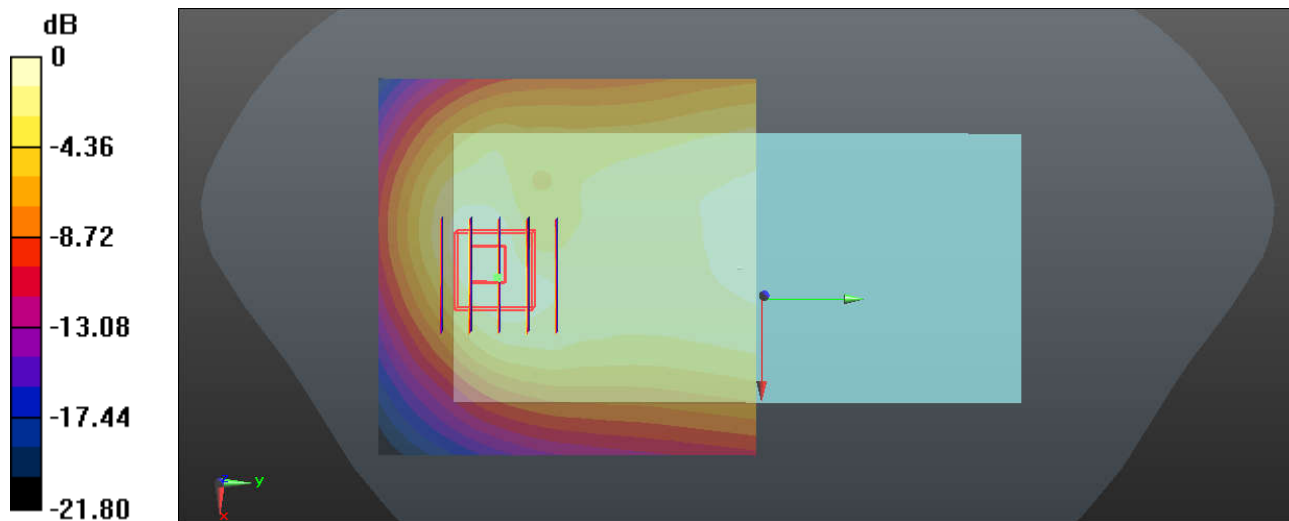

0 dB = 0.325 W/kg

24_WCDMA IV_RMC 12.2Kbps_Back_10mm_Ch1413


Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_200618 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.66$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.62, 8.62, 8.62); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1413/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.958 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 4.512 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.411 W/kg
 Maximum value of SAR (measured) = 0.947 W/kg

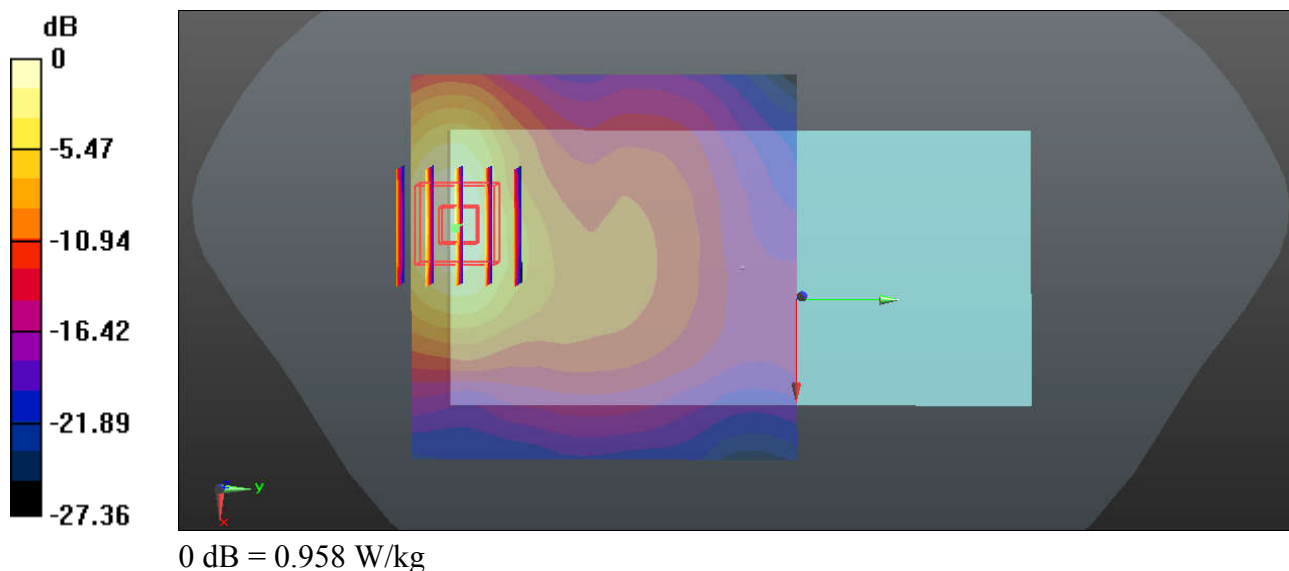

25_WCDMA II_RMC 12.2Kbps_Top Side_10mm_Ch9538


Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_200617 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.408 \text{ S/m}$; $\epsilon_r = 41.107$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.34, 8.34, 8.34); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9538/Area Scan (41x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.10 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.957 V/m ; Power Drift = 0.16 dB
 Peak SAR (extrapolated) = 1.59 W/kg
SAR(1 g) = 0.920 W/kg ; SAR(10 g) = 0.508 W/kg
 Maximum value of SAR (measured) = 1.10 W/kg

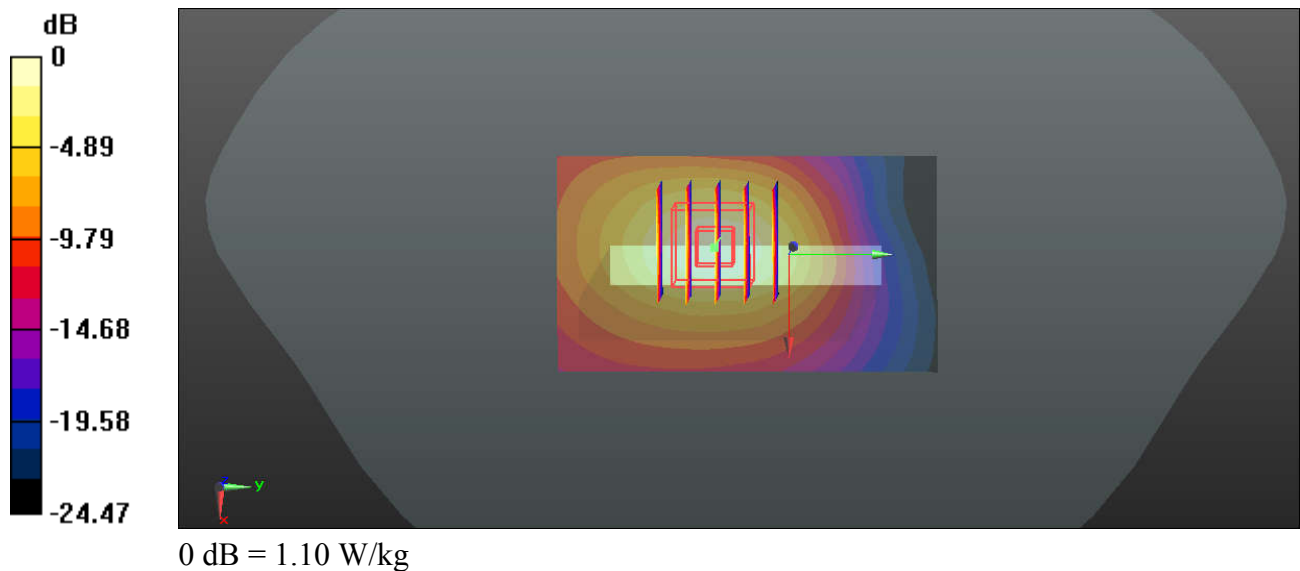

26_LTE Band 71_20M_QPSK_1RB_49Offset_Back_10mm_Ch133322


Communication System: UID 0, FDD-LTE (0); Frequency: 683 MHz; Duty Cycle: 1:1
Medium: HSL_750_200605 Medium parameters used: $f = 683$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.183$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch133322/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.330 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.17 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.370 W/kg
SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.240 W/kg
Maximum value of SAR (measured) = 0.330 W/kg

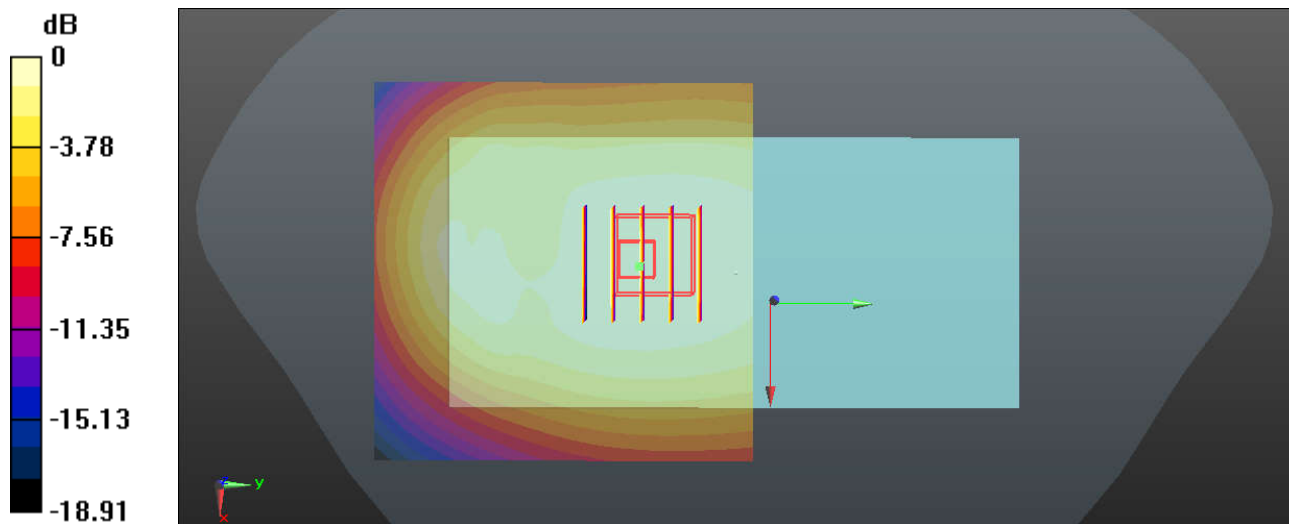

0 dB = 0.330 W/kg

27_LTE Band 12_10M_QPSK_1RB_25Offset_Back_10mm_Ch23095


Communication System: UID 0, FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750_200605 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 41.795$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23095/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.351 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.72 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.394 W/kg
SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.32 W/kg
Maximum value of SAR (measured) = 0.348 W/kg

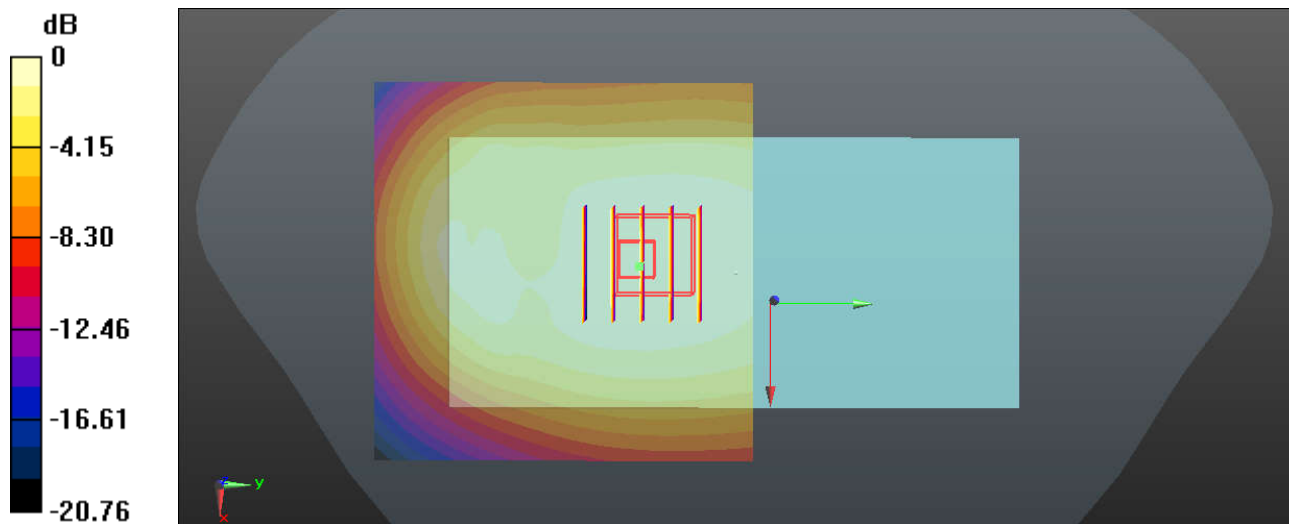

0 dB = 0.351 W/kg

28_LTE Band 13_10M_QPSK_1RB_0Offset_Back_10mm_Ch23230


Communication System: UID 0, FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750_200605 Medium parameters used: $f = 782$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 40.139$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23230/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.374 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.72 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.421 W/kg
SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.269 W/kg
Maximum value of SAR (measured) = 0.374 W/kg

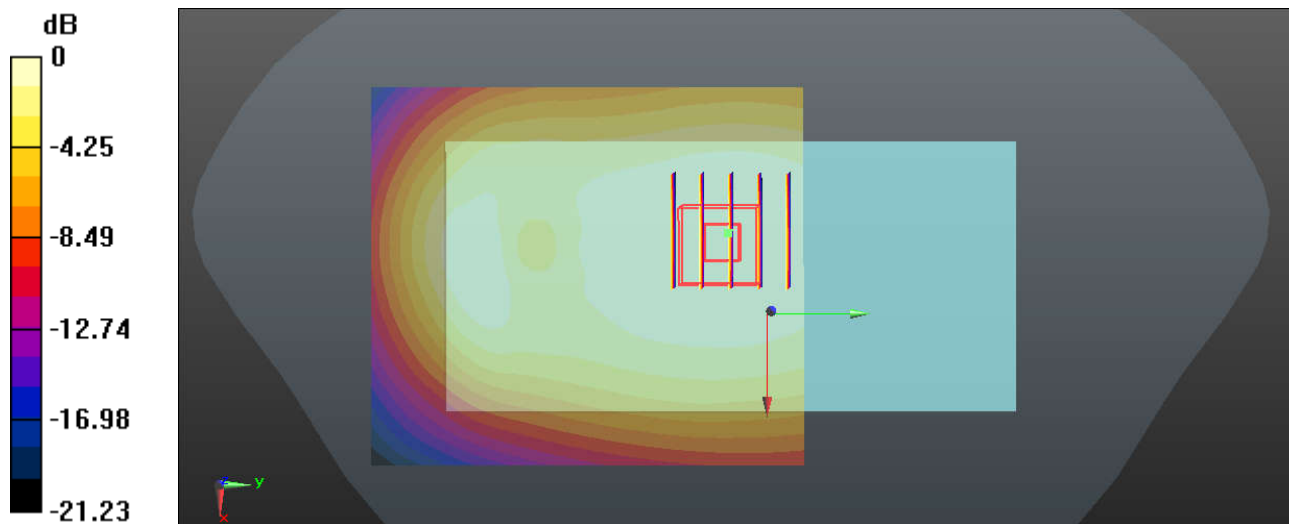

0 dB = 0.374 W/kg

29_LTE Band 14_10M_QPSK_1RB_25Offset_Back_10mm_Ch23330


Communication System: UID 0, FDD-LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
Medium: HSL_750_200605 Medium parameters used: $f = 793$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 39.972$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23330/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.269 W/kg

Ch23330/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.11 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.395 W/kg
SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.166 W/kg
Maximum value of SAR (measured) = 0.278 W/kg

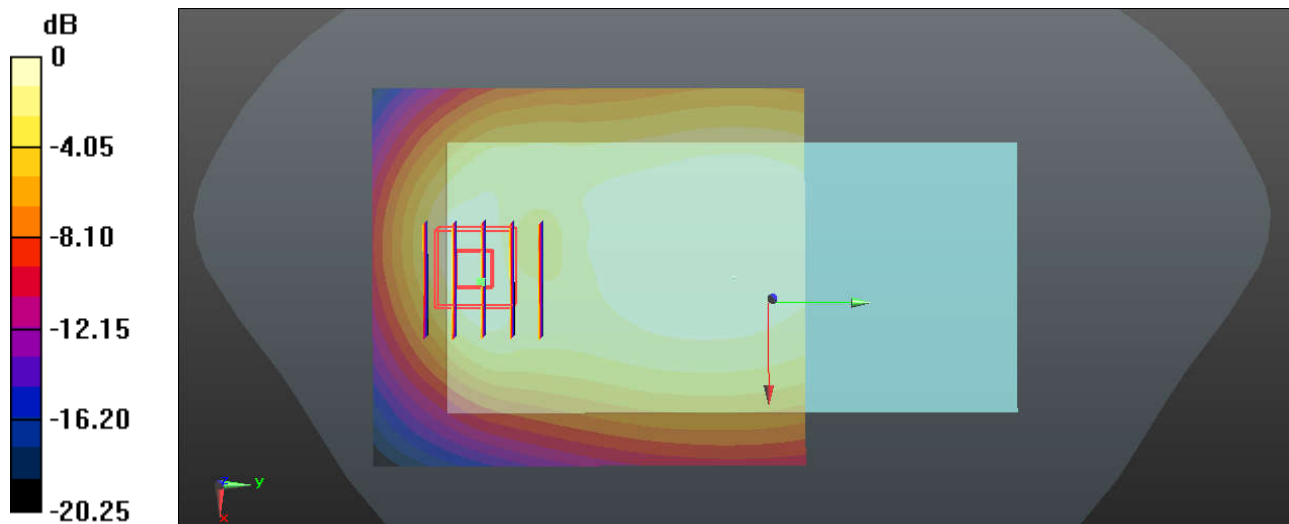

0 dB = 0.269 W/kg

30_LTE Band 26_15M_QPSK_1RB_37Offset_Back_10mm_Ch26865


Communication System: UID 0, FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_200606 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.008$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.69, 9.69, 9.69); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26865/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.295 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.38 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.374 W/kg
SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.142 W/kg
Maximum value of SAR (measured) = 0.266 W/kg

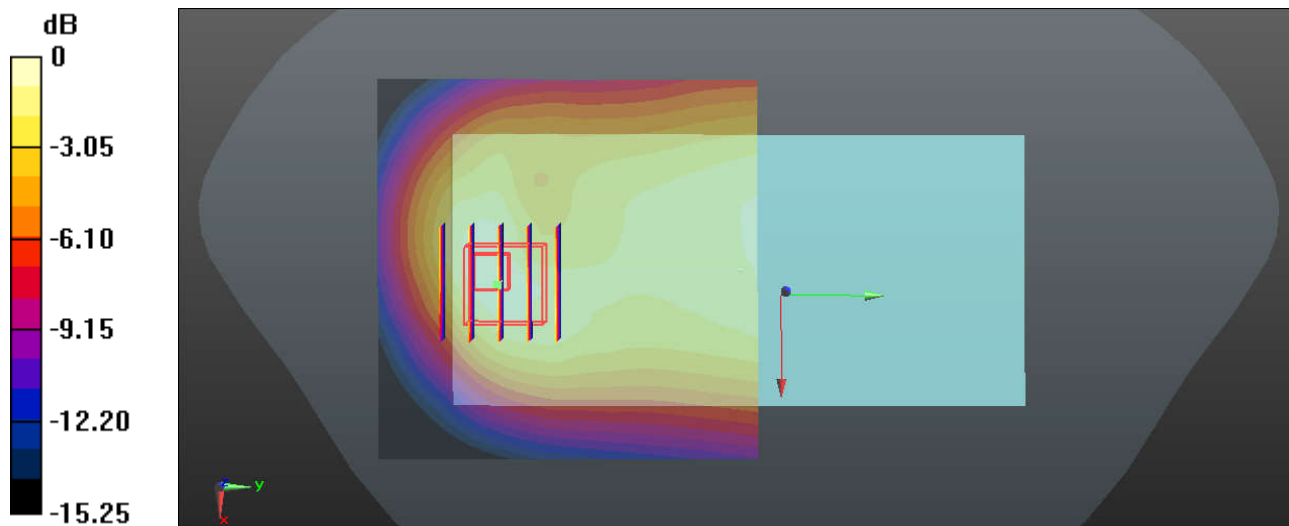

0 dB = 0.295 W/kg

31_LTE Band 5_10M_QPSK_1RB_25Offset_Back_10mm_Ch20525


Communication System: UID 0, FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_200606 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.974$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.69, 9.69, 9.69); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20525/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.305 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.31 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.433 W/kg
SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.147 W/kg
Maximum value of SAR (measured) = 0.301 W/kg

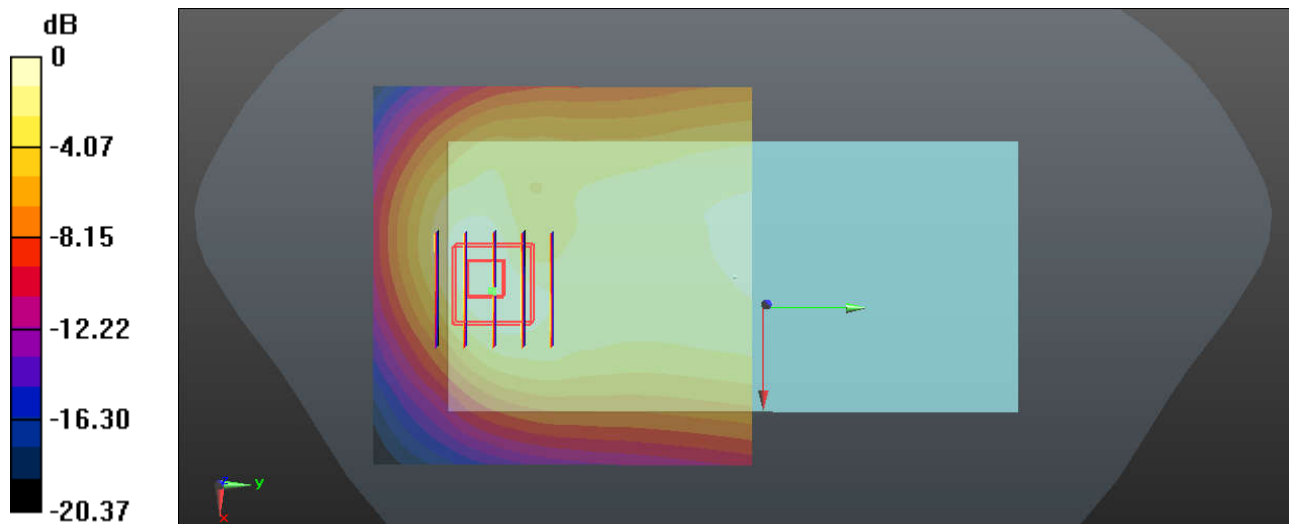

0 dB = 0.305 W/kg

32_LTE Band 66_20M_QPSK_1RB_49Offset_Back_10mm_Ch132072


Communication System: UID 0, FDD-LTE(0); Frequency: 1720 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_200618 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.769$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.62, 8.62, 8.62); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132072/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.06 W/kg

Ch132072/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 4.041 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 1.46 W/kg
SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.433 W/kg
 Maximum value of SAR (measured) = 1.05 W/kg

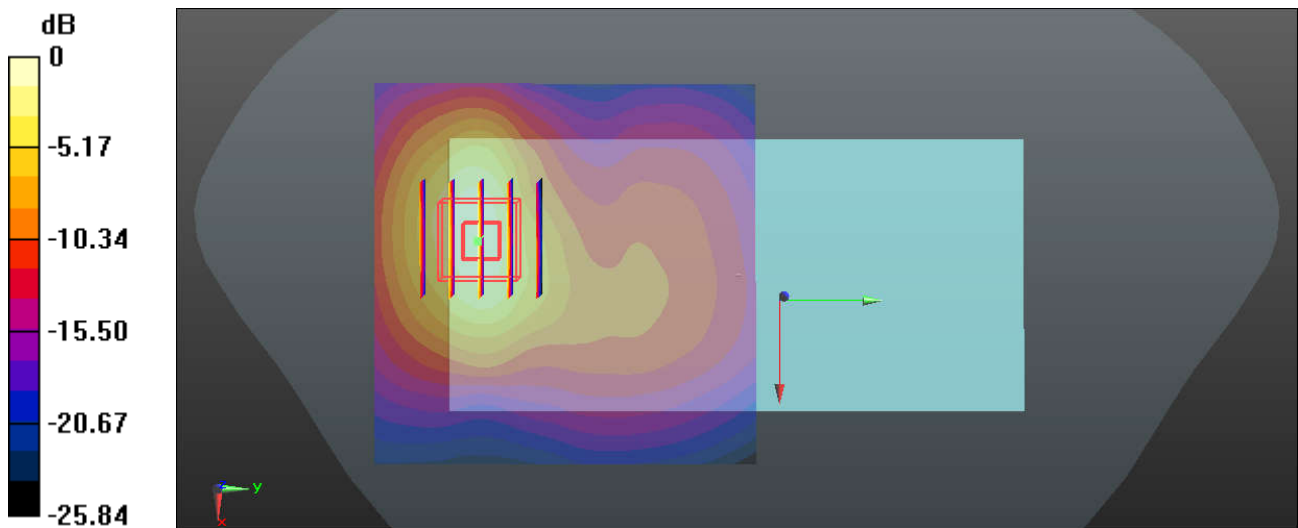

0 dB = 1.06 W/kg

33_LTE Band 25_20M_QPSK_1RB_49Offset_Top Side_10mm_Ch26590


Communication System: UID 0, FDD-LTE (0); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium: HSL_1900_200603 Medium parameters used: $f = 1905$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.994$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.34, 8.34, 8.34); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26590/Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.11 W/kg

Ch26590/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.21 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 1.54 W/kg
SAR(1 g) = 0.874 W/kg; SAR(10 g) = 0.472 W/kg
Maximum value of SAR (measured) = 1.09 W/kg

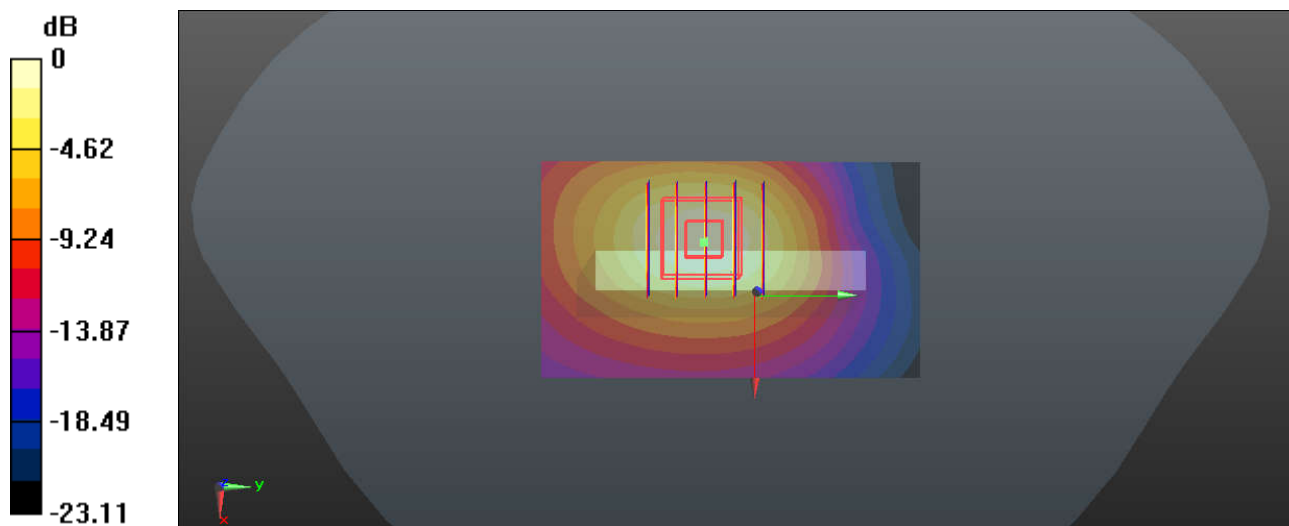

0 dB = 1.11 W/kg

34_LTE Band 7_20M_QPSK_1RB_49Offset_Top Side_10mm_Ch21350


Communication System: UID 0, FDD-LTE(0); Frequency: 2560 MHz; Duty Cycle: 1:1
 Medium: HSL_2600_200616 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.008$ S/m; $\epsilon_r = 37.791$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.51, 7.51, 7.51); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch21350/Area Scan (41x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 1.34 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 13.36 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 2.12 W/kg
SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.478 W/kg
 Maximum value of SAR (measured) = 1.33 W/kg

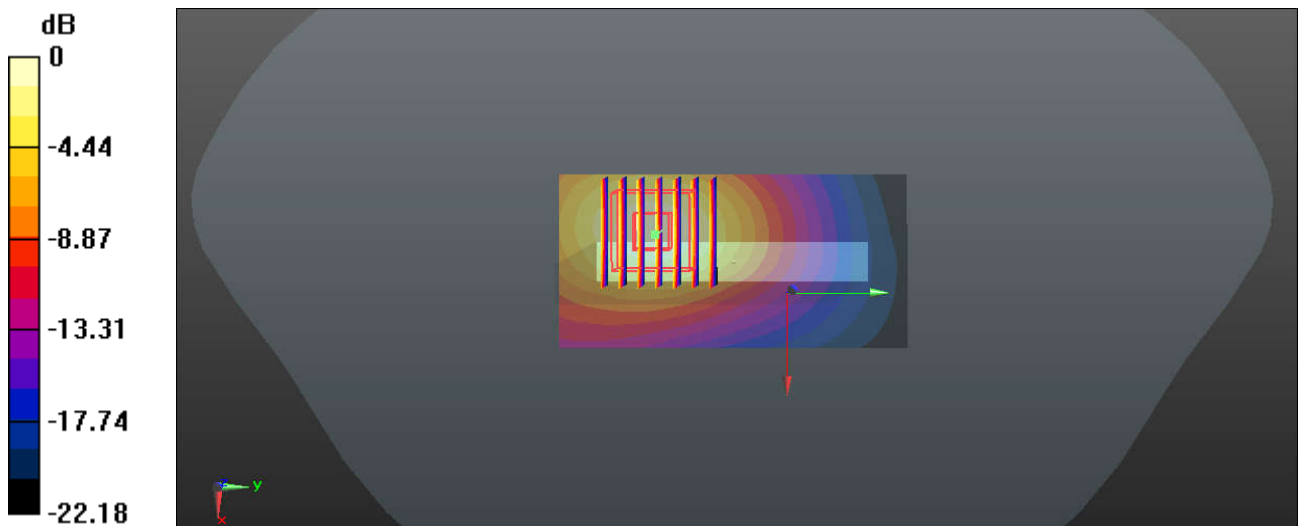

0 dB = 1.34 W/kg

35_LTE Band 41_20M_QPSK_1RB_49Offset_Top Side_10mm_Ch41055_HPUE


Communication System: UID 0, TDD-LTE(0); Frequency: 2636.5 MHz; Duty Cycle: 1:2.331
Medium: HSL_2600_200616 Medium parameters used: $f = 2636.5$ MHz; $\sigma = 2.095$ S/m; $\epsilon_r = 37.588$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.51, 7.51, 7.51); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch41055/Area Scan (41x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.23 W/kg

Ch41055/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.271 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.89 W/kg
SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.439 W/kg
Maximum value of SAR (measured) = 1.20 W/kg

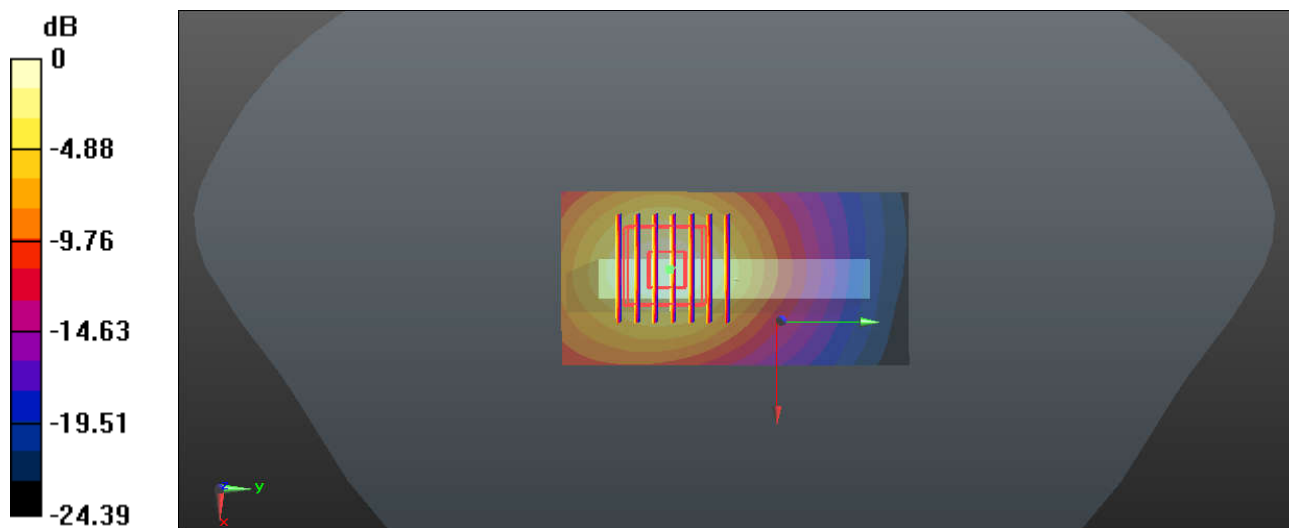

0 dB = 1.23 W/kg

36_Bluetooth_DH5 1Mbps_Back_10mm_Ch39


Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.304
Medium: HSL_2450_200609 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 39.693$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.80, 7.80, 7.80); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39/Area Scan (81x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0390 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.268 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.0630 W/kg
SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.014 W/kg
Maximum value of SAR (measured) = 0.0366 W/kg

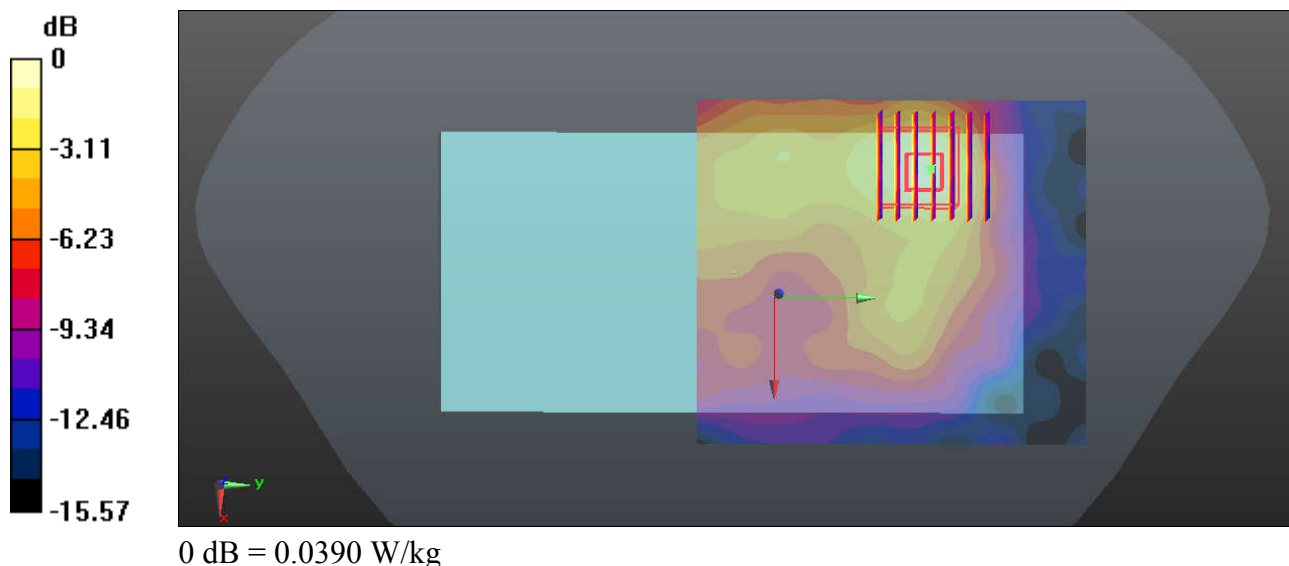

37_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch6


Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: HSL_2450_200609 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.754$ S/m; $\epsilon_r = 39.473$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.80, 7.80, 7.80); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.140 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.289 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.232 W/kg
SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.052 W/kg
Maximum value of SAR (measured) = 0.139 W/kg

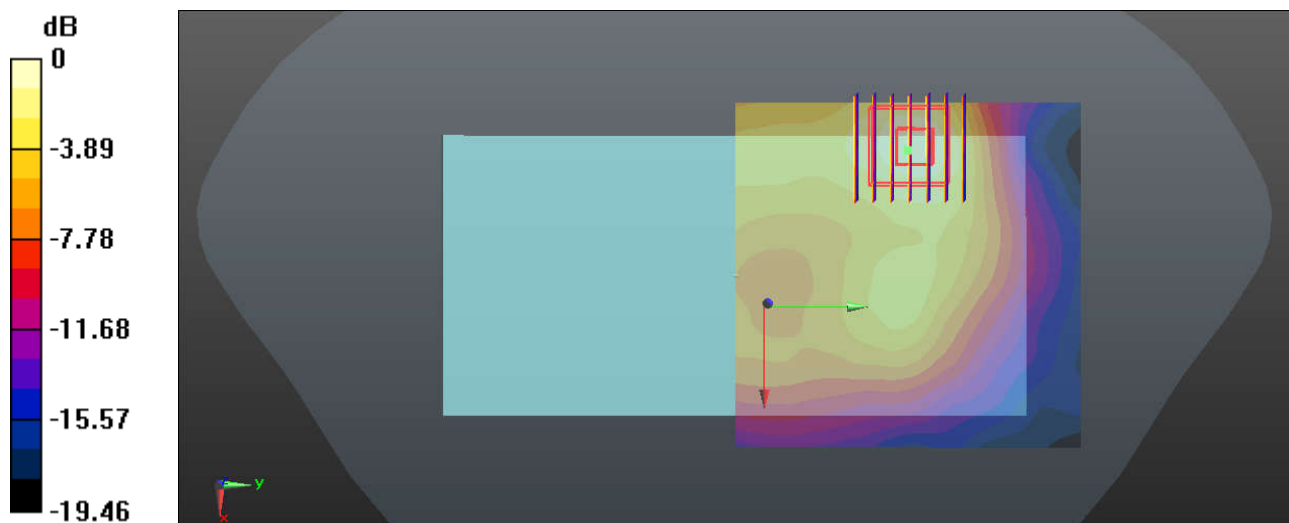

0 dB = 0.140 W/kg

38_WLAN5GHz_802.11a_6Mbps_Back_10mm_Ch44


Communication System: UID 0, WIFI (0); Frequency: 5220 MHz; Duty Cycle: 1:1
Medium: HSL_5250_200620 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.571$ S/m; $\epsilon_r = 36.372$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(5.14, 5.14, 5.14); Calibrated: 03/02/2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch44/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.489 W/kg

Ch44/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.034 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.786 W/kg
SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.083 W/kg
Maximum value of SAR (measured) = 0.481 W/kg

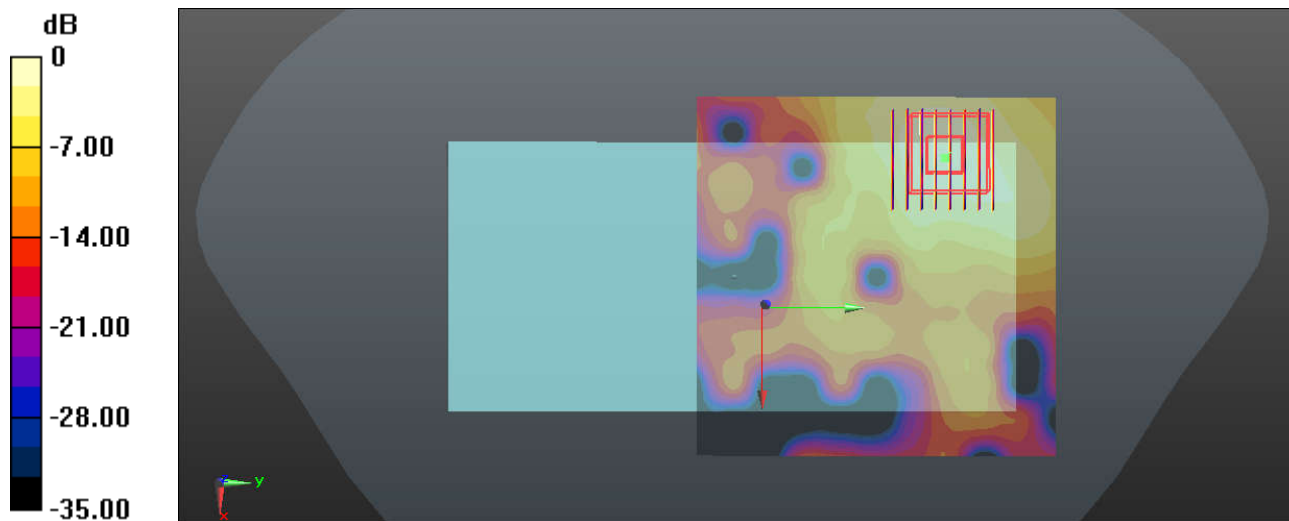

0 dB = 0.489 W/kg

39_WLAN5GHz_802.11a_6Mbps_Right Side_10mm_Ch149


Communication System: UID 0, WIFI (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium: HSL_5750_200622 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.113$ S/m; $\epsilon_r = 35.513$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(4.78, 4.78, 4.78); Calibrated: 03/02/2020;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch149/Area Scan (41x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.455 W/kg

Ch149/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.9190 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.891 W/kg
SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.072 W/kg
Maximum value of SAR (measured) = 0.439 W/kg

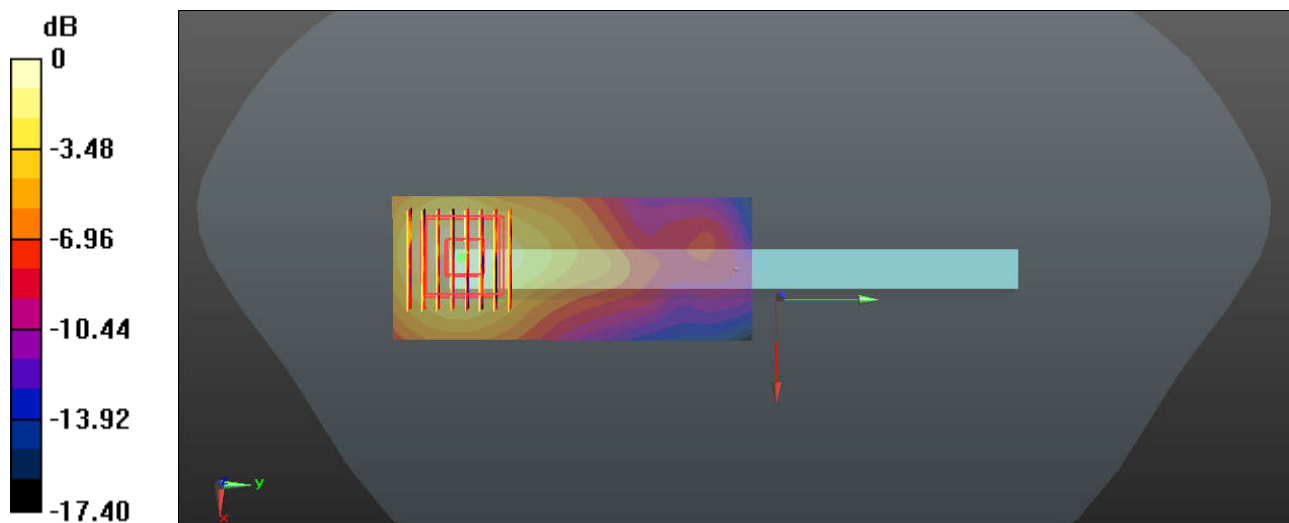

0 dB = 0.455 W/kg

40_GSM850_GPRS(4 Tx slots)_Back_10mm_Ch251


Communication System: UID 0, GPRS/EGPRS(0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08
Medium: HSL_835_200606 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 41.879$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.69, 9.69, 9.69); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.717 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.63 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.333 W/kg
Maximum value of SAR (measured) = 0.712 W/kg

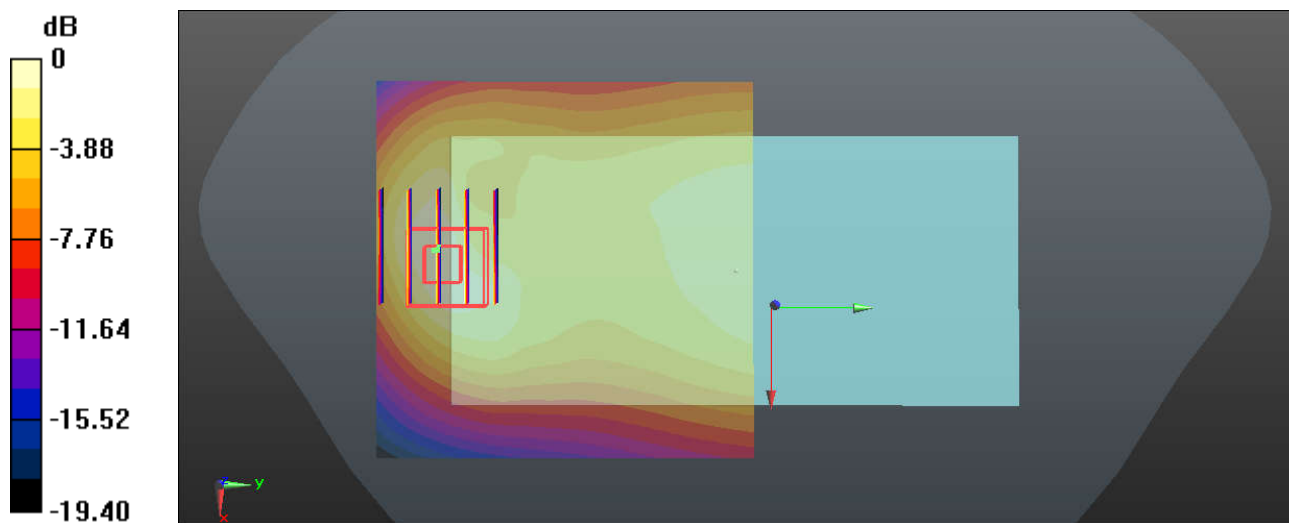

0 dB = 0.717 W/kg

41_GSM1900_GPRS(4 Tx slots)_Front_10mm_Ch810


Communication System: UID 0, GPRS/EGPRS (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08
 Medium: HSL_1900_200603 Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.457$ S/m; $\epsilon_r = 39.975$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.34, 8.34, 8.34); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch810/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.02 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 10.67 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.273 W/kg
 Maximum value of SAR (measured) = 1.07 W/kg

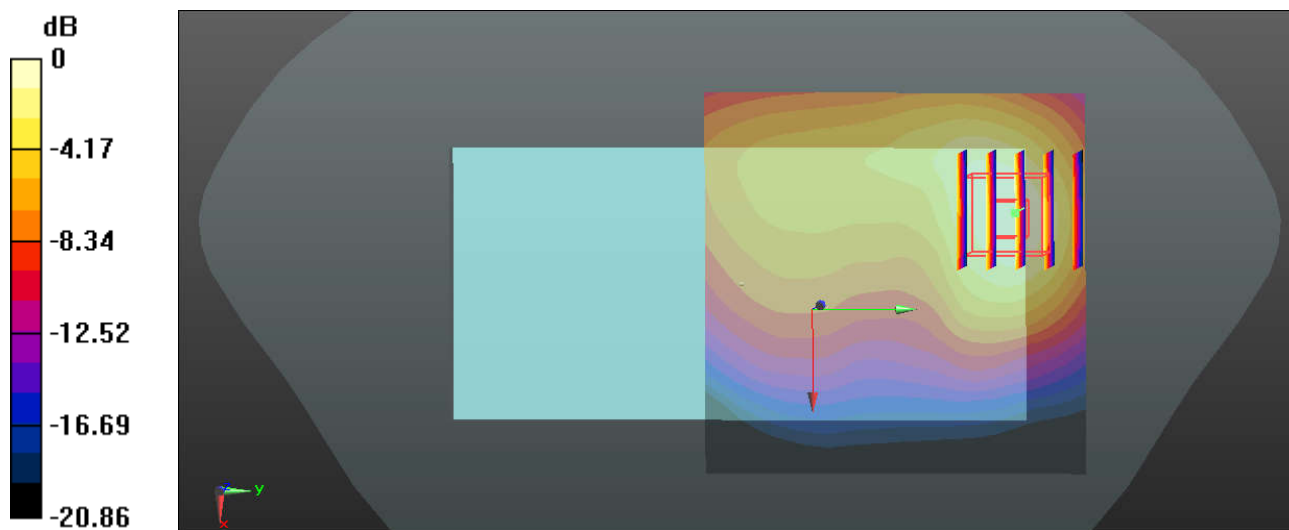

0 dB = 1.02 W/kg

42_WCDMA V_RMC 12.2Kbps_Back_10mm_Ch4233


Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: HSL_835_200606 Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 41.879$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.69, 9.69, 9.69); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4233/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.325 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.95 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.455 W/kg
SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.155 W/kg
Maximum value of SAR (measured) = 0.321 W/kg

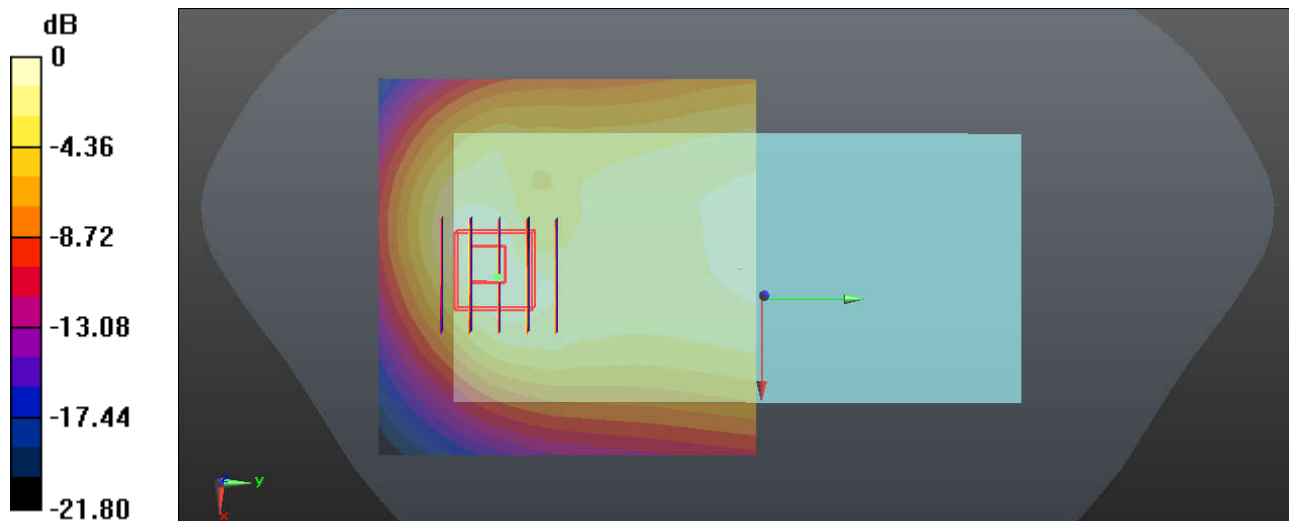

0 dB = 0.325 W/kg

43_WCDMA IV_RMC 12.2Kbps_Back_10mm_Ch1413


Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_200618 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.375 \text{ S/m}$; $\epsilon_r = 40.66$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.62, 8.62, 8.62); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1413/Area Scan (71x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.958 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.512 V/m ; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.765 W/kg ; SAR(10 g) = 0.411 W/kg
 Maximum value of SAR (measured) = 0.947 W/kg

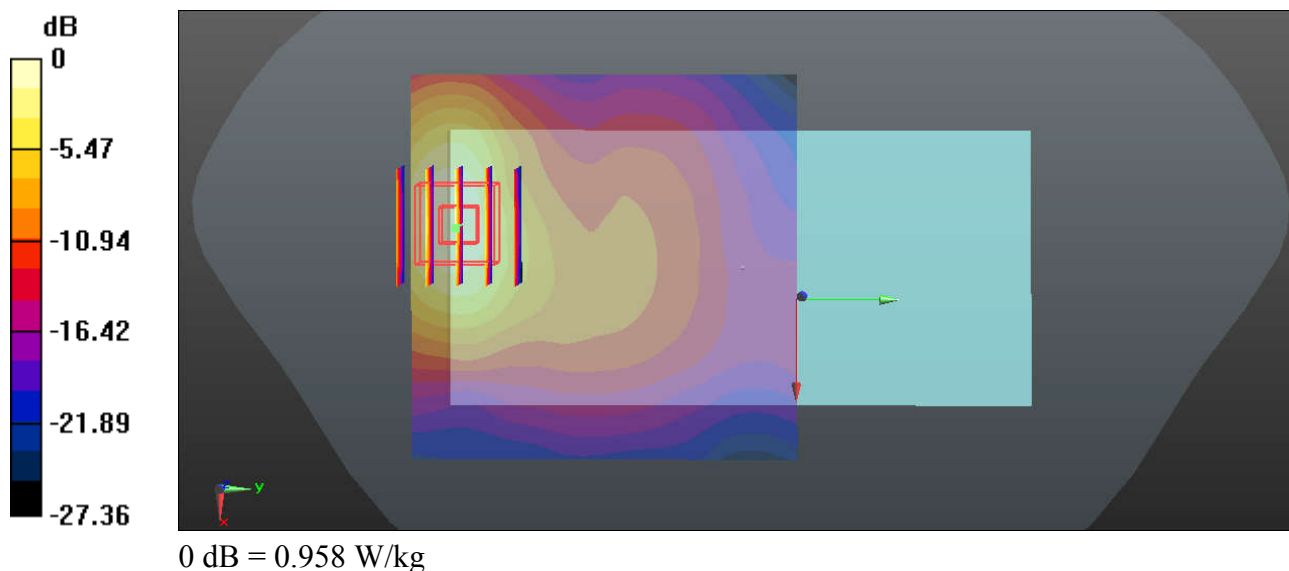

44_WCDMA II_RMC 12.2Kbps_Front_10mm_Ch9538


Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: HSL_1900_200617 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 41.107$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.34, 8.34, 8.34); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9538/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.00 W/kg

Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.66 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.53 W/kg
SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.390 W/kg
Maximum value of SAR (measured) = 1.05 W/kg

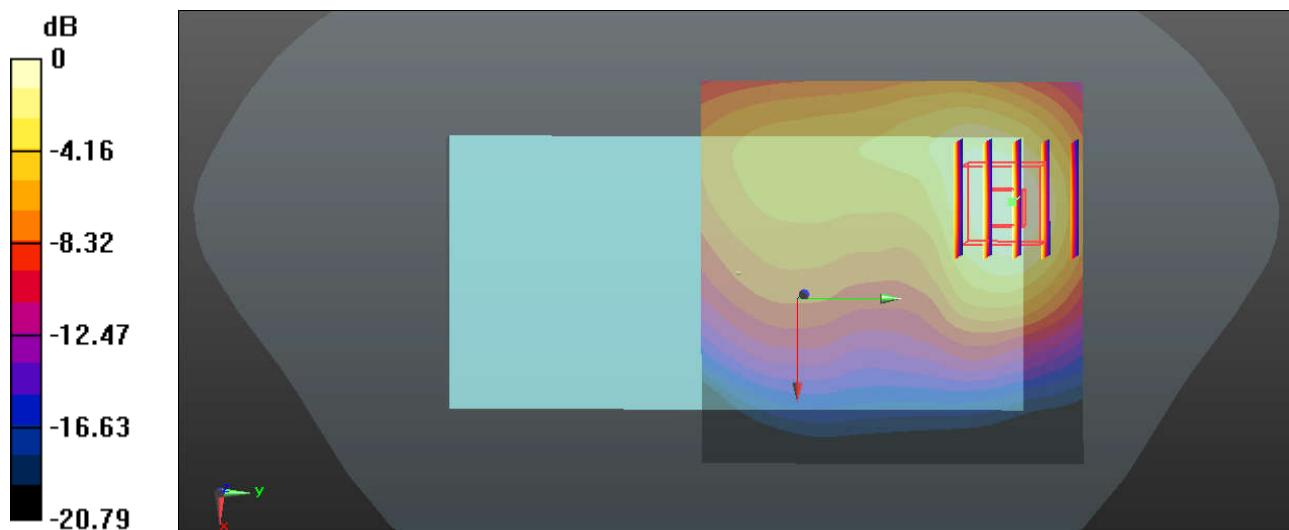

0 dB = 1.00 W/kg

45_LTE Band 71_20M_QPSK_1RB_49Offset_Back_10mm_Ch133322


Communication System: UID 0, FDD-LTE (0); Frequency: 683 MHz; Duty Cycle: 1:1
Medium: HSL_750_200605 Medium parameters used: $f = 683$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.183$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch133322/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.330 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.17 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.370 W/kg
SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.240 W/kg
Maximum value of SAR (measured) = 0.330 W/kg

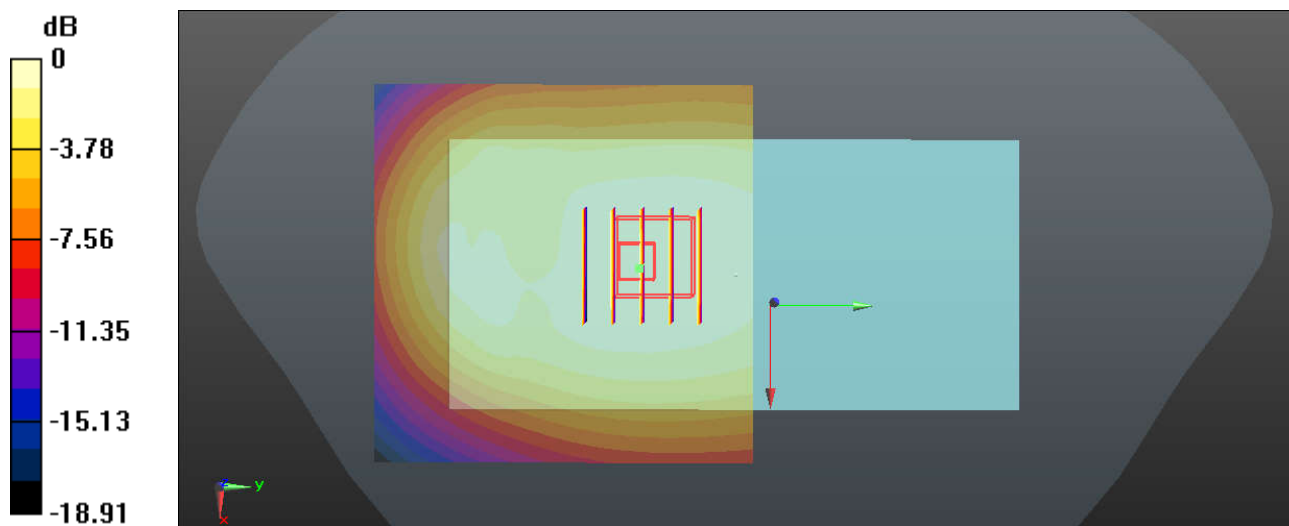

0 dB = 0.330 W/kg

46_LTE Band 12_10M_QPSK_1RB_25Offset_Back_10mm_Ch23095


Communication System: UID 0, FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium: HSL_750_200605 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 41.795$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23095/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.351 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 19.72 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.394 W/kg
SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.32 W/kg
 Maximum value of SAR (measured) = 0.348 W/kg

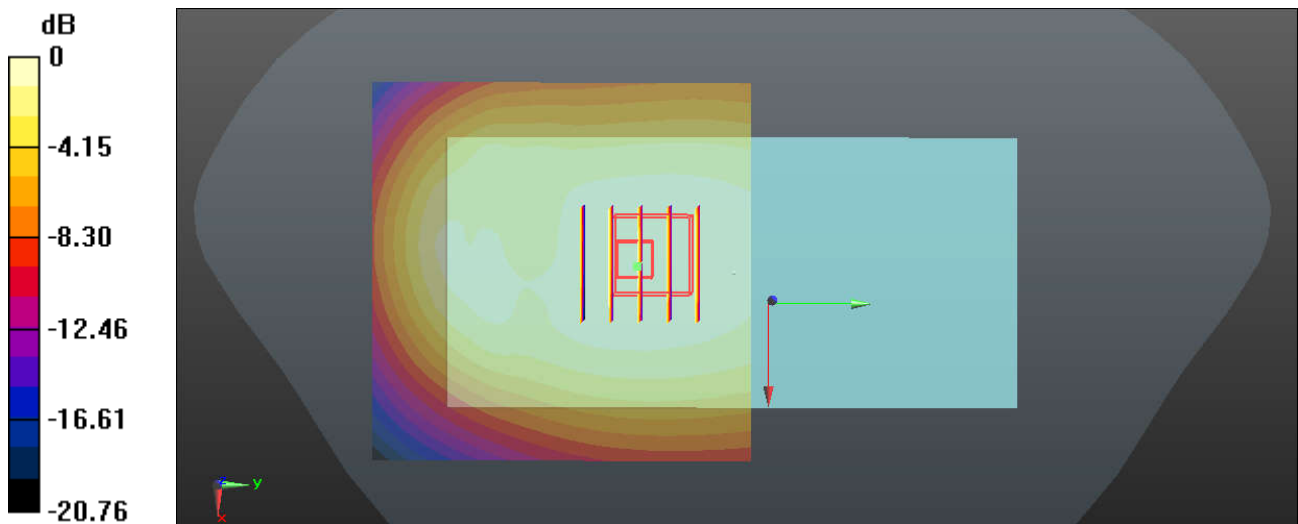

0 dB = 0.351 W/kg

47_LTE Band 13_10M_QPSK_1RB_0Offset_Back_10mm_Ch23230


Communication System: UID 0, FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium: HSL_750_200605 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 40.139$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23230/Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.374 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 20.72 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.421 W/kg
SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.269 W/kg
 Maximum value of SAR (measured) = 0.374 W/kg

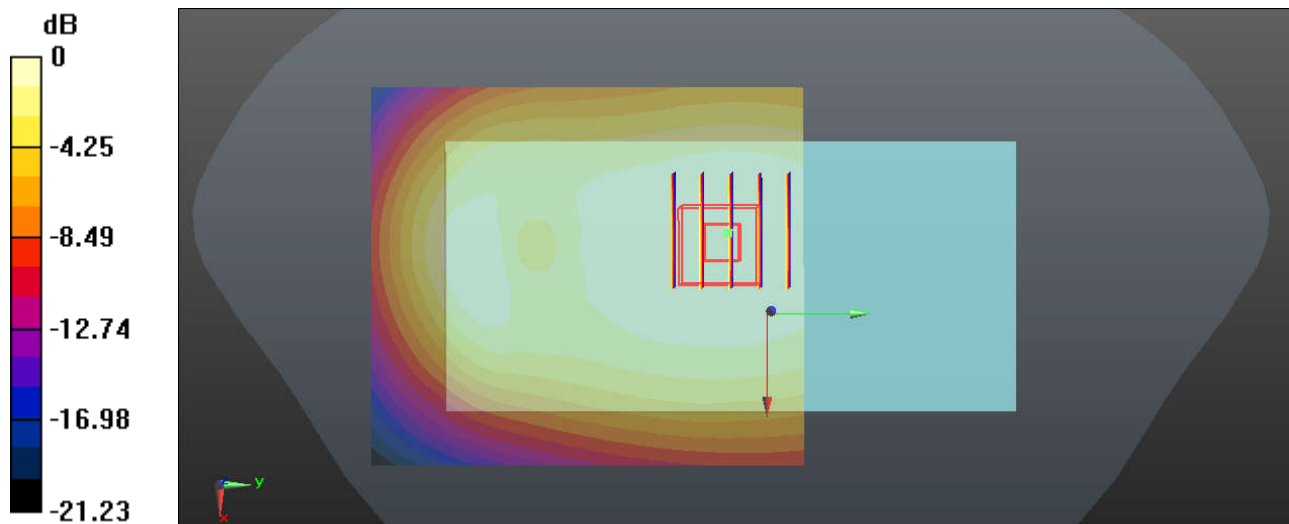

0 dB = 0.374 W/kg

48_LTE Band 14_10M_QPSK_1RB_25Offset_Back_10mm_Ch23330


Communication System: UID 0, FDD-LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
Medium: HSL_750_200605 Medium parameters used: $f = 793$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 39.972$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(10.10, 10.10, 10.10); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23330/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.269 W/kg

Ch23330/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.11 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.395 W/kg
SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.166 W/kg
Maximum value of SAR (measured) = 0.278 W/kg

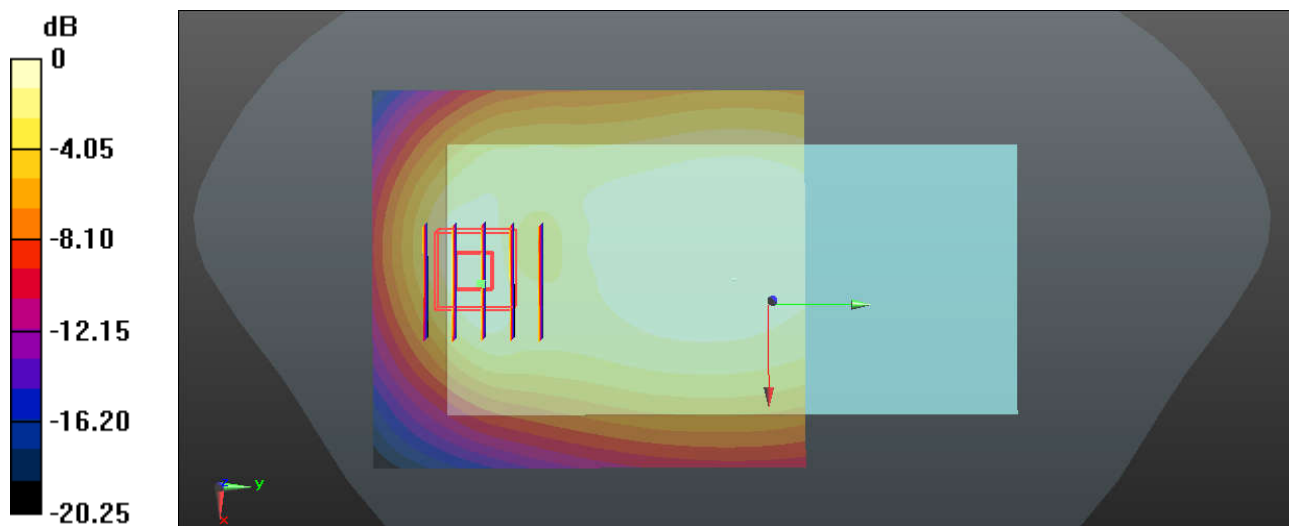

0 dB = 0.269 W/kg

49_LTE Band 26_15M_QPSK_1RB_37Offset_Back_10mm_Ch26865


Communication System: UID 0, FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_200606 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.008$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.69, 9.69, 9.69); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26865/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.295 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.38 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.374 W/kg
SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.142 W/kg
Maximum value of SAR (measured) = 0.266 W/kg

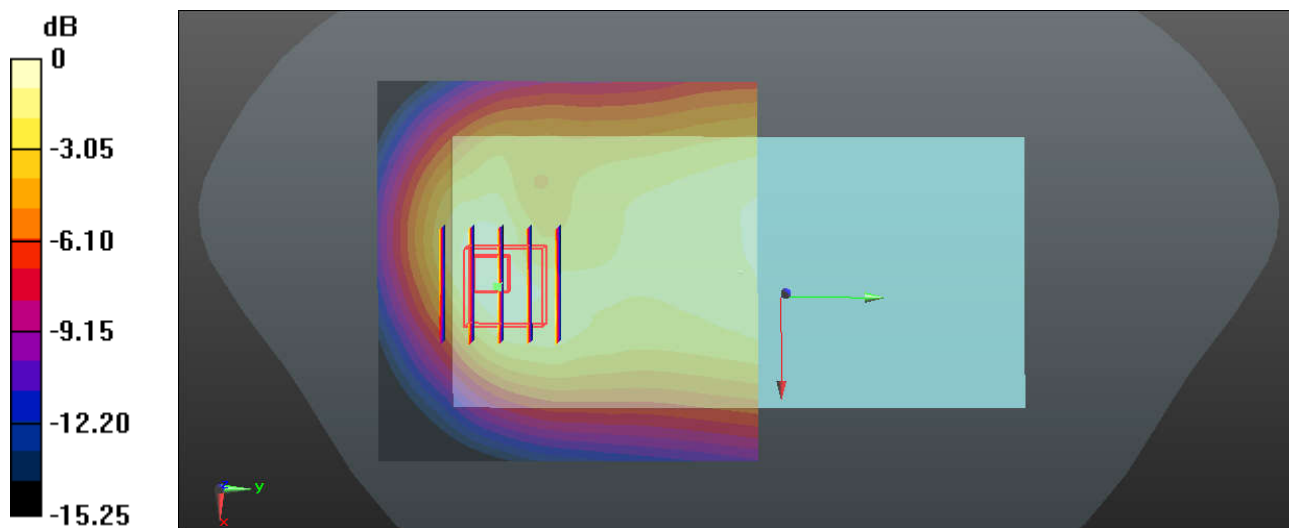

0 dB = 0.295 W/kg

50_LTE Band 5_10M_QPSK_1RB_25Offset_Back_10mm_Ch20525


Communication System: UID 0, FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_835_200606 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.974$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(9.69, 9.69, 9.69); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20525/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.305 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.31 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.433 W/kg
SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.147 W/kg
Maximum value of SAR (measured) = 0.301 W/kg

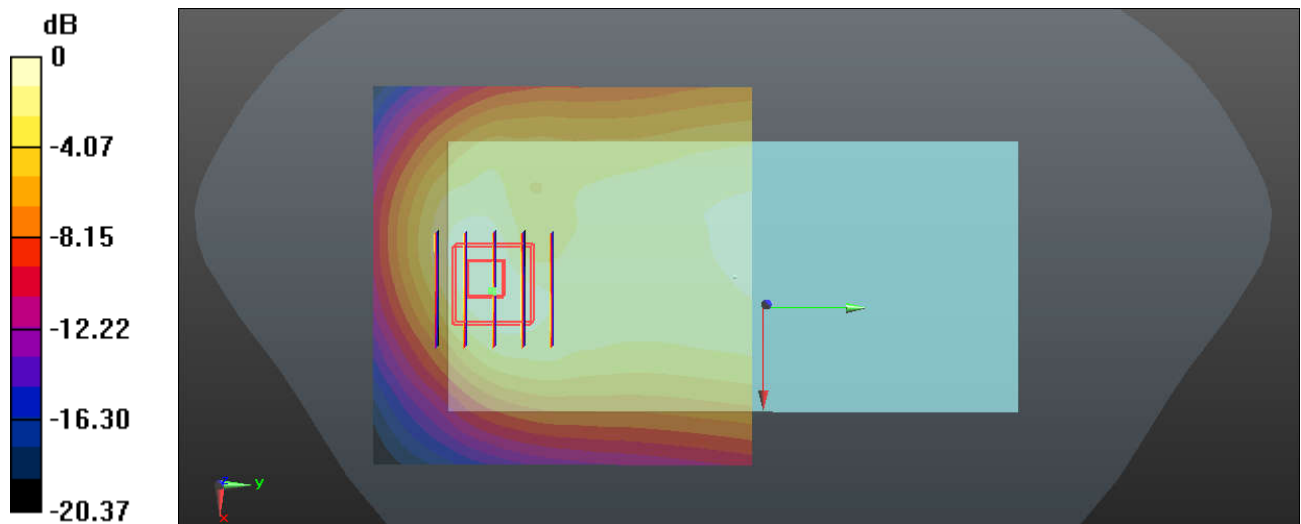

0 dB = 0.305 W/kg

51_LTE Band 66_20M_QPSK_1RB_49Offset_Back_10mm_Ch132072


Communication System: UID 0, FDD-LTE(0); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: HSL_1750_200618 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.354$ S/m; $\epsilon_r = 40.769$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.62, 8.62, 8.62); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132072/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.06 W/kg

Ch132072/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.041 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.46 W/kg
SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.433 W/kg
Maximum value of SAR (measured) = 1.05 W/kg

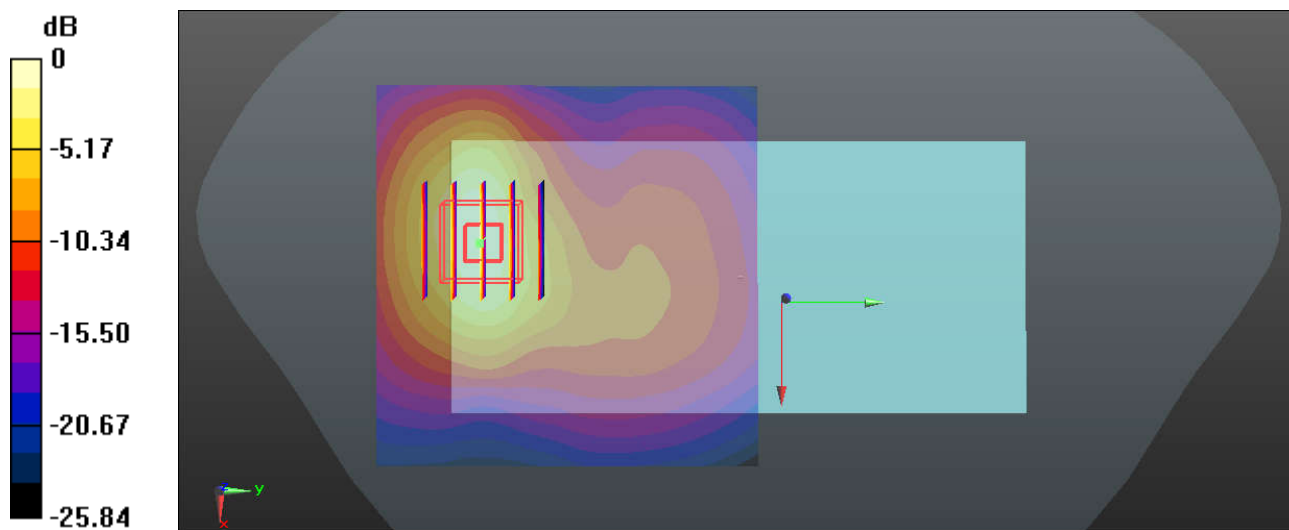

0 dB = 1.06 W/kg

52_LTE Band 25_20M_QPSK_1RB_49Offset_Front_10mm_Ch26590


Communication System: UID 0, FDD-LTE (0); Frequency: 1905 MHz; Duty Cycle: 1:1
Medium: HSL_1900_200603 Medium parameters used: $f = 1905$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 39.994$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(8.34, 8.34, 8.34); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26590/Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.00 W/kg

Ch26590/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.65 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.398 W/kg
Maximum value of SAR (measured) = 1.05 W/kg

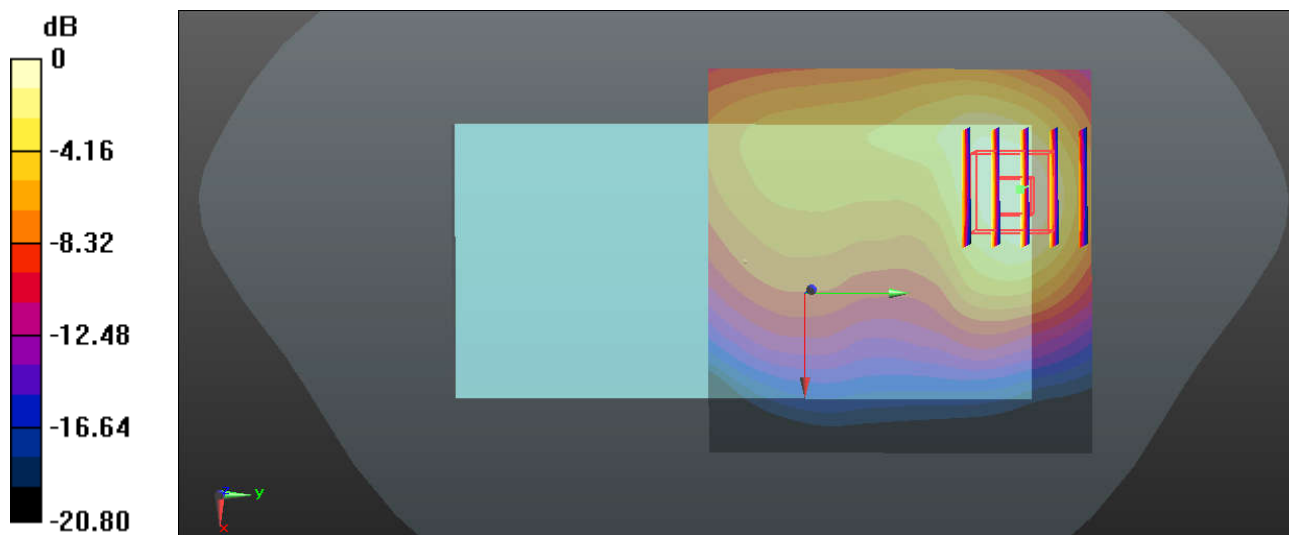

0 dB = 1.00 W/kg

53_LTE Band 7_20M_QPSK_1RB_49Offset_Back_10mm_Ch21350


Communication System: UID 0, FDD-LTE(0); Frequency: 2560 MHz; Duty Cycle: 1:1
 Medium: HSL_2600_200616 Medium parameters used: $f = 2560$ MHz; $\sigma = 2.008$ S/m; $\epsilon_r = 37.791$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.51, 7.51, 7.51); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch21350/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 1.50 W/kg

Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.804 V/m; Power Drift = 0.18 dB
 Peak SAR (extrapolated) = 2.33 W/kg
SAR(1 g) = 0.918 W/kg; SAR(10 g) = 0.423 W/kg
 Maximum value of SAR (measured) = 1.48 W/kg

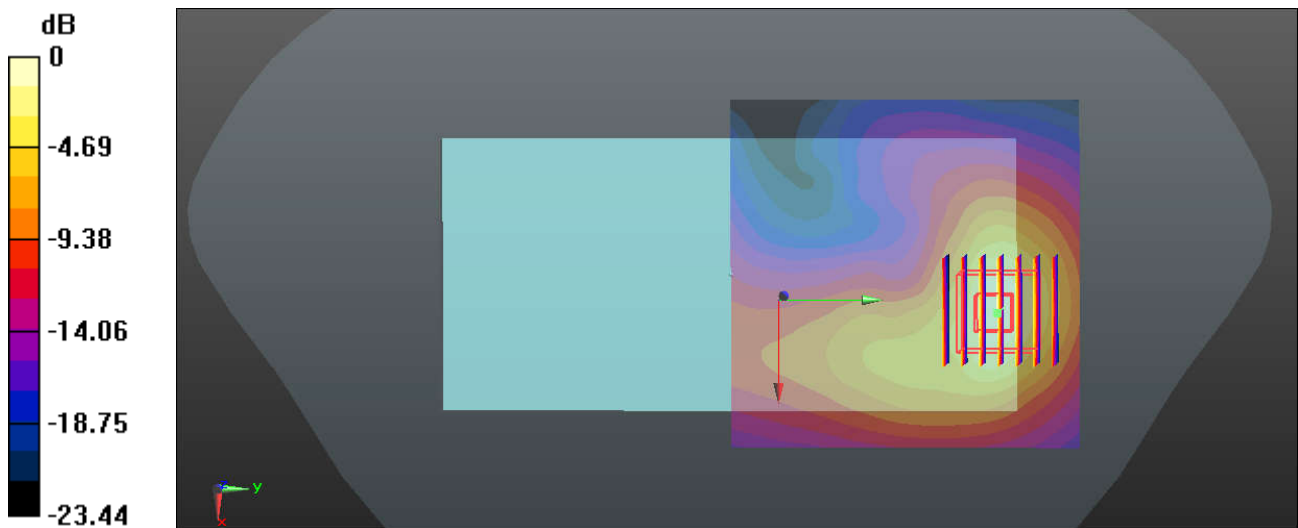

0 dB = 1.50 W/kg

54_LTE Band 41_20M_QPSK_1RB_49Offset_Back_10mm_Ch41055_HPUE


Communication System: UID 0, TDD-LTE(0); Frequency: 2636.5 MHz; Duty Cycle: 1:2.331
Medium: HSL_2600_200616 Medium parameters used: $f = 2636.5$ MHz; $\sigma = 2.095$ S/m; $\epsilon_r = 37.588$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.51, 7.51, 7.51); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch41055/Area Scan (81x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.20 W/kg

Ch41055/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.273 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.87 W/kg
SAR(1 g) = 0.833 W/kg; SAR(10 g) = 0.391 W/kg
Maximum value of SAR (measured) = 1.16 W/kg

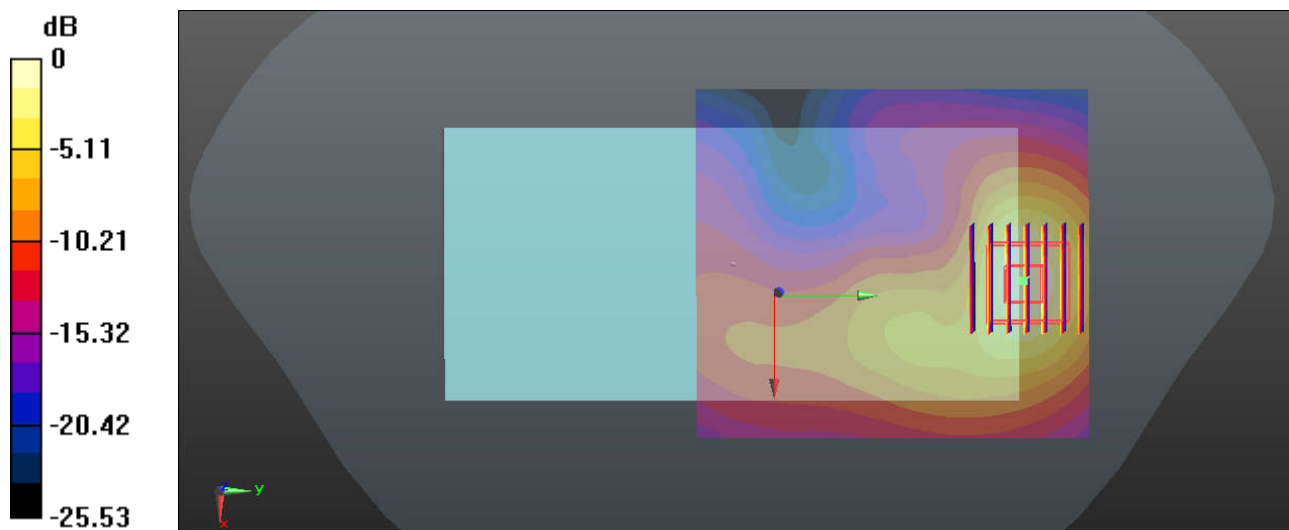

0 dB = 1.20 W/kg

55_Bluetooth_DH5 1Mbps_Back_10mm_Ch39


Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 1:1.304
Medium: HSL_2450_200609 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.815$ S/m; $\epsilon_r = 39.693$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.80, 7.80, 7.80); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch39/Area Scan (81x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0390 W/kg

Ch39/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.268 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.0630 W/kg
SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.014 W/kg
Maximum value of SAR (measured) = 0.0366 W/kg

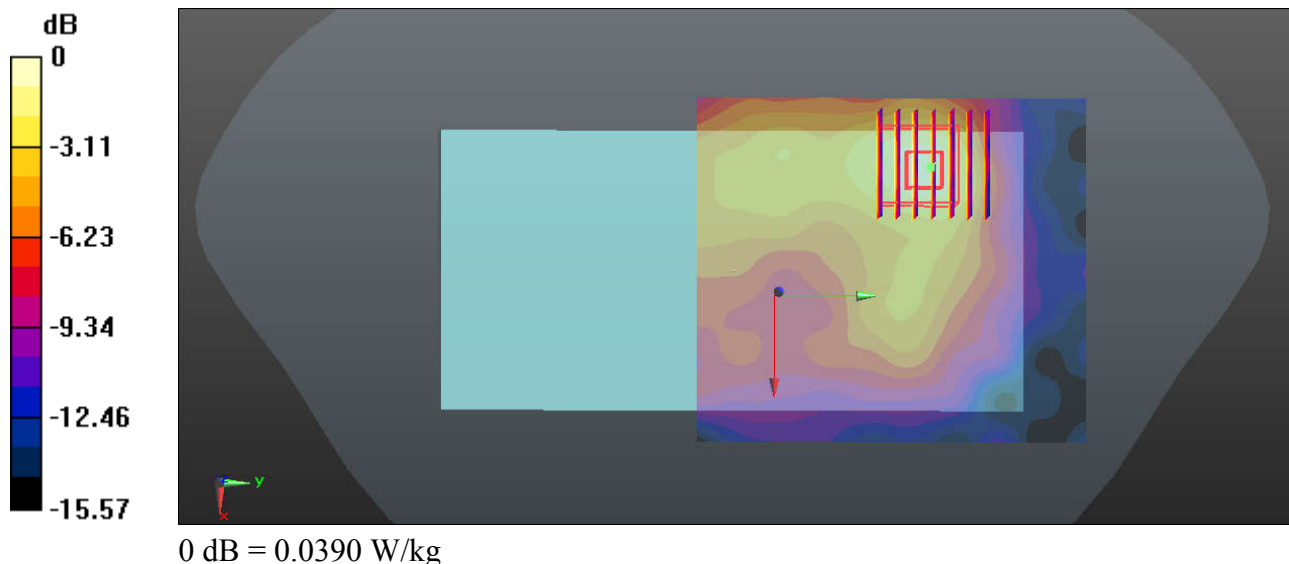

56_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch6


Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 1:1
 Medium: HSL_2450_200609 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.754$ S/m; $\epsilon_r = 39.473$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7577; ConvF(7.80, 7.80, 7.80); Calibrated: 03/02/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1356; Calibrated: 19/05/2020
- Phantom: SAM with CRP v4.0(Front); Type: QD000P40CC; Serial: TP:1575
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.140 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.289 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 0.232 W/kg
SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.052 W/kg
 Maximum value of SAR (measured) = 0.139 W/kg

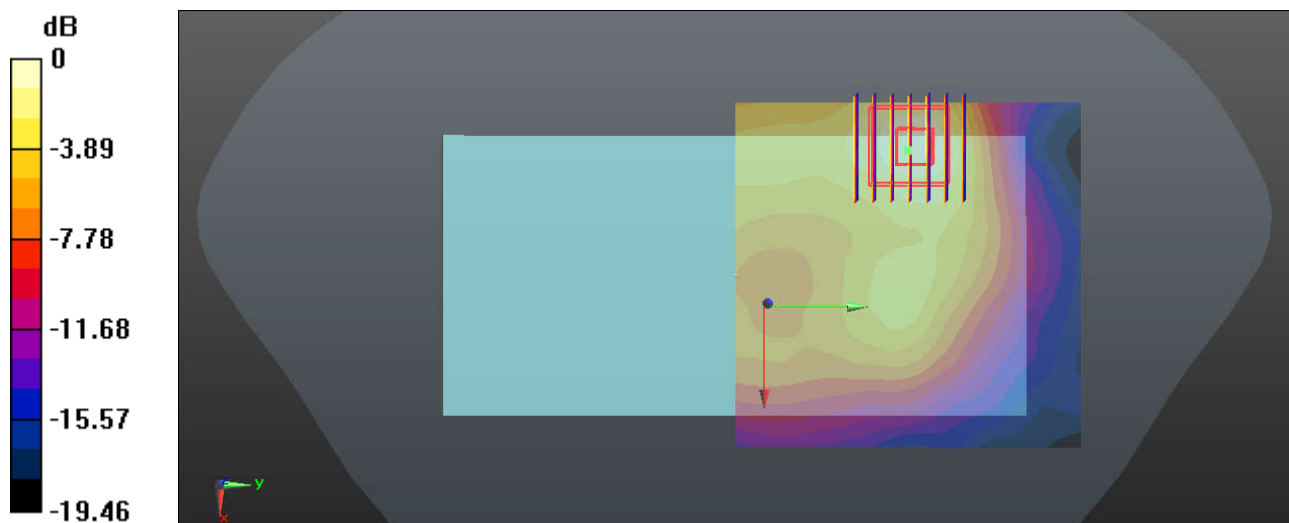

0 dB = 0.140 W/kg