FCC RF Test Report

APPLICANT : Bullitt Group

EQUIPMENT: Rugged Smart Phone

BRAND NAME : CAT
MODEL NAME : S61
FCC ID : ZL5S61

STANDARD : FCC 47 CFR Part 2, and 90(S)

CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jan. 11, 2018 and testing was completed on Apr. 14, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-E and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 1 of 20 Report Issued Date : May 03, 2018

Testing Laboratory 1190

: Rev. 01

Report No.: FG7D2711-02C

Report Template No.: BU5-FWLTE Version 1.0

Report Version

TABLE OF CONTENTS

RE	VISIO	N HISTORY	3
SU	MMAI	RY OF TEST RESULT	4
1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	5
	1.3	Feature of Equipment Under Test	5
	1.4	Modification of EUT	5
	1.5	Testing Site	6
	1.6	Applied Standards	6
2	TES	T CONFIGURATION OF EQUIPMENT UNDER TEST	7
	2.1	Test Mode	7
	2.2	Connection Diagram of Test System	8
	2.3	Support Unit used in test configuration and system	8
	2.4	Measurement Results Explanation Example	
	2.5	Frequency List of Low/Middle/High Channels	9
3	TES	T RESULT	10
	3.1	Conducted Output Power Measurement	10
	3.2	99% Occupied Bandwidth and 26dB Bandwidth Measurement	
	3.3	Emissions Mask Measurement	
	3.4	Emissions Mask – Out Of Band Emissions Measurement	14
	3.5	Field Strength of Spurious Radiation Measurement	
	3.6	Frequency Stability Measurement	17
4	LIST	OF MEASURING EQUIPMENT	19
5	UNC	ERTAINTY OF EVALUATION	20
ΑP	PEND	DIX A. TEST RESULTS OF CONDUCTED TEST	
ΑP	PEND	DIX B. TEST RESULTS OF RADIATED TEST	

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 2 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG7D2711-02C	Rev. 01	Initial issue of report	May 03, 2018

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 3 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	< 50+10log ₁₀ (P[Watts])	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	< 43+10log ₁₀ (P[Watts])	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 45.32 dB at 3264.000 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 4 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

1 General Description

1.1 Applicant

Bullitt Group

One Valpy, Valpy Street, Reading, Berkshire, England RG1 1AR

1.2 Manufacturer

Compal Electronics, INC.

No. 385, Yangguang St. Neihu District, Taipei City 11491, Taiwan, R.O.C

1.3 Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, FM Receiver, NFC, and GNSS.

Report No.: FG7D2711-02C

Product specification subjective to this standard					
	WWAN: PIFA Antenna				
	WLAN: PIFA Antenna				
Antonno Typo	Bluetooth: PIFA Antenna				
Antenna Type	GPS / Glonass / BDS / Galileo / SBAS : PIFA Antenna				
	NFC: Loop Antenna				
	FM: using earphone as antenna				

<Sample Information>

S61 has 2 different Variant						
Sample 1	Dual SIM					
Sample 2	Single SIM					
Dual SIM to Single SIM choose by SIM tray HW detection to select by image setting.						
(Two setting, by HW detection pin to trigger)						

Remark: All test items were performed with Sample 1.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

 SPORTON INTERNATIONAL INC.
 Page Number
 : 5 of 20

 TEL: 886-3-327-3456
 Report Issued Date
 : May 03, 2018

 FAX: 886-3-328-4978
 Report Version
 : Rev. 01

FCC ID : ZL5S61 Report Template No.: BU5-FWLTE Version 1.0

1.5 Testing Site

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.					
	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park,					
Test Site Location	Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.					
rest site Location	TEL: +886-3-327-3456					
	FAX: +886-3-328-4978					
Test Site No.	Sporton Site No.					
rest site No.	TH05-HY					

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.						
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-3273456						
	FAX: +886-3-3284978 Sporton Site No.						
Test Site No.	03CH11-HY						

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 90
- ANSI / TIA / EIA-603-E
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- Interim Guidance for Equipment Authorization of Devices with Channel Bandwidths Combined Across Two Contiguous Service Rule Allocations OET/Lab/EACB, June 6, 2013

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

SPORTON INTERNATIOINAL INC.

Page Number TEL: 886-3-327-3456 Report Issued Date: May 03, 2018 FAX: 886-3-328-4978 FCC ID: ZL5S61

Report Version : Rev. 01

: 6 of 20

Report No.: FG7D2711-02C

Report Template No.: BU5-FWLTE Version 1.0

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.


Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

		Bandwidth (MHz)			Modulation		RB#		Test Channel							
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	М	Н
Max. Output Power	26	v	v	٧	٧	v	-	v	v	v	v	v	v	٧	٧	v
26dB and 99% Bandwidth	26	v	v	v	v	v	-	v	v	v			٧	٧	٧	v
Emission masks In-band emissions	26	٧	v	v	v	v	-	٧	v	v	v		>	>		v
Emission masks – Out of band emissions	26	v	v	v	v	v	•	V	v	v	v			٧	٧	v
Frequency Stability	26				v	v	-	v					v		v	
E.R.P.	26					٧	-	v	v	v	٧			٧		
Radiated Spurious Emission	26	v	v	v	v	v	-	v			v			٧	٧	v
1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. Note 3. LTE Band26 transmit frequency for part22 rule is 824MHz-849MHz, for part90 rule is 814MHz-824MHz. 15MHz bandwidth complies the ERP limit line of part22 rule, therefore ERP of the partial frequency specific within part 22 also complies.																

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 7 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

2.2 Connection Diagram of Test System

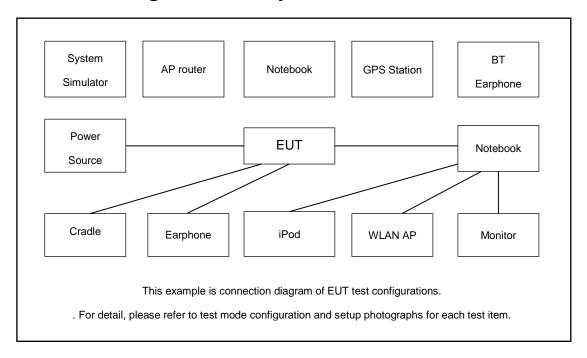

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$

$$= 4.2 + 10 = 14.2 (dB)$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 26 Channel and Frequency List								
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest				
15	Channel	26765	-	-				
15	Frequency	821.5	-	-				
10	Channel	-	26740	-				
	Frequency	-	819	-				
5	Channel	26715	26740	26765				
	Frequency	816.5	819	821.5				
2	Channel	26705	26740	26775				
3	Frequency	815.5	819	822.5				
1.4	Channel	26697	26740	26783				
	Frequency	814.7	819	823.3				

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 9 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.

3.1.4 Test Setup



3.1.5 Test Result of Conducted Output Power

Please refer to Appendix A.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 10 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01

Report No.: FG7D2711-02C

Report Template No.: BU5-FWLTE Version 1.0

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

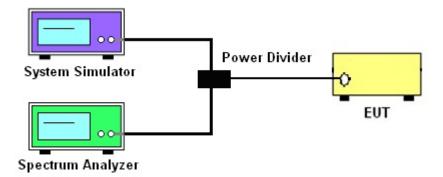

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Please refer to Appendix A.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 11 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01

Report No.: FG7D2711-02C

Report Template No.: BU5-FWLTE Version 1.0

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)

- (a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:
- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 $\log_{10}(f/6.1)$ decibels or 50 + 10 $\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.3.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and base station via power divider.
- 2. The emissions mask of low and high channels for the highest RF powers were measured.
- The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor 10log (1% of OBW/measured RBW)(dB) was compensated, if required.
- The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 12 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

3.3.4 Test Setup

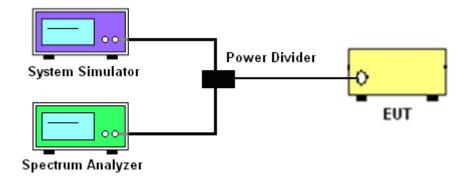

3.3.5 Test Result (Plots) of Conducted Emissions Mask

Please refer to Appendix A.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 13 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

3.4 Emissions Mask - Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least 43 + 10 log (P) dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
 The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.4.4 Test Setup

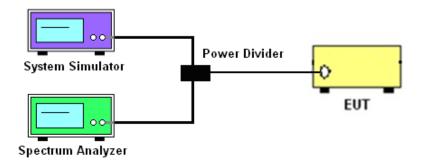

3.4.5 Test Result (Plots) of Conducted Emission

Please refer to Appendix A.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 14 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01

Report No.: FG7D2711-02C

Report Template No.: BU5-FWLTE Version 1.0

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43+10log₁₀(P[Watts]) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 11. ERP (dBm) = EIRP 2.15
- 12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 13. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 15 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01


Report Template No.: BU5-FWLTE Version 1.0

3.5.4 Test Setup

For radiated test from 30MHz to 1GHz

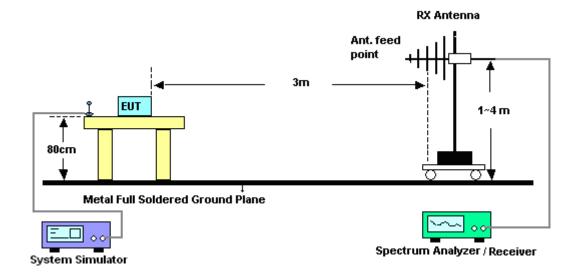

For radiated test above 1GHz

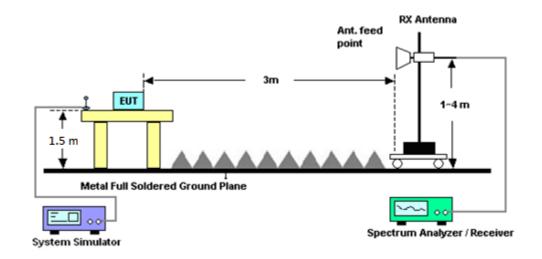

3.5.5 Test Result of Field Strength of Spurious Radiated

Please refer to Appendix B.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 16 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures for Temperature Variation

- 1. The EUT was set up in the thermal chamber and connected with the base station.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three
 hours. Power was applied and the maximum change in frequency was recorded within one
 minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.


3.6.4 Test Procedures for Voltage Variation

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the base station.
- 2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 17 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01

Report Template No.: BU5-FWLTE Version 1.0

3.6.5 Test Setup

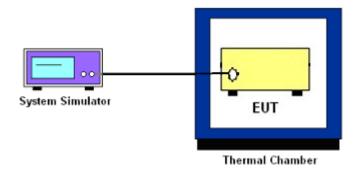

3.6.6 Test Result of Temperature Variation

Please refer to Appendix A.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 18 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201432821	GSM/GPRS /WCDMA/LTE	Oct. 13, 2017	Mar. 31. 2018~ Apr. 14. 2018	Oct. 12, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 07, 2017	Mar. 31. 2018~ Apr. 14. 2018	Nov. 06, 2018	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-30°C ~70°C	Aug. 28, 2017	Mar. 31. 2018~ Apr. 14. 2018	Aug. 27, 2018	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~5A	Oct. 06, 2017	Mar. 31. 2018~ Apr. 14. 2018	Oct. 05, 2018	Conducted (TH05-HY)
Coupler	Warison	1-18GHz 20 dB 25WSM A Directiona I Coupler	#B	1G~18GHz	Dec. 04, 2017	Mar. 31. 2018~ Apr. 14. 2018	Dec. 03, 2018	Conducted (TH05-HY)
Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Mar. 23, 2018~ Mar. 29, 2018	Jul. 17, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Mar. 23, 2018~ Mar. 29, 2018	Nov. 09, 2018	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6- 06	35414&AT-N 0602	30MHz~1GHz	Oct. 14, 2017	Mar. 23, 2018~ Mar. 29, 2018	Oct. 13, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 16, 2017	Mar. 23, 2018~ Mar. 29, 2018	Oct. 15, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Oct. 20, 2017	Mar. 23, 2018~ Mar. 29, 2018	Oct. 19, 2018	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Mar. 23, 2018~ Mar. 29, 2018	Nov. 22, 2019	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY5327008 0	1GHz~26.5GHz	Nov. 10, 2016	Mar. 23, 2018~ Mar. 29, 2018	Nov. 09, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY5420048 6	10Hz ~ 44GHz	Oct. 19, 2017	Mar. 23, 2018~ Mar. 29, 2018	Oct. 18, 2018	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-10 80-1200-15 00-60SS	SN2	1.2G High Pass	Sep. 18, 2017	Mar. 23, 2018~ Mar. 29, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-27 00-3000-18 000-60SS	SN3	2.7G High Pass	Sep. 18, 2017	Mar. 23, 2018~ Mar. 29, 2018	Sep. 17, 2018	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-450 0-B	N/A	1~4m	N/A	Mar. 23, 2018~ Mar. 29, 2018	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Mar. 23, 2018~ Mar. 29, 2018	N/A	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MX E)	MY5729011 1	3Hz~26.5GHz	Nov. 02, 2017	Mar. 23, 2018~ Mar. 29, 2018	Nov. 01, 2018	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 76	18GHz- 40GHz	Apr. 27, 2017	Mar. 23, 2018~ Mar. 29, 2018	Apr. 26, 2018	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 84	18GHz- 40GHz	Nov. 27, 2017	Mar. 23, 2018~ Mar. 29, 2018	Nov. 26, 2018	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Mar. 23, 2018~ Mar. 29, 2018	N/A	Radiation (03CH11-HY)

SPORTON INTERNATIOINAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 19 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	2 27
Confidence of 95% (U = 2Uc(y))	3.37

Uncertainty of Radiated Emission Measurement (1 GHz ~ 9 GHz)

Measuring Uncertainty for a Level of	3.67
Confidence of 95% (U = 2Uc(y))	3.07

SPORTON INTERNATIOINAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: ZL5S61 Page Number : 20 of 20
Report Issued Date : May 03, 2018
Report Version : Rev. 01
Report Template No.: BU5-FWLTE Version 1.0



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 26 Maximum Average Power [dBm]										
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest				
15	1	0		23.68	-	-				
15	1	37		23.72	-	-				
15	1	74		23.84	-	-				
15	36	0	QPSK	22.77	1	-				
15	36	20		22.88	1	-				
15	36	39		22.86	1	-				
15	75	0		22.87	•	-				
15	1	0		22.96	1	-				
15	1	37		22.95	•	-				
15	1	74		22.98	-	-				
15	36	0	16-QAM	21.89	•	-				
15	36	20		21.93	-	-				
15	36	39		21.82	-	-				
15	75	0		21.91	-	-				
15	1	0		21.96	-	-				
15	1	37		21.83	-	-				
15	1	74		21.98	-	-				
15	36	0	64-QAM	20.77	-	-				
15	36	20		20.91	-	-				
15	36	39		20.88	-	-				
15	75	0		20.89	-	-				
10	1	0		-	23.76	-				
10	1	25		-	23.82	-				
10	1	49		-	23.80	-				
10	25	0	QPSK	-	22.86	-				
10	25	12		-	22.87	-				
10	25	25		-	22.83	-				
10	50	0		-	22.87	-				
10	1	0		-	22.96	-				
10	1	25		-	22.99	-				
10	1	49		-	22.94	-				
10	25	0	16-QAM	-	21.85	-				
10	25	12		-	21.83	-				
10	25	25		-	21.78	-				
10	50	0		-	21.82	-				
10	1	0		-	21.92	-				
10	1	25		-	22.00	-				
10	1	49		-	21.91	-				
10	25	0	64-QAM	-	20.85	-				
10	25	12		-	20.86	-				
10	25	25		-	20.81	-				
10	50	0		-	20.81	-				

		LTE	Band 26 Ma	ximum Average Po	ower [dBm]	
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0		23.66	23.84	23.68
5	1	12		23.64	23.81	23.71
5	1	24		23.73	23.79	23.66
5	12	0	QPSK	22.71	22.85	22.71
5	12	7		22.79	22.88	22.75
5	12	13		22.78	22.86	22.71
5	25	0		22.77	22.83	22.72
5	1	0		22.93	22.99	22.93
5	1	12		22.93	22.95	22.80
5	1	24		22.97	22.93	22.76
5	12	0	16-QAM	21.82	21.82	21.79
5	12	7		21.93	21.85	21.79
5	12	13		21.89	21.81	21.74
5	25	0		21.88	21.78	21.76
5	1	0		21.93	21.98	21.94
5	1	12		21.93	21.96	21.80
5	1	24		21.97	21.90	21.78
5	12	0	64-QAM	20.89	20.91	20.89
5	12	7		20.92	20.91	20.86
5	12	13		20.96	20.88	20.84
5	25	0		20.91	20.80	20.81
3	1	0		21.17	21.32	21.16
3	1	8		21.15	21.29	21.12
3	1	14		21.14	21.28	21.12
3	8	0	QPSK	20.22	20.37	20.21
3	8	4		20.26	20.39	20.23
3	8	7		20.22	20.35	20.23
3	15	0		20.20	20.33	20.20
3	1	0		20.83	21.07	20.78
3	1	8		20.84	21.08	20.81
3	1	14		20.82	21.04	20.76
3	8	0	16-QAM	19.69	19.89	19.65
3	8	4		19.71	19.90	19.69
3	8	7		19.69	19.86	19.68
3	15	0		19.63	19.79	19.61
3	1	0		21.41	21.49	21.31
3	1	8		21.43	21.48	21.29
3	1	14		21.41	21.41	21.27
3	8	0	64-QAM	20.88	21.09	20.78
3	8	4		20.93	21.10	20.81
3	8	7		20.89	21.06	20.81
3	15	0		20.84	21.00	20.81

0

LTE Band 26 Maximum Average Power [dBm] RB Offset BW [MHz] **RB Size** Mod Middle Lowest Highest 1.4 1 0 21.07 21.25 21.07 1.4 1 3 21.14 21.30 21.15 1.4 1 5 21.08 21.25 21.07 1.4 3 0 QPSK 21.13 21.27 21.09 1.4 3 1 21.14 21.29 21.14 1.4 3 3 21.13 21.28 21.13 1.4 6 0 20.14 20.28 20.15 1 1.4 0 20.79 20.99 20.72 1.4 1 3 20.85 21.07 20.80 1.4 1 5 20.81 20.97 20.72 1.4 3 0 16-QAM 20.57 20.75 20.52 20.78 1.4 3 1 20.59 20.54 1.4 3 3 20.52 20.58 20.76 1.4 6 0 19.62 19.79 19.62 1.4 1 0 21.15 21.40 21.03 1 1.4 3 21.22 21.44 21.08 1.4 1 5 21.19 21.37 21.02 1.4 3 21.37 21.07 0 64-QAM 21.17 1.4 3 1 21.20 21.42 21.09 1.4 3 3 21.16 21.36 21.08 1.4 6

20.07

20.23


20.03

LTE Band 26_Part 90S


Peak-to-Average Ratio

Mode										
Mod.	QP	SK	160	Limit: 13dB						
RB Size	1RB Full RB		1RB	Full RB	Result					
Lowest CH	-	-	-	-						
Middle CH	3.36	4.46	4.58	5.59	PASS					
Highest CH	-	-	-	-]					
Mode		LTE Band 26 / 10MHz								
Mod.	64C	AM			Limit: 13dB					
		1RB Full RB								
RB Size	1RB	Full RB			Result					
RB Size Lowest CH	1RB	Full RB	-	-	Result					
	1RB 5.83	Full RB 6.38	- -	-	Result PASS					

TEL: 886-3-327-3456 FAX: 886-3-328-4978

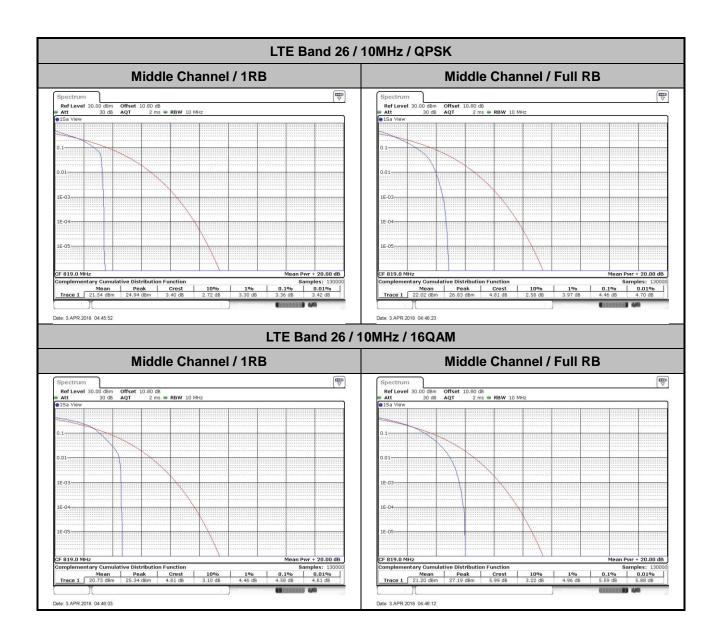



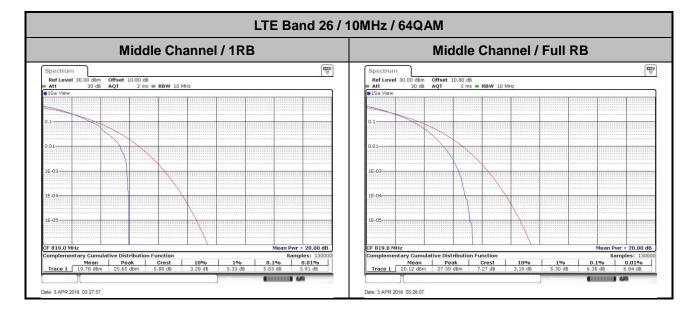


26dB Bandwidth

Mode	LTE Band 26 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.23	1.24	2.96	3.05	4.94	4.84			14.63	14.48		
Middle CH	1.24	1.23	3.04	3.04	4.82	4.96	9.75	9.75				
Highest CH	1.22	1.24	2.99	3.01	4.85	4.84						
Mode					LTE Ba	and 26 :	26dB BV	V(MHz)				
BW	1.4	ИНz	3M	lHz	5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.22		3.04	-	4.95	-	-	-	14.54	-	-	-
Middle CH	1.22		2.94	-	4.88	-	9.81	-		-	-	-
Highest CH	1.23		3.00	-	4.83	-	-	-	-	-	-	-

Report No. :FG7D2711-02C


: A2-4 of 47

TEL: 886-3-327-3456 FAX: 886-3-328-4978

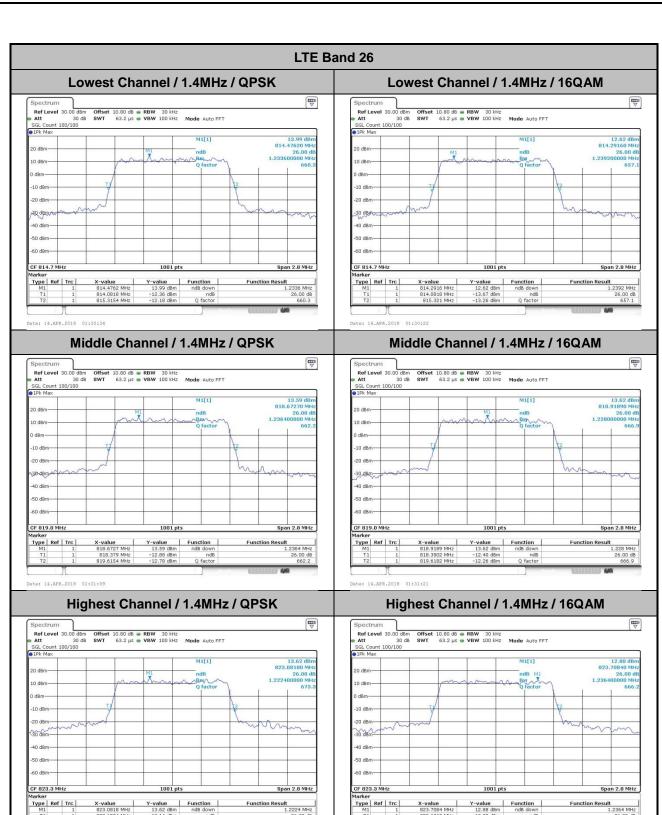


: A2-5 of 47


Report No. :FG7D2711-02C

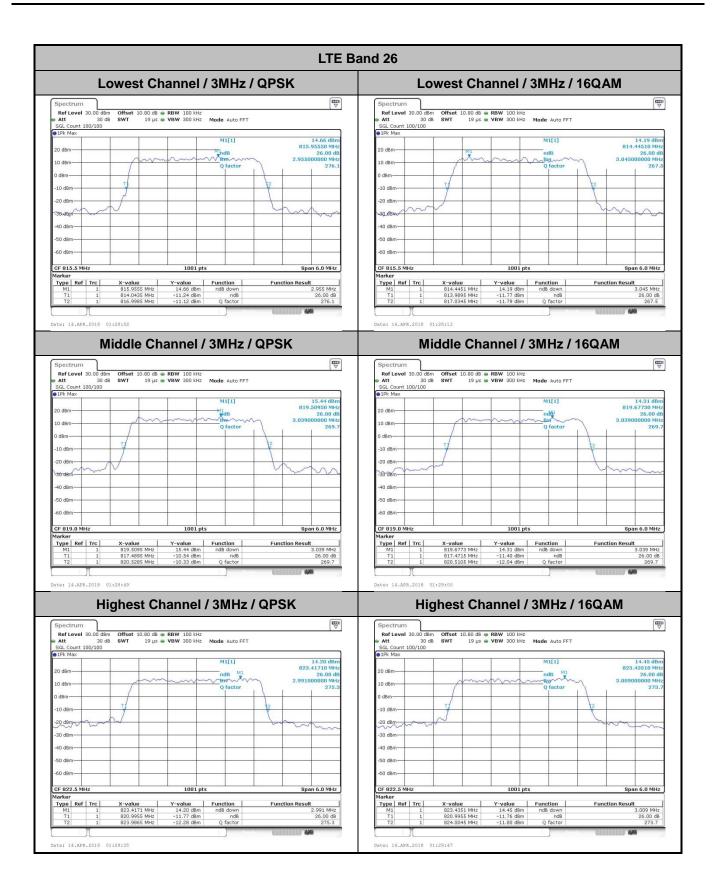


TEL: 886-3-327-3456 FAX: 886-3-328-4978



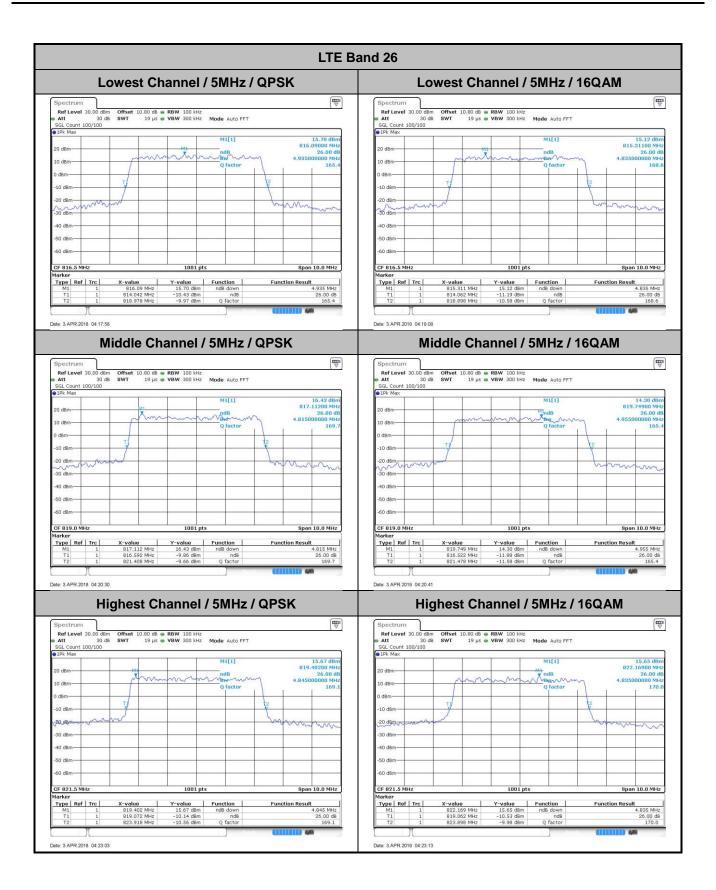


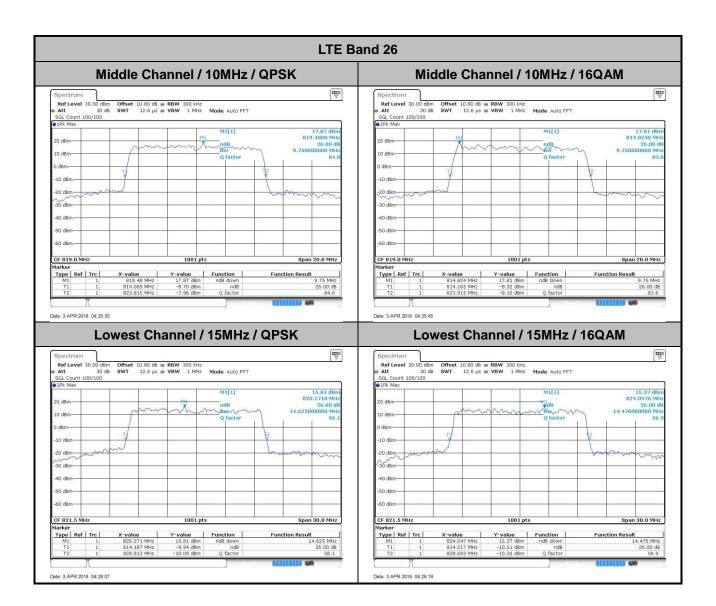




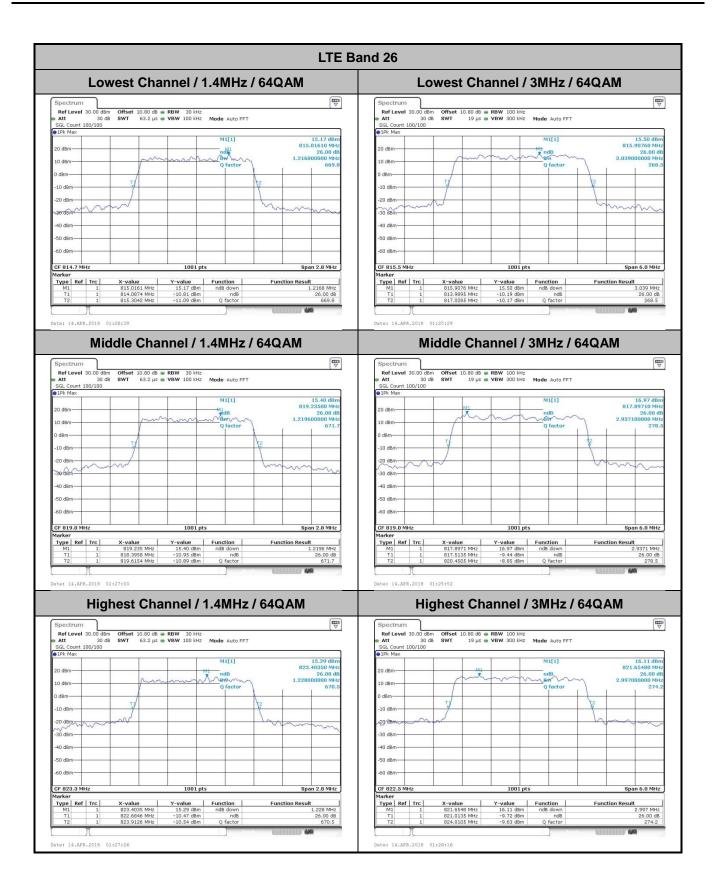


: A2-9 of 47



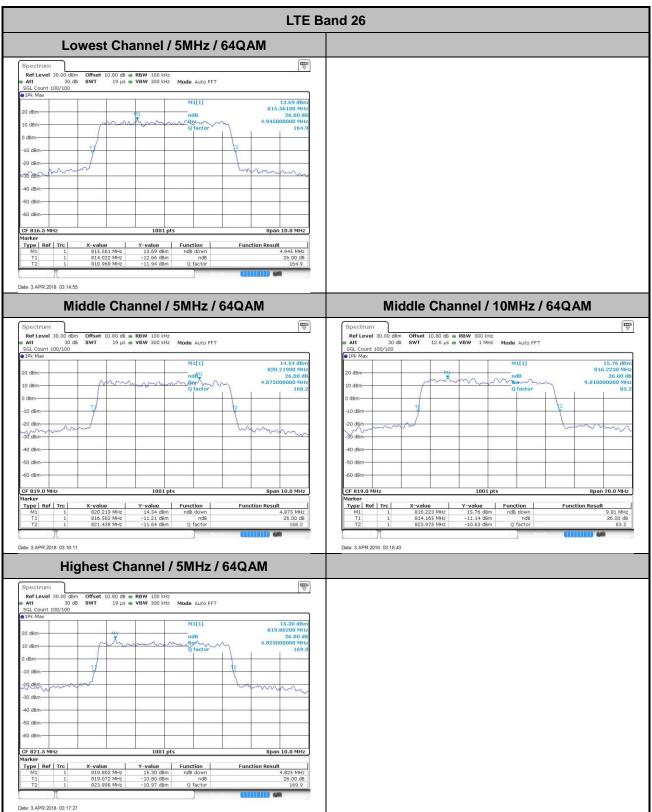

: A2-10 of 47



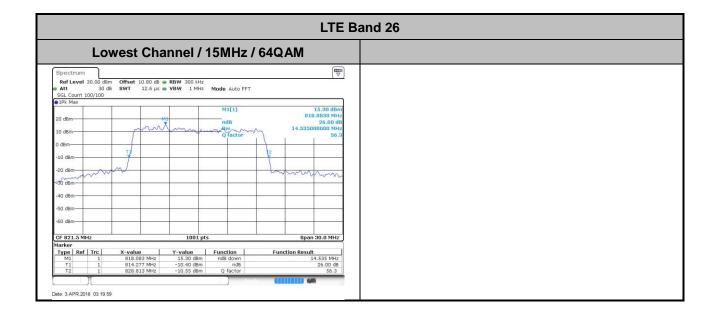

Occupied Bandwidth

Mode	LTE Band 26 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.72	2.70	4.52	4.50			13.43	13.49		
Middle CH	1.09	1.09	2.71	2.70	4.51	4.49	8.95	8.99				
Highest CH	1.09	1.09	2.72	2.73	4.51	4.54						
Mode					LTE Ba	and 26 :	99%OBV	V(MHz)				
BW	1.41	ИНz	Hz 3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.09		2.73	-	4.49	-	-	-	13.43	-	-	-
Middle CH	1.09		2.74	-	4.48	-	9.01	-		-	-	-
Highest CH	1.09		2.71	-	4.50	-	-	-	-	-	-	-

TEL: 886-3-327-3456 FAX: 886-3-328-4978

Report No.:FG7D2711-02C



TEL: 886-3-327-3456 FAX: 886-3-328-4978

LTE Band 26 Lowest Channel / 3MHz / QPSK Lowest Channel / 3MHz / 16QAM 15.49 dBn 815.18230 MH: 2.703296703 MH: 14.28 dBn 815.12240 MH: 2.715284715 MH: M1[1] M1[1] 10 dBm -10 dBm -10 dBm -40 dBm -60 dBm CF 815.5 X-value 815.1823 MHz 814.15734 MHz 816.86064 MHz Y-value 15.49 dBm 8.43 dBm 9.66 dBm Type Ref Trc Type Ref Trc Middle Channel / 3MHz / QPSK Middle Channel / 3MHz / 16QAM 0 dBm--20 dBm allutten. 30 dBm--40 dBm -50 dBm CF 819.0 MH CF 819.0 MH Type Ref Trc
 X-value
 Y-value
 Function

 819.7433 MHz
 15.24 dBm
 0cc Bw

 817.63337 MHz
 8.76 dBm
 0cc Bw

 820.34266 MHz
 8.71 dBm
 0cc Bw

 X-value
 Y-value
 Function

 818.0949 MHz
 14.65 dBm
 917.64835 MHz
 8.47 dBm
 Occ Bw

 820.34865 MHz
 8.14 dBm
 8.14 dBm
 Occ Bw
 Type Ref Trc **Function Result Function Result** 2.709290709 MHz 2.703296703 MHz Date: 14.APR.2018 01:28:25 Highest Channel / 3MHz / QPSK Highest Channel / 3MHz / 16QAM .80 dB **RBW** 100 kHz 19 µs **VBW** 300 kHz **Mode** Auto FFT 15.41 dBn 821.75670 MH: 2.721278721 MH: 14.35 dBm 821.89460 MHz 2.72727277 MHz M1[1] 20 dBm 0 dBmdBm-10 dBm -10 dBm -20 dBm -30 dBm -50 dBm

CF 822.5 MI

Function Result

2.721278721 MHz

X-value Y-value Function 821.7567 MHz 15.41 dBm

9.62 dBm Occ Bw 9.78 dBm

TEL: 886-3-327-3456 FAX: 886-3-328-4978

CF 822.5 MHz
Marker
Type | Ref | Trc |


Occ Bw


Function Result

2.727272727 MHz

 Type
 Ref
 Trc
 X-value
 Y-value
 Function

 M1
 1
 821.8946 MHz
 14.35 dBm

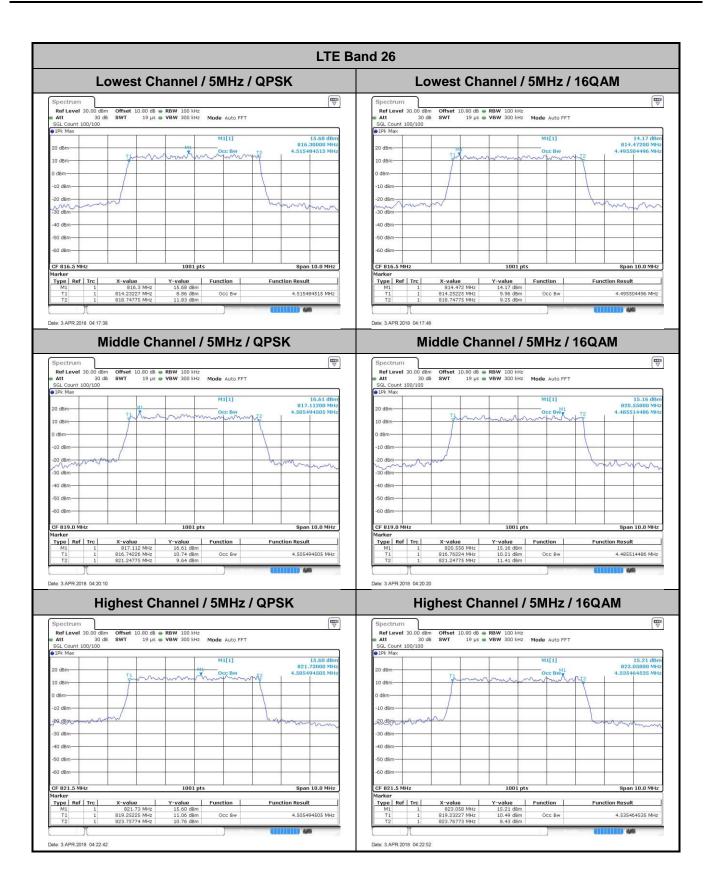

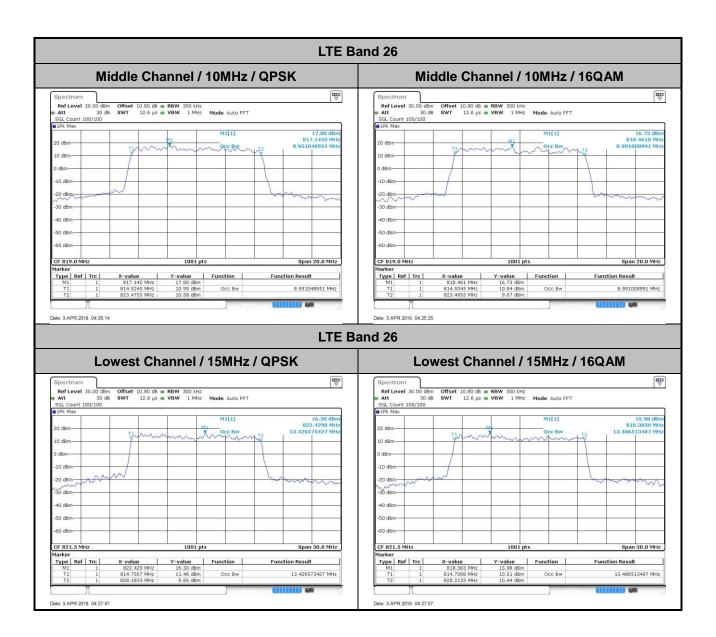

: A2-16 of 47

FCC RF Test Report Report No.:FG7D2711-02C LTE Band 26 Lowest Channel / 1.4MHz / 64QAM Lowest Channel / 3MHz / 64QAM Ref Level 30.00 dBm Offset 10.80 dB RBW 30 kHz

att 30 db SWT 63.2 µs VBW 100 kHz Mode Auto FFT

5GL Count 100/100

1Pk Max Ref Level 30.00 dBm Offset 10.80 dB RBW 100 kHz

att 30 db SWT 19 µs VBW 300 kHz Mode Auto FFT

5GL Count 100/100

1Pk Max M1[1] 0 dBm--10 dBm 3Ø dBm--30 dBm--50 dBm
 X-value
 Y-value
 Function

 814.507 MHz
 13.95 dBm
 B14.1545 MHz
 7.79 dBm
 Occ Bw

 815.24545 MHz
 8.44 dBm
 Occ Bw
 Type | Ref | Trc | Function Result Type | Ref | Trc | Function Occ Bw 1.090909091 MHz 2.733266733 MHz Middle Channel / 1.4MHz / 64QAM Middle Channel / 3MHz / 64QAM 15.63 dBn 819.23780 MH 1.093706294 MH 15.87 dBr M1[1] M1[1] 10 dBm--10 dBm -10 dBm 1 -40 dBm -60 dBm-Span 2.8 MHz 1001 pt Span 6.0 MHz CF 819.0 MH 1001 pt CF 819.0 M Y-value Function
15.63 dBm
8.33 dBm Occ Bw
7.60 dBm Function Result Type Ref Trc 2.739260739 MHz Highest Channel / 1.4MHz / 64QAM Highest Channel / 3MHz / 64QAM Ref Level 30.00 d8m Offset 10.80 d8 ● RBW 30 kHz Att 30 d8 SWT 63.2 µs ● VBW 100 kHz Mode Auto FFT SGL Count 100/100 10.80 dB • RBW 100 kHz 19 µs • VBW 300 kHz Mode Auto FFT M1[1] M1[1] 10 dBm-0 dBm--20 dBm

> -40 dBm -50 dBm 60 dBm-CF 822.5 MH:

Marker
Type Ref Trc

SPORTON INTERNATIONAL INC.

Y-value Function

14.12 dBm

7.51 dBm Occ Bw

8.63 dBm

Function Result

1.090909091 MHz

TEL: 886-3-327-3456 FAX: 886-3-328-4978

CF 823.3 MH

Date: 14.APR.2018 01:27:15

1001 pt


821.14535 MHz 823.85465 MHz


Function


Occ Bw

Function Result

2.709290709 MHz

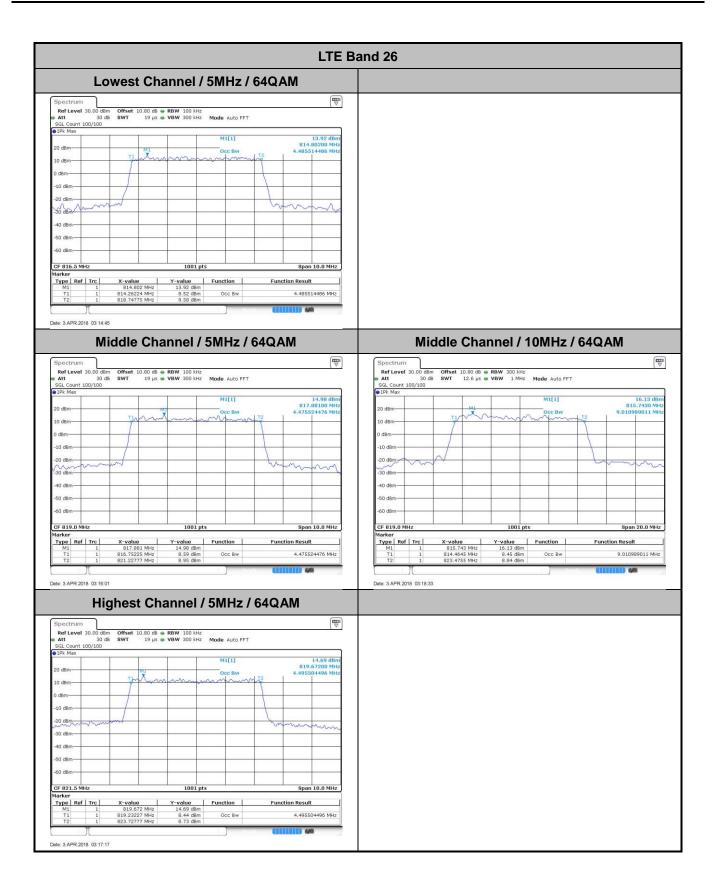




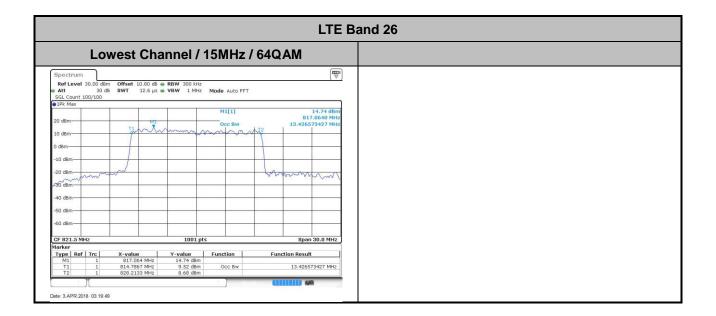


Conducted Band Edge

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978



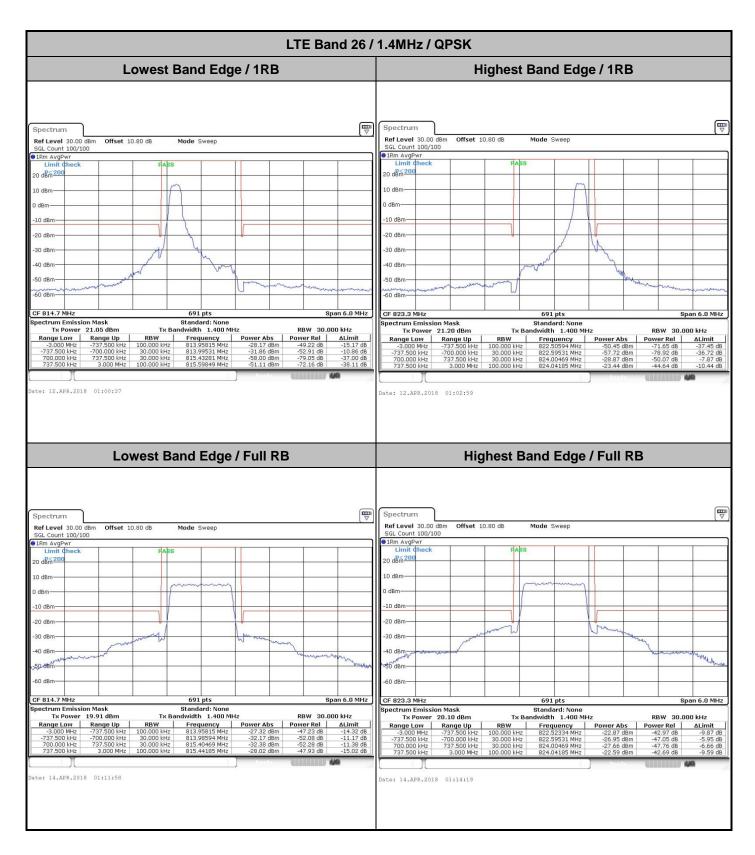

LTE Band 26 / 1.4MHz / 16QAM Lowest Band Edge / 1 RB Highest Band Edge / 1 RB Spectrum Ref Level 30.00 dBm Offset 10.80 dB Mode Sweep Ref Level 30.00 Offset 10.80 dB Mode Sweep GL Count 100/100 20 d<mark>B</mark>≤ 200 20 dBm 20 10 dBm dBm -10 dBr -10 dBm -20 dBr 20 dBm 30 dBn 30 dBm 40 dBm 40 dBm -50 dBm 50 dBm -60 dBm CF 814.7 MHz 691 pts 691 pts Span 6.0 MHz CF 823.3 Spectrum Emission Mask
Tx Power 21.63 dBm
Range Low Range Up
-3.000 MHz -737.500 kHz Standard: None ndwidth 1.400 MHz RBW 30.000 kHz
 Frequency
 Power Abs

 822.49724 MHz
 -48.88 dBm

 822.56719 MHz
 -55.74 dBm

 824.00469 MHz
 -24.54 dBm

 824.01485 MHz
 -20.78 dBm
 Frequency 813.95815 MHz 813.99531 MHz Power Rel | ALimit Range Low Range Up ate: 12.APR.2018 01:01:47 Date: 12.APR.2018 01:04:11 Lowest Band Edge / Full RB **Highest Band Edge / Full RB** Spectrum Mode Sweep Offset 10.80 dB Mode Sweep Ref Level 30.00 dBm Offset 10.80 dB SGL Count 100/100 1Rm AvgPwr Limit ¢heck 20 dRm 20 20 dBm 20 -20 dBm 50 dBn 691 pts Standard: None Tx Bandwidth 1.400 MHz Standard: None ndwidth 1.400 MHz RBW 30.000 kHz Tx Ba Frequency 95815 MHz Tx Power 19.63 dBm RBW 30,000 kHz | Power Rel | ΔLimit |
-47.63 dB	-15.09
-52.23 dB	-11.69
-53.28 dB	-12.74
-47.67 dB	-15.13 Range Up
 Frequency
 Power Abs

 822.52334 MHz
 -22.94 dBr
 ate: 14.APR.2018 01:13:08 Date: 14.APR.2018 01:15:31

TEL: 886-3-327-3456 FAX: 886-3-328-4978

LTE Band 26 / 1.4MHz / 64QAM Lowest Band Edge / 1 RB Highest Band Edge / 1 RB Spectrum Ref Level 30.00 dBm Offset 10.80 dB Mode Sweep Ref Level 30.00 Offset 10.80 dB Mode Sweep GL Count 100/100 20 d<mark>B</mark>≤ 200 20 dBm 20 10 dBm dBm -10 dBr -10 dBm -20 dBr 20 dBm 30 dBn 30 dBm 40 dBn 40 dBm -50 dBm 50 dBm 691 pts 691 pts Span 6.0 MHz CF 823.3 Spectrum Emission Mask Tx Power 21.37 dBm Range Low Range Up -3.000 MHz -737.500 kHz Standard: None ndwidth 1.400 MHz RBW 30.000 kHz
 Frequency
 Power Abs

 822.41022 MHz
 -50.87 dBm

 822.58594 MHz
 -56.94 dBm

 824.00469 MHz
 -24.88 dBm

 824.05055 MHz
 -20.69 dBm
 Frequency 813.95815 MHz 813.99531 MHz Power Rel ALimit Range Low Range Up ate: 12.APR.2018 01:10:13 Date: 12.APR.2018 01:11:24 Lowest Band Edge / Full RB Highest Band Edge / Full RB Spectrum Ref Level 30.00 dBm Offset 10.80 dB Mode Sweep Offset 10.80 dB Mode Sweep SGL Count 100/100 1Rm AvgPwr 20 dRm 20 20 dBm 20 40,dB 50 dBn 691 pts Span 6.0 MHz Standard: None Tx Bandwidth 1.400 MHz RBW 30.000 kHz Tx Ba dwidth 1.400 MHz Tx Power 20.70 dBm RBW 30,000 kHz Range Low Range Up | Power Rel | ΔLimit |
-46.95 dB	-13.51
-51.92 dB	-10.47
-52.27 dB	-10.82
-46.94 dB	-13.49
 Frequency
 Power Abs

 822.53204 MHz
 -21.70 dB
 ate: 14.APR.2018 01:21:30 Date: 14.APR.2018 01:22:41

TEL: 886-3-327-3456 FAX: 886-3-328-4978