



# FCC RADIO TEST REPORT

**FCC ID** : ZL5S62PROE  
**Equipment** : Rugged Smart Phone  
**Brand Name** : CAT  
**Model Name** : S62 Pro  
**Applicant** : Bullitt Group  
One Valpy, Valpy Street, Reading,  
Berkshire, England RG1 1AR  
**Standard** : FCC Part 15 Subpart E §15.407

The product was received on May 05, 2020 and testing was started from May 22, 2020 and completed on Jun. 25, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	6
1.4 Applicable Standards.....	6
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>7</b>
2.1 Carrier Frequency and Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 Test Result .....</b>	<b>11</b>
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement .....	11
3.2 Maximum Conducted Output Power Measurement .....	14
3.3 Power Spectral Density Measurement .....	15
3.4 Unwanted Emissions Measurement.....	17
3.5 AC Conducted Emission Measurement.....	21
3.6 Automatically Discontinue Transmission .....	23
3.7 Antenna Requirements .....	24
<b>4 List of Measuring Equipment.....</b>	<b>25</b>
<b>5 Uncertainty of Evaluation .....</b>	<b>27</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	
<b>Appendix F. Setup Photographs</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403 (i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407 (a)	Maximum Conducted Output Power	Pass	-
3.3	15.407 (a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	Under limit 1.12 dB at 11490.000 MHz
3.5	15.207	AC Conducted Emission	Pass	Under limit 18.35 dB at 0.502 MHz
3.6	15.407 (c)	Automatically Discontinue Transmission	Pass	-
3.7	15.203 & 15.407 (a)	Antenna Requirement	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Yimin Ho**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, NFC and GNSS.

Product Specification subjective to this standard	
Sample 1	Dual SIM
Sample 2	Single SIM
Antenna Type	WWAN <Main 1>: PIFA Antenna <Main 2>: PIFA Antenna <Diversity 1>: PIFA Antenna <Diversity 2>: Loop Antenna WLAN 2.4GHz: PIFA Antenna WLAN 5GHz: Mono Pole Antenna Bluetooth: PIFA Antenna GPS/Glonass/BDS/Galileo/SBAS: PIFA Antenna NFC: Loop Antenna

**Remark:**

1. The samples have same layout, circuit and components but different SIM tray. The phone software will identify the loaded sim card combinations whether with single sim card or dual sim cards.
2. The tests were performed with Sample 1.

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.3 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory		
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		
	TH05-HY	CO05-HY	03CH07-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190

### 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 <sup>#</sup>	5775	165	5825

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80.



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN (5GHz) Link + NFC On + MPEG4 + USB Cable (Charging from AC Adapter) + SIM 1

Ch. #	Band IV : 5725-5850 MHz			
	802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L Low	149	149	151	-
M Middle	157	157	-	155
H High	165	165	159	-

**Remark:** For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.



### 2.3 Connection Diagram of Test System



### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
3.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	Latitude E3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A



## 2.5 EUT Operation Test Setup

The RF test items, utility “QRCT v4.0 00142.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


##### 3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

##### 3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


##### 3.1.4 Test Setup

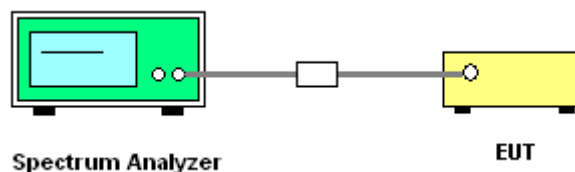

##### 3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

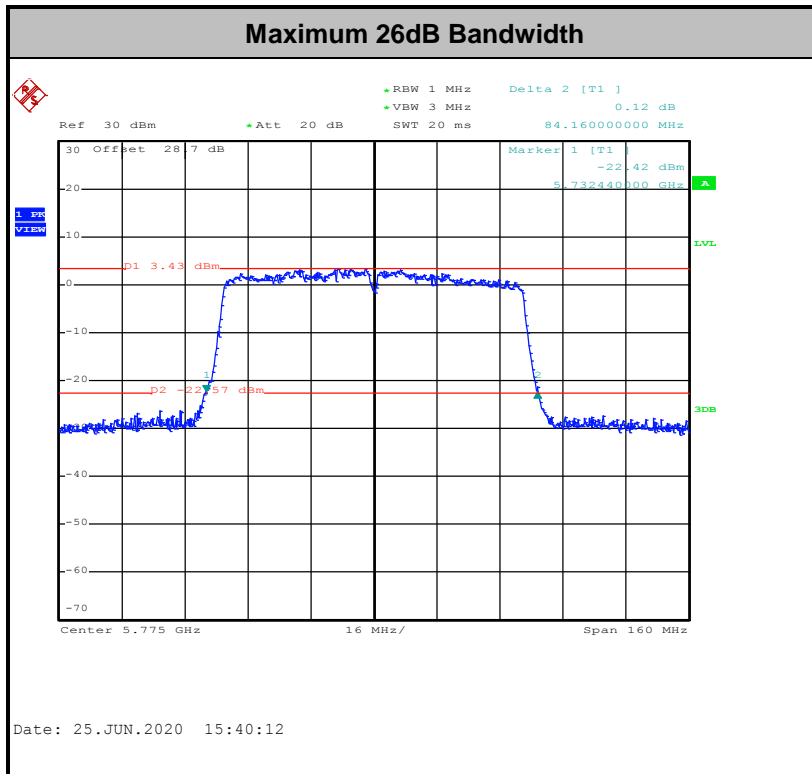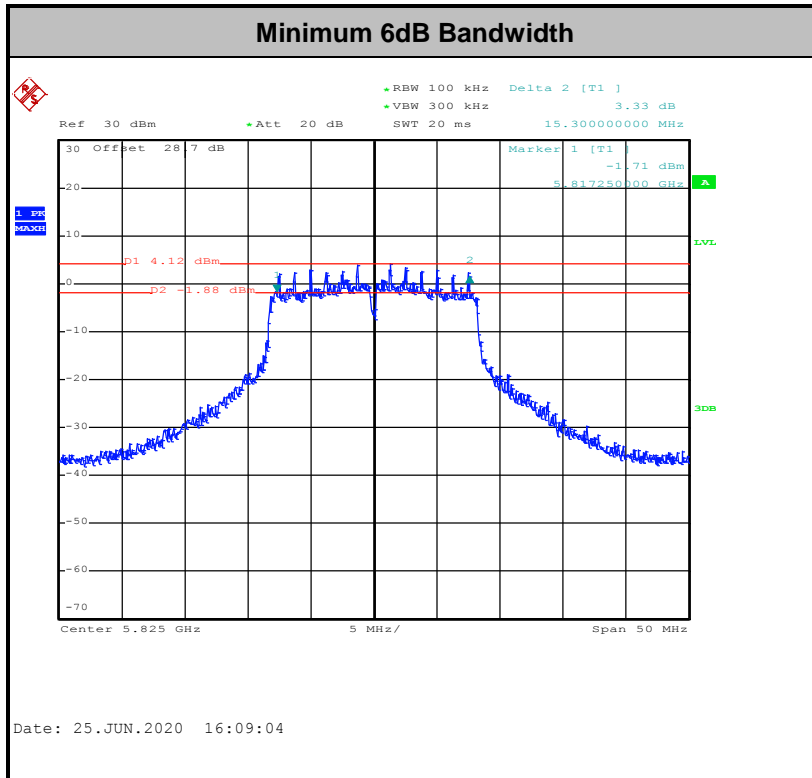

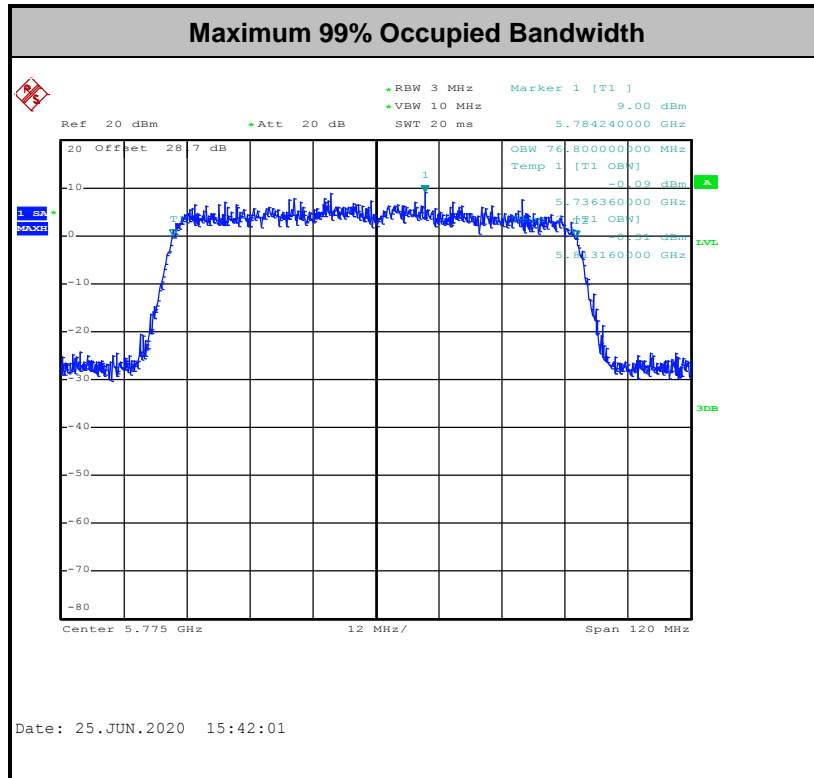

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### 3.2.4 Test Setup

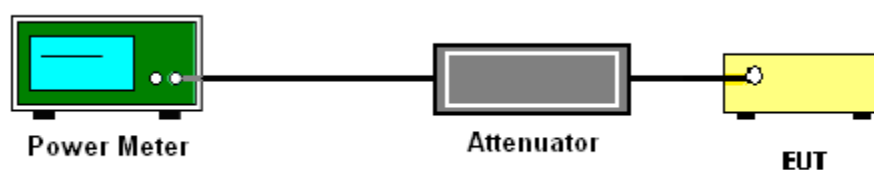

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

##### # Method SA-3 #

(power averaging (rms) detection with max hold):


- Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 300 kHz.
  - Set VBW  $\geq$  1 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time  $\leq$  (number of points in sweep)  $\times$  T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
  - Detector = power averaging (rms).
  - Trace mode = max hold.
  - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup

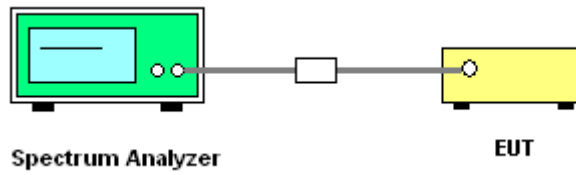

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

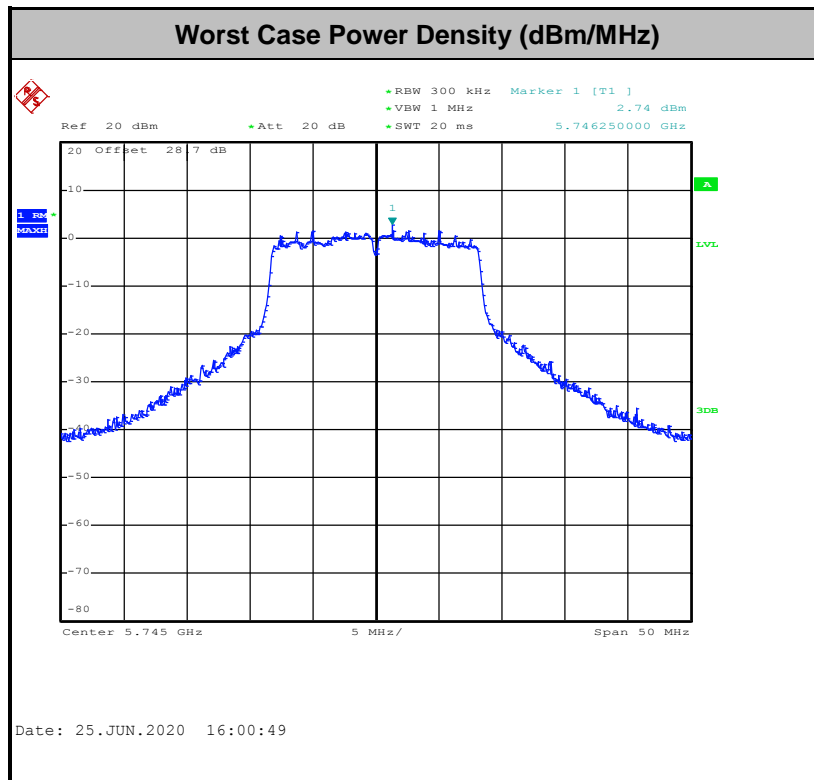





### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.
- (ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.



### 3.4.2 Measuring Instruments


See list of measuring equipment of this test report.

### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

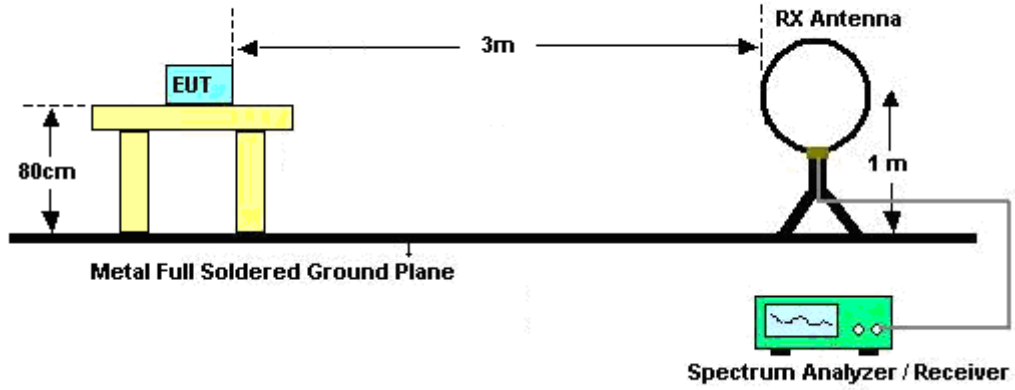

For radiated emissions from 30MHz to 1GHz

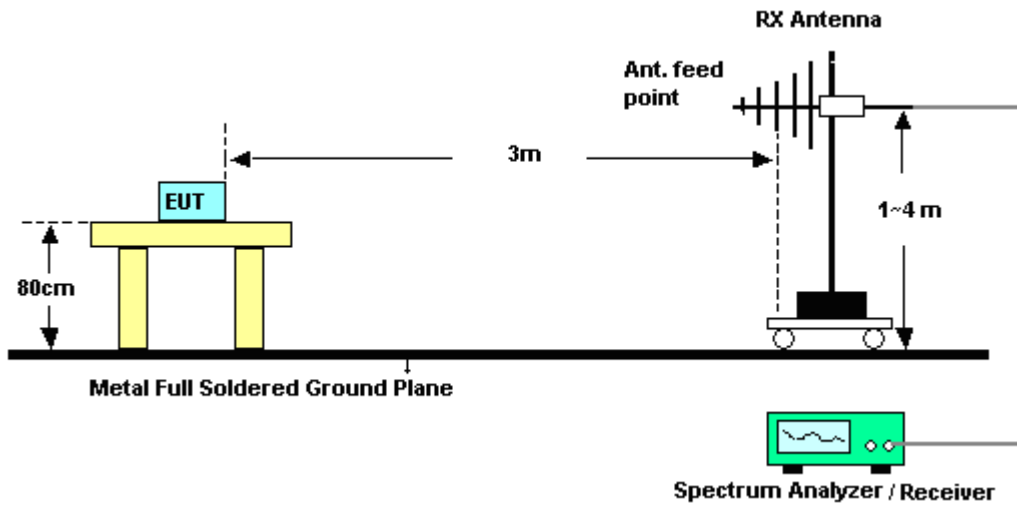

For radiated emissions above 1GHz

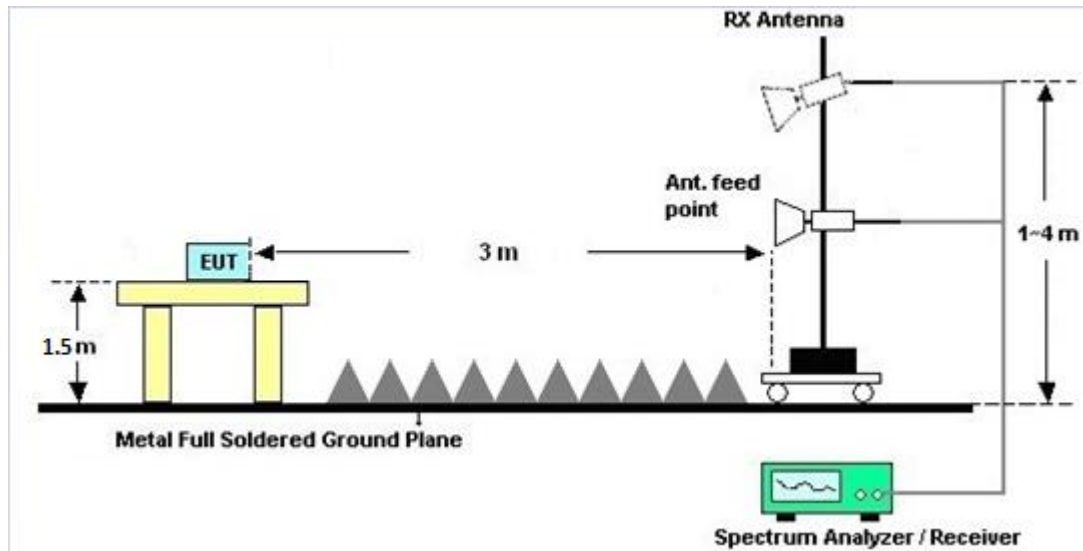

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

### 3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C and D.

### 3.4.7 Duty Cycle

Please refer to Appendix E.

### 3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

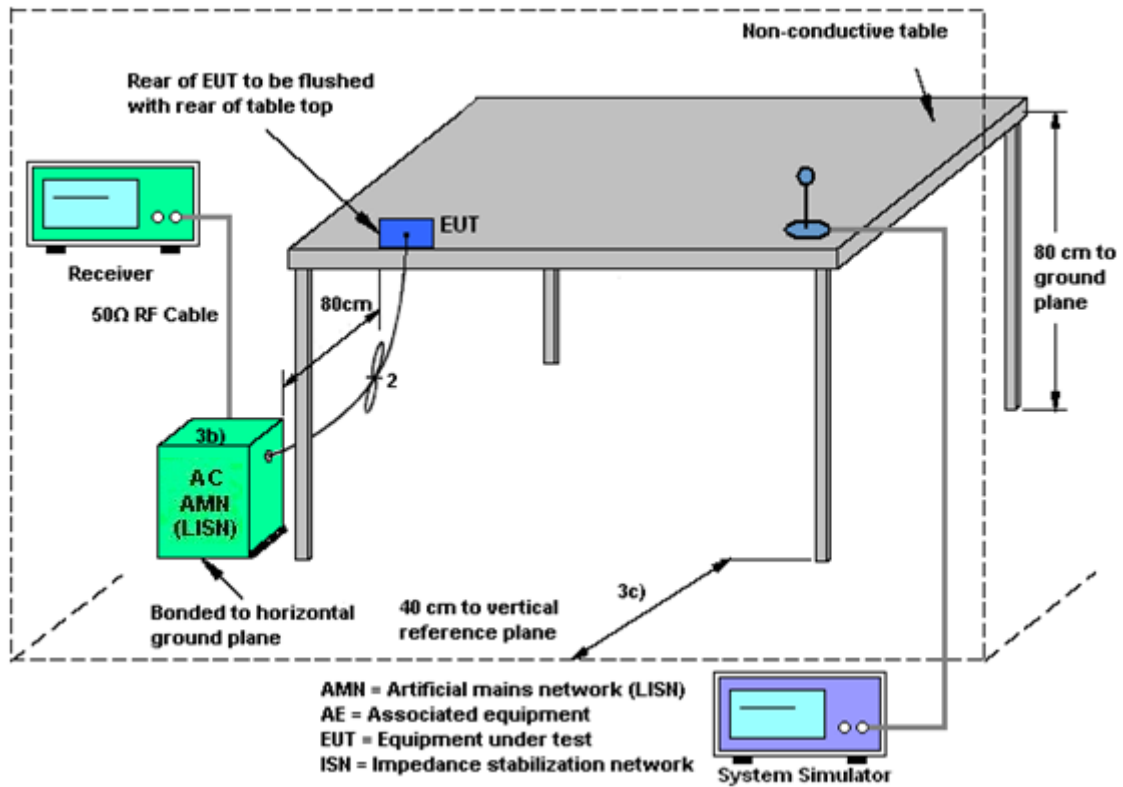

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Automatically Discontinue Transmission**

### **3.6.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.6.2 Measuring Instruments**

See list of measuring equipment of this test report.

### **3.6.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	35419 & 03	30MHz~1GHz	Apr. 29, 2020	Jun. 16, 2020~Jun. 22, 2020	Apr. 28, 2021	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 06, 2019	Jun. 16, 2020~Jun. 22, 2020	Dec. 05, 2020	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY5329005 3	20Hz~26.5GHz	May 21, 2020	Jun. 16, 2020~Jun. 22, 2020	May 20, 2021	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	Jun. 16, 2020~Jun. 22, 2020	Dec. 25, 2020	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10 P	1590075	1GHz~18GHz	Apr. 23, 2020	Jun. 16, 2020~Jun. 22, 2020	Apr. 22, 2021	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 19, 2020	Jun. 16, 2020~Jun. 22, 2020	May 18, 2021	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A0236 2	1GHz~26.5GHz	Nov. 01, 2019	Jun. 16, 2020~Jun. 22, 2020	Oct. 31, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2,8 01606/2	18GHz~40GHz	Feb. 25, 2020	Jun. 16, 2020~Jun. 22, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4, MY28655/4	9kHz~30MHz	Feb. 25, 2020	Jun. 16, 2020~Jun. 22, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 25, 2020	Jun. 16, 2020~Jun. 22, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 25, 2020	Jun. 16, 2020~Jun. 22, 2020	Feb. 24, 2021	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Jun. 16, 2020~Jun. 22, 2020	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF7802083 68	Control Ant Mast	N/A	Jun. 16, 2020~Jun. 22, 2020	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jun. 16, 2020~Jun. 22, 2020	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jun. 16, 2020~Jun. 22, 2020	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB24 95	N/A	N/A	Jun. 16, 2020~Jun. 22, 2020	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	18GHz~40GHz	Nov. 26, 2019	Jun. 16, 2020~Jun. 22, 2020	Nov. 25, 2020	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	N/A	N/A	N/A	Jun. 16, 2020~Jun. 22, 2020	N/A	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	Jun. 16, 2020~Jun. 22, 2020	Dec. 12, 2020	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 22, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	May 22, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 07, 2019	May 22, 2020	Nov. 06, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	May 22, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 22, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	May 22, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	May 22, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	May 29, 2020~ Jun. 25, 2020	Mar. 01, 2021	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16100054S NO10	10MHz~6GHz	Dec. 23, 2019	May 29, 2020~ Jun. 25, 2020	Dec. 22, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz-40GHz	Aug. 14, 2019	May 29, 2020~ Jun. 25, 2020	Aug. 13, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Aug. 22,2019	May 29, 2020~ Jun. 25, 2020	Aug. 21,2020	Conducted (TH05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.6
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.3
---	-----

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Andy Kao / Junyu / Rebecca Li	Temperature:	22.2~24.1	°C
Test Date:	2020/5/29~2020/6/25	Relative Humidity:	51~53.6	%

**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

Band IV single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	16.80	-	25.90	-	15.50	-	0.5	Pass
11a	6Mbps	1	157	5785	16.75	-	25.35	-	15.35	-	0.5	Pass
11a	6Mbps	1	165	5825	16.85	-	25.10	-	15.30	-	0.5	Pass
HT20	MCS0	1	149	5745	17.95	-	26.20	-	15.95	-	0.5	Pass
HT20	MCS0	1	157	5785	17.90	-	26.65	-	15.90	-	0.5	Pass
HT20	MCS0	1	165	5825	17.95	-	26.65	-	15.95	-	0.5	Pass
HT40	MCS0	1	151	5755	36.70	-	41.94	-	34.92	-	0.5	Pass
HT40	MCS0	1	159	5795	36.60	-	41.76	-	34.92	-	0.5	Pass
VHT80	MCS0	1	155	5775	76.80	-	84.16	-	75.20	-	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Band IV single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	15.10	-		30.00	-	-1.60	-	Pass
11a	6Mbps	1	157	5785	14.30	-		30.00	-	-1.60	-	Pass
11a	6Mbps	1	165	5825	14.60	-		30.00	-	-1.60	-	Pass
HT20	MCS0	1	149	5745	12.80	-		30.00	-	-1.60	-	Pass
HT20	MCS0	1	157	5785	12.70	-		30.00	-	-1.60	-	Pass
HT20	MCS0	1	165	5825	12.80	-		30.00	-	-1.60	-	Pass
HT40	MCS0	1	151	5755	12.90	-		30.00	-	-1.60	-	Pass
HT40	MCS0	1	159	5795	12.90	-		30.00	-	-1.60	-	Pass
VHT20	MCS0	1	149	5745	12.70	-		30.00	-	-1.60	-	Pass
VHT20	MCS0	1	157	5785	12.60	-		30.00	-	-1.60	-	Pass
VHT20	MCS0	1	165	5825	12.70	-		30.00	-	-1.60	-	Pass
VHT40	MCS0	1	151	5755	12.80	-		30.00	-	-1.60	-	Pass
VHT40	MCS0	1	159	5795	12.80	-		30.00	-	-1.60	-	Pass
VHT80	MCS0	1	155	5775	12.80	-		30.00	-	-1.60	-	Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band IV single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	2.22	-	4.96	-		30.00	-	-1.60	-	Pass
11a	6Mbps	1	157	5785	2.22	-	4.54	-		30.00	-	-1.60	-	Pass
11a	6Mbps	1	165	5825	2.22	-	4.94	-		30.00	-	-1.60	-	Pass
HT20	MCS0	1	149	5745	2.22	-	2.40	-		30.00	-	-1.60	-	Pass
HT20	MCS0	1	157	5785	2.22	-	2.89	-		30.00	-	-1.60	-	Pass
HT20	MCS0	1	165	5825	2.22	-	2.42	-		30.00	-	-1.60	-	Pass
HT40	MCS0	1	151	5755	2.22	-	-0.90	-		30.00	-	-1.60	-	Pass
HT40	MCS0	1	159	5795	2.22	-	-1.02	-		30.00	-	-1.60	-	Pass
VHT80	MCS0	1	155	5775	2.22	-	-2.96	-		30.00	-	-1.60	-	Pass



## Appendix B. AC Conducted Emission Test Results


Test Engineer :	Tom Lee	Temperature :	21~25°C
		Relative Humidity :	42~50%



# EUT Information

Report NO : 042406-02  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Line

Full Spectrum

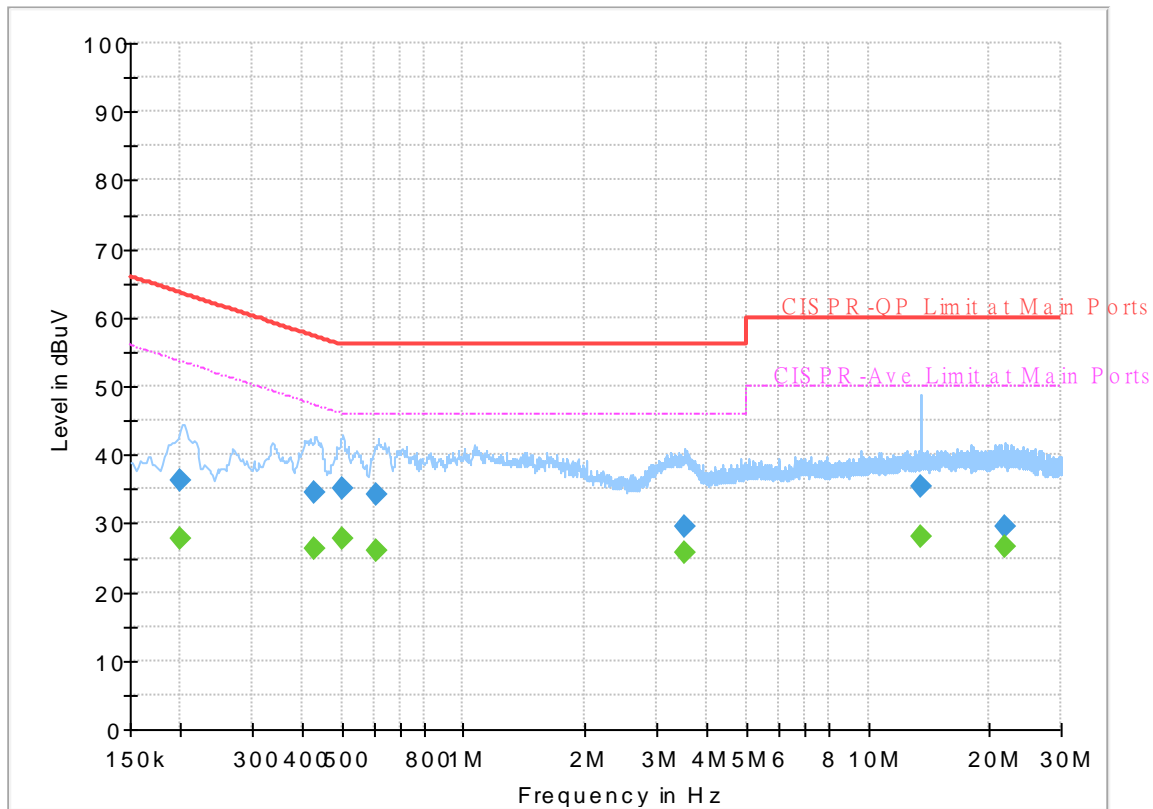


## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.199590	---	27.78	53.63	25.85	L1	OFF	19.6
0.199590	36.37	---	63.63	27.26	L1	OFF	19.6
0.426750	---	26.41	47.32	20.91	L1	OFF	19.6
0.426750	34.63	---	57.32	22.69	L1	OFF	19.6
0.502350	---	27.65	46.00	18.35	L1	OFF	19.6
0.502350	35.01	---	56.00	20.99	L1	OFF	19.6
0.611250	---	25.95	46.00	20.05	L1	OFF	19.6
0.611250	34.29	---	56.00	21.71	L1	OFF	19.6
3.525000	---	25.63	46.00	20.37	L1	OFF	19.7
3.525000	29.66	---	56.00	26.34	L1	OFF	19.7
13.560000	---	28.19	50.00	21.81	L1	OFF	20.2
13.560000	35.24	---	60.00	24.76	L1	OFF	20.2
21.815970	---	26.71	50.00	23.29	L1	OFF	20.5
21.815970	29.44	---	60.00	30.56	L1	OFF	20.5

# EUT Information

Report NO : 042406-02  
 Test Mode : Mode 1  
 Test Voltage : 120Vac/60Hz  
 Phase : Neutral

Full Spectrum

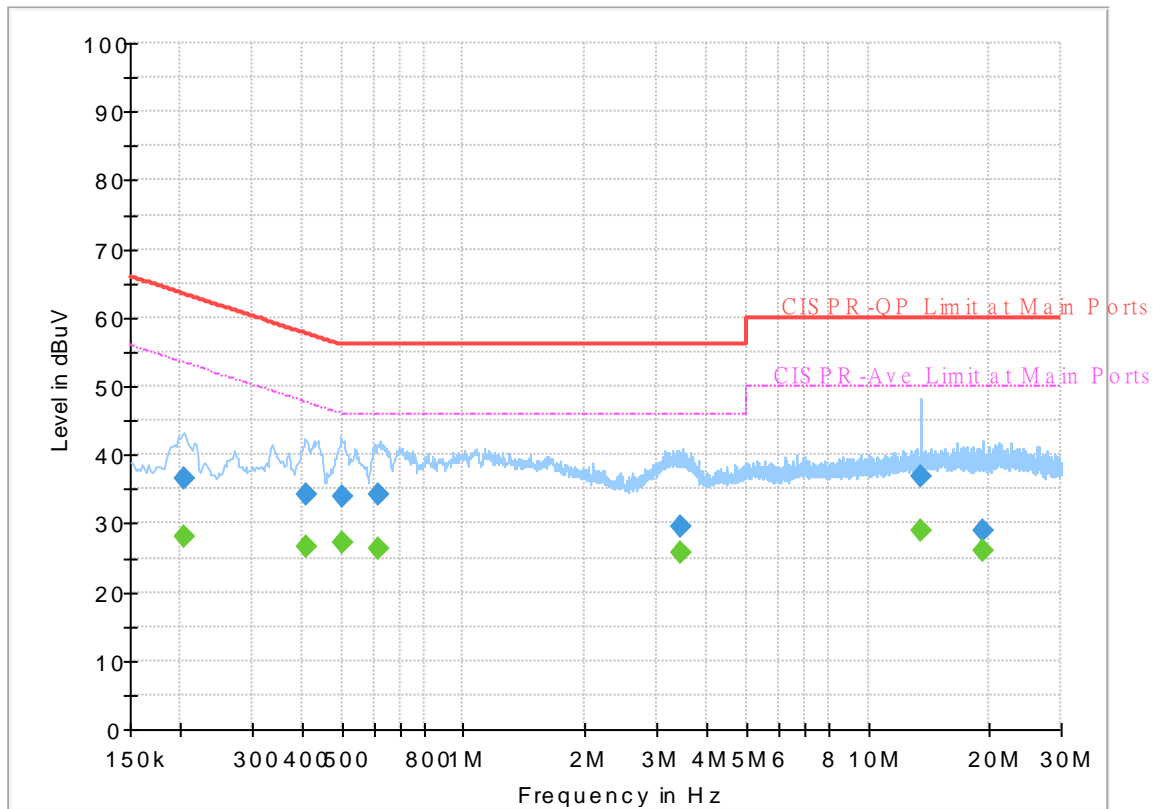

## Final\_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.203010	---	27.99	53.49	25.50	N	OFF	19.6
0.203010	36.62	---	63.49	26.87	N	OFF	19.6
0.408300	---	26.57	47.68	21.11	N	OFF	19.6
0.408300	34.35	---	57.68	23.33	N	OFF	19.6
0.500190	---	27.23	46.00	18.77	N	OFF	19.6
0.500190	34.05	---	56.00	21.95	N	OFF	19.6
0.618990	---	26.25	46.00	19.75	N	OFF	19.6
0.618990	34.11	---	56.00	21.89	N	OFF	19.6
3.423660	---	25.63	46.00	20.37	N	OFF	19.7
3.423660	29.52	---	56.00	26.48	N	OFF	19.7
13.560000	---	29.04	50.00	20.96	N	OFF	20.2
13.560000	36.97	---	60.00	23.03	N	OFF	20.2
19.243500	---	25.98	50.00	24.02	N	OFF	20.4
19.243500	29.06	---	60.00	30.94	N	OFF	20.4



### Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu, James Chiu	Temperature :	22~25°C
		Relative Humidity :	53~58%

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11a CH 149 5745MHz		5622.6	49.23	-18.97	68.2	37.56	34.9	12.08	35.31	100	60	P	H	
		5689.2	59.18	-38.06	97.24	47.31	35	12.19	35.32	100	60	P	H	
		5719.2	59.83	-50.75	110.58	47.91	35	12.24	35.32	100	60	P	H	
		5725	63.93	-58.27	122.2	52	35	12.25	35.32	100	60	P	H	
	*	5745	105.85	-	-	93.89	35	12.28	35.32	100	60	P	H	
	*	5745	98.05	-	-	86.09	35	12.28	35.32	100	60	A	H	
														H
														H
			5645.6	48.76	-19.44	68.2	37.15	34.8	12.12	35.31	336	103	P	V
			5699.2	53.5	-51.11	104.61	41.62	35	12.2	35.32	336	103	P	V
			5710.8	58.22	-50.01	108.23	46.32	35	12.22	35.32	336	103	P	V
			5724.6	62.25	-59.04	121.29	50.32	35	12.25	35.32	336	103	P	V
	*	5745	105.05	-	-	93.09	35	12.28	35.32	336	103	P	V	
	*	5745	97.25	-	-	85.29	35	12.28	35.32	336	103	A	V	
														V
														V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5631.6	47.83	-20.37	68.2	36.15	34.9	12.09	35.31	102	60	P	H
		5687	48.27	-47.34	95.61	36.41	35	12.18	35.32	102	60	P	H
		5700.6	48.89	-56.48	105.37	37	35	12.21	35.32	102	60	P	H
		5723.8	47.96	-71.5	119.46	36.04	35	12.24	35.32	102	60	P	H
	*	5785	104.92	-	-	92.9	35	12.35	35.33	102	60	P	H
	*	5785	97.18	-	-	85.16	35	12.35	35.33	102	60	A	H
		5851.2	49.17	-70.29	119.46	37.11	35	12.4	35.34	102	60	P	H
		5857.6	49.75	-60.32	110.07	37.62	35.07	12.4	35.34	102	60	P	H
		5910.6	49.29	-29.53	78.82	37	35.2	12.43	35.34	102	60	P	H
		5927.8	49.26	-18.94	68.2	36.97	35.2	12.43	35.34	102	60	P	H
													H
													H
<b>802.11a</b>													
<b>CH 157</b>													
<b>5785MHz</b>		5616.6	48.57	-19.63	68.2	36.91	34.9	12.07	35.31	386	104	P	V
		5652.8	47.53	-22.75	70.28	36.02	34.7	12.13	35.32	386	104	P	V
		5701	48.35	-57.13	105.48	36.46	35	12.21	35.32	386	104	P	V
		5722.6	48.14	-68.59	116.73	36.22	35	12.24	35.32	386	104	P	V
	*	5785	103.82	-	-	91.8	35	12.35	35.33	386	104	P	V
	*	5785	96.13	-	-	84.11	35	12.35	35.33	386	104	A	V
		5852.8	49.03	-66.79	115.82	36.97	35	12.4	35.34	386	104	P	V
		5856.6	48.99	-61.36	110.35	36.86	35.07	12.4	35.34	386	104	P	V
		5884.6	49.12	-48.95	98.07	36.92	35.13	12.41	35.34	386	104	P	V
		5935.2	48.37	-19.83	68.2	36.07	35.2	12.44	35.34	386	104	P	V
													V
													V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11a CH 165 5825MHz	*	5825	104.15	-	-	92.1	35	12.38	35.33	100	59	P	H	
	*	5825	96.45	-	-	84.4	35	12.38	35.33	100	59	A	H	
		5850	52.54	-69.66	122.2	40.47	35	12.4	35.33	100	59	P	H	
		5872.4	50.28	-55.65	105.93	38.08	35.13	12.41	35.34	100	59	P	H	
		5888.8	50.14	-44.82	94.96	37.87	35.2	12.41	35.34	100	59	P	H	
		5925.4	51.13	-17.07	68.2	38.84	35.2	12.43	35.34	100	59	P	H	
														H
														H
	*	5825	104.25	-	-	92.2	35	12.38	35.33	380	104	P	V	
	*	5825	96.65	-	-	84.6	35	12.38	35.33	380	104	A	V	
		5850	51.9	-70.3	122.2	39.83	35	12.4	35.33	380	104	P	V	
		5865	50.34	-57.66	108	38.21	35.07	12.4	35.34	380	104	P	V	
		5904.6	49.74	-33.52	83.26	37.46	35.2	12.42	35.34	380	104	P	V	
		5932	49.43	-18.77	68.2	37.13	35.2	12.44	35.34	380	104	P	V	
														V
														V
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz**

**WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
<b>802.11a CH 149 5745MHz</b>		11490	60.31	-13.69	74	61.17	38.18	18.48	57.52	100	11	P	H
		11490	49.6	-4.4	54	50.46	38.18	18.48	57.52	100	11	A	H
		17235	49.44	-18.76	68.2	41.27	41.53	22.95	56.31	100	0	P	H
													H
		11490	63.86	-10.14	74	64.72	38.18	18.48	57.52	115	59	P	V
		11490	52.88	-1.12	54	53.74	38.18	18.48	57.52	115	59	A	V
		17235	49.27	-18.93	68.2	41.1	41.53	22.95	56.31	100	0	P	V
<b>802.11a CH 157 5785MHz</b>		11570	59.96	-14.04	74	60.42	38.33	18.55	57.34	100	5	P	H
		11570	48.3	-5.7	54	48.76	38.33	18.55	57.34	100	5	A	H
		17355	49.67	-18.53	68.2	41.5	41.5	23.02	56.35	100	0	P	H
													H
		11570	63.25	-10.75	74	63.71	38.33	18.55	57.34	114	61	P	V
		11570	52.23	-1.77	54	52.69	38.33	18.55	57.34	114	61	A	V
		17355	49.2	-19	68.2	41.03	41.5	23.02	56.35	100	0	P	V
<b>802.11a CH 165 5825MHz</b>		11650	59.17	-14.83	74	59.25	38.44	18.63	57.15	100	7	P	H
		11650	48.02	-5.98	54	48.1	38.44	18.63	57.15	100	7	A	H
		17475	49.13	-19.07	68.2	41.09	41.33	23.09	56.38	100	0	P	H
													H
		11650	63.34	-10.66	74	63.42	38.44	18.63	57.15	106	61	P	V
		11650	51.99	-2.01	54	52.07	38.44	18.63	57.15	106	61	A	V
		17475	48.22	-19.98	68.2	40.18	41.33	23.09	56.38	100	0	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**

**WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 149 5745MHz		5602	48.89	-19.31	68.2	37.16	35	12.04	35.31	100	60	P	H	
		5682.8	49.1	-43.41	92.51	37.39	34.85	12.18	35.32	100	60	P	H	
		5709.2	56.83	-50.95	107.78	44.93	35	12.22	35.32	100	60	P	H	
		5725	54.56	-67.64	122.2	42.63	35	12.25	35.32	100	60	P	H	
	*	5745	103.05	-	-	91.09	35	12.28	35.32	100	60	P	H	
	*	5745	94.99	-	-	83.03	35	12.28	35.32	100	60	A	H	
														H
														H
			5609.2	47.92	-20.28	68.2	36.17	35	12.06	35.31	336	103	P	V
			5674.4	47.4	-38.9	86.3	35.71	34.85	12.16	35.32	336	103	P	V
			5716	48.63	-61.05	109.68	36.72	35	12.23	35.32	336	103	P	V
			5725	53.86	-68.34	122.2	41.93	35	12.25	35.32	336	103	P	V
	*		5745	102.25	-	-	90.29	35	12.28	35.32	336	103	P	V
	*		5745	94.25	-	-	82.29	35	12.28	35.32	336	103	A	V
														V
														V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5625.2	48.26	-19.94	68.2	36.59	34.9	12.08	35.31	103	60	P	H
		5682.2	50.1	-41.97	92.07	38.39	34.85	12.18	35.32	103	60	P	H
		5720	50.99	-59.81	110.8	39.07	35	12.24	35.32	103	60	P	H
		5720	50.99	-59.81	110.8	39.07	35	12.24	35.32	103	60	P	H
	*	5785	101.44	-	-	89.42	35	12.35	35.33	103	60	P	H
		5854.2	47.52	-65.1	112.62	35.39	35.07	12.4	35.34	103	60	P	H
		5874	49.17	-56.31	105.48	36.97	35.13	12.41	35.34	103	60	P	H
		5893.4	50.03	-41.52	91.55	37.75	35.2	12.42	35.34	103	60	P	H
		5930.6	49.89	-18.31	68.2	37.59	35.2	12.44	35.34	103	60	P	H
													H
													H
													H
<b>802.11n</b>													
<b>HT20</b>													
<b>CH 157</b>		5646.6	47.85	-20.35	68.2	36.24	34.8	12.12	35.31	385	103	P	V
<b>5785MHz</b>		5698.2	48.19	-55.68	103.87	36.31	35	12.2	35.32	385	103	P	V
		5707.6	48.38	-58.95	107.33	36.48	35	12.22	35.32	385	103	P	V
		5724.4	46.05	-74.78	120.83	34.12	35	12.25	35.32	385	103	P	V
	*	5785	101.52	-	-	89.5	35	12.35	35.33	385	103	P	V
	*	5785	93.62	-	-	81.6	35	12.35	35.33	385	103	A	V
		5851.2	49.04	-70.42	119.46	36.98	35	12.4	35.34	385	103	P	V
		5862.8	47.84	-60.77	108.61	35.71	35.07	12.4	35.34	385	103	P	V
		5910.2	49.41	-29.71	79.12	37.12	35.2	12.43	35.34	385	103	P	V
													V
													V
													V





WiFi Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11n HT20 CH 165 5825MHz	*	5825	101.7	-	-	89.65	35	12.38	35.33	100	59	P	H	
	*	5825	93.99	-	-	81.94	35	12.38	35.33	100	59	A	H	
		5850.6	50.58	-70.25	120.83	38.52	35	12.4	35.34	100	59	P	H	
		5875	54.44	-50.76	105.2	42.24	35.13	12.41	35.34	100	59	P	H	
		5875	54.44	-50.76	105.2	42.24	35.13	12.41	35.34	100	59	P	H	
		5945.8	50.58	-17.62	68.2	38.28	35.2	12.44	35.34	100	59	P	H	
														H
														H
	*	5825	101.64	-	-	89.59	35	12.38	35.33	380	105	P	V	
	*	5825	93.32	-	-	81.27	35	12.38	35.33	380	105	A	V	
		5852.2	47.72	-69.46	117.18	35.66	35	12.4	35.34	380	105	P	V	
		5864.6	48.42	-59.69	108.11	36.29	35.07	12.4	35.34	380	105	P	V	
		5895.6	50.03	-39.89	89.92	37.75	35.2	12.42	35.34	380	105	P	V	
		5945	49.01	-19.19	68.2	36.71	35.2	12.44	35.34	380	105	P	V	
														V
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**Band 4 5725~5850MHz**

**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 149 5745MHz		11490	55.12	-18.88	74	55.98	38.18	18.48	57.52	100	13	P	H
		11490	43.71	-10.29	54	44.57	38.18	18.48	57.52	100	13	A	H
		17235	49.09	-19.11	68.2	40.92	41.53	22.95	56.31	100	0	P	H
													H
		11490	57.52	-16.48	74	58.38	38.18	18.48	57.52	100	0	P	V
		11490	47.18	-6.82	54	48.04	38.18	18.48	57.52	100	0	A	V
		17235	49.31	-18.89	68.2	41.14	41.53	22.95	56.31	100	0	P	V
													V
802.11n HT20 CH 157 5785MHz		11570	54.96	-19.04	74	55.42	38.33	18.55	57.34	100	14	P	H
		11570	44.13	-9.87	54	44.59	38.33	18.55	57.34	100	14	A	H
		17355	48.62	-19.58	68.2	40.45	41.5	23.02	56.35	100	0	P	H
													H
		11570	59.2	-14.8	74	59.66	38.33	18.55	57.34	115	61	P	V
		11570	48.22	-5.78	54	48.68	38.33	18.55	57.34	115	61	A	V
		17355	49.51	-18.69	68.2	41.34	41.5	23.02	56.35	100	0	P	V
													V
802.11n HT20 CH 165 5825MHz		11650	55.72	-18.28	74	55.8	38.44	18.63	57.15	100	13	P	H
		11650	43.83	-10.17	54	43.91	38.44	18.63	57.15	100	13	A	H
		17475	47.98	-20.22	68.2	39.94	41.33	23.09	56.38	100	0	P	H
													H
		11650	58.82	-15.18	74	58.9	38.44	18.63	57.15	114	63	P	V
		11650	47.65	-6.35	54	47.73	38.44	18.63	57.15	114	63	A	V
		17475	49.31	-18.89	68.2	41.27	41.33	23.09	56.38	100	0	P	V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5636.6	49.77	-18.43	68.2	38.18	34.8	12.1	35.31	284	61	P	H
		5696.6	52.72	-49.97	102.69	40.84	35	12.2	35.32	284	61	P	H
		5706.8	55.32	-51.79	107.11	43.42	35	12.22	35.32	284	61	P	H
		5724.2	56.87	-63.51	120.38	44.95	35	12.24	35.32	284	61	P	H
	*	5755	99.01	-	-	87.04	35	12.3	35.33	284	61	P	H
	*	5755	91.33	-	-	79.36	35	12.3	35.33	284	61	A	H
		5850	48.21	-73.99	122.2	36.14	35	12.4	35.33	284	61	P	H
		5856.6	49.69	-60.66	110.35	37.56	35.07	12.4	35.34	284	61	P	H
		5901.8	50.01	-35.32	85.33	37.73	35.2	12.42	35.34	284	61	P	H
		5929	49.42	-18.78	68.2	37.13	35.2	12.43	35.34	284	61	P	H
802.11n													H
HT40													H
CH 151		5639	48	-20.2	68.2	36.41	34.8	12.1	35.31	335	105	P	V
5755MHz		5693.2	48.69	-51.5	100.19	36.82	35	12.19	35.32	335	105	P	V
		5715.2	52.78	-56.68	109.46	40.87	35	12.23	35.32	335	105	P	V
		5724.99	56.58	-65.6	122.18	44.65	35	12.25	35.32	335	105	P	V
	*	5755	99.18	-	-	87.21	35	12.3	35.33	335	105	P	V
	*	5755	91.89	-	-	79.92	35	12.3	35.33	335	105	A	V
		5854.2	47.88	-64.74	112.62	35.75	35.07	12.4	35.34	335	105	P	V
		5873	49.24	-56.52	105.76	37.04	35.13	12.41	35.34	335	105	P	V
		5891	49.94	-43.39	93.33	37.66	35.2	12.42	35.34	335	105	P	V
		5933.8	49.89	-18.31	68.2	37.59	35.2	12.44	35.34	335	105	P	V
													V
													V



WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5620.4	48.85	-19.35	68.2	37.19	34.9	12.07	35.31	275	63	P	H
		5697.2	48.52	-54.62	103.14	36.64	35	12.2	35.32	275	63	P	H
		5710.6	48.49	-59.68	108.17	36.59	35	12.22	35.32	275	63	P	H
		5721.6	54.54	-59.91	114.45	42.62	35	12.24	35.32	275	63	P	H
	*	5795	98.72	-	-	86.69	35	12.36	35.33	275	63	P	H
	*	5795	91.32	-	-	79.29	35	12.36	35.33	275	63	A	H
		5852.8	49.46	-66.36	115.82	37.4	35	12.4	35.34	275	63	P	H
		5856.2	52.04	-58.42	110.46	39.91	35.07	12.4	35.34	275	63	P	H
		5896.4	51.07	-38.26	89.33	38.79	35.2	12.42	35.34	275	63	P	H
		5939.8	49.04	-19.16	68.2	36.74	35.2	12.44	35.34	275	63	P	H
802.11n													H
HT40													H
CH 159		5609.6	48.84	-19.36	68.2	37.09	35	12.06	35.31	347	104	P	V
5795MHz		5658.6	49.76	-24.83	74.59	38.24	34.7	12.14	35.32	347	104	P	V
		5709.8	48.28	-59.67	107.95	36.38	35	12.22	35.32	347	104	P	V
		5722.4	47.65	-68.62	116.27	35.73	35	12.24	35.32	347	104	P	V
	*	5795	99.99	-	-	87.96	35	12.36	35.33	347	104	P	V
	*	5795	92.2	-	-	80.17	35	12.36	35.33	347	104	A	V
		5854.6	49.18	-62.53	111.71	37.05	35.07	12.4	35.34	347	104	P	V
		5871.2	50.67	-55.59	106.26	38.47	35.13	12.41	35.34	347	104	P	V
		5883.6	50.12	-48.69	98.81	37.92	35.13	12.41	35.34	347	104	P	V
		5930	50.73	-17.47	68.2	38.43	35.2	12.44	35.34	347	104	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**

**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT40 CH 151 5755MHz		11510	49.77	-24.23	74	50.54	38.2	18.51	57.48	100	0	P	H
		17265	48.24	-19.96	68.2	40.13	41.47	22.96	56.32	100	0	P	H
													H
													H
		11510	49.63	-24.37	74	50.4	38.2	18.51	57.48	100	0	P	V
		17265	49.65	-18.55	68.2	41.54	41.47	22.96	56.32	100	0	P	V
													V
													V
802.11n HT40 CH 159 5795MHz		11590	49.64	-24.36	74	49.99	38.37	18.57	57.29	100	0	P	H
		17385	50.19	-18.01	68.2	41.94	41.57	23.04	56.36	100	0	P	H
													H
													H
		11590	49.81	-24.19	74	50.16	38.37	18.57	57.29	100	0	P	V
		17385	50.08	-18.12	68.2	41.83	41.57	23.04	56.36	100	0	P	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
		5619.4	48.44	-19.76	68.2	36.78	34.9	12.07	35.31	108	62	P	H
		5687.4	57.1	-38.81	95.91	45.24	35	12.18	35.32	108	62	P	H
		5717.8	58.78	-51.4	110.18	46.87	35	12.23	35.32	108	62	P	H
		5724.4	58.28	-62.55	120.83	46.35	35	12.25	35.32	108	62	P	H
	*	5775	98.17	-	-	86.17	35	12.33	35.33	108	62	P	H
	*	5775	91.1	-	-	79.1	35	12.33	35.33	108	62	A	H
		5853	55.96	-59.4	115.36	43.9	35	12.4	35.34	108	62	P	H
		5859.4	54.59	-54.98	109.57	42.46	35.07	12.4	35.34	108	62	P	H
		5914.6	50.1	-25.77	75.87	37.81	35.2	12.43	35.34	108	62	P	H
		5926.6	49.18	-19.02	68.2	36.89	35.2	12.43	35.34	108	62	P	H
													H
													H
802.11ac VHT80 CH 155 5775MHz		5612.2	49.17	-19.03	68.2	37.42	35	12.06	35.31	349	103	P	V
		5686	51.54	-43.33	94.87	39.68	35	12.18	35.32	349	103	P	V
		5718.6	53.24	-57.17	110.41	41.32	35	12.24	35.32	349	103	P	V
		5723	53.94	-63.7	117.64	42.02	35	12.24	35.32	349	103	P	V
	*	5775	96.67	-	-	84.67	35	12.33	35.33	349	103	P	V
	*	5775	89.47	-	-	77.47	35	12.33	35.33	349	103	A	V
		5851.8	49.07	-69.03	118.1	37.01	35	12.4	35.34	349	103	P	V
		5855.4	49.7	-60.99	110.69	37.57	35.07	12.4	35.34	349	103	P	V
		5897.4	49.39	-39.2	88.59	37.11	35.2	12.42	35.34	349	103	P	V
		5927	49.57	-18.63	68.2	37.28	35.2	12.43	35.34	349	103	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**

**WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
802.11ac VHT80 CH 155 5775MHz		11550	48.42	-25.58	74	48.96	38.3	18.54	57.38	100	0	P	H	
		17325	49.17	-19.03	68.2	41.08	41.43	23	56.34	100	0	P	H	
													H	
													H	
			11550	49.77	-24.23	74	50.31	38.3	18.54	57.38	100	0	P	V
			17325	48.9	-19.3	68.2	40.81	41.43	23	56.34	100	0	P	V
														V
														V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
802.11a LF		82.92	33.57	-6.43	40	48.31	13.64	1.6	29.98	100	0	P	H	
		99.66	27.7	-15.8	43.5	39.93	15.96	1.78	29.97	-	-	P	H	
		149.34	35.99	-7.51	43.5	46.6	17.15	2.19	29.95	-	-	P	H	
		767.6	30.68	-15.32	46	27.52	27.79	4.89	29.52	-	-	P	H	
		869.8	32.29	-13.71	46	27.24	28.9	5.28	29.13	-	-	P	H	
		951.7	34.14	-11.86	46	26.94	30.31	5.58	28.69	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
														H
			30.27	32.29	-7.71	40	37.04	24.32	0.94	30.01	100	0	P	V
			66.45	29.87	-10.13	40	46.43	12.02	1.4	29.98	-	-	P	V
			82.92	30.96	-9.04	40	45.7	13.64	1.6	29.98	-	-	P	V
			778.1	31.06	-14.94	46	27.87	27.74	4.95	29.5	-	-	P	V
			861.4	32.06	-13.94	46	27.09	28.89	5.25	29.17	-	-	P	V
			958	34.76	-11.24	46	27.37	30.44	5.6	28.65	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													





**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu, James Chiu	Temperature :	22~25°C
		Relative Humidity :	53~58%

**Band 4 - 5725~5850MHz**  
**WIFI 802.11a (Band Edge @ 3m)**

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Fundamental
<b>Peak</b>	<p>Date: 2020-06-22 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 34</p>	<p>Date: 2020-06-22 PEAK(LN1)</p> <p>Site : 03CH07-HY Condition : PEAK(LN1) 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 34</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH149 5745MHz	
1	Vertical	Fundamental
Peak	<p>Site : E3CH07-RV Condition : PEAK_BE(B4) 16-24 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 34</p>	<p>Site : E3CH07-RV Condition : PEAK(FUNB) 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : Peak Mode : 34</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	<p>Date: 2020-06-22 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 042406-02 Mode : 35</p>	<p>Date: 2020-06-22 PEAK(FUN)</p> <p>Site : 03CH07-HY Condition : PEAK(FUN) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 042406-02 Mode : 35</p>
<p><b>Peak</b></p>	<p>Date: 2020-06-22 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 042406-02 Mode : 35</p>	<p><b>Left blank</b></p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH157 5785MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>		
<p><b>Peak</b></p>		<p><b>Left blank</b></p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Fundamental
<b>Peak</b>	<p>Site : ESCH07-11Y Condition : PEAK_BE(B4) 16-24 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : FR042406-02 Mode : 36</p>	<p>Site : ESCH07-11Y Condition : PEAK(U11) 3m HF_ANT_00075962 HORIZONTAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Project : FR042406-02 Mode : 36</p>

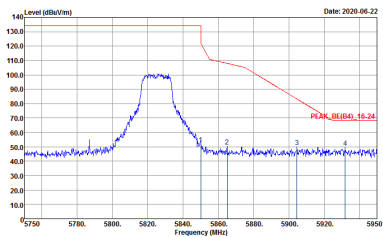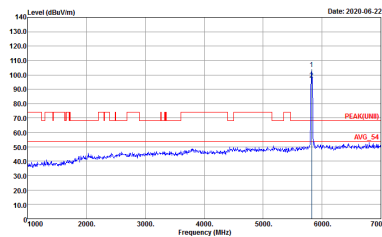

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11a CH165 5825MHz	
1	Vertical	Fundamental
Peak	 <p>Date: 2020-06-22</p> <p>Site : E3CH07-11Y          Condition : PEAK_BE(B4) 16-24 3m HF_ANT_00075962 VERTICAL          RBW:1000.000kHz VBW:3000.000kHz SWT:Auto          Detector : Peak          Project : 042406-02          Mode : 36</p>	 <p>Date: 2020-06-22</p> <p>Site : E3CH07-11Y          Condition : PEAK(U11) 3m HF_ANT_00075962 VERTICAL          RBW:1000.000kHz VBW:3000.000kHz SWT:Auto          Detector : Peak          Project : 042406-02          Mode : 36</p>





**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Band Edge @ 3m)**

<b>WIFI</b>	<b>Band 4 5725~5850MHz Band Edge @ 3m</b>	
<b>ANT</b>	<b>802.11n HT20 CH149 5745MHz</b>	
<b>1</b>	<b>Horizontal</b>	<b>Fundamental</b>
<b>Peak</b>	<p>Site : 03CH07-HY          Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL          Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Project : 042406-02          Mode : 37</p>	<p>Site : 03CH07-HY          Condition : PEAK(LIN)1 3m HF_ANT_00075962 HORIZONTAL          Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Project : 042406-02          Mode : 37</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Vertical	Fundamental
Peak	<p>Site : ESCH07-11Y Condition : PEAK_BE(B4) 16-24 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 37</p>	<p>Site : ESCH07-11Y Condition : PEAK(U11) 3m HF_ANT_00075962 VERTICAL Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 37</p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	<p>Date: 2020-06-22 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 38</p>	<p>Date: 2020-06-22 PEAK(LIMB) AVG-51</p> <p>Site : 03CH07-HY Condition : PEAK(LIMB)_3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 38</p>
<p><b>Peak</b></p>	<p>Date: 2020-06-22 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 38</p>	<p><b>Left blank</b></p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Date: 2020-06-22 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 38</p>	<p>Date: 2020-06-22 PEAK(FUNB) AVG_51</p> <p>Site : 03CH07-HY Condition : PEAK(FUNB)_3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 38</p>
<p><b>Peak</b></p>	<p>Date: 2020-06-22 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 38</p>	<p><b>Left blank</b></p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Fundamental
Peak	<p>Site : E3CH07-11Y          Condition : PEAK_BE(B4) 16-24 3m HF_ANT_00075962 HORIZONTAL          Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 042406-02          Mode : 39</p>	<p>Site : E3CH07-11Y          Condition : PEAK(LUN1) 3m HF_ANT_00075962 HORIZONTAL          Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto          Detector : Peak          Project : 042406-02          Mode : 39</p>






WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Date: 2020-06-22</p> <p>Site : E3CH07-RV            Condition : PEAK_BE(B4) 16-24 3m HF_ANT_00075962 VERTICAL            Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Project : FR042406-02            Mode : 39</p>	<p>Date: 2020-06-22</p> <p>Site : E3CH07-RV            Condition : PEAK(U)11 3m HF_ANT_00075962 VERTICAL            Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Project : FR042406-02            Mode : 39</p>



**Band 4 5725~5850MHz  
WIFI 802.11n HT40 (Band Edge @ 3m)**




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH07-HY Condition : PEAK_BE(B4)_15-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 042406-02 Mode : 40</p>	<p>Site : 03CH07-HY Condition : PEAK(FUN) 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 042406-02 Mode : 40</p>
<p><b>Peak</b></p>	<p>Site : 03CH07-HY Condition : PEAK_BE(B4)_14-24 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 042406-02 Mode : 40</p>	<p><b>Left blank</b></p>

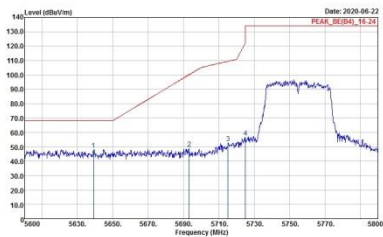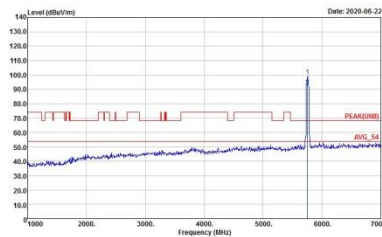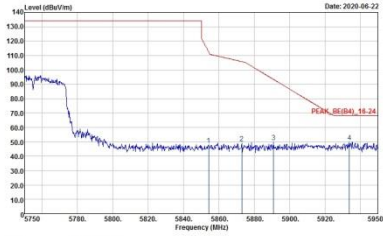

WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH07-HY            Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL            Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 042406-02            Mode : 40</p>	 <p>Site : 03CH07-HY            Condition : PEAK(FUN) 3m HF_ANT_00075962 VERTICAL            Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 042406-02            Mode : 40</p>
<p><b>Peak</b></p>	 <p>Site : 03CH07-HY            Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL            Detector : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 042406-02            Mode : 40</p>	<p><b>Left blank</b></p>



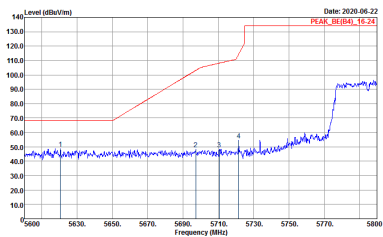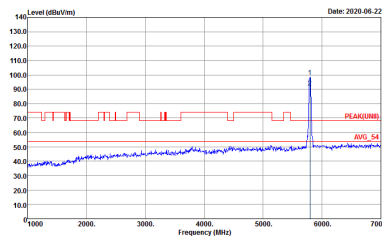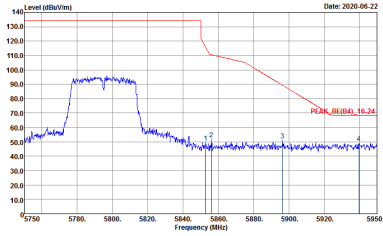




WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH07-HY            Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 042406-02            Mode : 41</p>	 <p>Site : 03CH07-HY            Condition : PEAK(LN1) 3m HF_ANT_00075962 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 042406-02            Mode : 41</p>
<p><b>Peak</b></p>	 <p>Site : 03CH07-HY            Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL            RBW:1000.000kHz VBW:3000.000kHz SWT:Auto            Detector : Peak            Project : 042406-02            Mode : 41</p>	<p><b>Left blank</b></p>



WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Date: 2020-06-22 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 41</p>	<p>Date: 2020-06-22 PEAK(B4)_16-24 AVG_01</p> <p>Site : 03CH07-HY Condition : PEAK(LUN)1 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 41</p>
<p><b>Peak</b></p>	<p>Date: 2020-06-22 PEAK_BE(B4)_16-24</p> <p>Site : 03CH07-HY Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 042406-02 Mode : 41</p>	<p><b>Left blank</b></p>



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

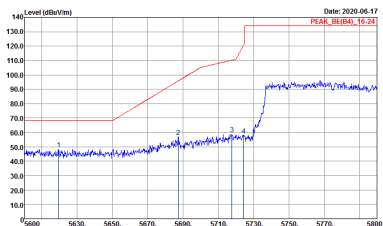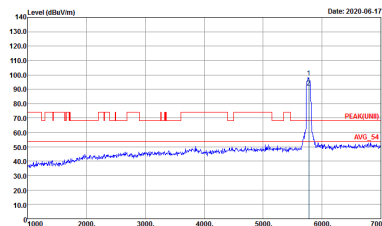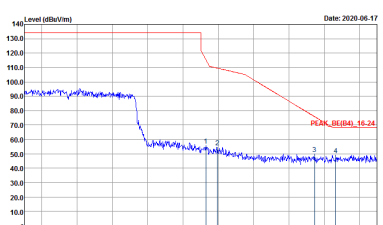WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Horizontal	Fundamental
<p align="center"><b>Peak</b></p>	 <p>Site : 03CH07-HY            Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL            Detector : Peak            Project : 042406-02            Mode : 42</p>	 <p>Site : 03CH07-HY            Condition : PEAK(UWB) 3m HF_ANT_00075962 HORIZONTAL            Detector : Peak            Project : 042406-02            Mode : 42</p>
<p align="center"><b>Peak</b></p>	 <p>Site : 03CH07-HY            Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 HORIZONTAL            Detector : Peak            Project : 042406-02            Mode : 42</p>	<p align="center"><b>Left blank</b></p>





WIFI	Band 4 5725~5850MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH155 5775MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH07-HY            Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL            Detector : Peak            Project : 042406-02            Mode : 42</p>	<p>Site : 03CH07-HY            Condition : PEAK(LIN) 3m HF_ANT_00075962 VERTICAL            Detector : Peak            Project : 042406-02            Mode : 42</p>
Peak	<p>Site : 03CH07-HY            Condition : PEAK_BE(B4)_16-24 3m HF_ANT_00075962 VERTICAL            Detector : Peak            Project : 042406-02            Mode : 42</p>	Left blank





Band 4 - 5725~5850MHz



WIFI 802.11a (Harmonic @ 3m)

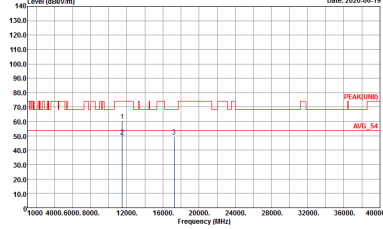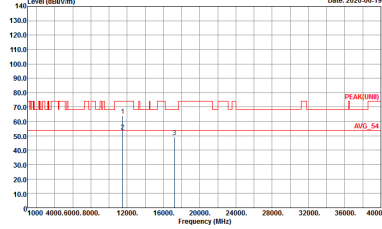WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH149 5745MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 09CH07-HY          Condition : PEAK(UWB) 3m HF_ANT_00075962 HORIZONTAL          Detector : Peak          Project : 042406-02          Mode : 34          Setting : 14.5</p>	 <p>Site : 09CH07-HY          Condition : PEAK(UWB) 3m HF_ANT_00075962 VERTICAL          Detector : Peak          Project : 042406-02          Mode : 34          Setting : 14.5</p>

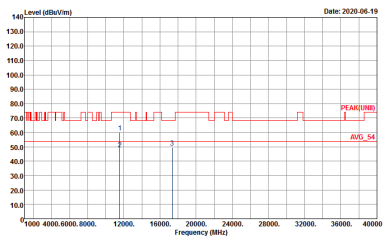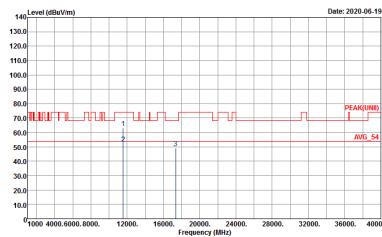

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH157 5785MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : E8CH07-RV          Condition : PEAK(LIN) 3m HE_ANT_00075962 HORIZONTAL          Detector : Peak          Project : 042406-02          Mode : 35          Setting : 14</p>	 <p>Site : E8CH07-RV          Condition : PEAK(LIN) 3m HE_ANT_00075962 VERTICAL          Detector : Peak          Project : 042406-02          Mode : 35          Setting : 14</p>

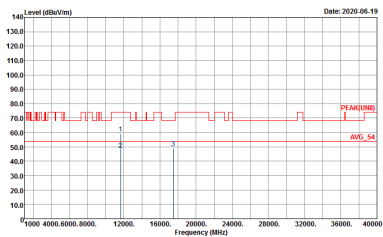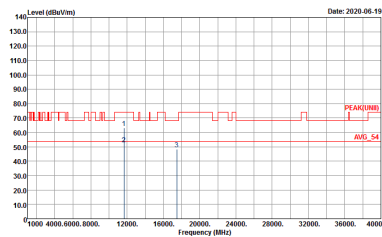

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11a CH165 5825MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : E3CH07-RV          Condition : PEAK(LIN) 3m HE_ANT_00075962 HORIZONTAL          Detector : Peak          Project : 042406-02          Mode : 36          Setting : 14</p>	 <p>Site : E3CH07-RV          Condition : PEAK(LIN) 3m HE_ANT_00075962 VERTICAL          Detector : Peak          Project : 042406-02          Mode : 36          Setting : 14</p>





**Band 4 5725~5850MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH149 5745MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	<p>Site : 03CH07-HY            Condition : PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL            Detector : Peak            Project : 042406-02            Mode : 37</p>	<p>Site : 03CH07-HY            Condition : PEAK(UNII) 3m HF_ANT_00075962 VERTICAL            Detector : Peak            Project : 042406-02            Mode : 37</p>



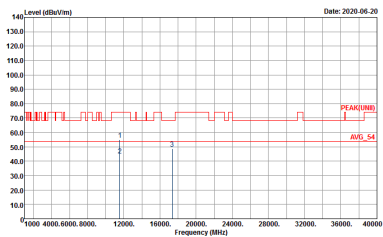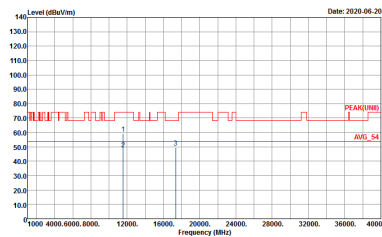

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH157 5785MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : E3CH07-RV          Condition : PEAK(LIN) 3m HE_ANT_00075962 HORIZONTAL          Detector : Peak          Project : 042406-02          Mode : 38</p>	 <p>Site : E3CH07-RV          Condition : PEAK(LIN) 3m HE_ANT_00075962 VERTICAL          Detector : Peak          Project : 042406-02          Mode : 38</p>

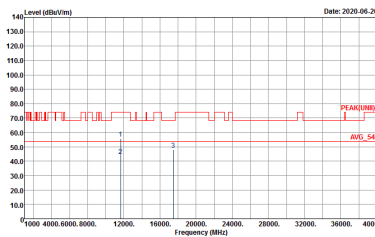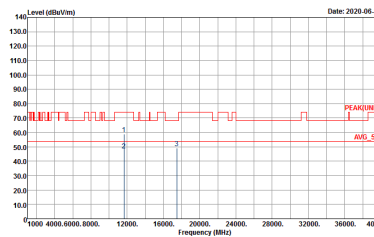



WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT20 CH165 5825MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : ESCH07-RV          Condition : PEAK(LIN) 3m HE_ANT_00075962 HORIZONTAL          Detector : Peak          Project : 042406-02          Mode : 39</p>	 <p>Site : ESCH07-RV          Condition : PEAK(LIN) 3m HE_ANT_00075962 VERTICAL          Detector : Peak          Project : 042406-02          Mode : 39</p>



**Band 4 5725~5850MHz**  
**WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH151 5755MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	<p>Site : 03CH07-HY            Condition : PEAK(UNII) 3m HF_ANT_00075962 HORIZONTAL            Detector : Peak            Project : 042406-02            Mode : 40</p>	<p>Site : 03CH07-HY            Condition : PEAK(UNII) 3m HF_ANT_00075962 VERTICAL            Detector : Peak            Project : 042406-02            Mode : 40</p>

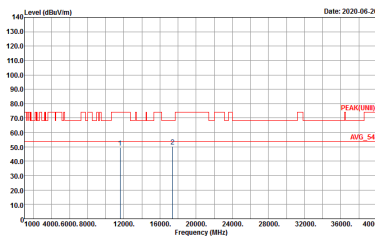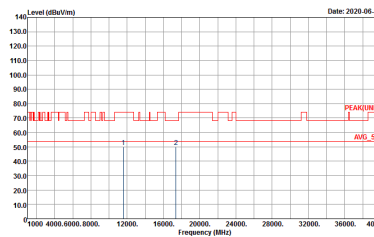

WIFI	Band 4 5725~5850MHz Harmonic @ 3m	
ANT	802.11n HT40 CH159 5795MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : E3CH07-RV          Condition : PEAK(LIN) 3m HE_ANT_00075962 HORIZONTAL          Detector : Peak          Project : 042406-02          Mode : 41</p>	 <p>Site : E3CH07-RV          Condition : PEAK(LIN) 3m HE_ANT_00075962 VERTICAL          Detector : Peak          Project : 042406-02          Mode : 41</p>



Band 4 5725~5850MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

Table with 2 columns: Horizontal and Vertical. Each column contains a spectral plot of Level (dBm/100MHz) vs Frequency (MHz) and associated test parameters like Site, Condition, Detector, Project, and Mode.



Emission below 1GHz  
5GHz WIFI 802.11a (LF)

WIFI	5GHz WIFI	
ANT	802.11a LF	
1	Horizontal	Vertical
QP / Peak	<p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(G) HORIZONTAL Detector : Peak Project : 042406-02 Mode : 43</p>	<p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(G) VERTICAL Detector : Peak Project : 042406-02 Mode : 43</p>




### Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
802.11a	98.34	-	-	10Hz	0.07
5GHz 802.11n HT20	97.97	1935	0.52	1kHz	0.09
5GHz 802.11n HT40	96.10	947	1.06	3kHz	0.17
5GHz 802.11ac VHT80	92.13	462	2.17	3kHz	0.36




802.11a

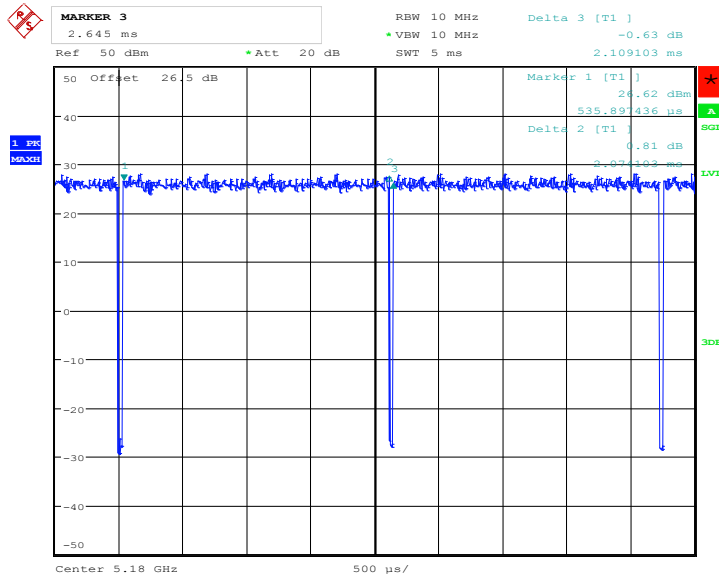

Date: 29.MAY.2020 15:34:52

802.11n HT20

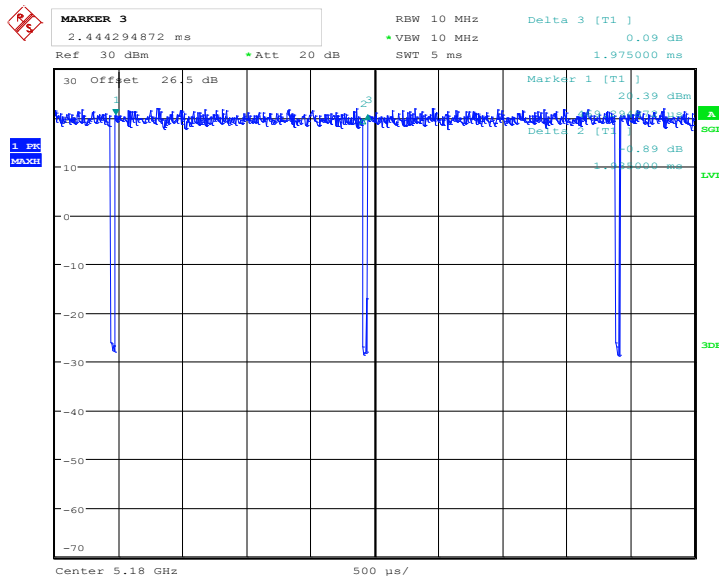


Date: 29.MAY.2020 16:13:45






802.11n HT40

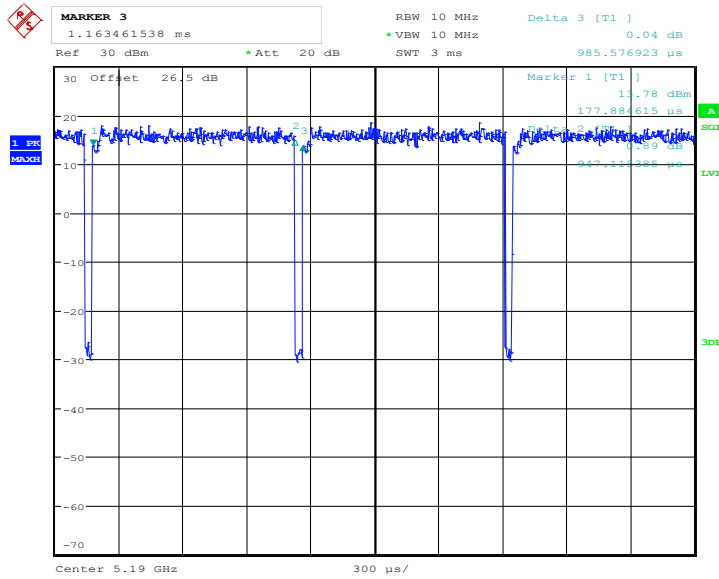

Date: 29.MAY.2020 15:49:59

802.11ac VHT80

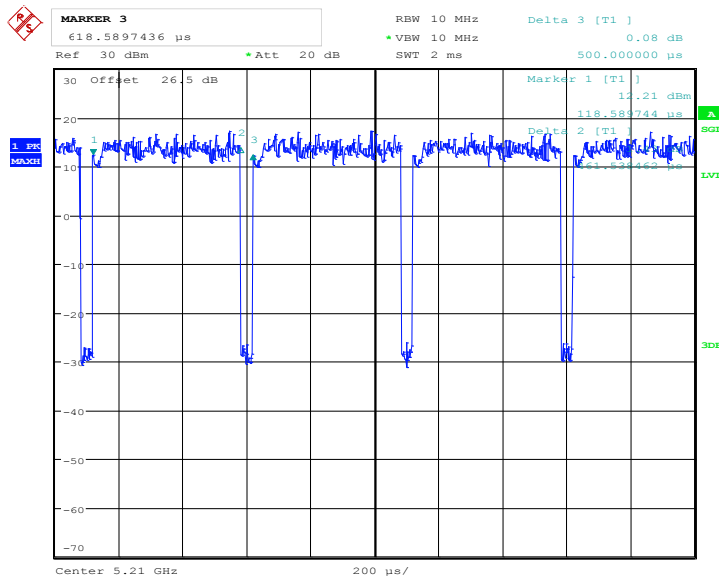

Date: 29.MAY.2020 16:02:30