

#01_HAC_E_GSM850_Voice_Ch128

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 824.2 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 37.37 V/m; Power Drift = 0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 33.48 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 30.4 dBV/m	Grid 2 M4 32.85 dBV/m	Grid 3 M4 32.9 dBV/m
Grid 4 M4 31.09 dBV/m	Grid 5 M4 33.42 dBV/m	Grid 6 M4 33.47 dBV/m
Grid 7 M4 31.87 dBV/m	Grid 8 M4 33.44 dBV/m	Grid 9 M4 33.48 dBV/m

Cursor:

Total = 33.48 dBV/m

E Category: M4

Location: -10, 13.5, 8.7 mm

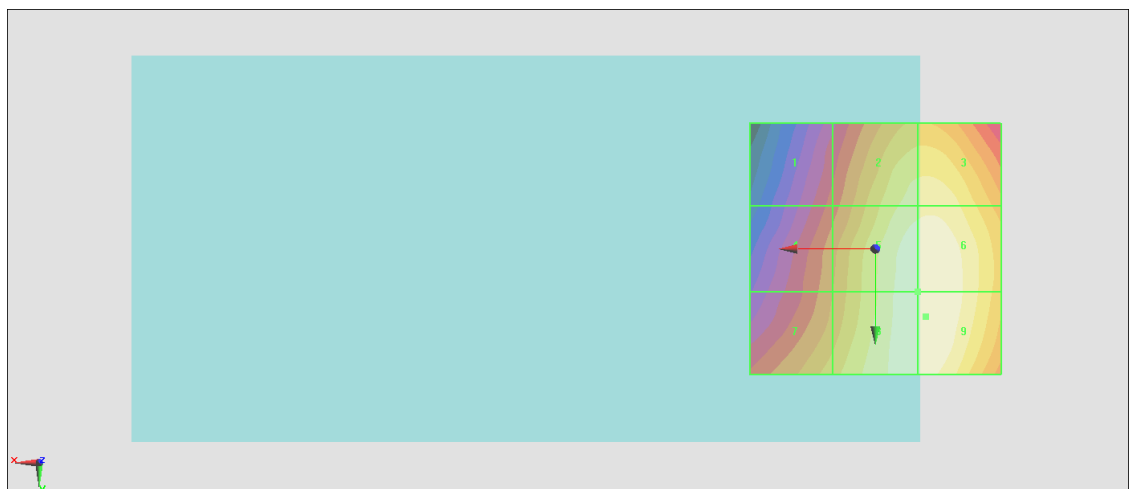

0 dB = 47.19 V/m = 33.48 dBV/m

#02_HAC_E_GSM850_Voice_Ch189

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 836.4 MHz; Calibrated: 2020/1/24

- Sensor-Surface: (Fix Surface)

- Electronics: DAE4 Sn854; Calibrated: 2020/5/26

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.90 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.71 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 28.13 dBV/m	Grid 2 M4 30.71 dBV/m	Grid 3 M4 30.76 dBV/m
Grid 4 M4 29.26 dBV/m	Grid 5 M4 31.53 dBV/m	Grid 6 M4 31.58 dBV/m
Grid 7 M4 30.64 dBV/m	Grid 8 M4 31.71 dBV/m	Grid 9 M4 31.7 dBV/m

Cursor:

Total = 31.71 dBV/m

E Category: M4

Location: -7, 25, 8.7 mm

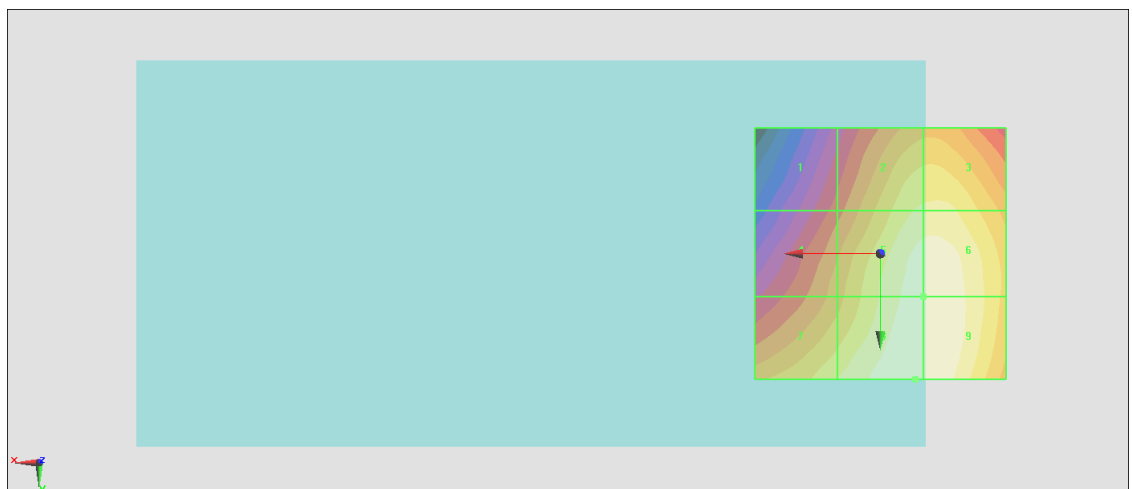

0 dB = 38.52 V/m = 31.71 dBV/m

#03_HAC_E_GSM850_Voice_Ch251

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 848.8 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 26.21 V/m; Power Drift = -0.00 dB

Applied MIF = 3.63 dB

RF audio interference level = 30.74 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 26.49 dBV/m	Grid 2 M4 29.73 dBV/m	Grid 3 M4 29.84 dBV/m
Grid 4 M4 27.65 dBV/m	Grid 5 M4 30.6 dBV/m	Grid 6 M4 30.69 dBV/m
Grid 7 M4 28.91 dBV/m	Grid 8 M4 30.69 dBV/m	Grid 9 M4 30.74 dBV/m

Cursor:

Total = 30.74 dBV/m

E Category: M4

Location: -11, 14, 8.7 mm

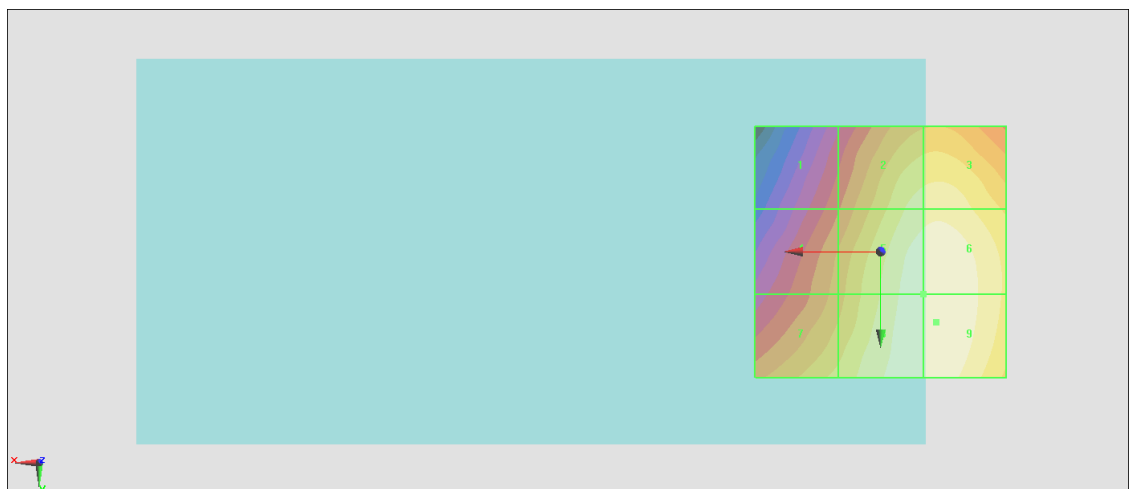

0 dB = 34.44 V/m = 30.74 dBV/m

#04_HAC_E_GSM1900_Voice_Ch512

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1850.2 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1850.2 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test

(101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.994 V/m; Power Drift = 0.08 dB

Applied MIF = 3.63 dB

RF audio interference level = 23.98 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.87 dBV/m	Grid 2 M4 23.78 dBV/m	Grid 3 M4 23.98 dBV/m
Grid 4 M4 21.87 dBV/m	Grid 5 M4 21.76 dBV/m	Grid 6 M4 21.85 dBV/m
Grid 7 M4 20.82 dBV/m	Grid 8 M4 19.96 dBV/m	Grid 9 M4 18.71 dBV/m

Cursor:

Total = 23.98 dBV/m

E Category: M4

Location: -12.5, -25, 8.7 mm



0 dB = 15.81 V/m = 23.98 dBV/m

#05_HAC_E_GSM1900_Voice_Ch661

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.179 V/m; Power Drift = 0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 24.22 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 24.22 dBV/m	Grid 2 M4 23.18 dBV/m	Grid 3 M4 23.53 dBV/m
Grid 4 M4 22.01 dBV/m	Grid 5 M4 22.27 dBV/m	Grid 6 M4 22.56 dBV/m
Grid 7 M4 21.05 dBV/m	Grid 8 M4 20.16 dBV/m	Grid 9 M4 20.82 dBV/m

Cursor:

Total = 24.22 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

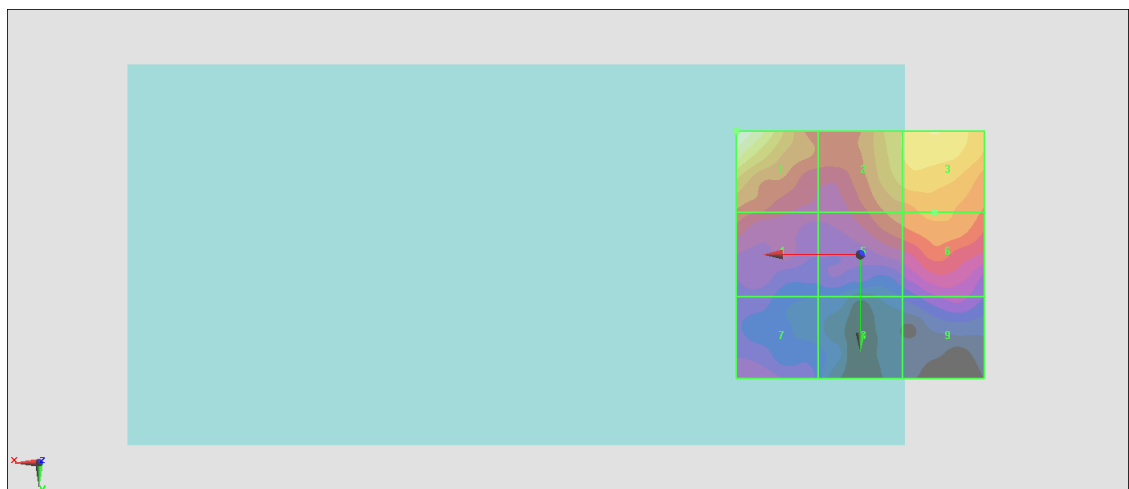

0 dB = 16.25 V/m = 24.22 dBV/m

#06_HAC_E_GSM1900_Voice_Ch810

Communication System: GSM-FDD (TDMA, GMSK); Frequency: 1909.8 MHz; Duty Cycle: 1:8.69961

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 1909.8 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 7.661 V/m; Power Drift = 0.09 dB

Applied MIF = 3.63 dB

RF audio interference level = 23.23 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 23.23 dBV/m	Grid 2 M4 22.36 dBV/m	Grid 3 M4 22.59 dBV/m
Grid 4 M4 20.66 dBV/m	Grid 5 M4 21.35 dBV/m	Grid 6 M4 21.61 dBV/m
Grid 7 M4 20.12 dBV/m	Grid 8 M4 19.11 dBV/m	Grid 9 M4 19.63 dBV/m

Cursor:

Total = 23.23 dBV/m

E Category: M4

Location: 25, -25, 8.7 mm

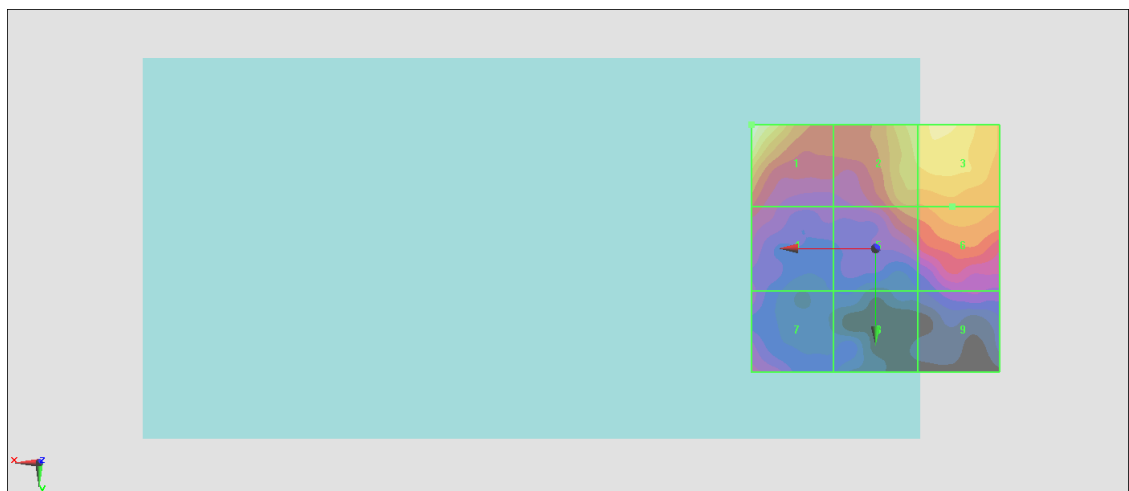

0 dB = 14.50 V/m = 23.23 dBV/m

#07_HAC_E_LTE Band 41_20M_QPSK_1_99_Ch40340

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2565 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2565 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 14.78 V/m; Power Drift = -0.11 dB

Applied MIF = -1.62 dB

RF audio interference level = 24.15 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 23.32 dBV/m	Grid 2 M4 24.14 dBV/m	Grid 3 M4 24.15 dBV/m
Grid 4 M4 21.61 dBV/m	Grid 5 M4 22.94 dBV/m	Grid 6 M4 23.06 dBV/m
Grid 7 M4 20.87 dBV/m	Grid 8 M4 20.3 dBV/m	Grid 9 M4 21.27 dBV/m

Cursor:

Total = 24.15 dBV/m

E Category: M4

Location: -9, -25, 8.7 mm

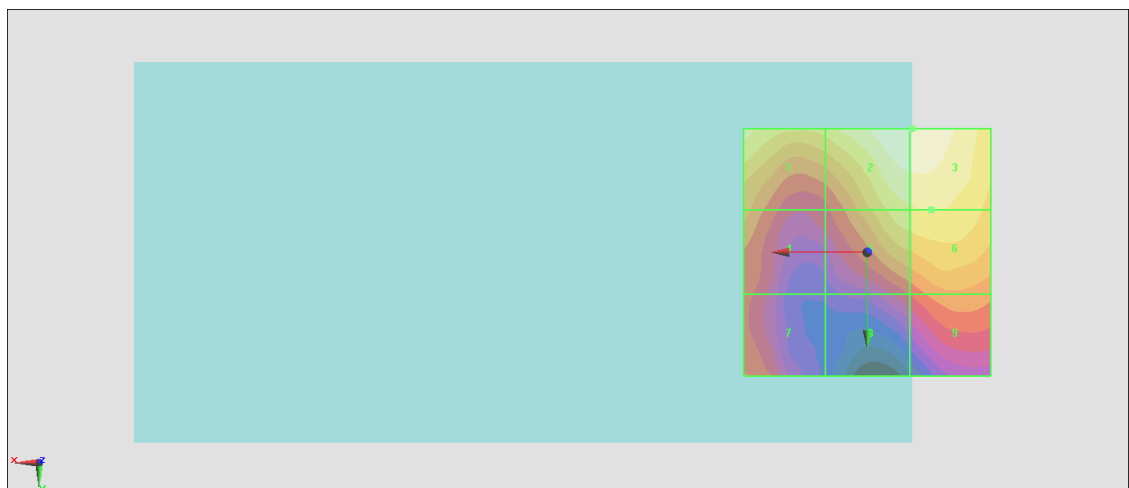

0 dB = 16.12 V/m = 24.15 dBV/m

#08_HAC_E_LTE Band 41_20M_QPSK_1_99_Ch40600

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2591 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2591 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.95 V/m; Power Drift = -0.02 dB

Applied MIF = -1.62 dB

RF audio interference level = 23.61 dBV/m

Emission category: M4

MIF scaled E-field



Grid 1 M4 23.09 dBV/m	Grid 2 M4 23.61 dBV/m	Grid 3 M4 23.61 dBV/m
Grid 4 M4 21.15 dBV/m	Grid 5 M4 21.98 dBV/m	Grid 6 M4 22.1 dBV/m
Grid 7 M4 19.9 dBV/m	Grid 8 M4 19.68 dBV/m	Grid 9 M4 20.6 dBV/m

Cursor:

Total = 23.61 dBV/m

E Category: M4

Location: -8, -25, 8.7 mm

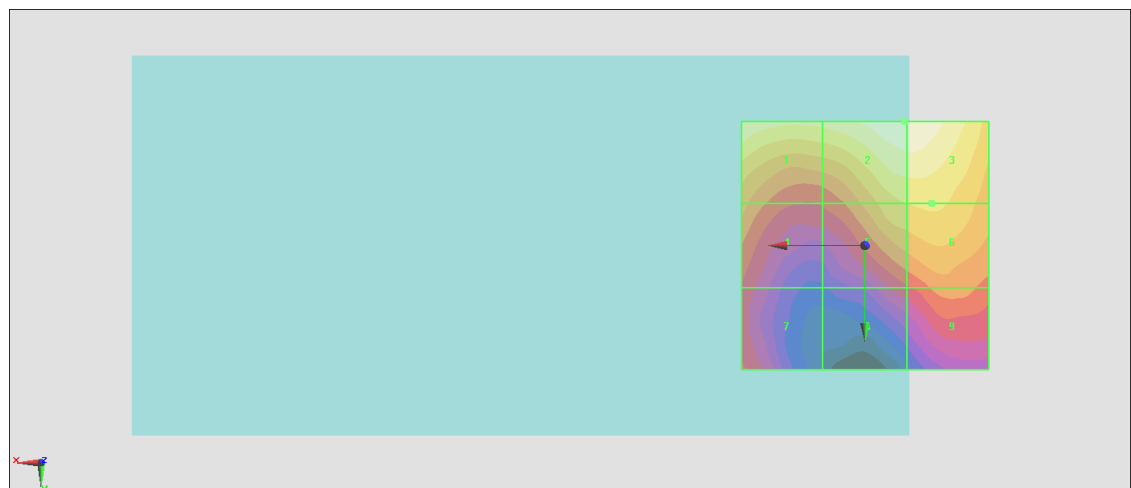

0 dB = 15.16 V/m = 23.61 dBV/m

#09_HAC_E_LTE Band 41_20M_QPSK_1_99_Ch40870

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2618 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2618 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.81 V/m; Power Drift = 0.03 dB

Applied MIF = -1.62 dB

RF audio interference level = 23.97 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.19 dBV/m	Grid 2 M4 23.88 dBV/m	Grid 3 M4 23.97 dBV/m
Grid 4 M4 21.12 dBV/m	Grid 5 M4 21.97 dBV/m	Grid 6 M4 22.39 dBV/m
Grid 7 M4 20.32 dBV/m	Grid 8 M4 19.72 dBV/m	Grid 9 M4 21.07 dBV/m

Cursor:

Total = 23.97 dBV/m

E Category: M4

Location: -10.5, -25, 8.7 mm



0 dB = 15.80 V/m = 23.97 dBV/m

#10_HAC_E_LTE Band 41_20M_QPSK_1_99_Ch41140

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2645 MHz; Duty Cycle: 1:8.33105

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2645 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 12.51 V/m; Power Drift = 0.04 dB

Applied MIF = -1.62 dB

RF audio interference level = 24.12 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 23.25 dBV/m	Grid 2 M4 24.09 dBV/m	Grid 3 M4 24.12 dBV/m
Grid 4 M4 21.43 dBV/m	Grid 5 M4 22.35 dBV/m	Grid 6 M4 22.67 dBV/m
Grid 7 M4 20.87 dBV/m	Grid 8 M4 20.09 dBV/m	Grid 9 M4 21.27 dBV/m

Cursor:

Total = 24.12 dBV/m

E Category: M4

Location: -9.5, -25, 8.7 mm

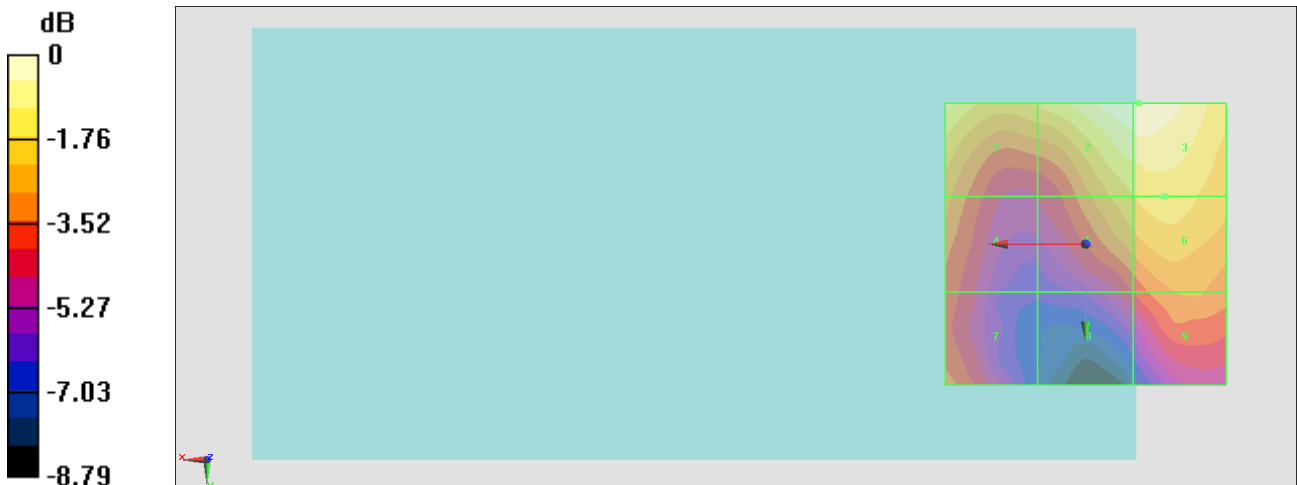

0 dB = 16.07 V/m = 24.12 dBV/m

#11_HAC_E_WLAN2.4GHz_802.11g_6Mbps_Ch1

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2412 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2412 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 70.34 V/m; Power Drift = -0.06 dB

Applied MIF = 0.12 dB

RF audio interference level = 33.78 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M3 31.32 dBV/m	Grid 2 M3 32.59 dBV/m	Grid 3 M3 32.15 dBV/m
Grid 4 M3 32.89 dBV/m	Grid 5 M3 33.78 dBV/m	Grid 6 M3 33.09 dBV/m
Grid 7 M3 32.83 dBV/m	Grid 8 M3 33.74 dBV/m	Grid 9 M3 33.03 dBV/m

Cursor:

Total = 33.78 dBV/m

E Category: M3

Location: -0.5, 5.5, 8.7 mm

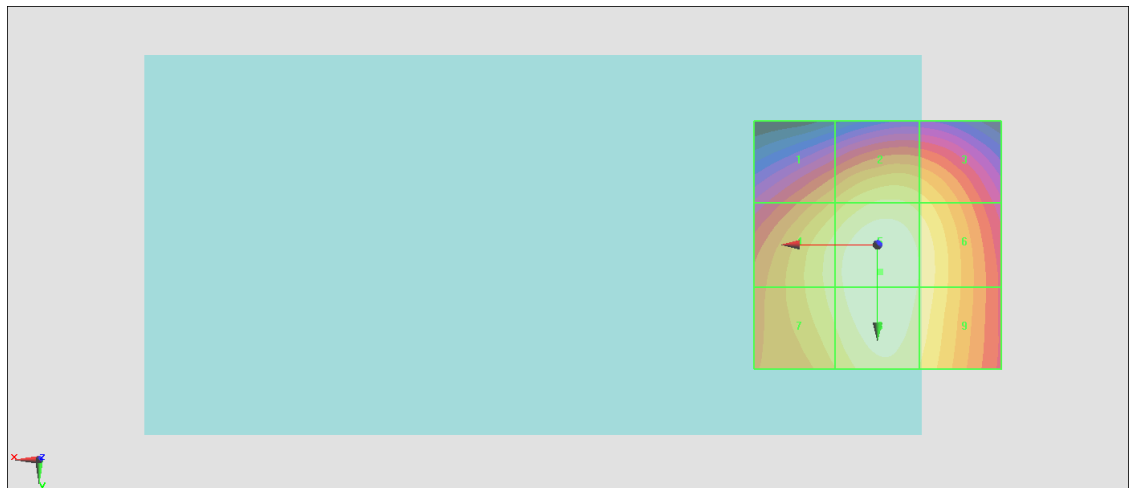

0 dB = 48.89 V/m = 33.78 dBV/m

#12_HAC_E_WLAN2.4GHz_802.11g_6Mbps_Ch6

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2437 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 69.66 V/m; Power Drift = -0.03 dB

Applied MIF = 0.12 dB

RF audio interference level = 33.78 dBV/m

Emission category: M3

MIF scaled E-field


Grid 1 M3 31.16 dBV/m	Grid 2 M3 32.67 dBV/m	Grid 3 M3 32.29 dBV/m
Grid 4 M3 32.78 dBV/m	Grid 5 M3 33.78 dBV/m	Grid 6 M3 33.16 dBV/m
Grid 7 M3 32.72 dBV/m	Grid 8 M3 33.71 dBV/m	Grid 9 M3 33.05 dBV/m

Cursor:

Total = 33.78 dBV/m

E Category: M3

Location: -1, 5, 8.7 mm



0 dB = 48.87 V/m = 33.78 dBV/m

#13_HAC_E_WLAN2.4GHz_802.11g_6Mbps_Ch11

Communication System: IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps); Frequency: 2437 MHz; Duty Cycle: 1:12.5777

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.6 °C

DASY5 Configuration

- Probe: EF3DV3 - SN4047; ConvF(1, 1, 1) @ 2437 MHz; Calibrated: 2020/1/24
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn854; Calibrated: 2020/5/26
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 57.67 V/m; Power Drift = -0.05 dB

Applied MIF = 0.12 dB

RF audio interference level = 32.08 dBV/m

Emission category: M3

MIF scaled E-field



Grid 1 M4 29.8 dBV/m	Grid 2 M3 31.18 dBV/m	Grid 3 M3 30.78 dBV/m
Grid 4 M3 31.08 dBV/m	Grid 5 M3 32.08 dBV/m	Grid 6 M3 31.49 dBV/m
Grid 7 M3 30.98 dBV/m	Grid 8 M3 31.94 dBV/m	Grid 9 M3 31.33 dBV/m

Cursor:

Total = 32.08 dBV/m

E Category: M3

Location: -1, 2, 8.7 mm

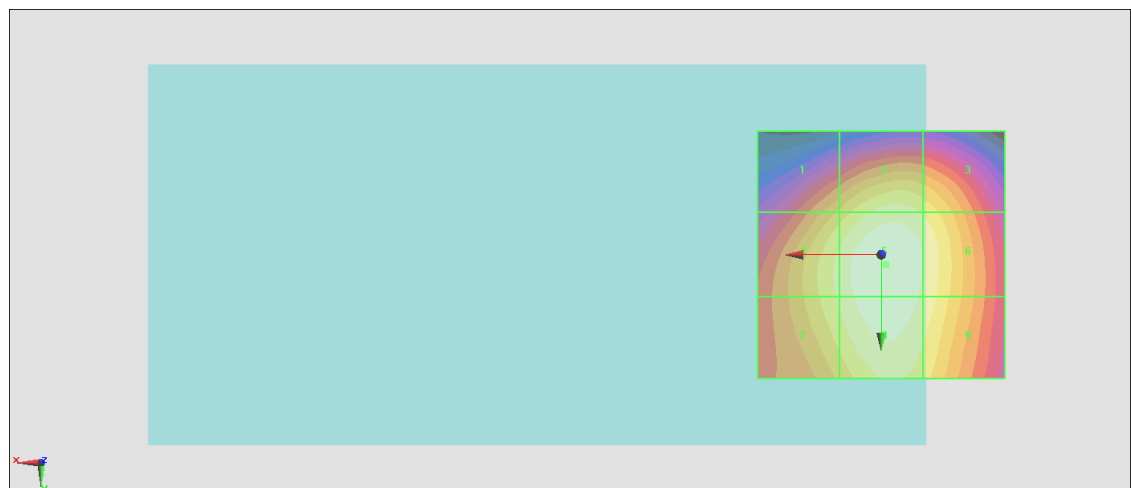

0 dB = 40.19 V/m = 32.08 dBV/m