



## FCC Part 15.247

### TEST REPORT

For

### GIANT MANUFACTURING CO., LTD.

No. 999, Sec. 1, Dongda Rd., Xitun Dist., Taichung City 40763, Taiwan

<b>Report Type</b>	<b>Original Report</b>
<b>FCC Identity:</b>	<b>FCC ID: ZL7-SG10S</b>
<b>Brand Name</b>	<b>GIANT</b>
<b>Product Name</b>	<b>Smart gateway</b>
<b>Model Name</b>	<b>10S</b>
<b>Report Number</b>	<b>RSHA200526005-00B</b>
<b>Report Date</b>	<b>2021/05/10</b>
<b>Reviewed By</b>	<b>Zeus Chen</b> <i>Zeus Chen</i>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp.(Linkou Laboratory) No. 6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.) Tel: +886 (3)3961072; Fax: +886 (3) 3961027 www.bacl.com.tw	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

### Revision History

Revision	Report Number	Issue Date	Description
1.0	RSHA200526005-00B	2021/05/10	Original Report

**TABLE OF CONTENTS**

**1 GENERAL INFORMATION..... 4**

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... 4

1.2 OPERATION CONDITION OF EUT ..... 4

1.3 OBJECTIVE AND TEST METHODOLOGY ..... 5

1.4 MEASUREMENT UNCERTAINTY ..... 5

1.5 ENVIRONMENTAL CONDITIONS AND TEST DATE ..... 5

1.6 TEST FACILITY ..... 5

**2 SYSTEM TEST CONFIGURATION..... 6**

2.1 TEST CHANNELS AND DESCRIPTION OF WORST TEST CONFIGURATION ..... 6

2.2 SUPPORT EQUIPMENT LIST AND EXTERNAL CABLE LIST ..... 6

2.3 BLOCK DIAGRAM OF TEST SETUP ..... 7

2.4 DUTY CYCLE ..... 7

**3 SUMMARY OF TEST RESULTS ..... 8**

**4 FCC§15.247(I), §1.1307, § 2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE) ..... 9**

4.1 APPLICABLE STANDARD..... 9

4.2 RF EXPOSURE EVALUATION RESULT ..... 9

**5 FCC §15.203 - ANTENNA REQUIREMENTS..... 10**

5.1 APPLICABLE STANDARD..... 10

5.2 ANTENNA LIST AND DETAILS ..... 10

**6 FCC §15.207 - AC LINE CONDUCTED EMISSIONS..... 11**

6.1 APPLICABLE STANDARD..... 11

6.2 EUT SETUP AND TEST PROCEDURE ..... 11

6.3 TEST EQUIPMENT LIST AND DETAILS ..... 12

6.4 TEST RESULT..... 13

**7 FCC §15.209, §15.205, §15.247(D) – SPURIOUS EMISSIONS ..... 14**

7.1 APPLICABLE STANDARD..... 14

7.2 EUT SETUP AND TEST PROCEDURE ..... 16

7.3 TEST EQUIPMENT LIST AND DETAILS ..... 17

7.4 TEST RESULT..... 18

**8 FCC §15.247(A)(2) – 6 DB EMISSION BANDWIDTH ..... 23**

8.1 APPLICABLE STANDARD..... 23

8.2 TEST PROCEDURE ..... 23

8.3 TEST EQUIPMENT LIST AND DETAILS ..... 23

8.4 TEST RESULTS ..... 24

**9 FCC §15.247(B) (3) – MAXIMUM OUTPUT POWER ..... 25**

9.1 APPLICABLE STANDARD..... 25

9.2 TEST PROCEDURE ..... 25

9.3 TEST EQUIPMENT LIST AND DETAILS ..... 25

9.4 TEST RESULTS ..... 25

**10 FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE ..... 26**

10.1 APPLICABLE STANDARD..... 26

10.2 TEST PROCEDURE ..... 26

10.3 TEST EQUIPMENT LIST AND DETAILS ..... 26

10.4 TEST RESULTS ..... 27

**11 FCC §15.247(E) – POWER SPECTRAL DENSITY..... 28**

11.1 APPLICABLE STANDARD..... 28

11.2 TEST PROCEDURE ..... 28

11.3 TEST EQUIPMENT LIST AND DETAILS ..... 28

11.4 TEST RESULTS ..... 29

# 1 General Information

## 1.1 Product Description for Equipment under Test (EUT)

<b>Applicant</b>	<b>GIANT MANUFACTURING CO., LTD.</b> No. 999, Sec. 1, Dongda Rd., Xitun Dist., Taichung City 40763, Taiwan
<b>Manufacturer</b>	<b>GIANT MANUFACTURING CO., LTD.</b> No. 999, Sec. 1, Dongda Rd., Xitun Dist., Taichung City 40763, Taiwan
<b>Brand Name</b>	GIANT
<b>Product (Equipment)</b>	Smart gateway
<b>Model Name</b>	10S
<b>Frequency Range</b>	BLE-1Mbps: 2402 - 2480 MHz ANT+: 2457 MHz
<b>Number of Channels</b>	BLE-1Mbps: 40 Channels ANT+: 1 Channel
<b>Output Power</b>	BLE: -2.89 dBm (0.0005 W) ANT+: -2.48 dBm (0.0006 W)
<b>Modulation Type</b>	GFSK
<b>Received Date</b>	2021-01-08
<b>Date of Test</b>	2021-01-11 – 2021-05-10

Note: All measurement and test data in this report was gathered from production sample serial number: 200526005. Assigned by Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

## 1.2 Operation Condition of EUT

<b>Power Operation (Voltage Range)</b>	<input type="checkbox"/> AC 120 V/60 Hz <input type="checkbox"/> Adapter (Not for Sale) <input type="checkbox"/> By Power Cord.
	<input checked="" type="checkbox"/> DC Type <input checked="" type="checkbox"/> DC Power Supply: DC 36Vr <input checked="" type="checkbox"/> From Laptop (For Test) <input type="checkbox"/> External from USB Cable <input type="checkbox"/> External DC Adapter

### 1.3 Objective and Test Methodology

The Objective of this Test Report was to document the compliance of the GIANT MANUFACTURING CO., LTD..  
Appliance (Model(s): 10S) to the requirements of the following Standards:

- Part 2, Subpart J, Part 15, Subparts A and C, section 15.247 of the Federal Communication Commission's rules.
- ANSI C63.10-2013 of the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

### 1.4 Measurement Uncertainty

Parameter	Expanded Measurement uncertainty
RF output power with Power Meter	± 1.488 dB
Occupied Channel Bandwidth	± 453.927 Hz
RF Conducted test with Spectrum	± 2.77 dB
AC Power Line Conducted Emission	± 2.66 dB
Radiated Below 1G	± 3.57 dB
Radiated Above 1G	± 5.32 dB

The test results with statement of conformity, the decision rules are based on the specifications and standards. The test results will not take the measurement uncertainty into account.

### 1.5 Environmental Conditions and Test Date

Test Site	Test Date	Temperature (°C)	Relative Humidity (%)	Test Engineer
Conduction (Con-01)	Jan. 12, 2021	20.3	55	Brian Chang
Radiated (966A)	Jan. 14, 2021 – Mar. 10, 2021	17.4-19	55-60	Leo Cheng
Conducted (TH-02)	Jan. 11, 2021 – Jan. 27, 2021	22.6-23.4	56-58	Blake Wang

### 1.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) by Mutual Recognition Agreement (MRA). The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database. The FCC Registration No.: 0027578244. Designation No.: TW3546. The Test Firm Registration No.: 181430.

## 2 System Test Configuration

### 2.1 Test Channels and Description of Worst Test Configuration

The system was configured for testing in testing mode which was provided by manufacturer. No special accessory, No modification was made to the EUT and No special equipment used during test.

For BLE, there are totally 40 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	--	--
2	2406	--	--
3	2408	37	2476
--	--	38	2478
19	2440	39	2480

For BLE: Channel 0, 19 and 39 were tested.


The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the Peak power and PSD across all data rates bandwidths, and modulations. Radiated below 1G were tested worst output power.

Worst Case of Power Setting				
EUT Exercise Software		nRFgo Studio		
Configuration	N <sub>TX</sub>	Low CH	Mid CH	High CH
BLE-1Mbps	1	Default	Default	Default
ANT+	1	-	Default	-

### 2.2 Support Equipment List and External Cable List

No.	Description	Manufacturer	Model Number	Serial Number
A	NoteBook	DELL	Latitude E6410	PP27LA001
B	DC power supply	GWINSTEK	SPS-2415	N/A


### 2.3 Block Diagram of Test Setup

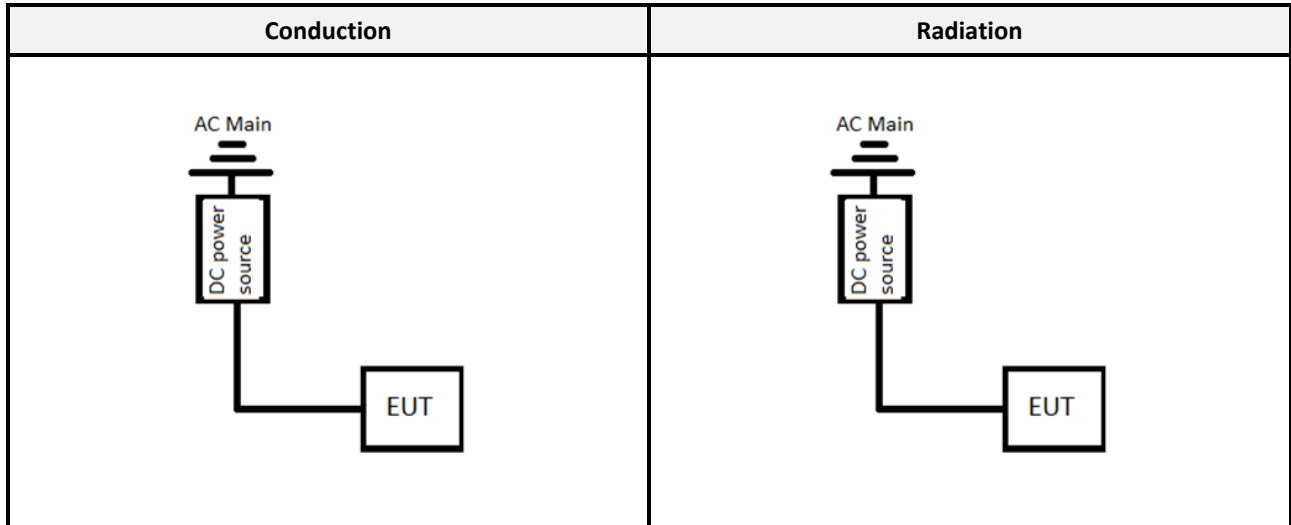

### 2.4 Duty Cycle

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum power transmission duration, T, are required for each tested mode of operation.

Configuration	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE-1Mbps	0.41	0.62	65.13	1.86
ANT+	100	100	100	0.00

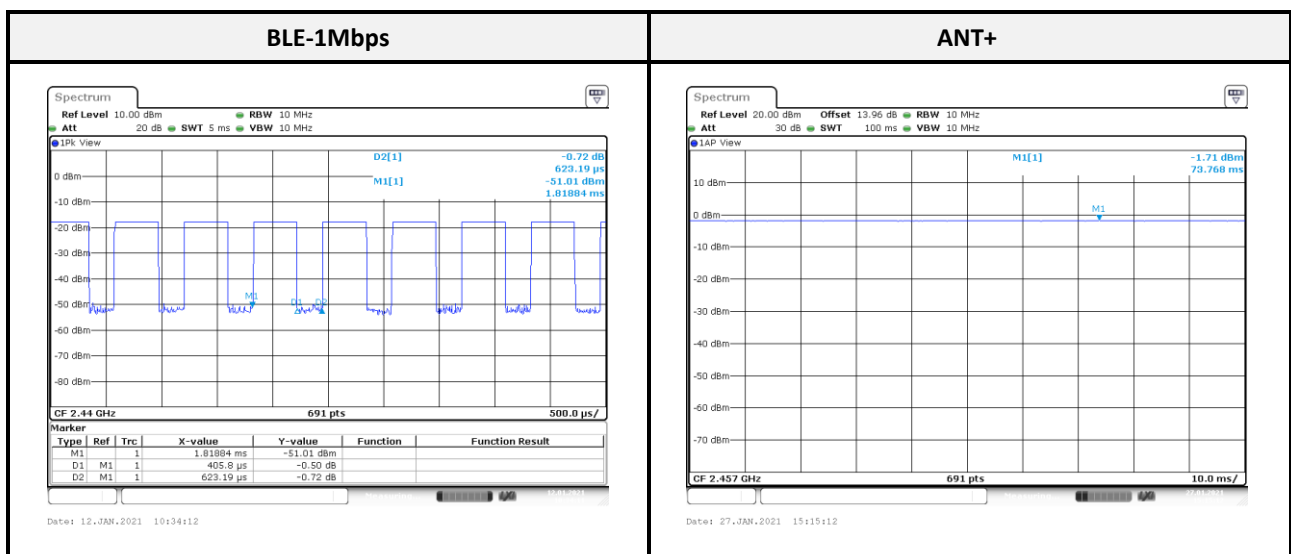

\*Note: Duty Factor = 10\*log (1/Duty cycle)

### 3 Summary of Test Results

FCC Rules	Description of Test	Result
§15.247(i), §1.1307, § 2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance



## 4 FCC§15.247(i), §1.1307, § 2.1091 – Maximum Permissible Exposure (MPE)

### 4.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

#### Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

**Calculated Formulary:** Predication of MPE limit at a given distance

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

### 4.2 RF Exposure Evaluation Result

#### MPE Evaluation:

Mode	Frequency Range (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
		(dBi)	(numeric)	(dBm)	(mW)			
BLE-1Mbps	2402-2480	1.50	1.4125	-2.00	0.6310	20	0.0002	1
ANT+	2457	1.50	1.4125	-2.00	0.6310	20	0.0002	1

BLE and ANT+ can transmit simultaneously, MPE evaluation is as below formula:

$PD1/Limit1 + PD2/Limit2 + \dots < 1$ , PD (Power Density)

#### The worst case is as below:

Max MPE of BLE + Max MPE of ANT+ = 0.0002/1 + 0.0002/1 = 0.0004 < 1.0

**Result:** MPE evaluation of single and simultaneous transmission meet the requirement of standard.

## 5 FCC §15.203 - Antenna Requirements

### 5.1 Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi

### 5.2 Antenna List and Details

Brand	Model	Antenna Type	Antenna Gain	Result
Chip Antenna	Unictron	AA055K	1.5dBi	Compliance

The EUT has an internal antennas arrangement and fulfill the requirement of this section.

## 6 FCC §15.207 - AC Line Conducted Emissions

### 6.1 Applicable Standard


According to FCC §15.207,

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 2</sup>
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency. Note 2: A linear average detector is required

### 6.2 EUT Setup and Test Procedure

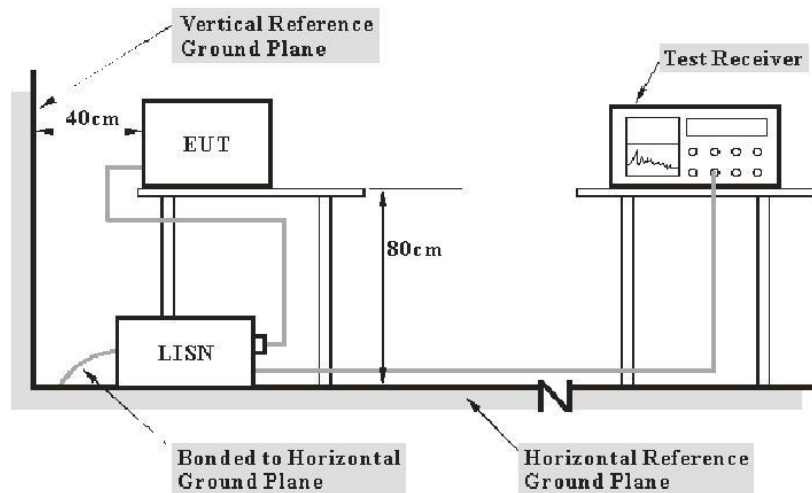

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits. The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	Receiver RBW
150 kHz - 30 MHz	9 kHz



During the conducted emission test, the adapter was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

### 6.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>AC Line Conduction Room (CON-01)</b>					
Two-Line V-Network	Rohde & Schwarz	ENV216	100010	2020/09/14	2021/09/13
Pulse Limiter	SCHWARZBECK	VSTD 9561-F	00432	2020/09/11	2021/09/10
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102430	2020/05/07	2021/05/06
RF Cable	EMCI	EMCCFD300-BM-BM-8000	180526	2020/08/18	2021/08/17
Software	Audix	e3 v9	E3LK-03	N.C.R	N.C.R

**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

### 6.4 Test Result

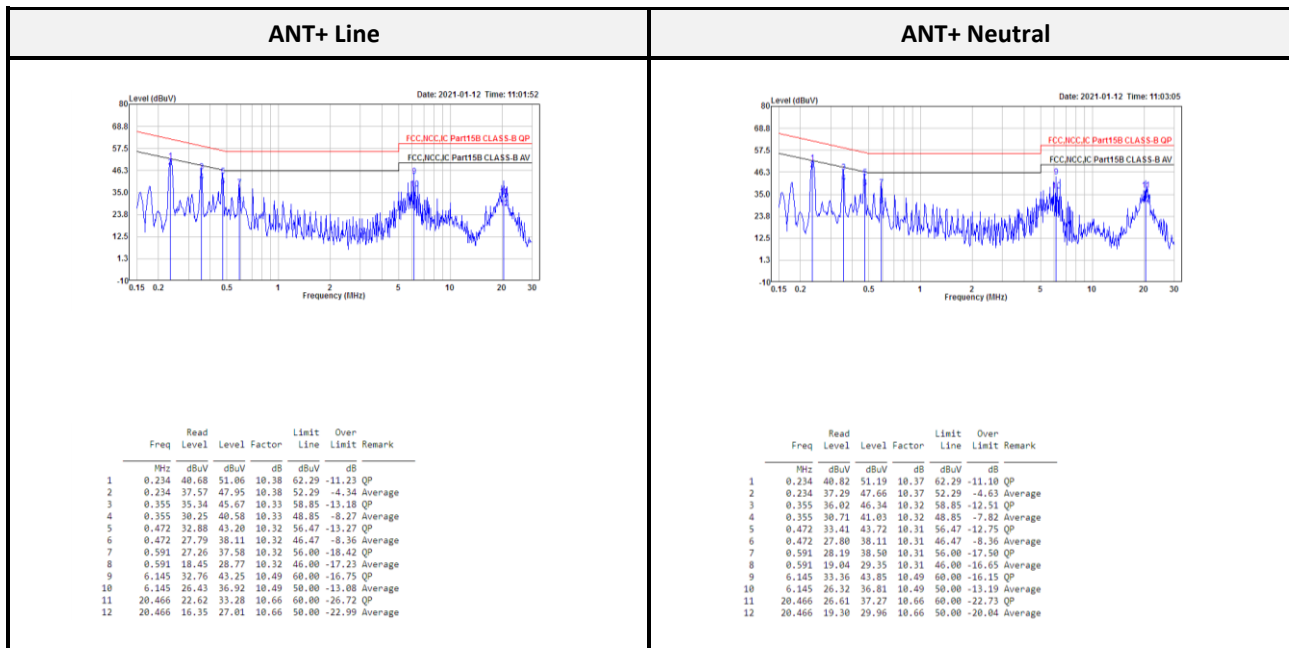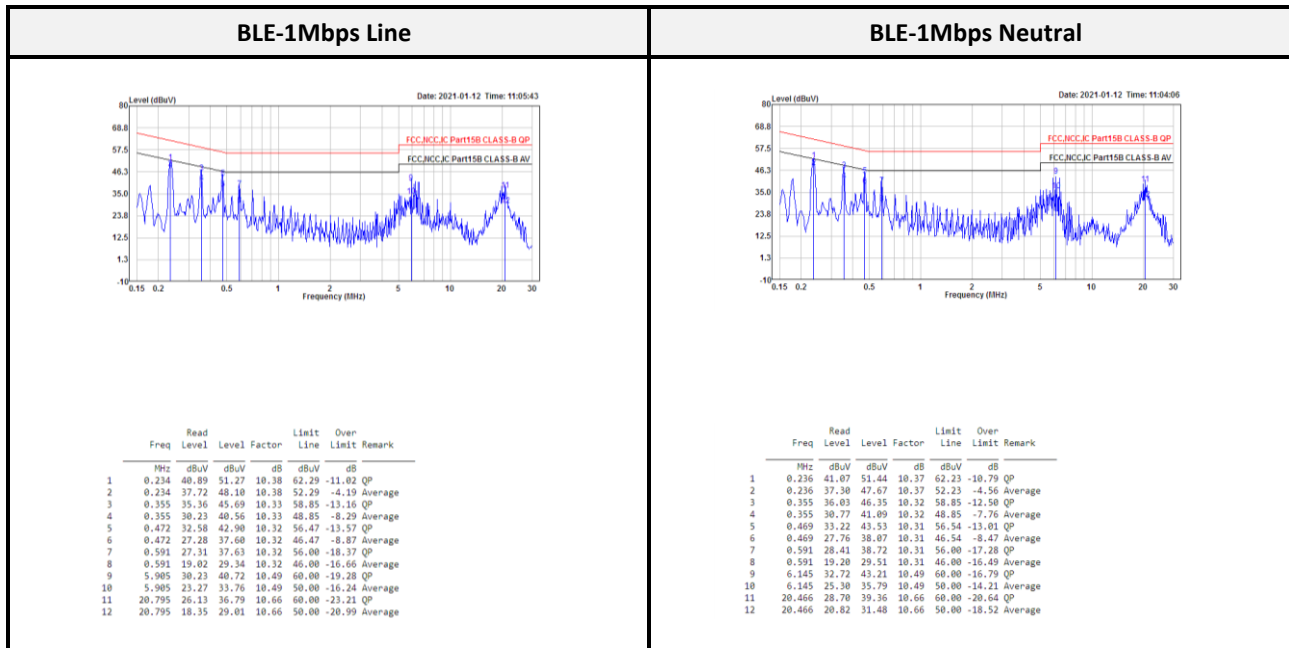

Note:

Level = Read Level + Factor

Over Limit (Margin) = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

## 7 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

### 7.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function.

Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	13.36-13.41	399.9-410	4.5-5.15
0.495-0.505	16.42-16.423	608-614	5.35-5.46
2.1735-2.1905	16.69475-16.69525	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6


As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

## 7.2 EUT Setup and Test Procedure

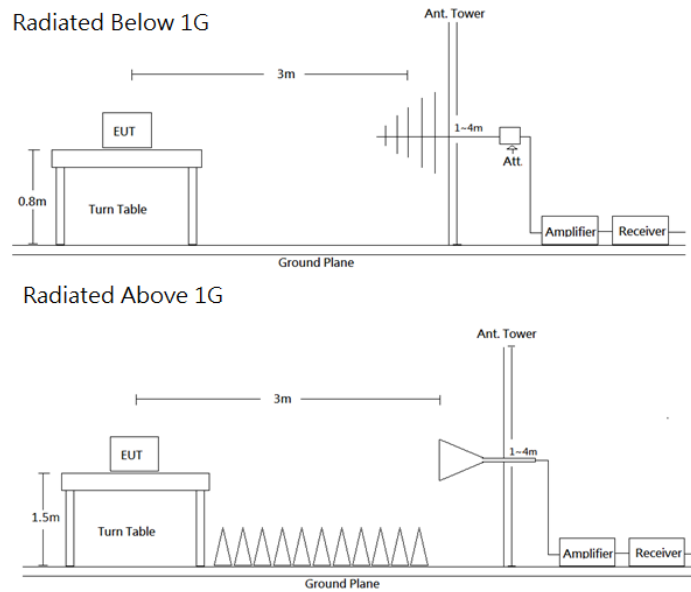

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	-	QP
Above 1 GHz	1 MHz	3 MHz	-	PK
	1 MHz	10 Hz	>98%	PK
	1 MHz	1/T	<98%	PK

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.





**7.3 Test Equipment List and Details**

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Radiation 3M Room (966B)</b>					
Active Loop	EMCO	6502	0001-3322	2020/03/16	2021/03/15
Bilog Antenna/6 dB Attenuator	SUNOL SCIENCES & EMEC /EMCI	JB3/N-6-06	A111513/AT-N0668	2020/03/19	2021/03/18
Bilog Antenna/6 dB Attenuator	SUNOL SCIENCES & EMEC /EMCI	JB3/N-6-06	A111513/AT-N0668	2021/03/30	2022/03/29
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2020/05/07	2021/05/06
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2020/06/03	2021/06/02
Horn Antenna	ETS-Lindgren	3115	00109141	2020/07/15	2021/07/14
Horn Antenna	ETS-Lindgren	3160-09	00123852	2020/07/07	2021/07/06
Preamplifier	A.H. Systems	PAM-1840VH	174	2020/03/25	2021/03/24
Preamplifier	A.H. Systems	PAM-1840VH	174	2021/03/22	2022/03/21
Preamplifier	A.H. Systems	PAM-0118	478	2020/05/05	2021/05/04
Preamplifier	A.H. Systems	PAM-0118	470	2021/03/15	2021/03/14
\Microflex Cable (1m)	EMCI	EMC102-KM-KM-1000	180524	2020/08/06	2021/08/05
Microflex Cable (2m)	EMCI	EMC106-SM-SM-2000	180516	2020/08/06	2021/08/05
Microflex Cable (8m)	UTIFLEX	UFA210A-1-3149-300300	MFR 64639 232490-002	2020/08/06	2021/08/05
Turn Table	Chaintek	T-200-S-1	003501	N.C.R	N.C.R
Antenna Tower	Chaintek	MBD-400-1	003504	N.C.R	N.C.R
Controller	Chaintek	3000-1	003507	N.C.R	N.C.R
Software	Audix	e3 v9	E3LK-01	N.C.R	N.C.R
<b>Conducted Room (TH-02)</b>					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2020/05/07	2021/05/06
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

### 7.4 Test Result

Below 1G (30 MHz-1 GHz) test the worst power mode. (Pre-scan with three orthogonal axis, and worse case as Y axis)

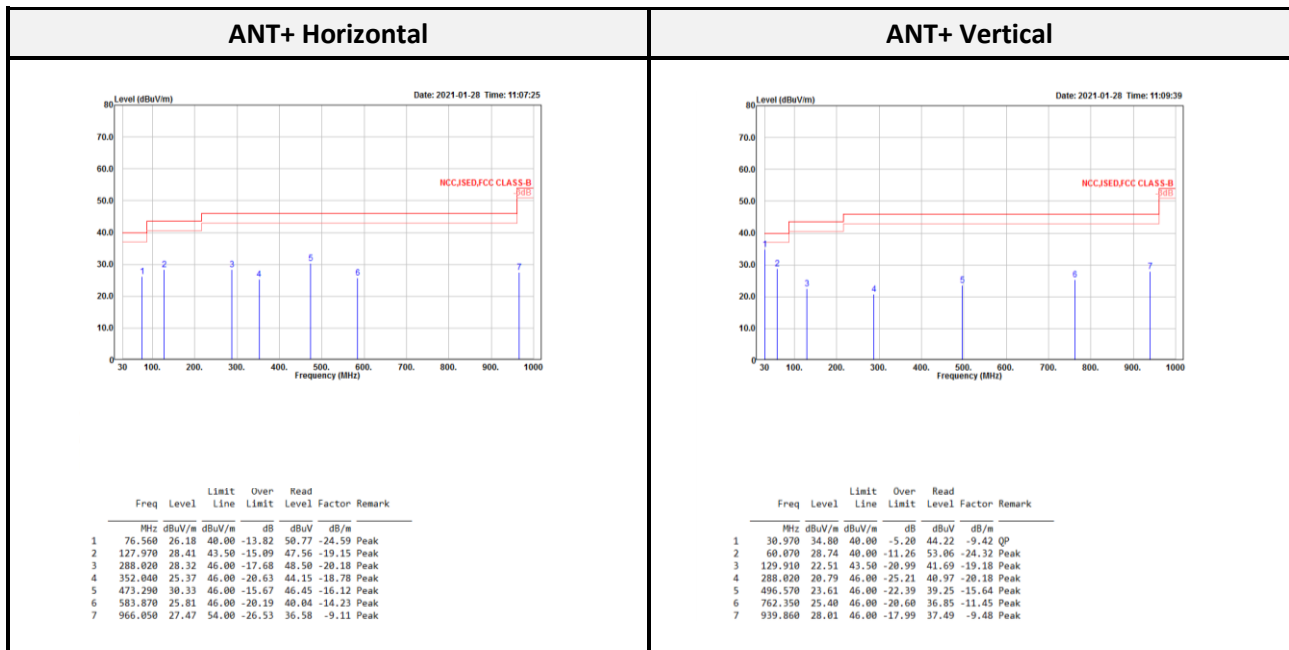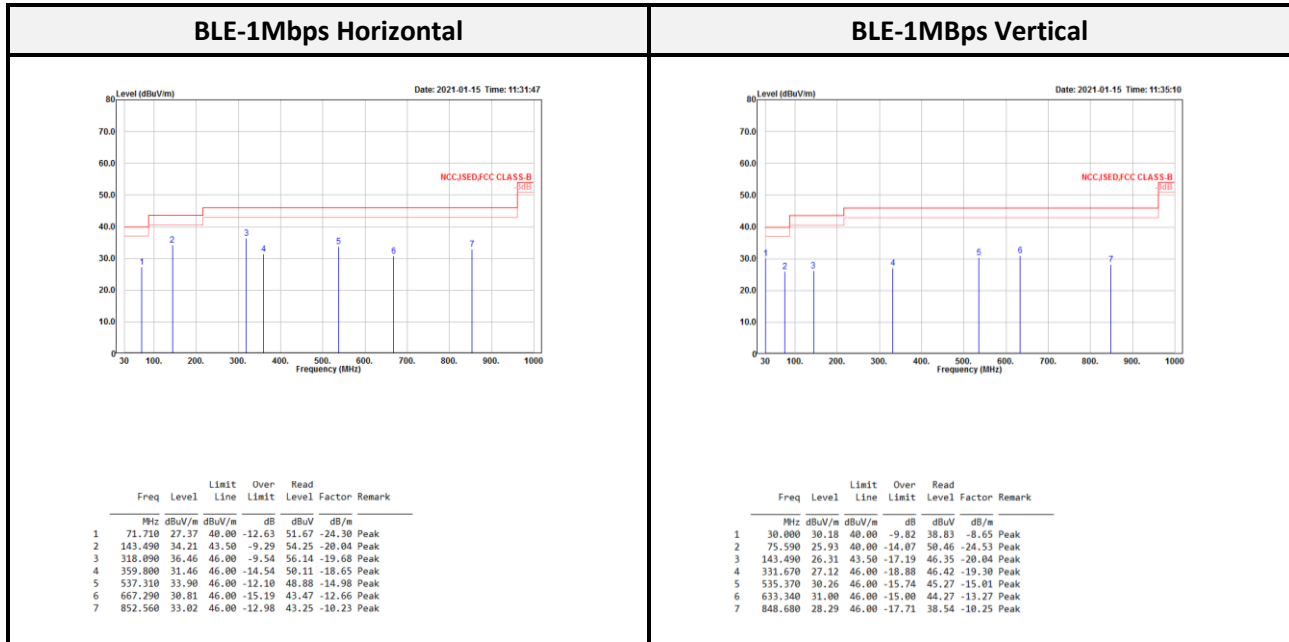

Note:

Result = Reading + Correct Factor.

Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

**Above 1G (1 GHz-26.5 GHz)**


BLE-1Mbps Low CH Horizontal							BLE-1Mbps Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2376.900	39.63	54.00	-14.37	47.43	-7.80	Average	2352.500	39.84	54.00	-14.16	47.72	-7.88	Average
2376.900	52.87	74.00	-21.13	60.67	-7.80	Peak	2352.500	53.39	74.00	-20.61	61.27	-7.88	Peak
2402.400	88.01			95.74	-7.73	Average	2402.400	97.48			105.21	-7.73	Average
2402.400	88.52			96.25	-7.73	Peak	2402.400	97.97			105.70	-7.73	Peak
4804.000	41.12	54.00	-12.88	42.80	-1.68	Average	4804.000	47.76	54.00	-6.24	49.44	-1.68	Average
4804.000	48.09	74.00	-25.91	49.77	-1.68	Peak	4804.000	53.25	74.00	-20.75	54.93	-1.68	Peak
7206.000	40.78	54.00	-13.22	34.95	5.83	Average	7206.000	42.13	54.00	-11.87	36.30	5.83	Average
7206.000	50.32	74.00	-23.68	44.49	5.83	Peak	7206.000	50.93	74.00	-23.07	45.10	5.83	Peak

BLE-1Mbps Middle CH Horizontal							BLE-1Mbps Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2380.664	39.67	54.00	-14.33	47.46	-7.79	Average	2363.724	39.76	54.00	-14.24	47.60	-7.84	Average
2380.664	52.54	74.00	-21.46	60.33	-7.79	Peak	2363.724	52.64	74.00	-21.36	60.48	-7.84	Peak
2440.438	89.65			97.30	-7.65	Average	2440.438	98.29			105.94	-7.65	Average
2440.438	90.10			97.75	-7.65	Peak	2440.438	98.74			106.39	-7.65	Peak
2550.064	40.52	54.00	-13.48	47.90	-7.38	Average	2498.276	40.25	54.00	-13.75	47.83	-7.58	Average
2550.064	53.35	74.00	-20.65	60.73	-7.38	Peak	2498.276	53.17	74.00	-20.83	60.75	-7.58	Peak
4880.000	38.12	54.00	-15.88	39.65	-1.53	Average	4880.000	41.42	54.00	-12.58	42.95	-1.53	Average
4880.000	46.79	74.00	-27.21	48.32	-1.53	Peak	4880.000	50.37	74.00	-23.63	51.90	-1.53	Peak
7320.000	39.27	54.00	-14.73	33.97	5.30	Average	7320.000	40.24	54.00	-13.76	34.94	5.30	Average
7320.000	49.21	74.00	-24.79	43.91	5.30	Peak	7320.000	49.52	74.00	-24.48	44.22	5.30	Peak

BLE-1Mbps High CH Horizontal							BLE-1Mbps High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2479.758	88.93			96.53	-7.60	Average	2480.250	97.78			105.38	-7.60	Average
2479.758	89.23			96.83	-7.60	Peak	2480.250	98.23			105.83	-7.60	Peak
2483.612	40.44	54.00	-13.56	48.03	-7.59	Average	2483.530	41.54	54.00	-12.46	49.13	-7.59	Average
2483.612	57.96	74.00	-16.04	65.55	-7.59	Peak	2483.530	65.46	74.00	-8.54	73.05	-7.59	Peak
4960.000	34.18	54.00	-19.82	35.52	-1.34	Average	4960.000	37.52	54.00	-16.48	38.86	-1.34	Average
4960.000	43.76	74.00	-30.24	45.10	-1.34	Peak	4960.000	49.86	74.00	-24.14	51.20	-1.34	Peak
7440.000	39.23	54.00	-14.77	33.59	5.64	Average	7440.000	37.13	54.00	-16.87	31.49	5.64	Average
7440.000	48.73	74.00	-25.27	43.09	5.64	Peak	7440.000	49.28	74.00	-24.72	43.64	5.64	Peak

ANT+ Horizontal							ANT+ Vertical						
Freq	Level	Limit	Over	Read	Factor	Remark	Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2341.944	40.54	54.00	-13.46	48.44	-7.90	Average	2354.770	36.95	54.00	-17.05	44.83	-7.88	Average
2341.944	50.97	74.00	-23.03	58.87	-7.90	Peak	2354.770	50.40	74.00	-23.60	58.28	-7.88	Peak
2456.894	97.73			105.35	-7.62	Average	2457.620	87.08			94.70	-7.62	Average
2456.894	99.08			106.70	-7.62	Peak	2457.620	88.41			96.03	-7.62	Peak
2546.676	42.43	54.00	-11.57	49.82	-7.39	Average	2509.166	37.63	54.00	-16.37	45.17	-7.54	Average
2546.676	52.32	74.00	-21.68	59.71	-7.39	Peak	2509.166	51.02	74.00	-22.98	58.56	-7.54	Peak
4914.000	37.19	54.00	-16.81	38.64	-1.45	Average	4914.000	48.85	54.00	-5.15	50.30	-1.45	Average
4914.000	45.66	74.00	-28.34	47.11	-1.45	Peak	4914.000	54.85	74.00	-19.15	56.30	-1.45	Peak
7371.000	37.77	54.00	-16.23	32.42	5.35	Average	7371.000	39.72	54.00	-14.28	34.37	5.35	Average
7371.000	49.14	74.00	-24.86	43.79	5.35	Peak	7371.000	49.95	74.00	-24.05	44.60	5.35	Peak

Above 1G (1 GHz-26.5 GHz): The worst mode is BLE-1Mbps Middle CH.

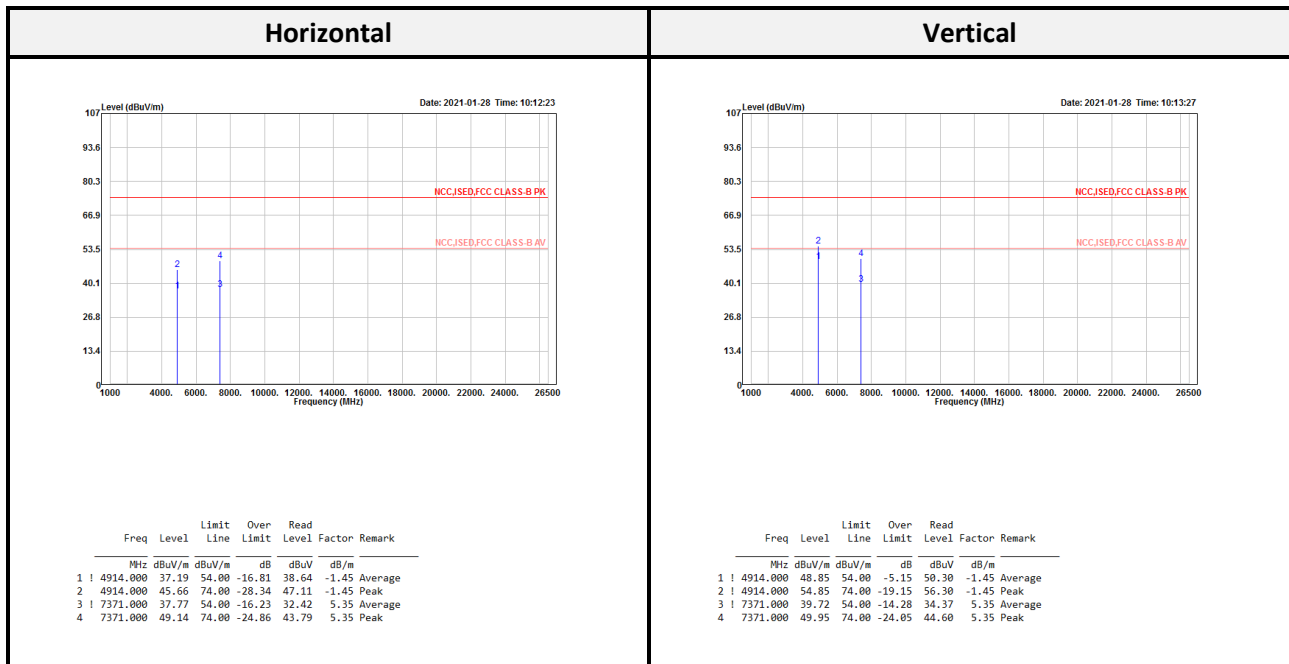

Note:



Result = Reading + Correct Factor.

Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.


Spurious emissions more than 20 dB below the limit were not reported.

**Co-location**

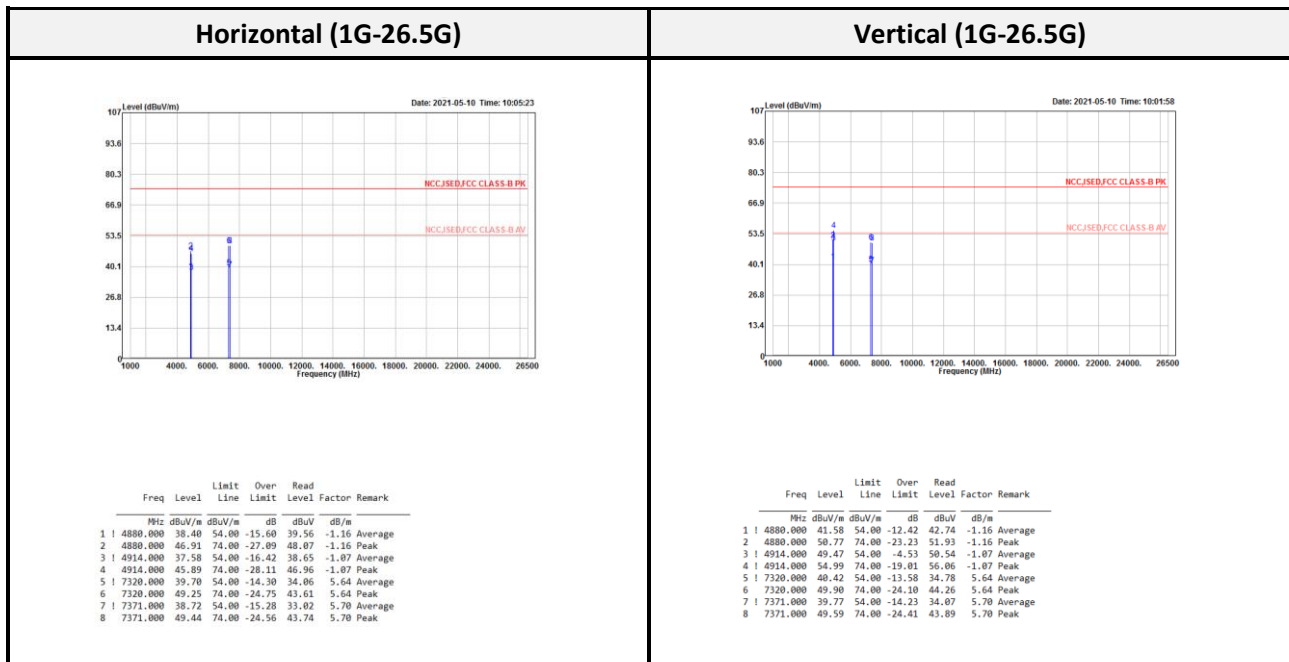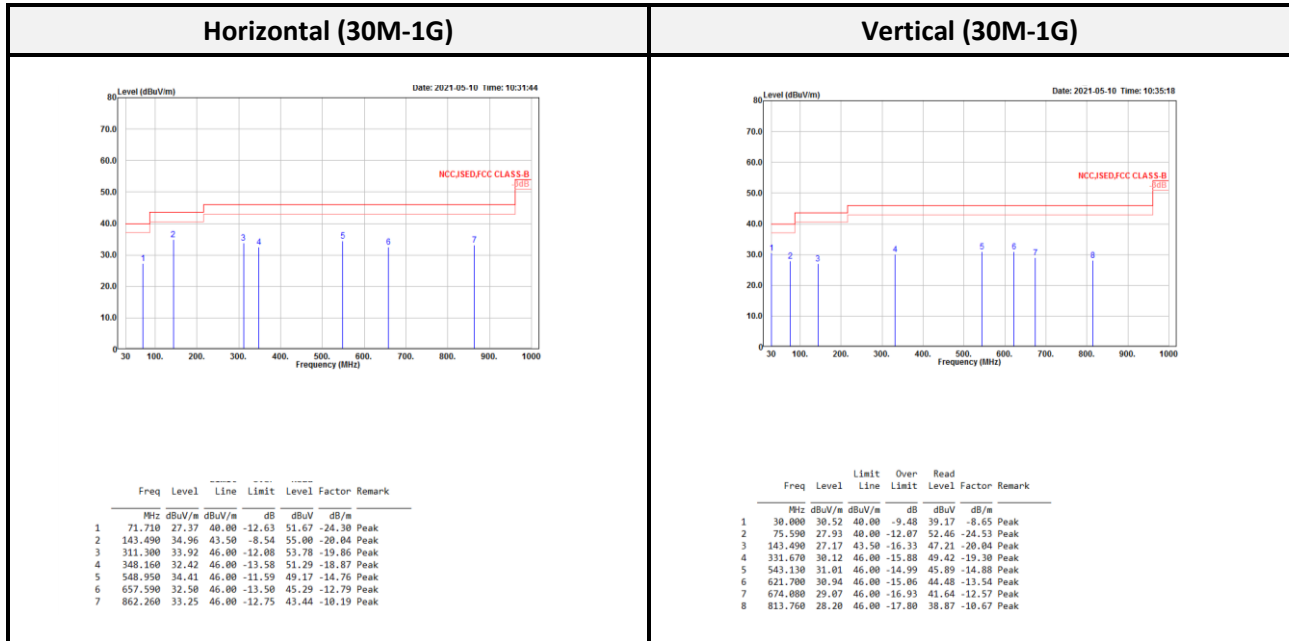

**Conducted Spurious Emissions:**

Configuration	Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BLE-1Mbps	Low	2402	37.53	≥ 20	Compliance
	Middle	2440	35.76	≥ 20	Compliance
	High	2480	41.29	≥ 20	Compliance
ANT+	-	2457	33.19	≥ 20	Compliance

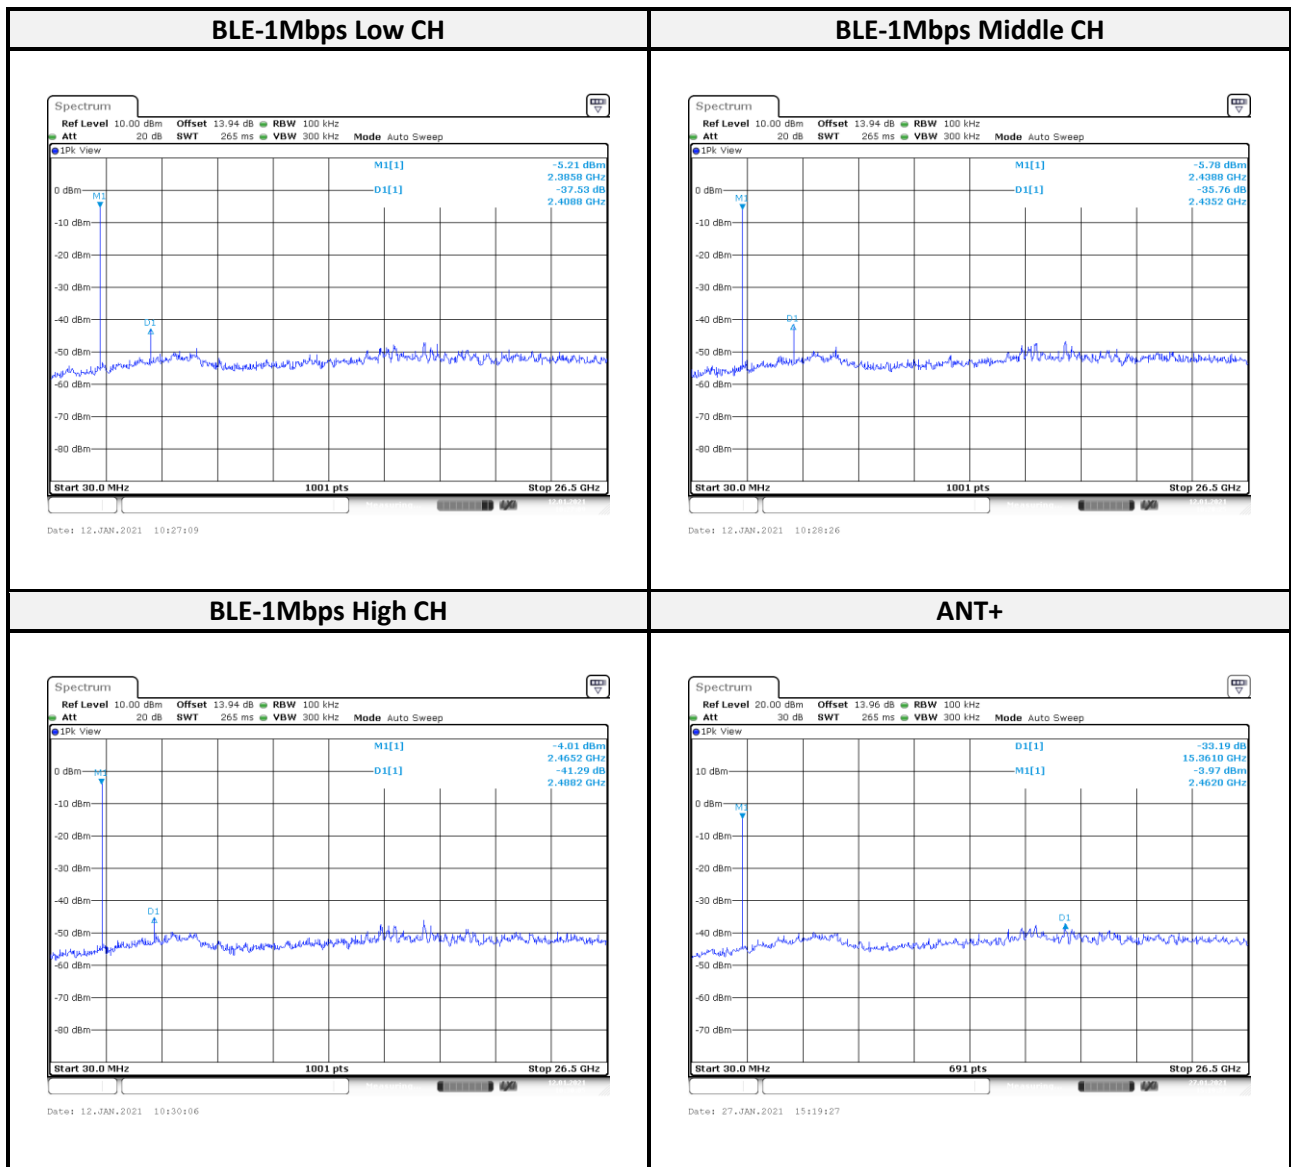

## 8 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

### 8.1 Applicable Standard

According to FCC §15.247(a) (2),

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.2 Test Procedure

According to ANSI C63.10-2013, the steps for the first option are as follows:

- (1) Set RBW = 100 kHz. (2) Set the VBW  $\geq [3 \times \text{RBW}]$ . (3) Detector = peak. (4) Trace mode = max hold.
- (5) Sweep = auto couple. (6) Allow the trace to stabilize. (7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


### 8.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room(TH-02)</b>					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2020/05/07	2021/05/06
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

### 8.4 Test Results

Configuration	Channel	Frequency (MHz)	6 dB BW (MHz)	6dB Limit (MHz)	Result
BLE-1Mbps	Low	2402	0.73	> 0.5	Compliance
	Middle	2440	0.73	> 0.5	Compliance
	High	2480	0.73	> 0.5	Compliance
ANT+	-	2457	0.90	> 0.5	Compliance

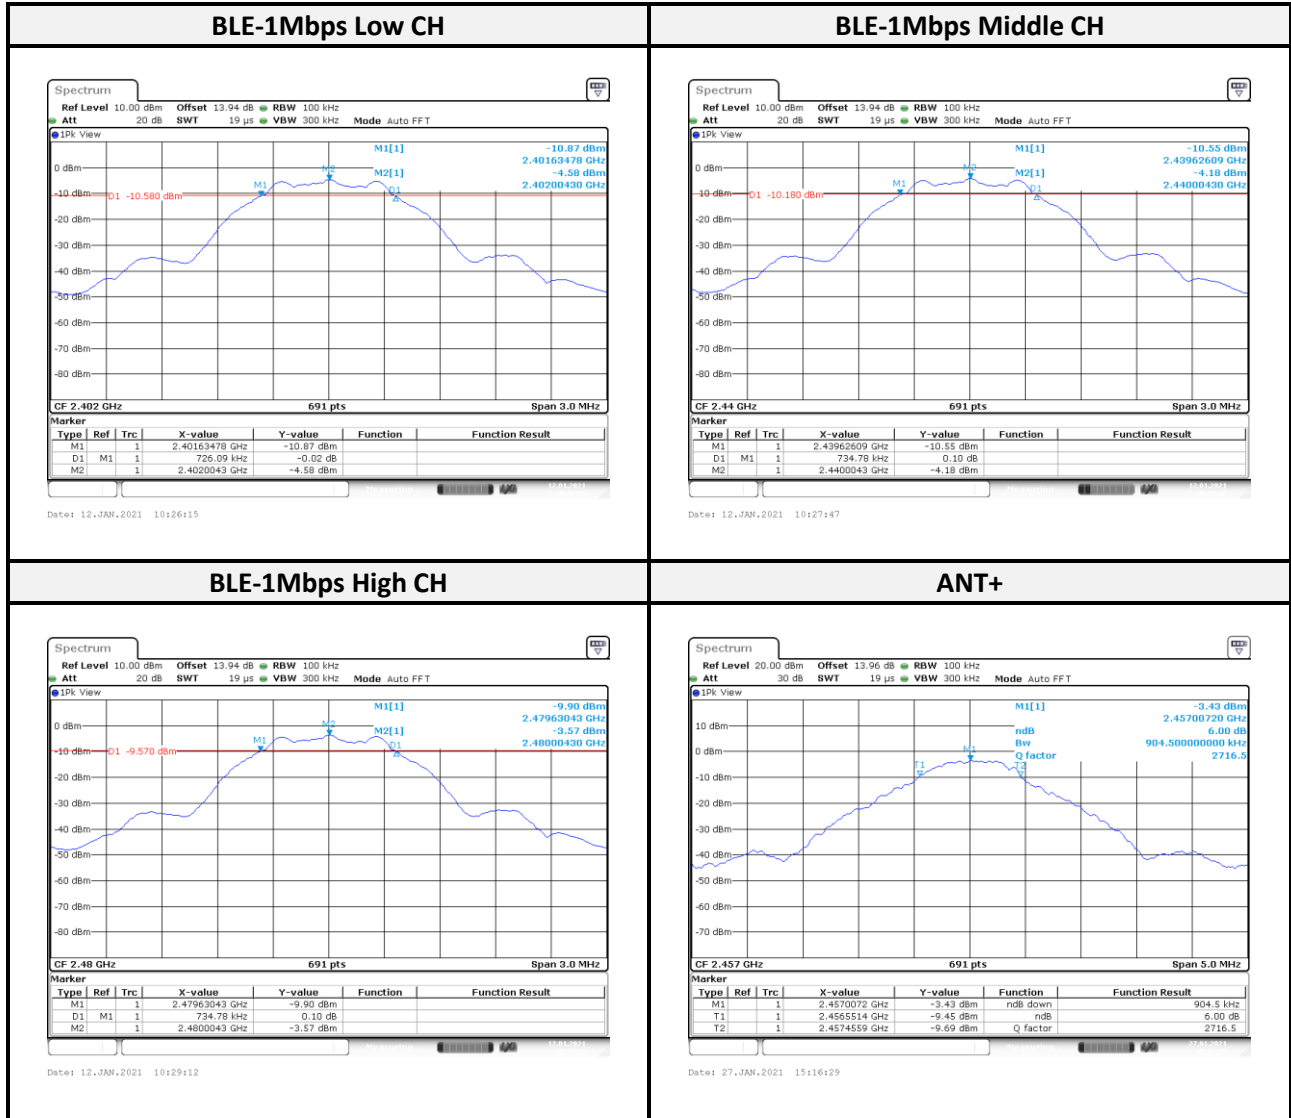



## 9 FCC §15.247(b) (3) – Maximum Output Power

### 9.1 Applicable Standard

According to FCC §15.247(b) (3),

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### 9.2 Test Procedure

- (1) Place the EUT on a bench and set it in transmitting mode.
- (2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.
- (3). Add a correction factor to the display.

### 9.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room(TH-02)</b>					
USB Wideband Power Sensor	Agilent	U2021XA	MY56120026	2020/09/14	2021/09/13
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

### 9.4 Test Results

Configuration	Channel	Frequency (MHz)	Maximum Peak Output Power		Limit (dBm)	Result
			(dBm)	(W)		
BLE-1Mbps	Low	2402	-3.72	0.0004	30	Compliance
	Middle	2440	-3.35	0.0005	30	Compliance
	High	2480	-2.89	0.0005	30	Compliance
ANT+	-	2457	-2.48	0.0006	30	Compliance

## 10 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

### 10.1 Applicable Standard

According to FCC §15.247(d),

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 10.2 Test Procedure

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- (3) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- (4) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.


### 10.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room(TH-02)</b>					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2020/05/07	2021/05/06
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

**\*Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

### 10.4 Test Results

Configuration	Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BLE-1Mbps	Low	2402	46.12	≥ 20	Compliance
	High	2480	48.84	≥ 20	Compliance
ANT+	Low	2457	39.50	≥ 20	Compliance
	High	2457	40.01	≥ 20	Compliance

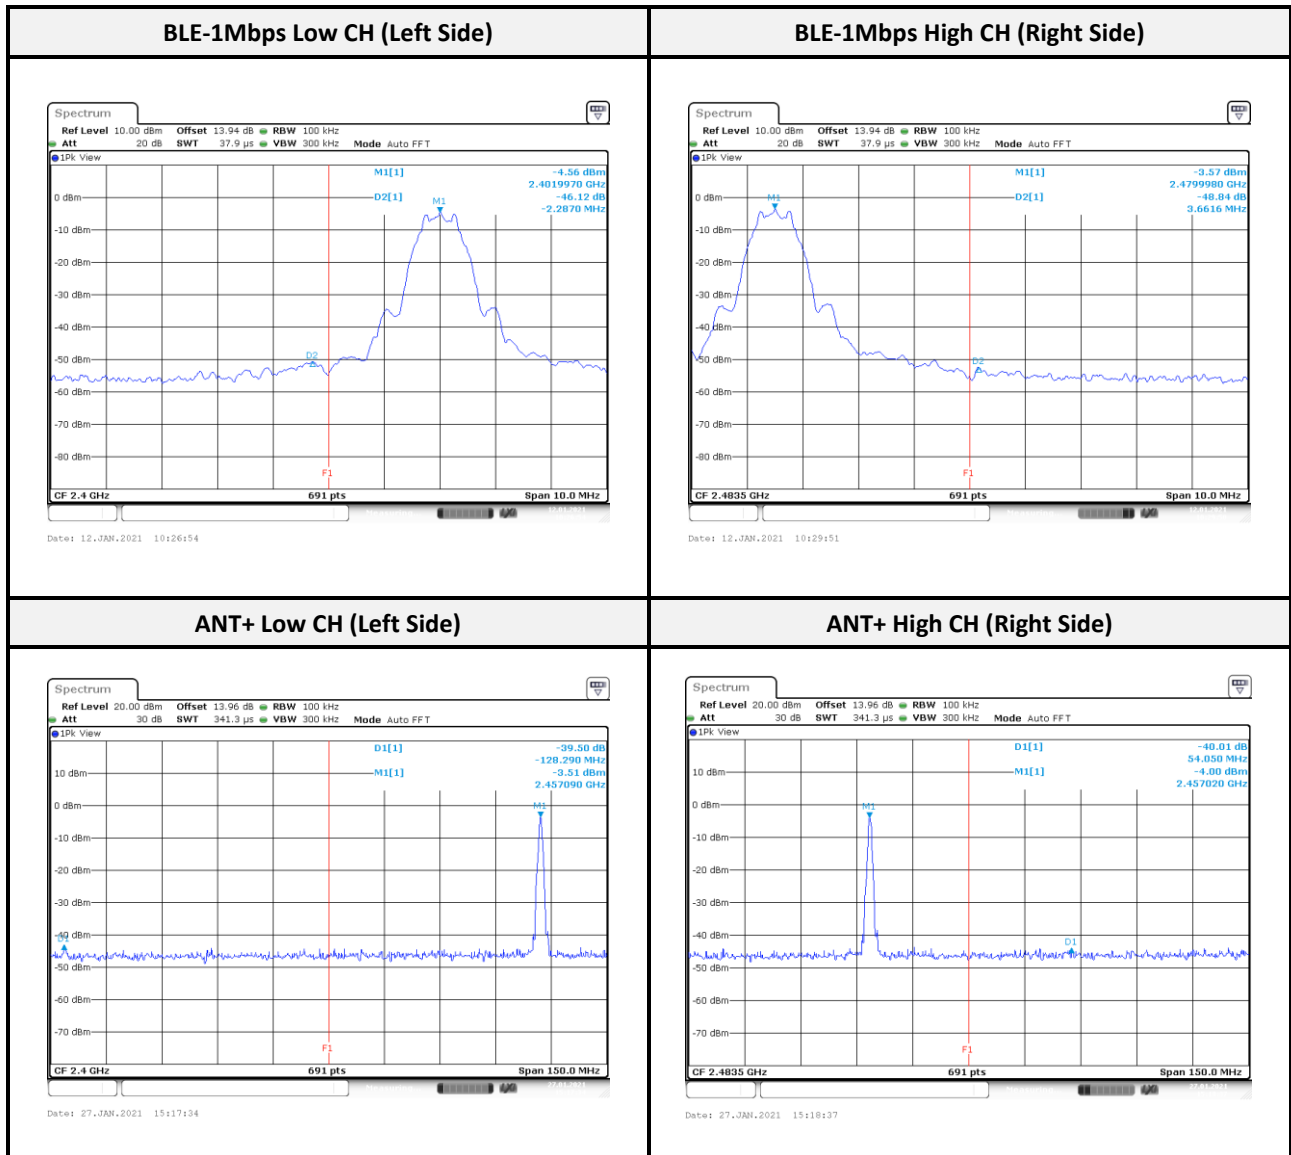

## 11 FCC §15.247(e) – Power Spectral Density

### 11.1 Applicable Standard

According to FCC §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 11.2 Test Procedure

According to ANSI C63.10-2013,

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth. (3) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- (4) Set the VBW  $\geq [3 \times \text{RBW}]$ . (5) Detector = peak. (6) Sweep time = auto couple.
- (7) Trace mode = max hold. (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- (10) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


### 11.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
<b>Conducted Room(TH-02)</b>					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2020/05/07	2021/05/06
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

**\*Statement of Traceability:** The testing equipment’s listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

11.4 Test Results

Configuration	Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
BLE-1Mbps	Low	2402	-20.01	8	Compliance
	Middle	2440	-19.50	8	Compliance
	High	2480	-19.02	8	Compliance
ANT+	-	2457	-15.34	8	Compliance

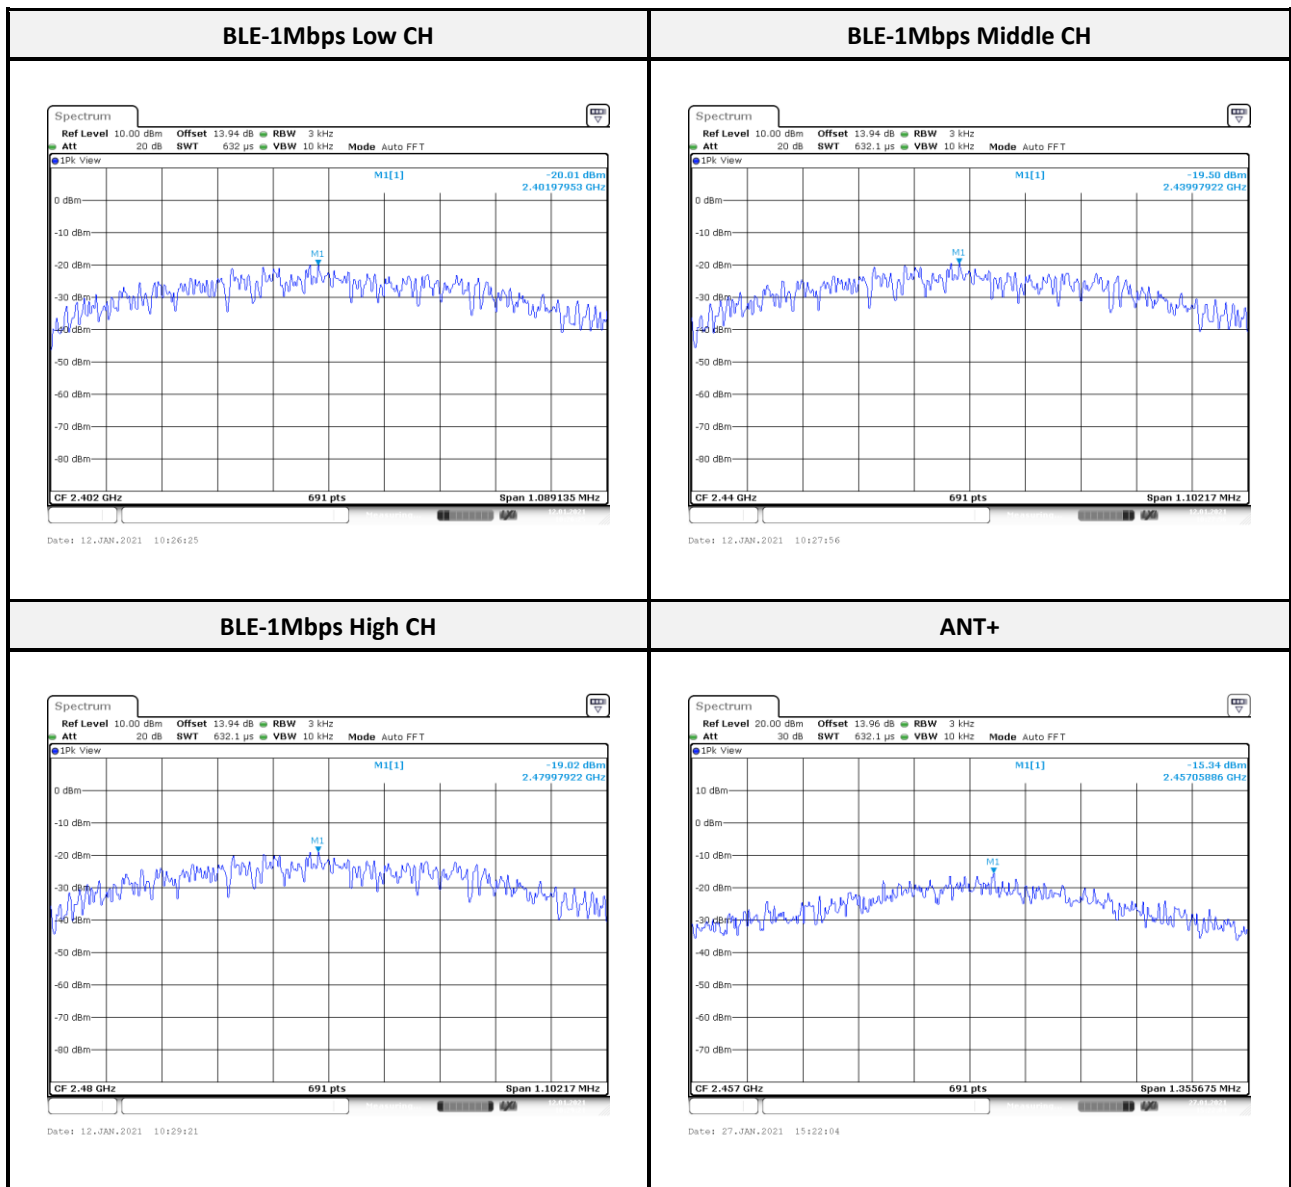

----- END OF REPORT -----