


CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)





Rg F	requency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6 5	5,318.800	91.31			14.17	н	5.8	1.0
6 5	5,350.000	40.47	54.0	13.53	14.27	н	197.8	1.0
6 5	5,356.400	40.98	54.0	13.02	14.28	н	5.8	1.0
1125 - 11	5 5315 G 5.	320 G 5325 G 5.	330 G 5335 G 5.	340 G 5.345 G	5.350 G 5.355 G	5.360 G 5.365 G 5.37	OG 5.375 G 5.38	0G 5385G 5.3

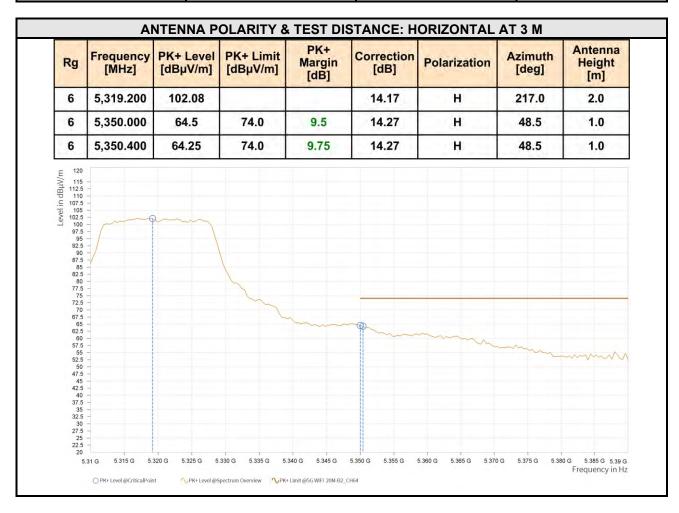

Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,321.200	105.82			14.18	V	248.2	1.0
6	5,350.000	57.0	74.0	17.0	14.27	٧	215.9	2.0
6	5,356.800	58.94	74.0	15.06	14.28	V	47.4	1.0
97.5 95 95 92.5 90 92.5 90 92.5 90 92.5 87.5 85.5 82.5 82.5 82.5 70 90 92.5 92.5 92.5 92.5 92.5 92.5 92.5 92.5					~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~			




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,320.800	91.28			14.18	V	335.4	1.0
6	5,350.000	40.28	54.0	13.72	14.27	٧	231.5	1.0
6	5,354.400	40.73	54.0	13.27	14.28	٧	231.5	1.0
= 120 1125 115 115 115 115 115 115 11			330 G 5335 G 5.	340 G 5.345 G	5.350 G 5.355 G	5.360 G 5.365 G 5.370	G 5.375 G 5.38	0 G 5.385 G 5.3

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5320MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

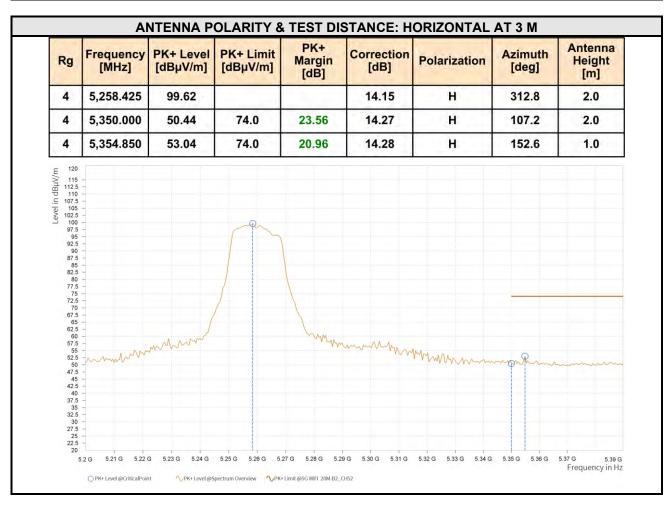



Rg Free	quency MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4 5,2	58.425	84.45			14.15	н	102.3	2.0
4 5,3	50.000	37.12	54.0	16.88	14.27	н	47.3	1.0
4 5,3	50.100	37.12	54.0	16.88	14.27	н	47.3	1.0
E 120 115 - 105 -								



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,261.275	101.86			14.14	٧	211.1	2.0
4	5,350.000	50.85	74.0	23.15	14.27	٧	262.5	2.0
4	5,359.600	53.29	74.0	20.71	14.29	٧	5.1	1.0
97.5 95.5 92.5 90.5 87.5 87.5 87.5 87.5 88.5 80.5 87.5 72.5 72.5 72.5 72.5 72.5 72.5 72.5 7	22G 521G 522		525 G 5.26 G 5.	27'G 528 G 5.	29 G 5.30 G 5.31 G	5,32 G 5,33 G 5,34 G		5.37 G 5.3




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,258.425	89.97			14.15	V	213.5	2.0
4	5,350.000	38.65	54.0	15.35	14.27	٧	113.1	2.0
4	5,350.575	38.63	54.0	15,37	14.27	٧	113.1	2.0
1125 - 11	2G 521G 522	G 523 G 524 G	525G 526G 5:	27 G 5.28 G 5.2	19 G 5.30 G 5.31 G	5.32 G 5.33 G 5.34 G	5.35 G 5.36 G	537G 5.3

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5260MHz: Fundamental frequency.



CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

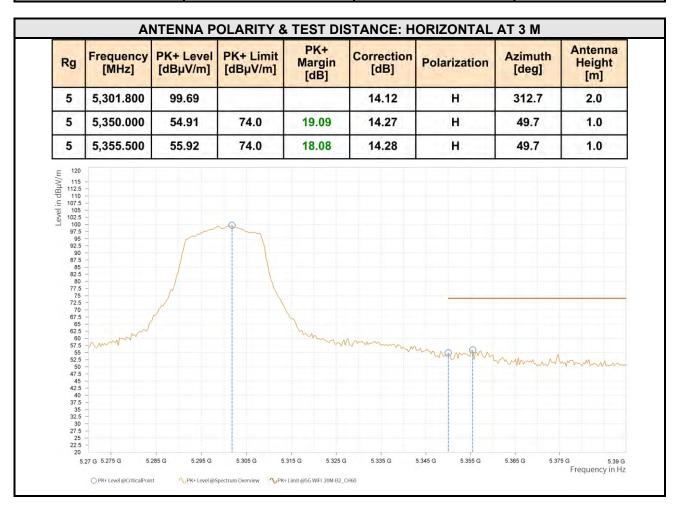



5 5	5,301.500 5,350.000 5,354.300	87.34 37.82 37.92	54.0	16.18 16.08	14.12 14.27 14.28	H H	312.7 113.1 113.1	2.0 1.0 1.0
5 5 5 120 112.5 115.5 107.5 100 97.5 92.5 90 87.5 88 82.5 75 75 70 70 97.5 70 97.5 97.5 97.5 97.5 97.5 97.5 97.5 97.5	3,122.4.22.4				2777			100000000000000000000000000000000000000
120 115 - 1115 - 1110 - 110 -	5,354.300	37.92	54.0	16.08	14.28	H 1	113.1	1.0
115 - 112.5 - 110 - 117.5 - 107.5 - 105 - 100 - 97.5 - 95 - 92.5 - 90 - 87.5 - 88.0 - 77.5 - 75 - 75.5 - 70								
65 - 62.5 - 60 - 57.5 - 55 50 - 47.5 - 42.5 - 40 - 37.5 - 32.5 - 30 - 27.5 - 26 - 20	G 5275 G 52	285 G 5.295 G	5.305 G 5	315 G 5.325	3 5.335 G	5.345 G 5.355 G	5.365 G 5.37	75G 5.3



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,301.200	101.63			14.12	V	215.8	2.0
5	5,350.000	55.14	74.0	18.86	14.27	٧	315.1	2.0
5	5,355.800	58.26	74.0	15.74	14.28	V	5.8	1.0
95 5 92.5 90 87.5 85 82.5 80 77.5 75 75 65 60 62.5 52.5 50 32.5 32.5 26 22.5 20 55.5 80 80 80 80 80 80 80 80 80 80 80 80 80	27 G 5.275 G 5.1	885 G 5.295 G	5.305 G 5.	315 G 5.325 G		5.345 G 5.355 G	5385 G 5.37	




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,298.500	88.11			14.11	V	213.5	2.0
5	5,350.000	38.25	54.0	15.75	14.27	٧	213.5	2.0
5	5,359.400	39.02	54.0	14.98	14.29	٧	5.8	1.0
E 120 101 1150 1150 1150 1150 1150 1150 1								

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5300MHz: Fundamental frequency.



CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

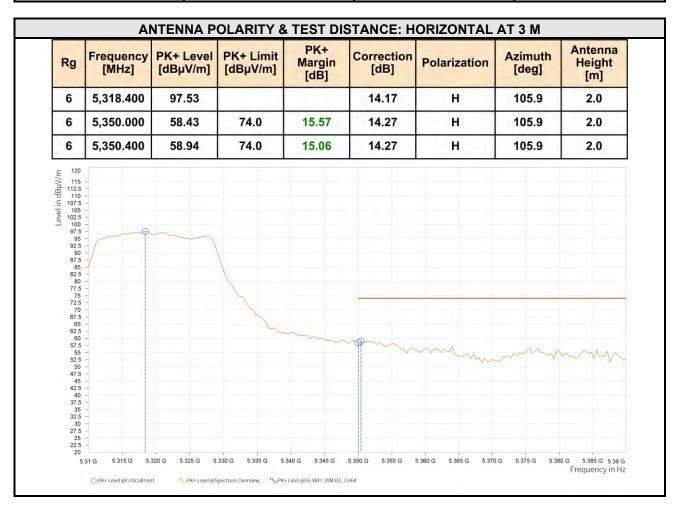



Rg F	requency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6 5	,322.800	88.83			14.19	н	47.3	1.0
6 5	5,350.000	37.88	54.0	16.12	14.27	н	355.0	2.0
6 5	,358.000	38.47	54.0	15,53	14.28	н	47.3	1.0
120 115 - 115 - 117 - 1 117 - 1 107 - 1 107 - 1 107 - 1 100 -	5.315 G 5.	320 G 5.325 G 5.	330 G 5.335 G 5.3	340 G 5.345 G	5.350 G 5.355 G	5.360 G 5.365 G 5.37	OG 5.375 G 5.38	0G 5385G 5.3



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,318.800	101.18			14.17	V	182.5	2.0
6	5,350.000	61.33	74.0	12.67	14.27	٧	7.3	1.0
6	5,356.400	64.09	74.0	9.91	14.28	٧	357.8	1.0
97.5 95.5 92.5 90.87.5.5 85.80 80.77.5 72.5 72.5 65.62.5 60.5 74.5 52.5 52.5 52.5 40.3 37.5 40.3 37.5 32.5					· • · · · · · · · · · · · · · · · · · ·		^	




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,325.200	87.68			14.19	V	46.1	1.0
6	5,350.000	39.63	54.0	14.37	14.27	٧	46.1	1.0
6	5,358.000	39.51	54.0	14.49	14.28	٧	46.1	1.0
120 115 115 110 107.5 105 100.5 100.5 97.5 95 92.5 97.5 82.5 82.5 77.5 70.6 67.5 65.6								
62.5 60 57.5 55 52.5 50 47.5 45 42.5								
40 37.5 35 32.5 30 27.5 25 22.5								

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5320MHz: Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

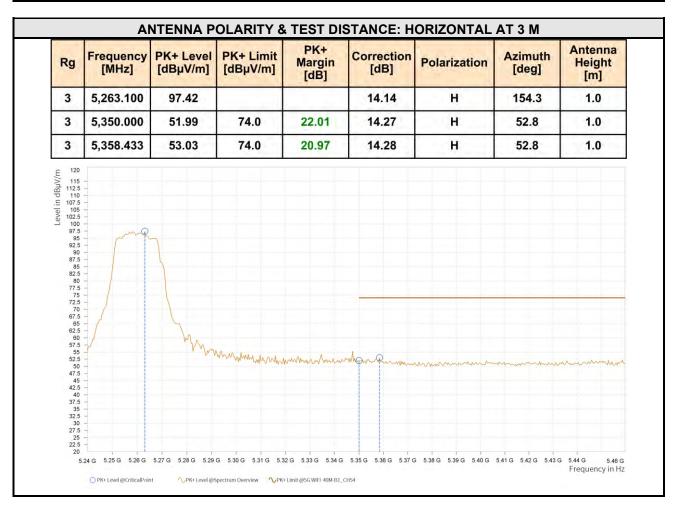



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,261.267	86.59			14.14	н	77.4	1.0
3	5,350.000	38.72	54.0	15.28	14.27	н	52.2	1.0
3	5,353.300	38.84	54.0	15,16	14.28	н	52.2	1.0
= 120 11/1d 115 115 105 105 105 105 105 105		527G 528G 529	G 530G 531G 53		PP	3 538 G 539 G 540 G		3 544G 54



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,260.900	102.09			14.14	V	267.8	1.0
3	5,350.000	53.37	74.0	20.63	14.27	٧	216.5	1.0
3	5,353.667	54.79	74.0	19.21	14.28	٧	216.5	1.0
= 120 115 115 115 115 115 115 115 115 115 115		V I I				3 538G 539G 540G		3 544G 54




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,257.967	88.84			14.15	V	156.8	1.0
3	5,350.000	38.42	54.0	15.58	14.27	٧	226.0	2.0
3	5,355.500	38.57	54.0	15,43	14.28	V	95.2	2.0
= 120 115 115 115 115 115 115 115 115 115 115								

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5270MHz: Fundamental frequency.



CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

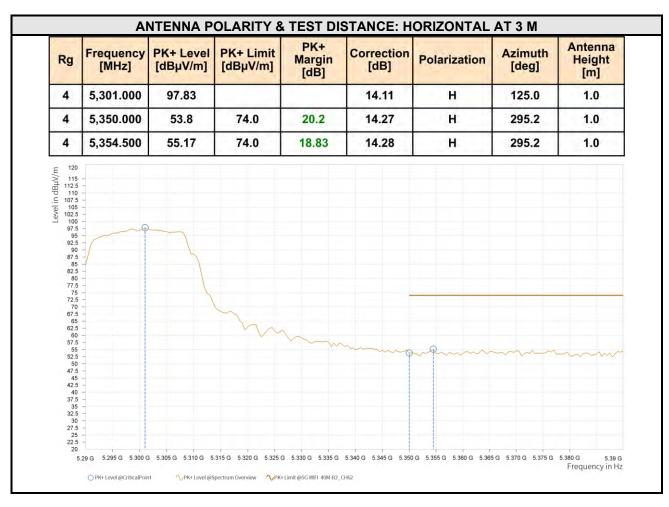



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,301.500	86.65			14.12	н	153.8	1.0
4	5,350.000	38.29	54.0	15.71	14.27	н	332.2	2.0
4	5,388.000	38.37	54.0	15.63	14.32	н	332.2	2.0
E 120 115 115 115 115 115 115 115 115 115 115					P	G 5.355 G 5.360 G 5.36		



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,301.500	101.37			14.12	V	200.3	2.0
4	5,350.000	56.11	74.0	17.89	14.27	٧	29.0	1.0
4	5,352.500	57.06	74.0	16.94	14.28	٧	29.0	1.0
97.5. 95. 92.5. 90. 92.5. 85. 85. 87.5. 85. 82.5. 80. 77.5. 72.5. 75. 55. 52.5						P		




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,303.000	89.79			14.12	V	222.4	1.0
4	5,350.000	39.99	54.0	14.01	14.27	٧	248.7	1.0
4	5,350.500	40.0	54.0	14.0	14.27	٧	248.7	1.0
E 120 110 115 105 107 117 117 117 117 117 117 117 117 117	-							

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5310MHz: Fundamental frequency.



802.11ac (20MHz)

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

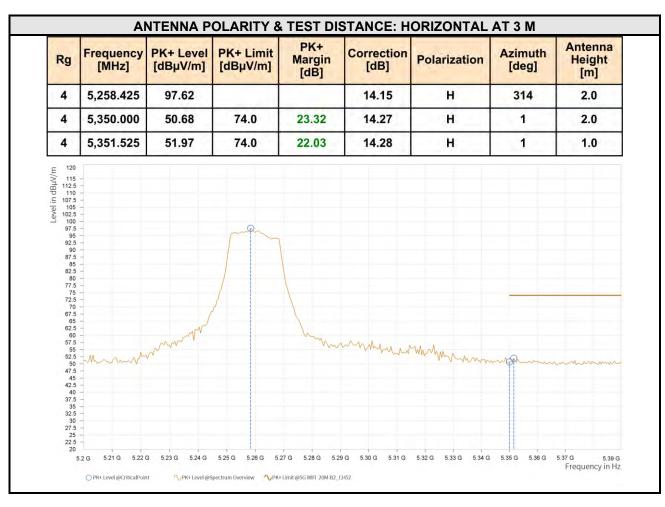



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,261.750	86.12			14.14	н	88.0	2.0
4	5,350.000	37.03	54.0	16.97	14.27	н	355.5	2.0
4	5,350.575	37.03	54.0	16.97	14.27	н	355.5	2.0
= 120 110.5	26 5216 522	G 5.23 G 5.24 G	525 G 528 G 53	77 G 5.28 G 5.2	9G 5.30 G 5.31 G	5.32 G 5.33 G 5.34 G	5.35 G 5.36 G	5.37 G 5.3 Frequency in



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,258.900	101.74			14.15	V	226.7	2.0
4	5,350.000	52.15	74.0	21.85	14.27	٧	226.7	2.0
4	5,382.400	52.47	74.0	21.53	14.31	٧	226.7	2.0
120 115 112.5 110.5 107.5 100.5 100.5 100.5 100.5 97.5 90.8 87.5 85.8 82.5 86.7 75.7 70.6 67.5 66.5 66.5 65.5 60.5 75.5 75.5 75.5 75.5 75.5 75.5 75.5 7	m	www		h	·•••••••••••••••••••••••••••••••••••••	······································	Mpm	v
45 42.5 40 37.5 35 32.5 30 27.5 25 22.5 20								

Page 117 of 253




Rg F	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,258.425	89.92			14.15	V	256.6	1.0
4	5,350.000	38.09	54.0	15.91	14.27	٧	309.2	1.0
4	5,350.575	37.95	54.0	16.05	14.27	٧	207.5	2.0
120 1115 1125 1107.5 1100 1100 100.5 100.5 100.9 97.5 99.5 99.5 87.5 99.5 88.5 82.5 77.5 72.5 72.5 65.5 62.5 65.5 62.5 65.5 62.5 65.5 62.5 65.5 62.5 65		/						

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5260MHz: Fundamental frequency.



CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

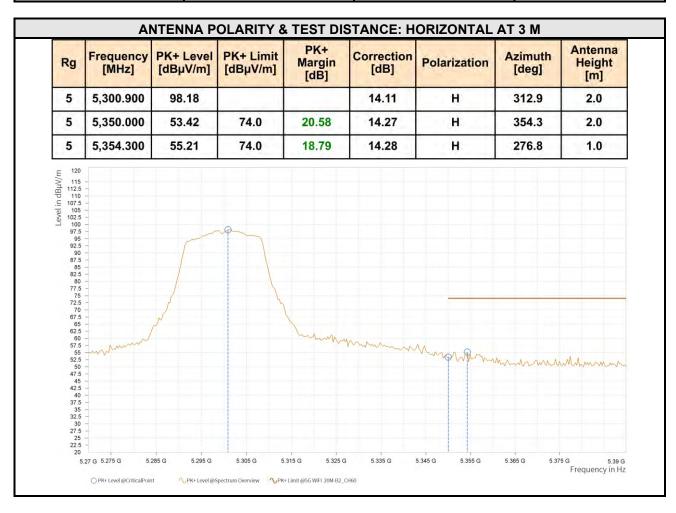

Page 119 of 253



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,298.200	86.0			14.11	н	46.2	1.0
5	5,350.000	38.02	54.0	15.98	14.27	н	46.2	1.0
5	5,350.400	38.0	54.0	16.0	14.27	н	46.2	1.0
E 120 115 115 115 1107.5 125 1107.5 125 1107.5 125 1107.5								



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	5,306.900	100.05			14.13	V	47.4	1.0
5	5,350.000	56.6	74.0	17.4	14.27	٧	47.4	1.0
5	5,355.800	58.66	74.0	15.34	14.28	٧	4.6	1.0
90		iiii						




	[MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Height [m]
5	5,301.500	87.54			14.12	V	208.7	2.0
5	5,350.000	38.78	54.0	15.22	14.27	٧	208.7	2.0
5	5,360.900	38.9	54.0	15.1	14.29	V	5.1	1.0
12.5 12.5 10.5 10.5 10.5 10.5 10.5 10.5 10.5 10	T							

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5300MHz: Fundamental frequency.



CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

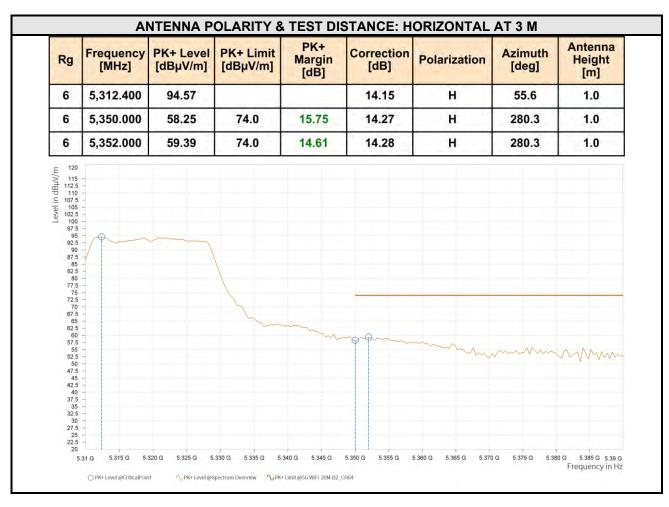



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,322.800	87.5			14.19	н	48.5	1.0
6	5,350.000	37.83	54.0	16.17	14.27	H	354.9	2.0
6	5,358.400	38.27	54.0	15.73	14.28	н	48.5	1.0
120 1115 1112.5 1107.5 107.5 108.5 102.5 102.5 102.5 97.5 95.5 92.5 92.5 95.8 82.5 82.5 80.77.5 72.5 75.7 76.7 76.7 76.7 76.7 76.7 76.7 76								
60 57.5 55 52.5 50 47.5 45 42.5 40 37.5 35 32.5 30 27.5 26 22.5					Φ			



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,321.600	101.16			14.18	V	100.0	2.0
6	5,350.000	62.07	74.0	11.93	14.27	٧	47.3	1.0
6	5,353.600	64.14	74.0	9.86	14.28	٧	45.0	2.0
95 92.5 90 87.5 85 82.5 77.5 72.5 70.6 67.5 62.5 60 57.5 55					~ R~		·	·
52.5 50 47.5 45 42.5 40 37.5 35 32.5 30 27.5 25	4							




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	5,321.200	86.34			14.18	V	339.5	1.0
6	5,350.000	38.72	54.0	15.28	14.27	٧	5.8	1.0
6	5,364.800	39.13	54.0	14.87	14.29	V	5.8	1.0
E 1/20/14/14/14/14/14/14/14/14/14/14/14/14/14/					5.350 G 5.355 G	5.360 G 5.365 G 5.377	OG 5375 G 538	

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5320MHz: Fundamental frequency.



802.11ac (40MHz)

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

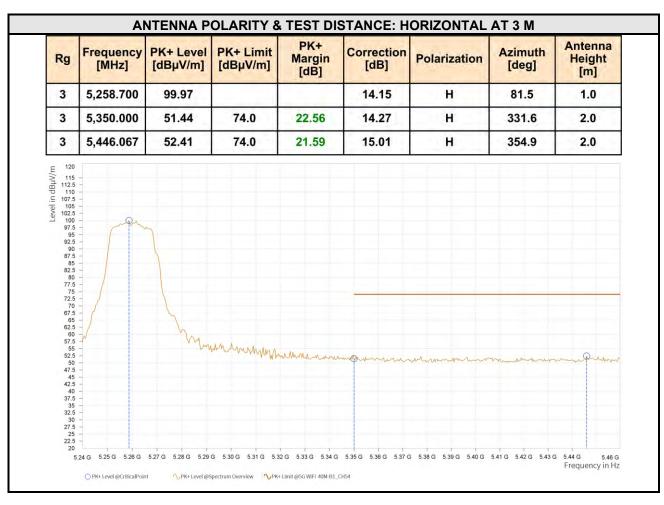



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,258.333	87.57			14.15	Н	82.1	1.0
3	5,350.000	37.85	54.0	16.15	14.27	Н	181.8	2.0
3	5,356.600	37.93	54.0	16.07	14.28	Н	181.8	2.0
= 120 1/1/1/1/1/1/1/1/1/1/1/1/1/1/1/1/1/1/1/	24 G 5.25 G 5.26 G	527G 528G 529	G 530G 531G 53	2G 533G 534G	5.35 G 5.36 G 5.37 C	3 538G 5.99G 540G	541 G 542 G 543 G	3 544G 54



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,272.633	99.69			14.13	V	145.4	1.0
3	5,350.000	55.68	74.0	18.32	14.27	٧	267.8	1.0
3	5,353.300	57.27	74.0	16.73	14.28	٧	267.8	1.0
97.5 92.5 90.0 87.5 85.5 80.0 77.5 70.6 67.5 62.5 60.5 75.5 55.5 50.4 47.5 40.3 7.5 32.5			V	~~~~~~	woquu.	· · · · · · · · · · · · · · · · · · ·	^	***************************************




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	5,272.267	86.3			14.13	V	241.6	1.0
3	5,350.000	40.79	54.0	13.21	14.27	٧	214.1	1.0
3	5,350.367	40.76	54.0	13.24	14.27	٧	214.1	1.0
E /120 / 120	24 G 525 G 526 G	P S S S S S S S S S S	G 530G 531G 53	20, 533, 534,	5366 5366 5376	3 538 G 539 G 540 G	540, 520, 543	3 544G 5.4

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5270MHz: Fundamental frequency.



CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

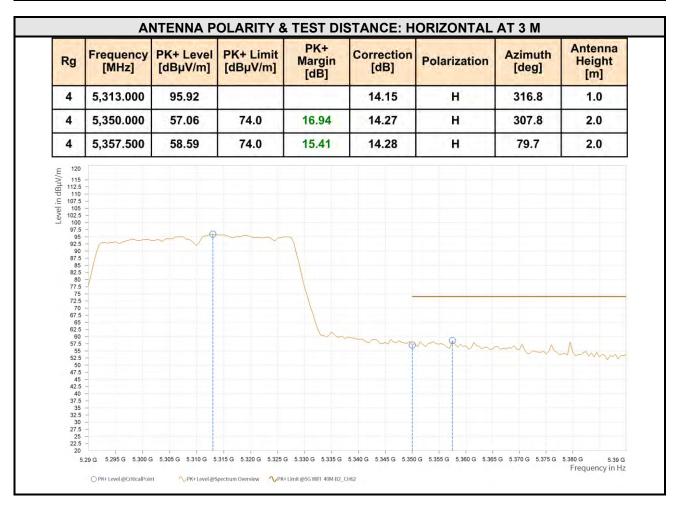



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,307.500	82.98			14.14	н	83.3	2.0
4	5,350.000	41.79	54.0	12.21	14.27	H	306.7	1.0
4	5,350.500	41.49	54.0	12.51	14.27	н	306.7	1.0
120								
112.5								
107.5 105 102.5	-							
102.5	I							
95 92.5								
90 87.5	-							
85 82.5	7							
80				~ · · · · · · · · · · · · · · · · · · ·				
77.5 75	1			\				
72.5 70	I							
67.5 65	1							
62.5 60	-			1				
57.5	-							
55 52.5	7			\				
50 47.5								
45 42.5	_							
40 37.5								
35								
32.5 30	I							
27.5 25	1							
22.5	-							
20	20.0 5295.0 5300.0	5 5 305 G 5 310 G 5	315 G 5 320 G 5 325 G	5 330 G 5 335 G	5340 G 5345 G 5350	G 5.355 G 5.360 G 5.365	SG 5370G 5375G	5.380 G 5.3



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,306.500	97.62			14.13	٧	29.6	1.0
4	5,350.000	60.5	74.0	13.5	14.27	٧	29.6	1.0
4	5,350.500	61.77	74.0	12.23	14.27	٧	29.6	1.0
= 120 110		G 5305G 5310G 5	315 G 5320 G 5325 G	3 5.330 G 5.335 G	5.340 G 5.345 G 5.350	P	5 G 5.370 G 5.375 G	5.380 G 5.3. Frequency in




Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	5,307.500	85.1			14.14	V	29.0	1.0
4	5,350.000	45.02	54.0	8.98	14.27	٧	95.2	2.0
4	5,350.500	44.71	54.0	9.29	14.27	٧	95.2	2.0
115 115 115 115 115 115 115 115 115 115								

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5310MHz: Fundamental frequency.



802.11ac (80MHz)

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

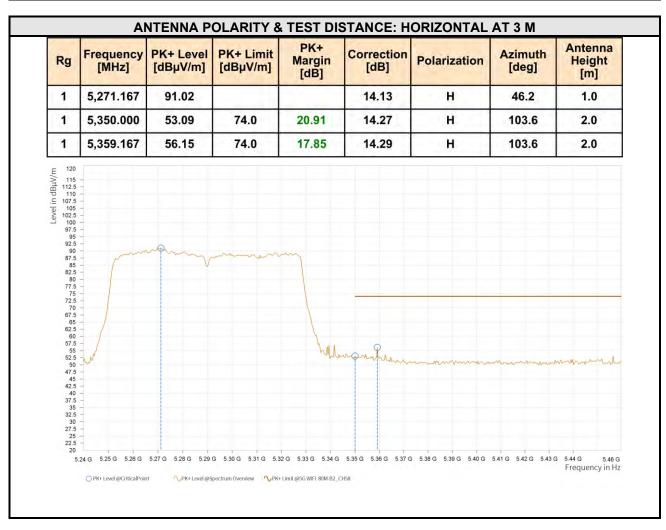



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,267.867	77.24			14.14	Н	46.1	1.0
1	5,350.000	38.61	54.0	15.39	14.27	Н	302.0	1.0
1	5,350.367	38.57	54.0	15.43	14.27	Н	302.0	1.0
E 120 107.5 112.5 107.5	24 G 5.25 G 5.26 G	527 G 528 G 529	G 5.30 G 5.31 G 5.3	2G 5.33G 5.34G	5.35 G 5.36 G 5.37 C	3 5.38 G 5.39 G 5.40 G	541 G 5.42 G 5.43 G	G 5.44 G 5.4 Frequency in



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,296.467	95.26			14.11	V	58.1	1.0
1	5,350.000	54.96	74.0	19.04	14.27	٧	200.3	1.0
1	5,355.500	62.6	74.0	11.4	14.28	V	264.9	2.0
95 92.5 90.87.5 85 82.5 75.5 72.5 70.67.5 70.5 70.5 70.5 70.5 70.5 70.5 70.5 7					man	·	Manua	



Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	5,256.133	81.25			14.15	V	44.9	1.0
1	5,350.000	41.44	54.0	12.56	14.27	٧	44.9	1.0
1	5,350.367	41.59	54.0	12.41	14.27	٧	44.9	1.0
= 120 (1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	24 G 525 G 526 G	527 G 528 G 529 G	G 530G 531G 53	2G 5.33G 5.34G	5.35 G 5.36 G 5.37 C	3 538G 5.99G 540G	541 G 542 G 543	3 544G 54


- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5290MHz: Fundamental frequency.



Band 4:

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

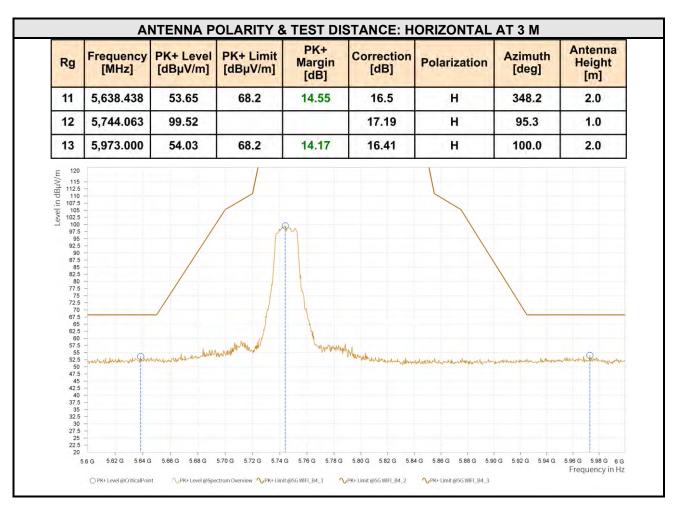



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,619.688	53.33	68.2	14.87	16.3	٧	229.1	1.0
12	5,744.063	98.84			17.19	٧	282.9	1.0
13	5,935.500	53.57	68.2	14.63	16.28	٧	170.5	2.0
120 120 125 125 125 125 125 125 125 125 125 125		rander was been with the same	John James Control of the Control of	De la constantina della consta	Wyd-mondal d and a second	Basispon and Manglith Surgery Man		uh, mana katung kana katung
52.5 50 47.5 45 42.5 40 37.5 35 32.5 30 27.5 25 22.5					1700/1000/100/100/100/100/100/100/100/10			


REMARKS:

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5745MHz: Fundamental frequency.

Page 140 of 253



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

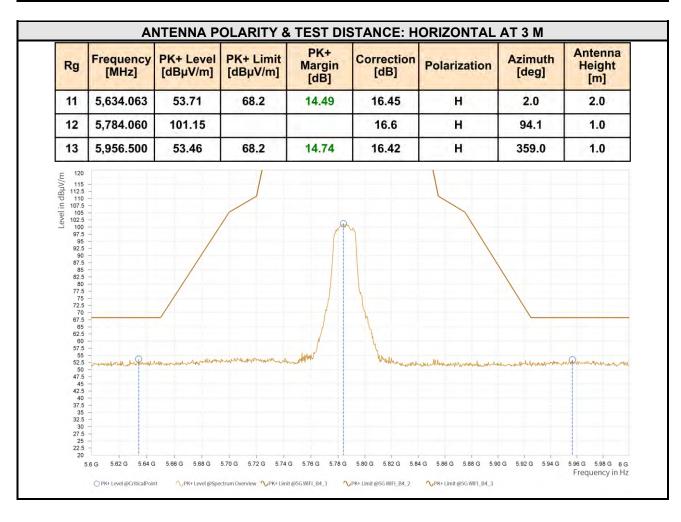




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,649.688	53.57	68.2	14.63	16.61	٧	232.6	1.0
12	5,788.438	101.35			16.54	٧	94.0	1.0
13	5,967.000	53.49	68.2	14.71	16.43	V	339.5	1.0
120 115 112.5 1107.5 1107.5 1005 1005 100.5 100.5 97.5 92.5 90. 87.5 80. 77.5 72.5 70. 67.5 60. 57.5 60. 57.5				apt our way	P MANAGE			
52.5 50 47.5 45 42.5 40 37.5 35 32.5 30 27.5 25 22.5 20	5.6 G 5.62 G 5.64 G		570 G 572 G 574			4 G 5.86 G 5.88 G 5.91	, , , , , , , , , , , , , , , , , , ,	5.96 G 5.98 G Frequency in

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5785MHz: Fundamental frequency.



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

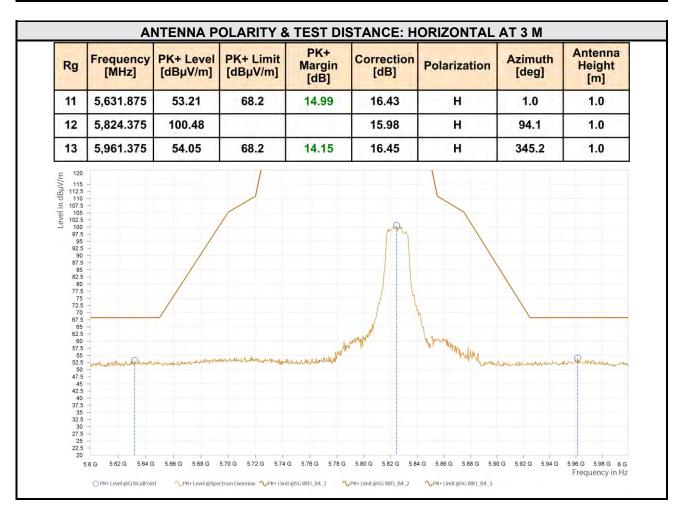




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,649.063	53.81	68.2	14.39	16.61	V	233.9	1.0
12	5,821.875	100.53			16.02	٧	94.0	1.0
13	5,957.625	53.74	68.2	14.46	16.43	٧	15.0	2.0
120 115 116 117 110 110 107 107 107 107 107 107 107		Rumanishaman	and the same of the same	- Andread Anna Control of the Contro		L. M.		4
47.5 45 42.5 40 37.5 35 32.5 30 27.5 25 22.5 20		5.66 G 5.68 G	5.70 G 5.72 G 5.74	G 576G 5.78G	5.80 G 5.82 G 5.8		1	5.96 G 5.98 G

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5825MHz: Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

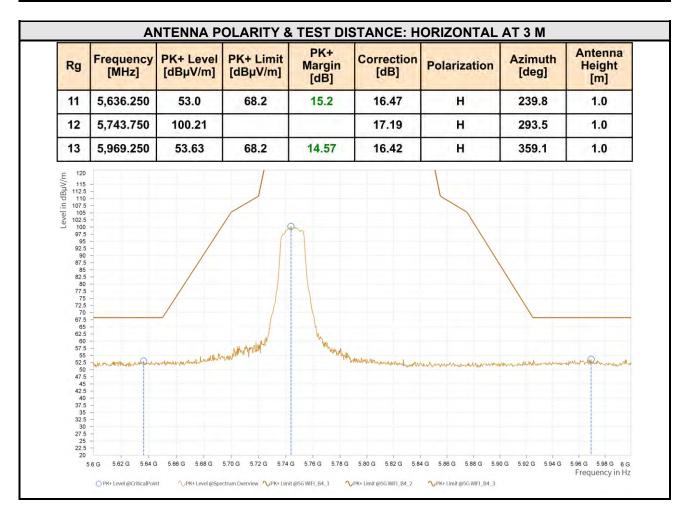




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,636.875	53.76	68.2	14.44	16.48	V	2.0	2.0
12	5,743.750	98.7			17.19	V	78.5	2.0
13	5,966.625	53.66	68.2	14.54	16.43	٧	183.7	1.0
120 112.5 112.5 110.5 100.5 100.5 100.9 97.5 92.5 92.5 82.5 86 82.5 77.5 70 67.5 66 62.5 60 57.5 55.5		Marion Marion which	white hard	A A A A A A A A A A A A A A A A A A A	Mondhelmerania	be war for Morrow of the second		www.Relevance
50 47.5 45 42.5 40 37.5 35 32.5 30 27.5 25 22.5								

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5745MHz: Fundamental frequency.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

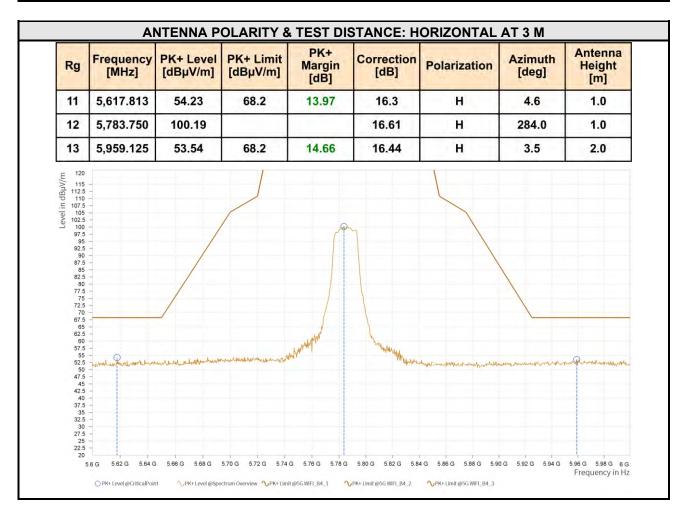




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,631.250	53.21	68.2	14.99	16.42	V	359.0	2.0
12	5,783.750	99.51			16.61	٧	91.6	1.0
13	5,971.500	53.87	68.2	14.33	16.42	٧	333.0	1.0
120 115 116 112.5 110 110.5 100.5 100 97.5 92.5 92.5 92.5 82.5 82.5 82.5 82.5 80 77.5 70 67.5 65 62.5 60 57.5 55 55 55 50 47.5	- Maria Maria	Manual designation of the second	mound who have the	whim it	A A A A A A A A A A A A A A A A A A A	Mentallangerana		war Paring
45 42.5 40 37.5 35 32.5 30 27.5 25 22.5								

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5785MHz: Fundamental frequency.



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

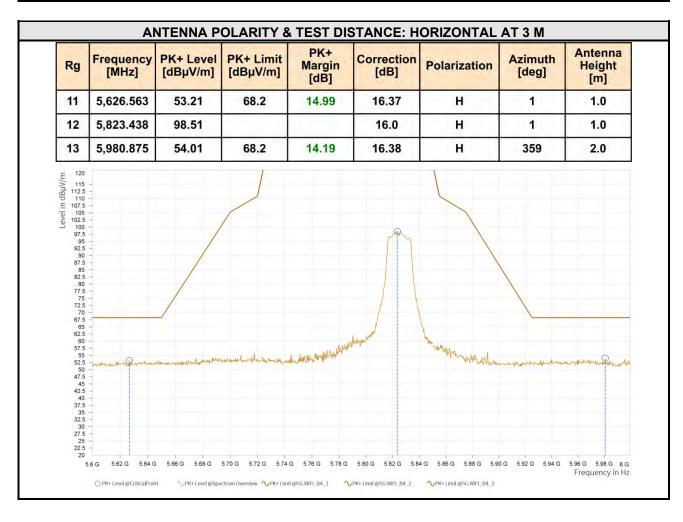




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,646.875	53.32	68.2	14.88	16.58	V	233.8	1.0
12	5,823.750	99.47			15.99	٧	95.2	1.0
13	5,962.875	53.81	68.2	14.39	16.45	٧	103.6	2.0
120 112.5 112.5 1107.5 1107.5 1107.5 102.5 102.5 102.5 90.5 92.5 90.8 87.5 82.5 80.77.5 72.5 72.5 70.7 70.7 70.5 65.6 62.5 65.5 60.5 75.5					Whiteleston	Ja marangha Ahrangha Marilan		
52.5 50 47.5 45 42.5 40 37.5 35 32.5 30 27.5 25 22.5 20			5.70 G 5.72 G 5.74		5.80 G 5.82 G 5.8		06 5926 5946	5,96 G 5,98 G

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5825MHz: Fundamental frequency.



802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

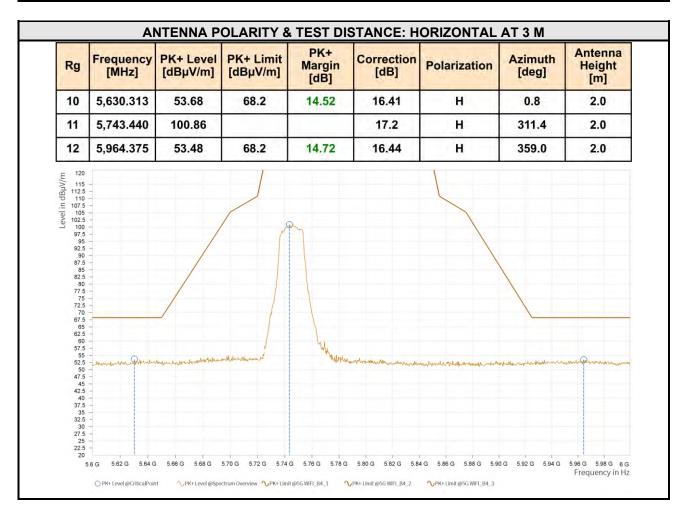




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,620.938	53.32	68.2	14.88	16.31	V	359.0	2.0
11	5,743.438	98.85			17.2	٧	298.3	1.0
12	5,976.750	54.38	68.2	13.82	16.4	٧	359.1	1.0
E 120 11 10 11 10 11 10 11 10 11 10 11 10 11 10 11 10 10				A Marian				

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5755MHz: Fundamental frequency.



CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

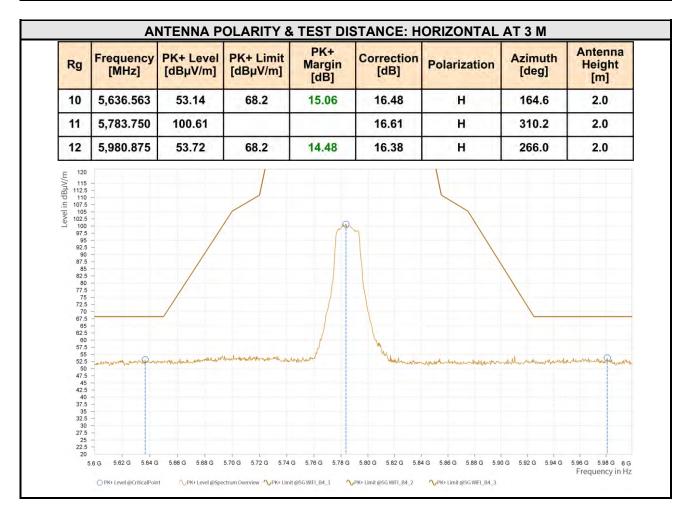




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
10	5,648.750	54.18	68.2	14.02	16.6	V	359.0	2.0
11	5,784.063	102.26			16.6	٧	217.5	2.0
12	5,945.625	53.89	68.2	14.31	16.34	٧	327.5	1.0
120 115 115 112.5 1102.5 100.5 100.5 100.5 95.5 95.5 92.5 82.5 82.5 77.5 72.5 70.6 67.5 60.5 57.5 55.5 55.5 55.5 55.5 55.5 55.5 5		Paris Maria	Somphish and March March March		The state of the s	Mary And Land Long Address Vol. 12 Mg.	mmmono	by the state of th
42.5 40 37.5 35 32.5 30 27.5 25 22.5 20	5.6 G 5.62 G 5.64 G	5.66 G 5.88 G	5.70 G 5.72 G 5.74	G 5.78 G 5.78 G	5.80 G 5.82 G 5.8	4 G 5.86 G 5.88 G 5.9	0G 592G 594G	5.96 G 5.98 G

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5795MHz: Fundamental frequency.



802.11ac (20MHz)

CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

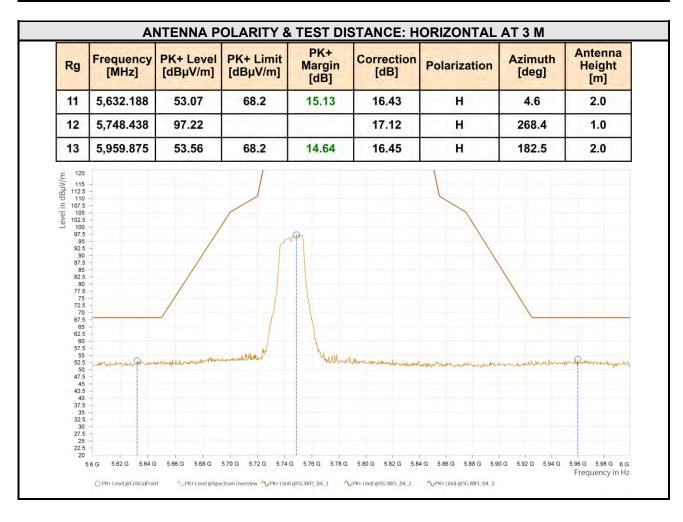




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,642.500	53.4	68.2	14.8	16.54	٧	354.9	2.0
12	5,743.440	100.4			17.2	٧	91.6	2.0
13	5,951.625	53.99	68.2	14.21	16.38	٧	1.0	1.0
= 120 107.5			non-a-waller			had be a second to the second to	add and the same of the same o	P

- 1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5745MHz: Fundamental frequency.



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

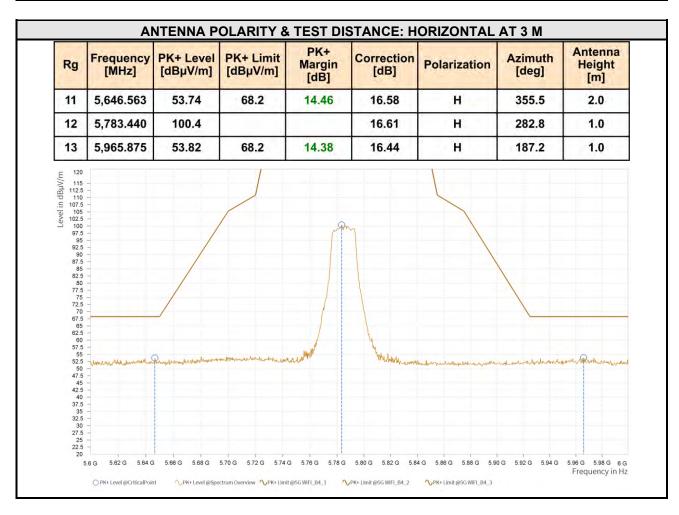




Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,647.813	53.37	68.2	14.83	16.59	V	134.6	2.0
12	5,792.813	97.01			16.48	٧	89.2	1.0
13	5,946.750	53.94	68.2	14.26	16.35	٧	1.0	1.0
120 1125 1125 1125 1107.5 1107.5 1105 100.5 100.5 92.5 92.5 90.8 82.5 82.5 77.5 75 67.5 67.5 60.5 62.5 60.5 77.5 65.5 62.5 62.5 63.5 63.5 64.5 65.5 65.5 65.5 65.5 65.5 65.5 65		Mary Mary Mary Mary Mary Mary Mary Mary	and the second second				And Make Make Make Make Make Make Make Make	
50 47.5 45 42.5 40 37.5 35 32.5 30 27.5 25 22.5 20	5.6 G 5.62 G 5.64 G		570G 572G 574					5.96 G 5.98 G

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5785MHz: Fundamental frequency.



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE		DETECTOR FUNCTION	Average (AV)

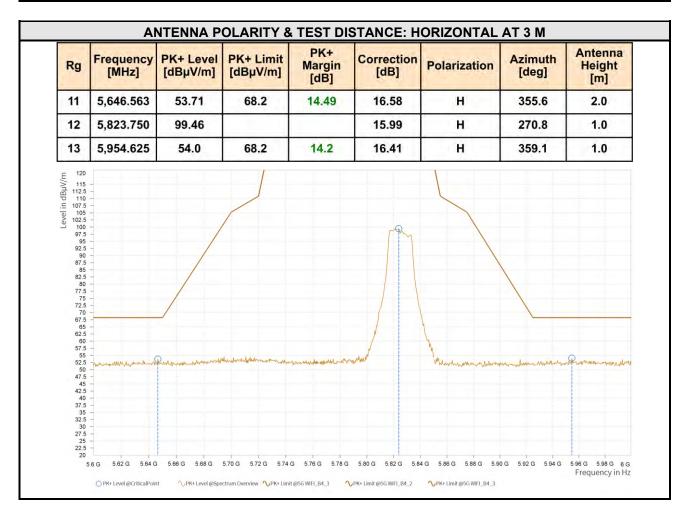



Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+ Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
11	5,638.750	53.25	68.2	14.95	16.5	V	4.5	1.0
12	5,823.750	100.01			15.99	٧	125.0	1.0
13	5,959.125	53.65	68.2	14.55	16.44	V	39.0	2.0
120 120 120 120 120 120 120 120 120 120		Dange Lafe Age age against 100 a.m.a.	ann han a shaadh		and the second s	Manuman		, was a superior of the superi
47.5 45.5 40.37.5 35.32.5 30.27.5 25.22.5								

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor Margin value = Limit value- Emission level.
- 2. 5825MHz: Fundamental frequency.



802.11ac (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	DETECTOR FUNCTION	Average (AV)

