



REPORT No.: SZ20080215W04


TEST REPORT

APPLICANT : Power Idea Technology (Shenzhen) Co., Ltd.
PRODUCT NAME : LTE SMARTPHONE
MODEL NAME : PSL05S RG360
BRAND NAME : RugGear
FCC ID : ZLE-RG360
STANDARD(S) : 47 CFR Part 15 Subpart E
RECEIPT DATE : 2020-08-19
TEST DATE : 2020-08-26 to 2020-08-29
ISSUE DATE : 2020-11-03

Edited by:


Zeng Xiaoying (Rapporteur)

Approved by:


Peng Huarui(Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen ,GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

- 1. Technical Information 3**
- 1.1. Applicant and Manufacturer Information 3**
- 1.2. Equipment Under Test (EUT) Description 3**
- 1.3. Modulation Type and Data Rate of EUT 5**
- 1.4. The Channel Number and Frequency 5**
- 1.5. Test Standards and Results 6**
- 1.6. Environmental Conditions 7**
- 2. 47 CFR Part 15E Requirements 8**
- 2.1. Antenna Requirement 8**
- 2.2. Duty Cycle of the Test Signal 9**
- 2.3. Maximum Conducted Output Power 12**
- 2.4. Emission Bandwidth 15**
- 2.5. Peak Power Spectral Density 27**
- 2.6. Frequency Stability 39**
- 2.7. Conducted Emission 41**
- 2.8. Restricted Frequency Bands 45**
- 2.9. Radiated Emission 51**
- Annex A Test Uncertainty 65**
- Annex B Testing Laboratory Information 66**

Change History		
Version	Date	Reason for change
1.0	2020-11-03	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Power Idea Technology (Shenzhen) Co., Ltd.
Applicant Address:	4th Floor, A Section, Languang Science&technology Building, No.7 Xinxu RD, Hi-Tech Industrial Park North, Nanshan District, ShenZhen, P.R.C.
Manufacturer:	Power Idea Technology (Shenzhen) Co., Ltd.
Manufacturer Address:	4th Floor, A Section, Languang Science&technology Building, No.7 Xinxu RD, Hi-Tech Industrial Park North, Nanshan District, ShenZhen, P.R.C.

1.2. Equipment Under Test (EUT) Description

Product Name:	LTE SMARTPHONE	
Serial No.:	(N/A, marked #1 by test site)	
Hardware Version:	V1.0	
Software Version:	RG360_Overseas_1.0.0.0.0_3_20200810	
Modulation Type:	OFDM	
Modulation Mode:	802.11a, 802.11n (HT20)	
Operating Frequency Range:	5180MHz-5240MHz; 5260MHz-5320MHz; 5745MHz-5825MHz	
Channel Number:	Refer to 1.3	
Antenna Type:	PIFA Antenna	
Antenna Gain:	0.4dBi	
Accessory Information:	Battery	
	Brand Name:	N/A
	Model No.:	BL300OP
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	3000mAh
	Rated Voltage:	3.80V
	Charge Limit:	4.35V
	Manufacturer:	ZHUHAI SUNDA TECHNOLOGY CO.,LTD



Accessory Information:	AC Adapter	
	Brand Name:	N/A
	Model No.:	SAW06C-050-1000UB
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5.00V \pm 1.00A
	Rated Input:	100-240V \sim 50/60Hz, 0.30A
	Manufacturer:	Shenzhen Shi Ying Yuan Electronics Co., Ltd.
	USB Cable 1	
	Model No.:	900-01060A-B032
	Manufacturer:	Winpower Technology CO., LTD
	USB Cable 2	
	Model No.:	2.0 USB
	Manufacturer:	FPR Connectivity Technology Inc.

Note 1: WIFI hotspot does not support U-NII band.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.3. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) ^{Note1}
OFDM (802.11a)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65

Note1: The worst-case mode (black bold) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

1.4. The Channel Number and Frequency

Frequency Range: 5150MHz-5250MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
Frequency Range: 5250MHz-5350MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	52	5260	56	5280
	60	5300	64	5320
Frequency Range: 5725MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		

Note 1: The black bold channels were selected for test.



1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart E (U-NII band) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15(5-1-14 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Aug 26, 2020	Lu Qiang	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Aug 26, 2020	Lu Qiang	PASS	No deviation
4	15.407(a) (e)	Emission Bandwidth	Aug 26, 2020	Lu Qiang	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Aug 26, 2020	Lu Qiang	PASS	No deviation
6	15.407(g)	Frequency Stability	Aug 26, 2020	Lu Qiang	PASS	No deviation
7	15.207	Conducted Emission	Aug 27, 2020	Huang Zhiye	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Aug 29, 2020	Gao Jianrou	PASS	No deviation
9	15.407(b)	Radiated Emission	Aug 29, 2020	Gao Jianrou	PASS	No deviation

Note 1: The DFS test report was documented in a separate report (Report No.: SZ20080215W05).

Note 2: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.102013.

Note 3: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v01r03.



Note 4: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 12dB contains two parts that cable loss 2dB and Attenuator 10dB.

Note 5: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 6: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% risk level.

1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106



2.47 CFR Part 15E Requirements

2.1. Antenna Requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the Metal shrapnel. Please refer to the EUT internal photos.

2.2. Duty Cycle of the Test Signal


2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be nonconstant.

2.2.2. Test Description

Test Setup:

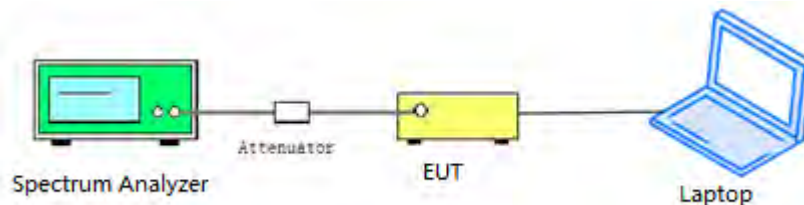

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

2.2.3. Test Procedure

KDB 789033 Section B was used in order to prove compliance.




2.2.4. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*log[1/D])
802.11a	97.20	0.12
802.11n (HT20)	97.01	0.13

B. Test Plot:

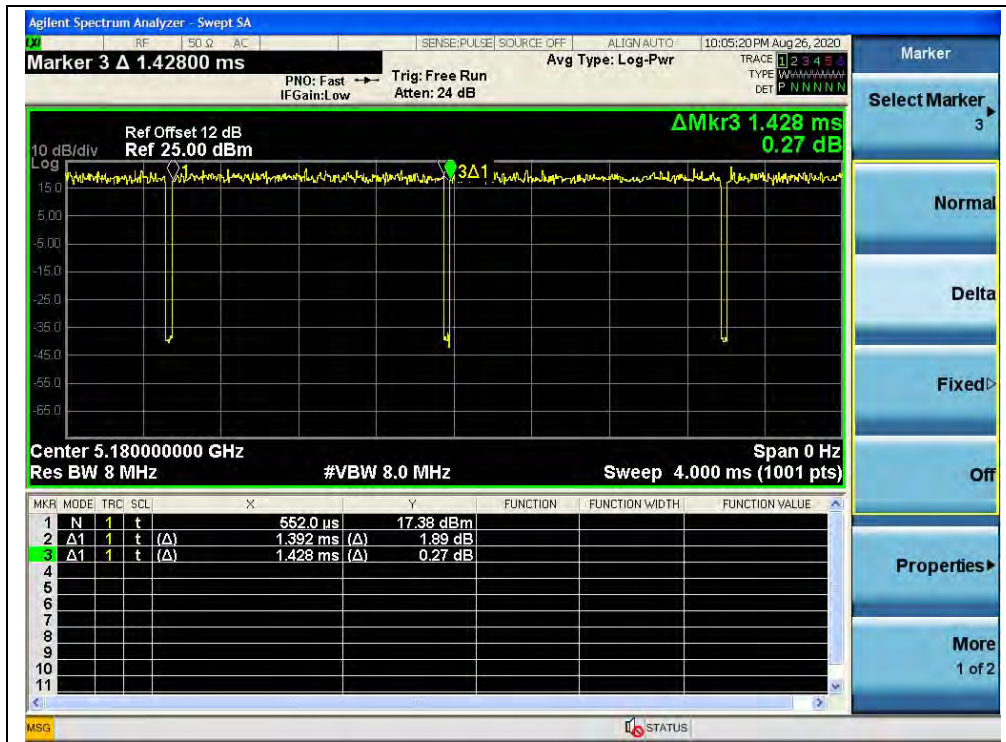

(Channel 36, 5180MHz, 802.11a)

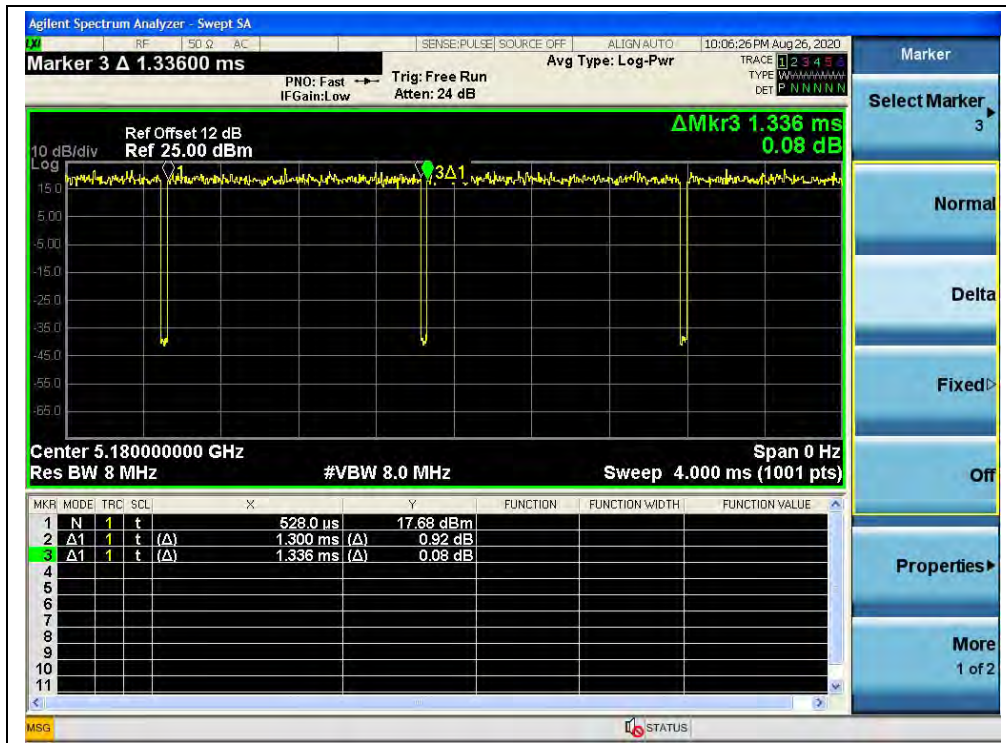

(Channel 36, 5180MHz, 802.11n (HT20))

2.3. Maximum Conducted Output Power

2.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{\text{ANT}} + 10\log(N_{\text{ANT}})\text{dBi}$, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.3.2. Test Description


Section E) 3) of KDB 789033 defines a methodology using a USB Wideband Power Sensor.

Test Setup:

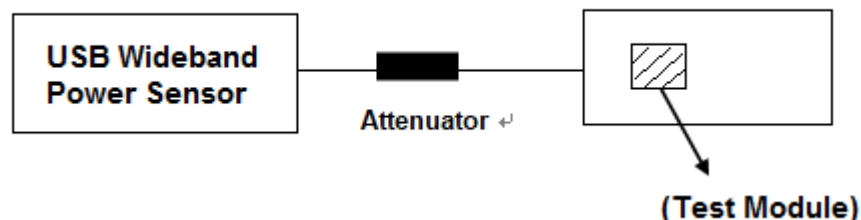

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.

For ac (VHT80) mode power

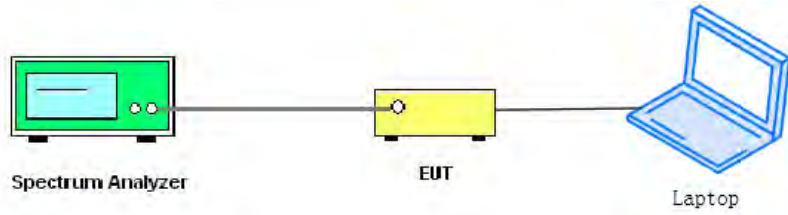

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

2.3.3.Limits

For the 5.25-5.35 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.

Mode	Band	Channel (MHz)	26dB BW (MHz)	11+10log(26dB BW)	Limits (dBm)
a	UNII-2a	5260	24.37	24.87	24.00
		5300	23.42	24.70	24.00
		5320	25.21	25.02	24.00
n20	UNII-2a	5260	24.40	24.87	24.00
		5300	25.81	25.12	24.00
		5320	25.45	25.06	24.00



2.3.4. Test Result

Maximum Average Conducted Output Power

802.11a Mode

Frequency (MHz)	Average Power				Limit		Verdict
	Measured	Duty Factor	Duty factor Calculated		dBm	W	
	dBm		dBm	W			
5180	15.07	0.12	15.19	0.033	24	0.25	PASS
5220	15.14		15.26	0.034			
5240	14.79		14.91	0.031			
5260	14.91		15.03	0.032			
5300	14.28		14.40	0.028			
5320	14.76		14.88	0.031			
5745	12.79		12.91	0.020	30	1	
5785	12.96		13.08	0.020			
5825	12.45		12.57	0.018			

802.11n (HT20) Mode

Frequency (MHz)	Average Power				Limit		Verdict
	Measured	Duty Factor	Duty factor Calculated		dBm	W	
	dBm		dBm	W			
5180	15.15	0.13	15.28	0.034	24	0.25	PASS
5220	14.74		14.87	0.031			
5240	14.64		14.77	0.030			
5260	14.84		14.97	0.031			
5300	14.36		14.49	0.028			
5320	14.76		14.89	0.031			
5745	12.78		12.91	0.020	30	1	
5785	13.05		13.18	0.021			
5825	12.34		12.47	0.018			


2.4. Emission Bandwidth

2.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

2.4.2. Test Description

Test Setup:

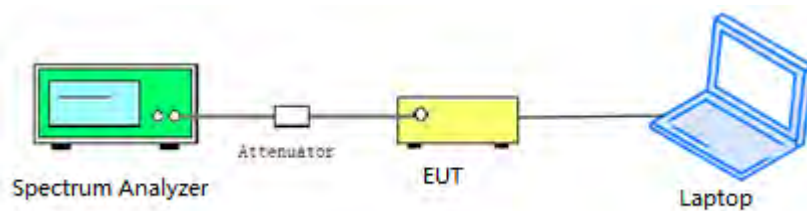

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

2.4.3. Test Procedure

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance
 - a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.
Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:



- a) Set RBW = 100 kHz.
- b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

2.4.4. Test Result

802.11a Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	22.17
44	5220	24.57
48	5240	25.41
52	5260	24.37
60	5300	23.42
64	5320	25.21
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	16.27
157	5785	15.15
165	5825	15.52



B.Test Plot:



(Channel 36, 5180MHz, 802.11a)




(Channel 44, 5220 MHz, 802.11a)



(Channel 48, 5240MHz, 802.11a)



(Channel 52, 5260MHz, 802.11a)

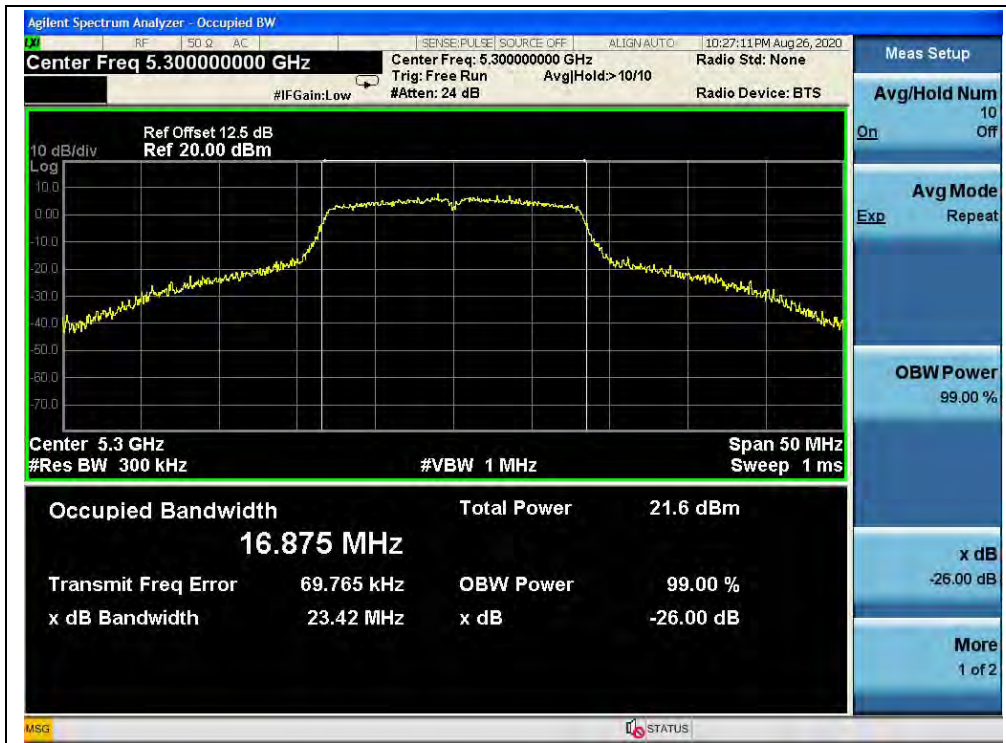

(Channel 60, 5300 MHz, 802.11a)



(Channel 64, 5320MHz, 802.11a)



(Channel 149,5745MHz, 802.11a)



(Channel 157,5785MHz, 802.11a)



(Channel 165, 5825MHz, 802.11a)




802.11n (HT20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	24.10
44	5220	26.32
48	5240	25.89
52	5260	24.40
60	5300	25.81
64	5320	25.45
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)
149	5745	16.05
157	5785	15.96
165	5825	15.06

B. Test Plot:

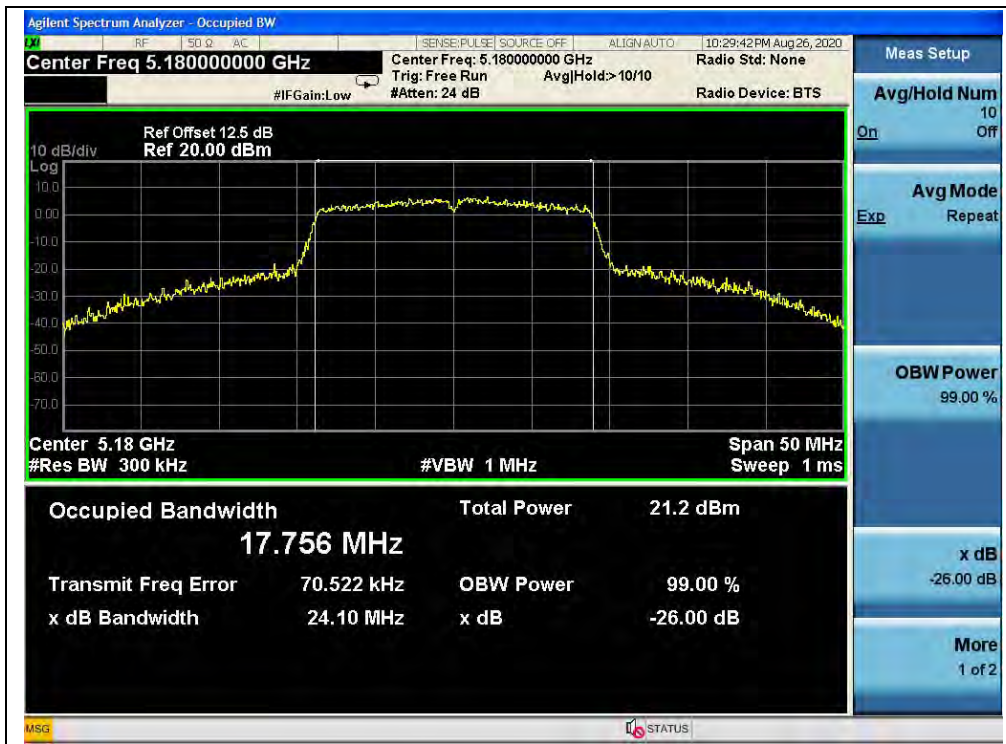

(Channel 36, 5180MHz, 802.11n (HT20))



(Channel 44, 5220MHz, 802.11n (HT20))



(Channel 48, 5240MHz, 802.11n (HT20))



(Channel 52, 5260MHz, 802.11n (HT20))



(Channel 60, 5300MHz, 802.11n (HT20))



(Channel 64, 5320MHz, 802.11n (HT20))



(Channel 149, 5745MHz, 802.11 n (HT20))



(Channel 157, 5785MHz, 802.11 n (HT20))



(Channel 165, 5825MHz, 802.11 n (HT20))

2.5. Peak Power Spectral Density

2.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.


If transmitting antennas of directional gain greater than 6dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.5.2. Test Description

Test Setup:

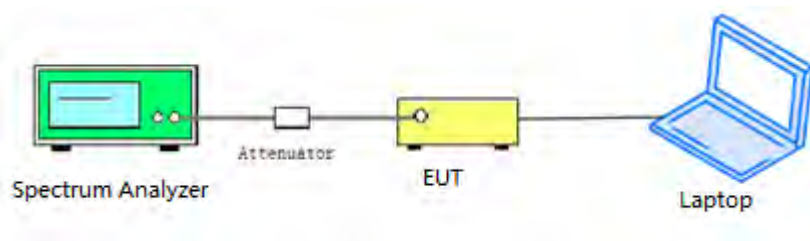

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

**2.5.3. Test Procedure**

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-1 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1MHz. Set VBW \geq 3MHz
- 3) Number of points in sweep \geq 2 Span / RBW. Sweep time = auto
- 4) Detector = Peak
- 5) Trace mode=Max hold
- 6) Record the max value

2.5.4. Test Result**802.11a Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Corrected PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	5.25	0.12	5.37	11	PASS
44	5220	5.13		5.25		
48	5240	5.27		5.39		
52	5260	5.03		5.15		
60	5300	5.28		5.40		
64	5320	5.27		5.39		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Corrected PPSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	0.25	0.12	0.37	30	PASS
157	5785	0.25		0.37		
165	5825	0.14		0.26		




B.Test Plot:



(Channel 36, 5180MHz, 802.11a)



(Channel 44, 5220MHz, 802.11a)

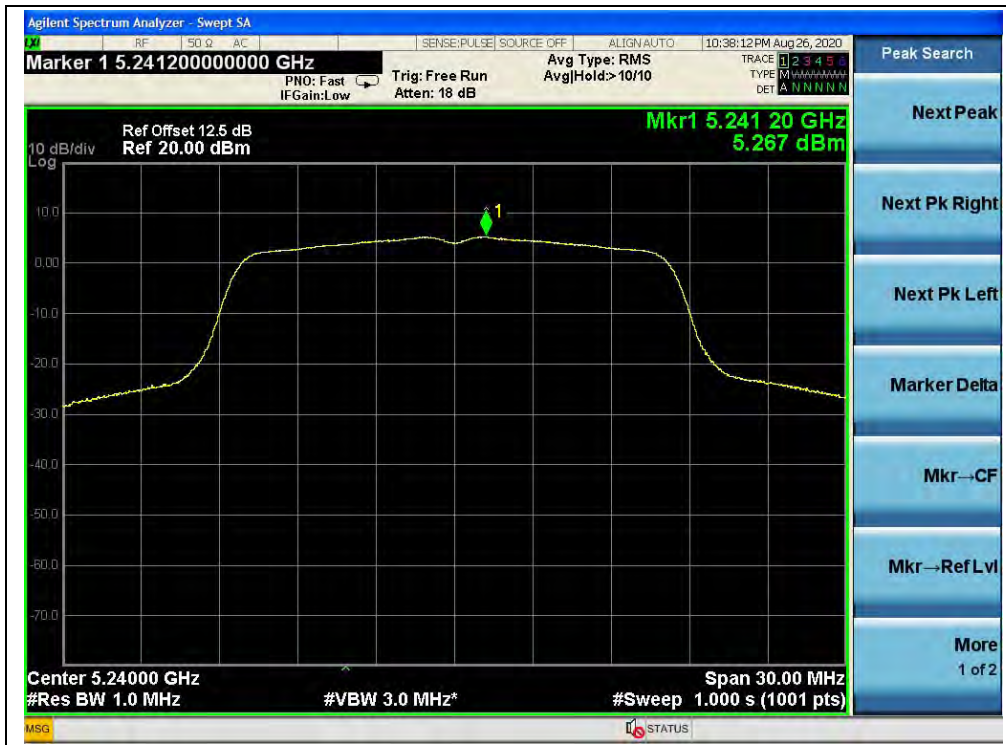

(Channel 48, 5240MHz, 802.11a)



(Channel 52, 5260MHz, 802.11a)



(Channel 60, 5300MHz, 802.11a)



(Channel 64, 5320MHz, 802.11a)



(Channel 149, 5745MHz, 802.11a)



(Channel 157, 5785MHz, 802.11a)



(Channel 165, 5825MHz, 802.11a)



802.11n (HT20) Mode

A.Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
36	5180	5.11	0.13	5.24	11	PASS
44	5220	5.01		5.14		
48	5240	4.99		5.12		
52	5260	4.79		4.92		
60	5300	4.97		5.10		
64	5320	5.06		5.19		
Channel	Frequency (MHz)	Measured PSD (dBm/500KHz)	Duty Factor	Corrected (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
149	5745	0.16	0.13	0.29	30	PASS
157	5785	0.06		0.19		
165	5825	0.01		0.14		

B.Test Plot:



(Channel 36, 5180MHz, 802.11n (HT20))



(Channel 44, 5220MHz, 802.11n (HT20))



(Channel 48, 5240MHz, 802.11n (HT20))



(Channel 52, 5260MHz, 802.11n (HT20))



(Channel 60, 5300MHz, 802.11n (HT20))



(Channel 64, 5320MHz, 802.11n (HT20))



(Channel 149, 5745MHz, 802.11n (HT20))



(Channel 157, 5785MHz, 802.11n (HT20))



(Channel 165, 5825MHz, 802.11n (HT20))



2.6. Frequency Stability

2.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

2.6.2. Test Procedure

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

2.6.3. Test Result

U-NII-1 (Ch. 36) 5180MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	3.80	+20(Ref)	20	3.861
100%		-30	22	4.247
100%		-20	24	4.633
100%		-10	24	4.633
100%		0	23	4.440
100%		+10	18	3.475
100%		+20	20	3.861
100%		+30	27	5.212
100%		+40	29	5.598
100%		+50	25	4.826
85%		3.23	+20	21
115%	4.37	+20	19	3.668



U-NII-2A (Ch. 52)				
5260MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	3.80	+20(Ref)	20	3.802
100%		-30	22	4.183
100%		-20	24	4.563
100%		-10	24	4.563
100%		0	23	4.373
100%		+10	18	3.422
100%		+20	20	3.802
100%		+30	27	5.133
100%		+40	29	5.513
100%		+50	25	4.753
85%	3.23	+20	21	3.992
115%	4.37	+20	19	3.612

U-NII-3 (Ch. 149)				
5745MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	3.80	+20(Ref)	21	3.655
100%		-30	25	4.352
100%		-20	30	5.222
100%		-10	28	4.874
100%		0	22	3.829
100%		+10	24	4.178
100%		+20	23	4.003
100%		+30	30	5.222
100%		+40	35	6.092
100%		+50	25	4.352
85%	3.23	+20	30	5.222
115%	4.37	+20	27	4.700

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dBμV)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

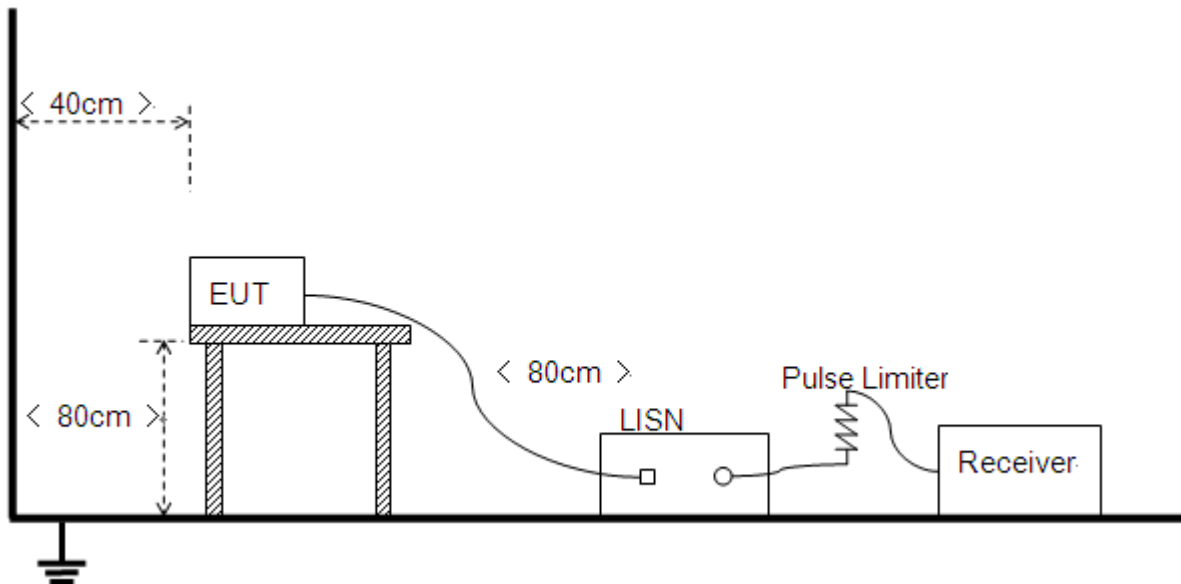

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and Plot below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+ADAPTER+EARPHONE+ WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B.Test Plot:

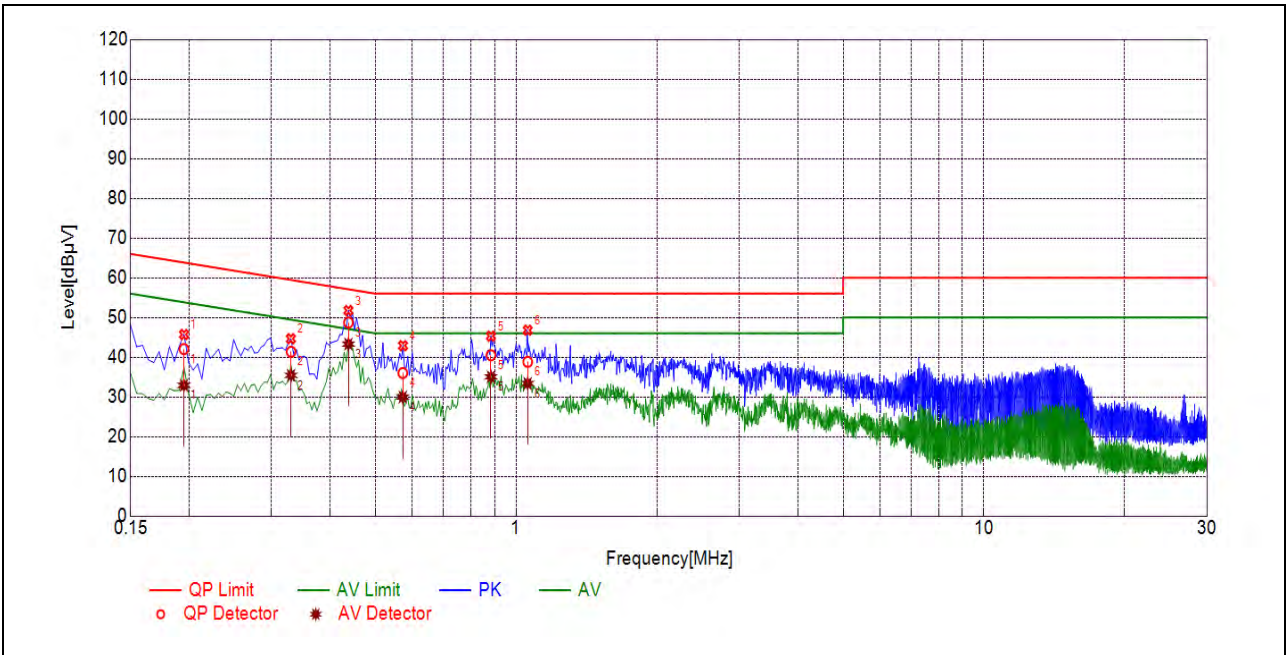

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1949	42.07	32.92	63.82	53.82	Line	PASS
2	0.3303	41.38	35.43	59.44	49.44		PASS
3	0.4381	48.74	43.31	57.10	47.10		PASS
4	0.5724	36.01	29.96	56.00	46.00		PASS
5	0.8834	40.50	35.06	56.00	46.00		PASS
6	1.0586	38.83	33.39	56.00	46.00		PASS

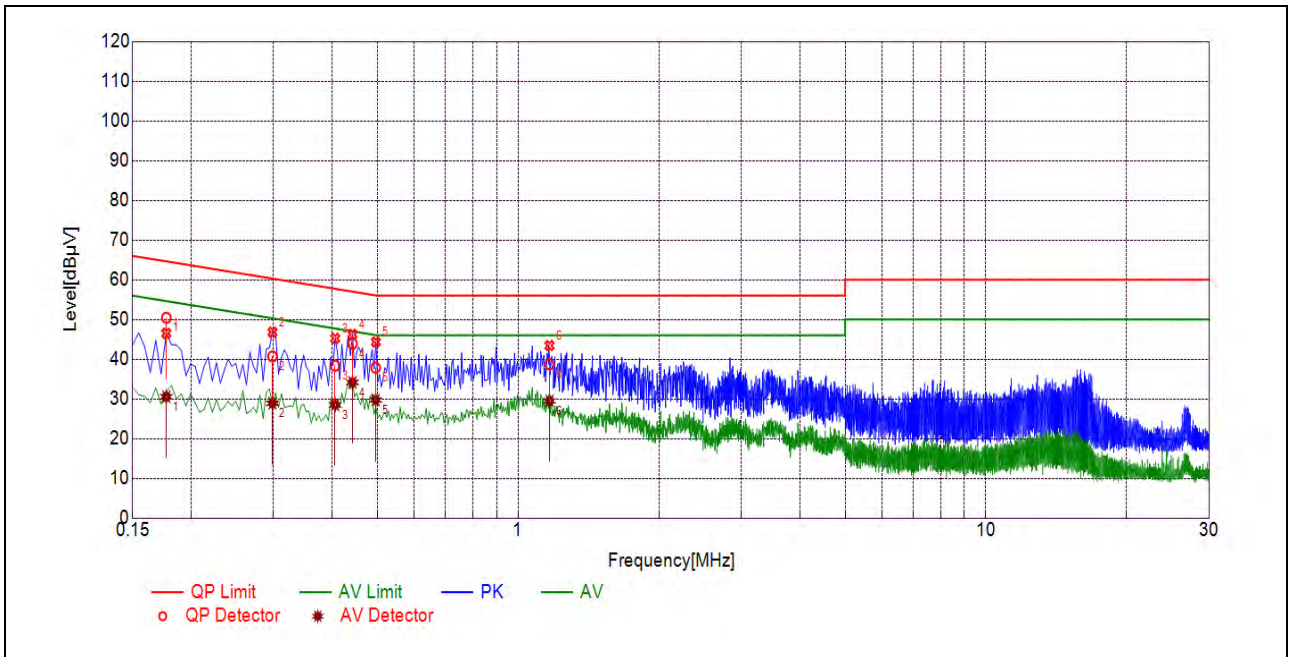

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1770	50.41	30.55	64.63	54.63	Neutral	PASS
2	0.2984	40.70	28.88	60.29	50.29		PASS
3	0.4063	38.37	28.50	57.72	47.72		PASS
4	0.4425	43.90	34.15	57.02	47.02		PASS
5	0.4960	37.85	29.74	56.07	46.07		PASS
6	1.1675	38.75	29.49	56.00	46.00		PASS



2.8. Restricted Frequency Bands

2.8.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m


Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

2.8.2. Test Description

Test Setup

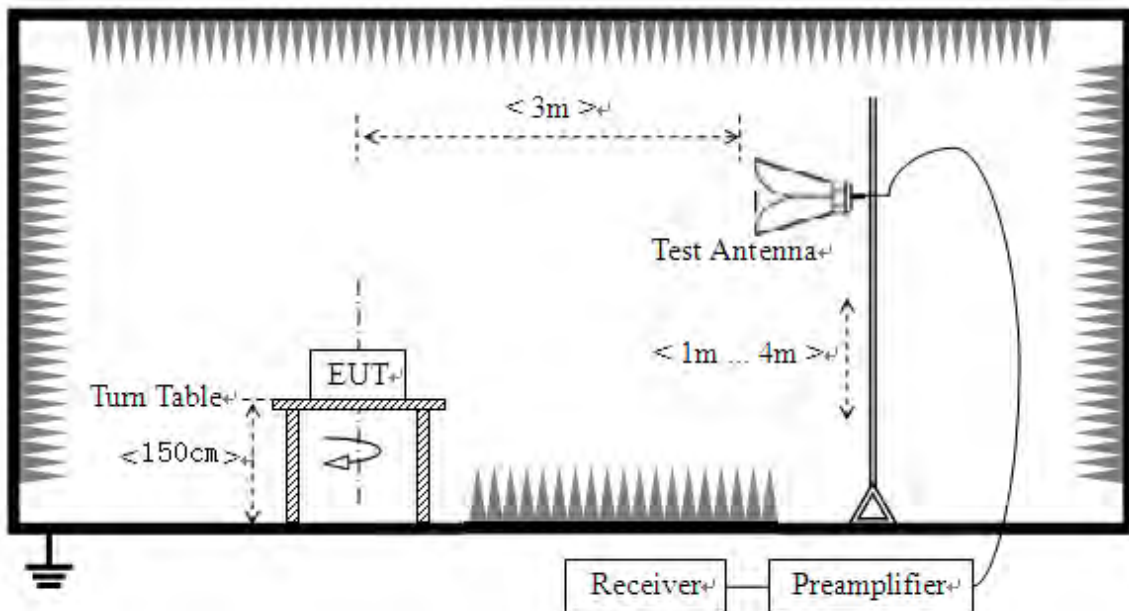



The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

2.8.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna; U_R : Receiver Reading

G_{preamp} : Preamplifier Gain; A_{Factor} : Antenna Factor at 3m

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Note 2 All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.


802.11a Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV	U_R (dB μ V)					
36	5018.16	PK	46.17	-26.92	32.20	51.45	74	PASS
36	5104.52	AV	34.00	-26.92	32.20	39.28	54	PASS
64	5352.44	PK	43.03	-26.80	32.20	48.43	74	PASS
64	5352.02	AV	32.50	-26.80	32.20	37.90	54	PASS
149	5725.00	PK	46.48	-26.23	32.20	52.45	122.23	PASS
165	5850.00	PK	45.75	-26.23	32.20	51.72	122.23	PASS




B.Test Plot:

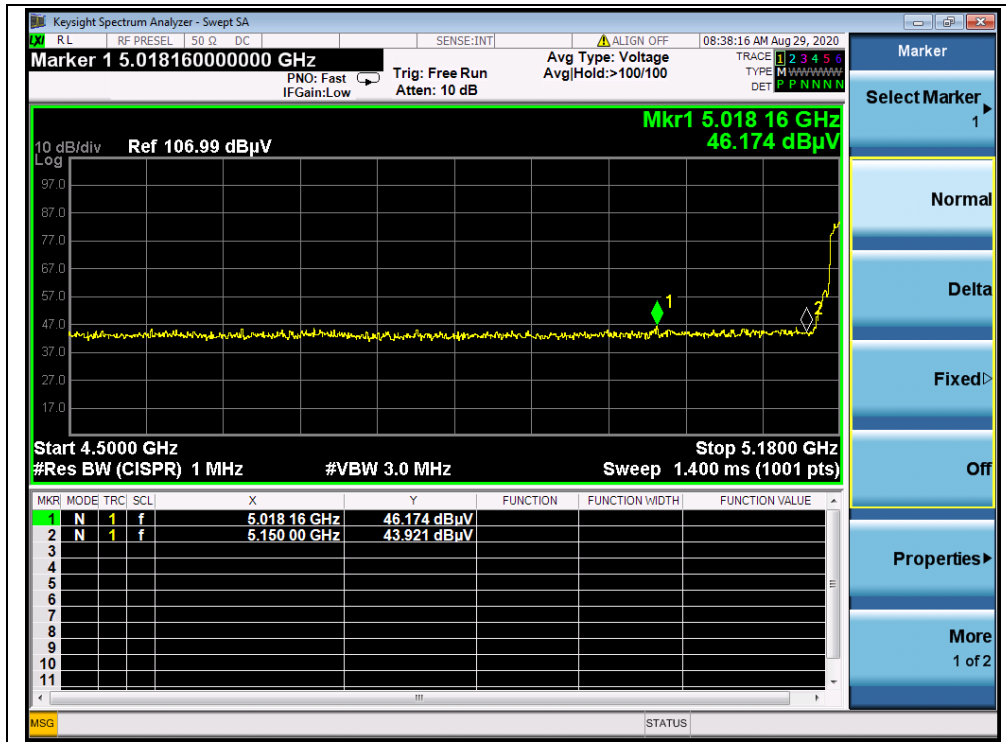


(PEAK, Channel 36, 802.11a)

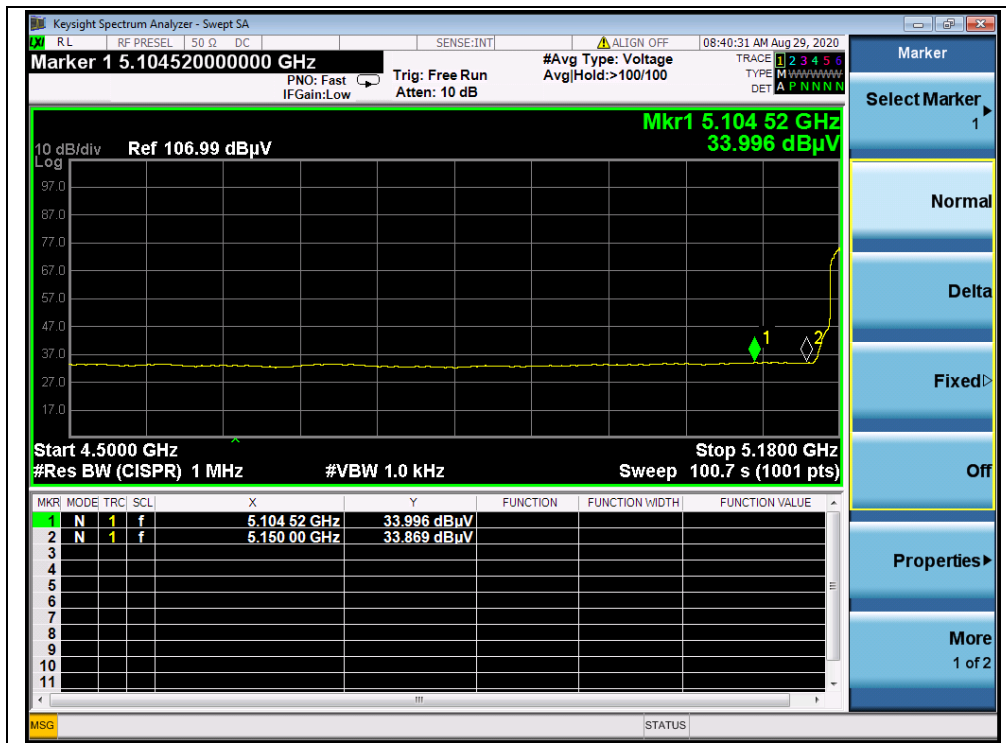


(AVERAGE, Channel 36, 802.11a)

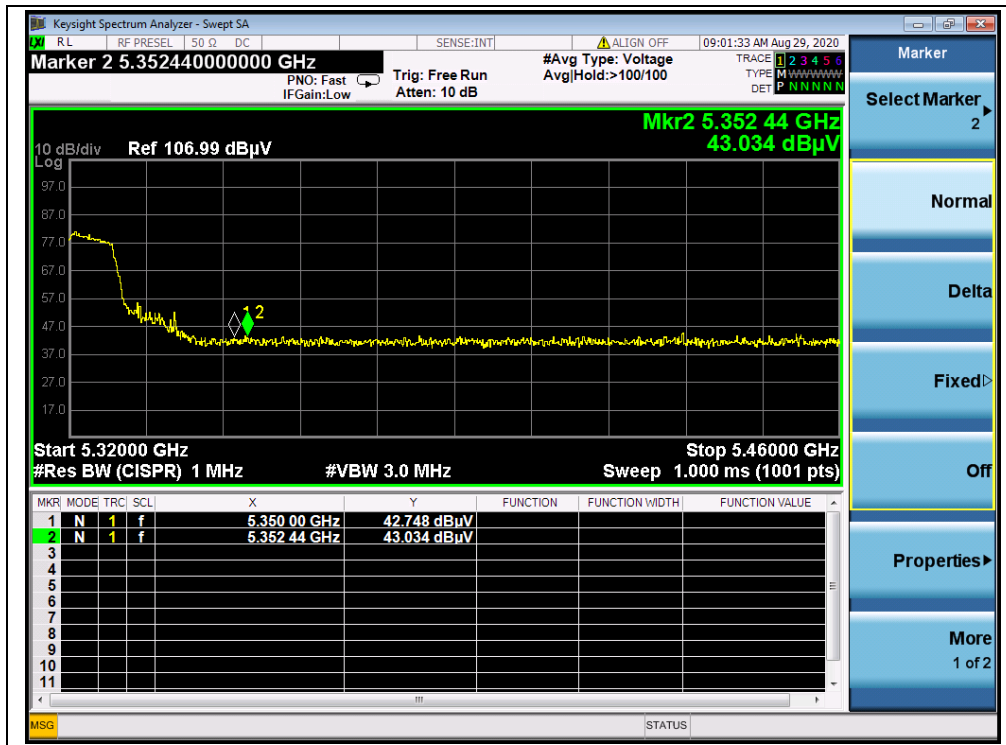


(PEAK, Channel 64, 802.11a)

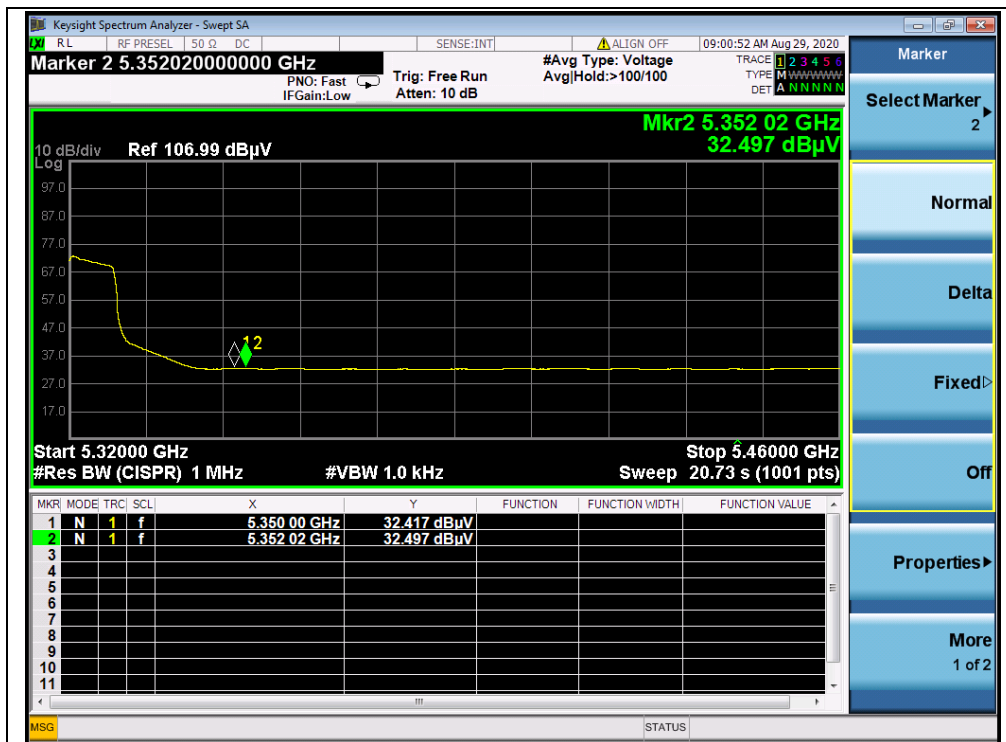

(AVERAGE, Channel 64, 802.11a)

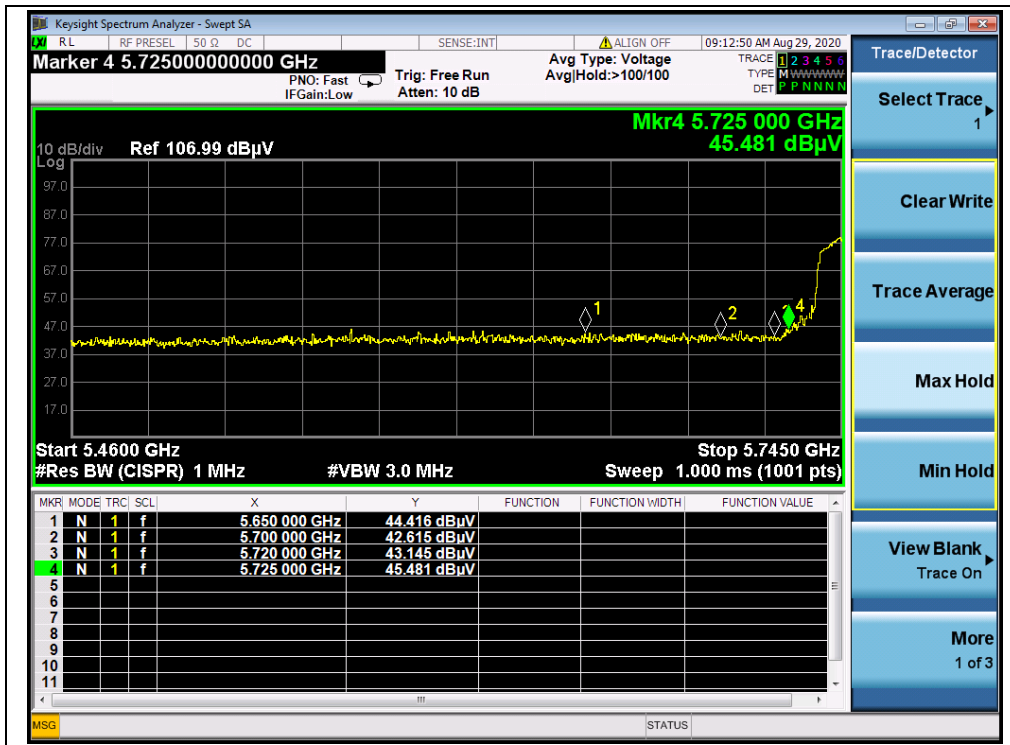

(PEAK, Channel 149, 802.11a)

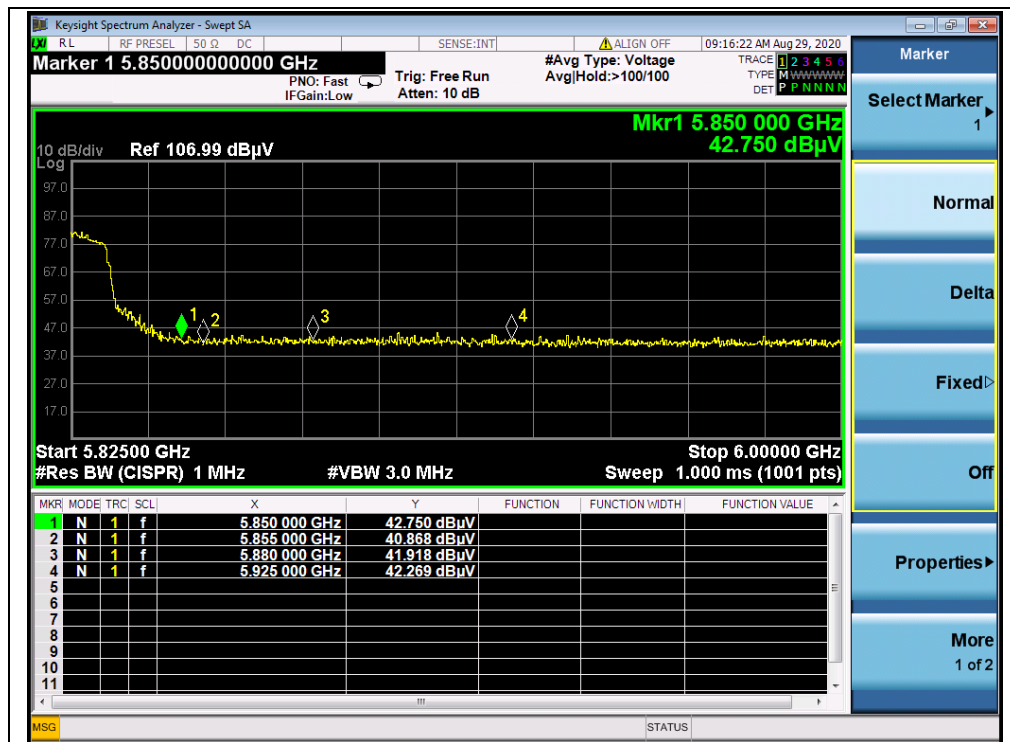

(PEAK, Channel 165, 802.11a)



2.9. Radiated Emission

2.9.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.9.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

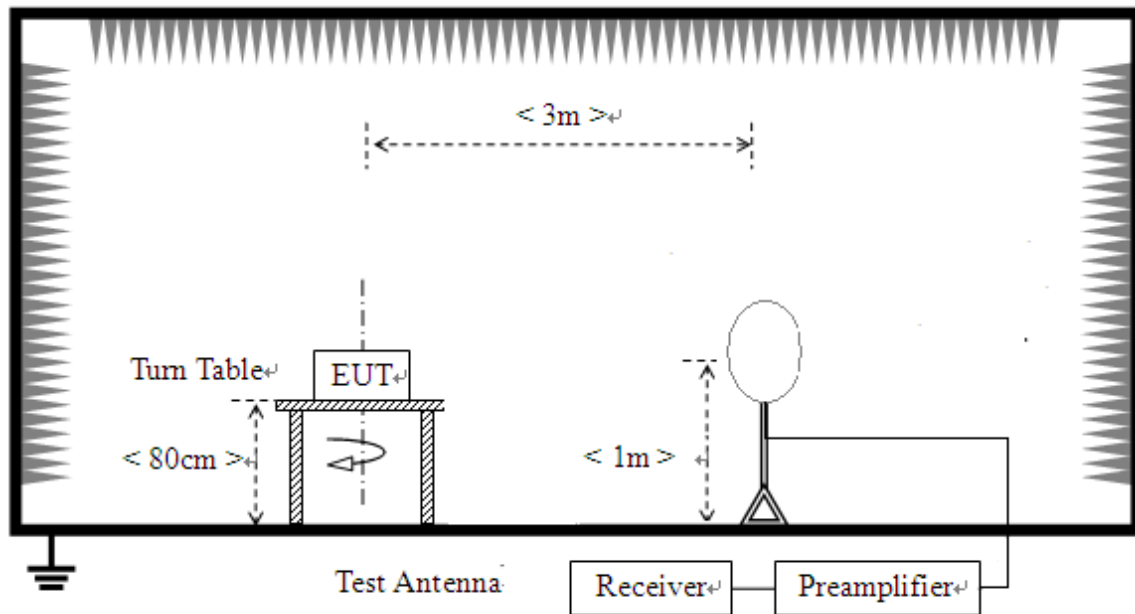

2) For radiated emissions from 30MHz to1GHz

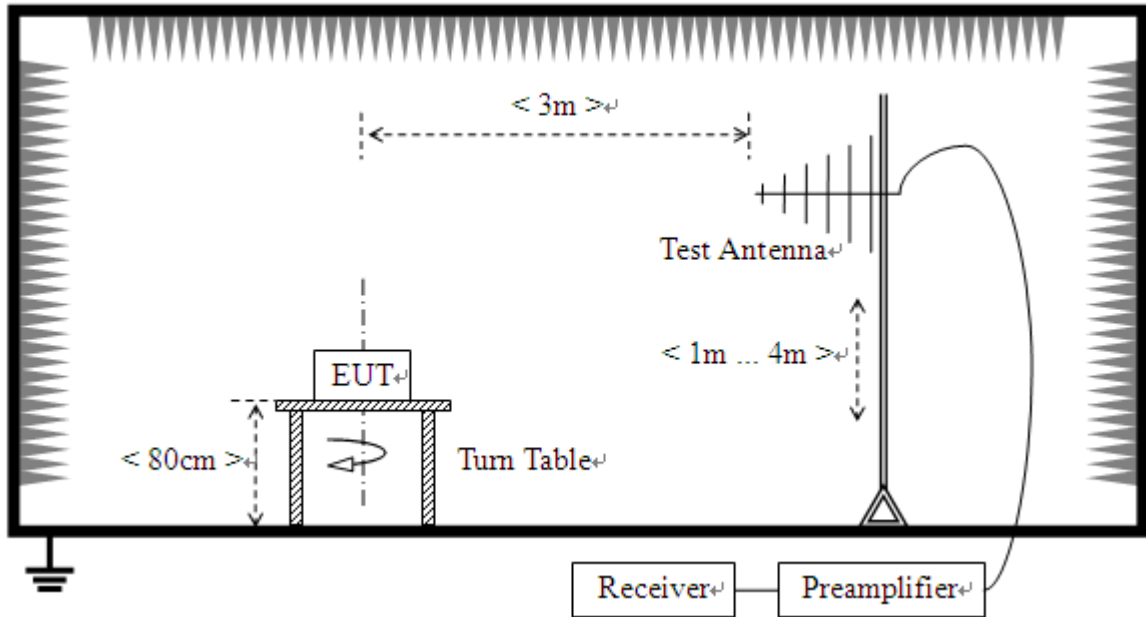

3) For radiated emissions above 1GHz

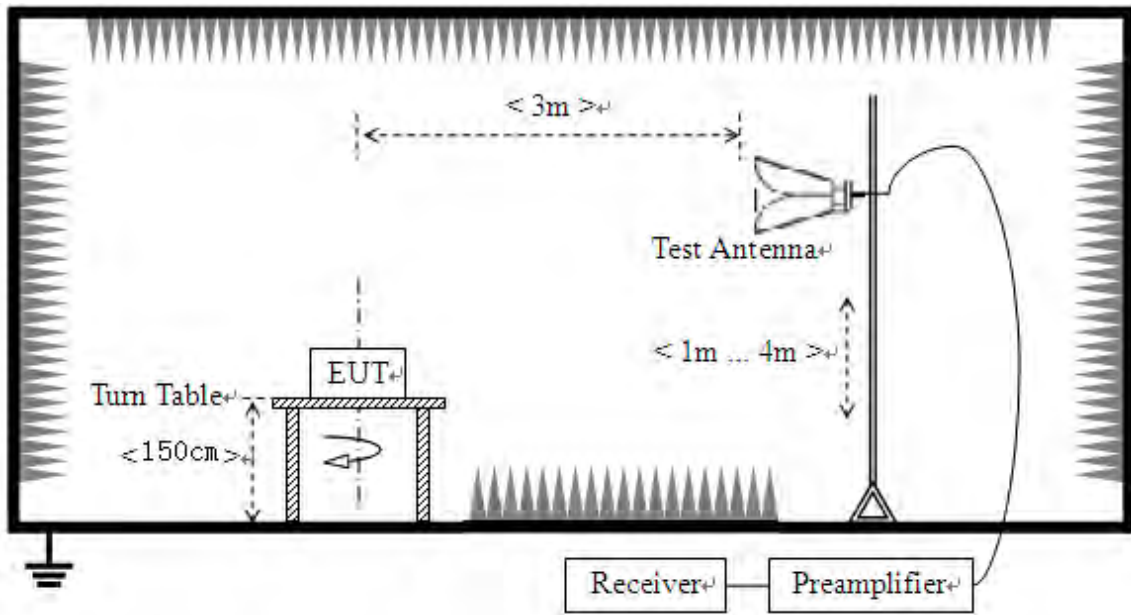

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT



was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.



2.9.3. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note 1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note 2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note 4: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.

802.11a Mode

Plot for Channel 36

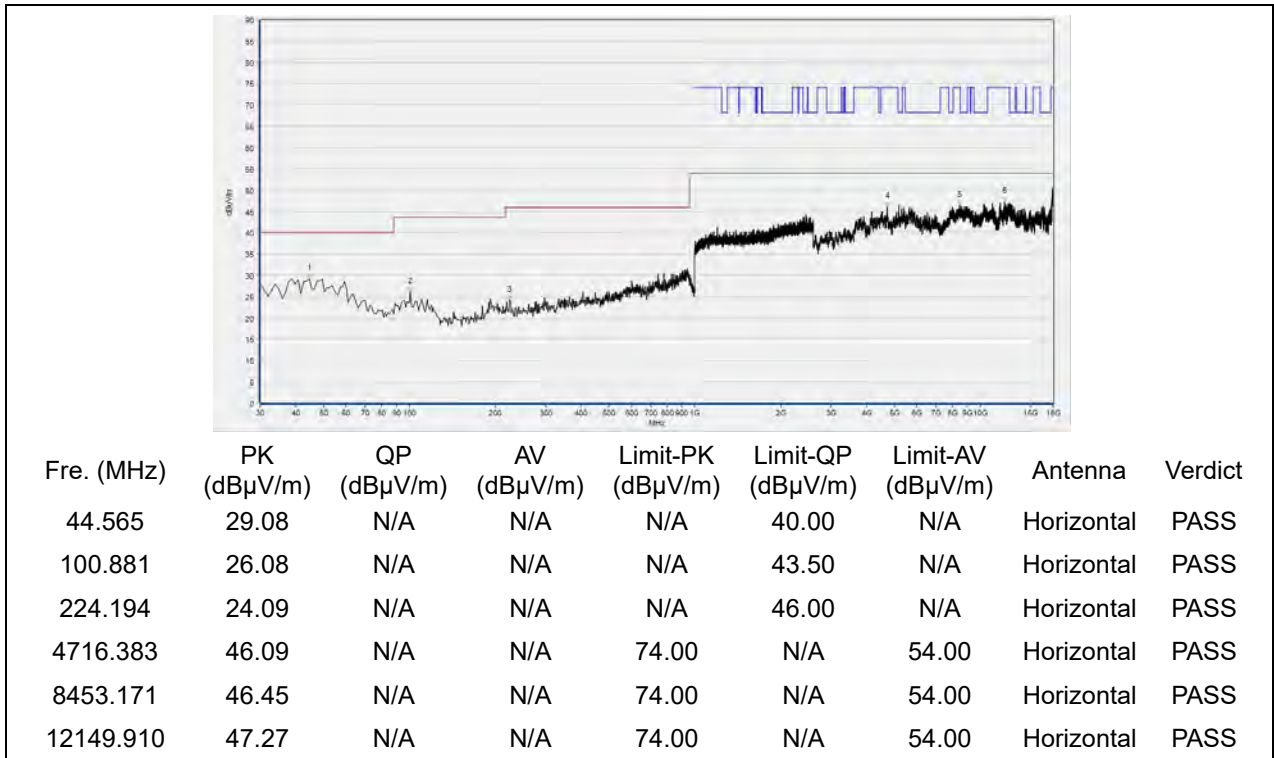


(Antenna Horizontal, 30MHz to 18GHz)

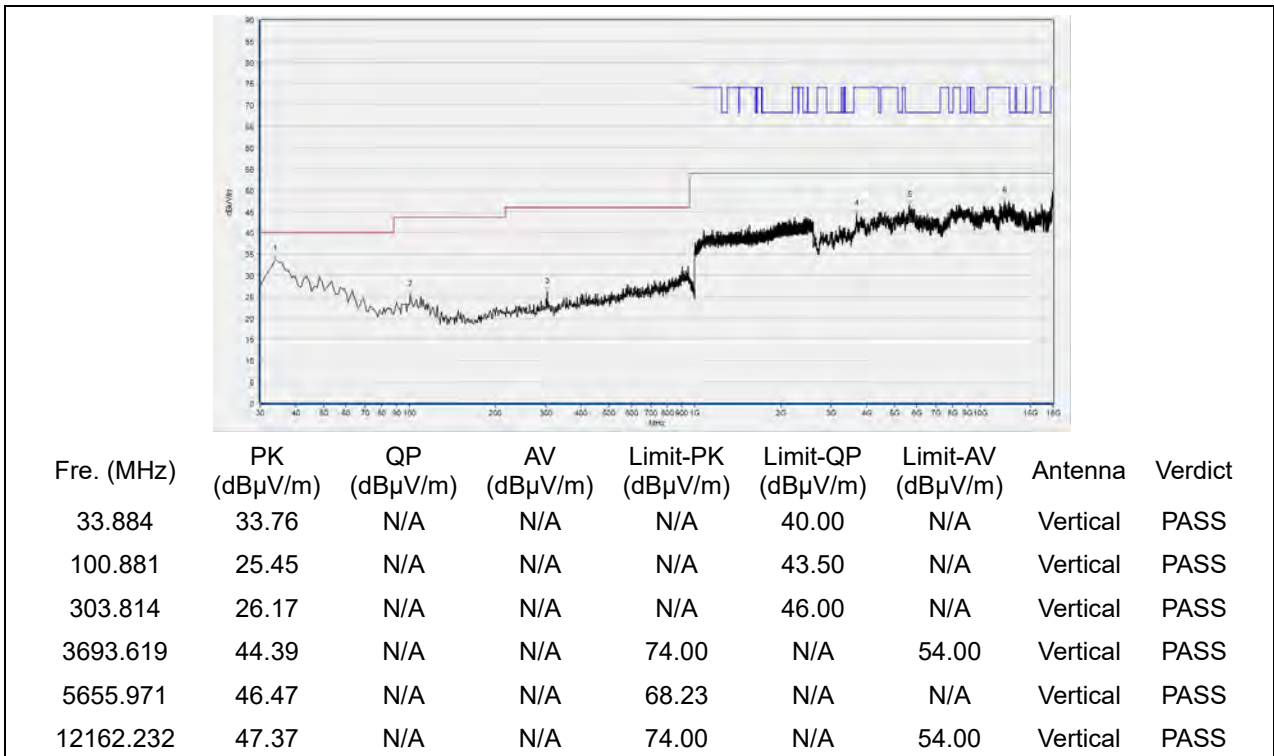


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 44

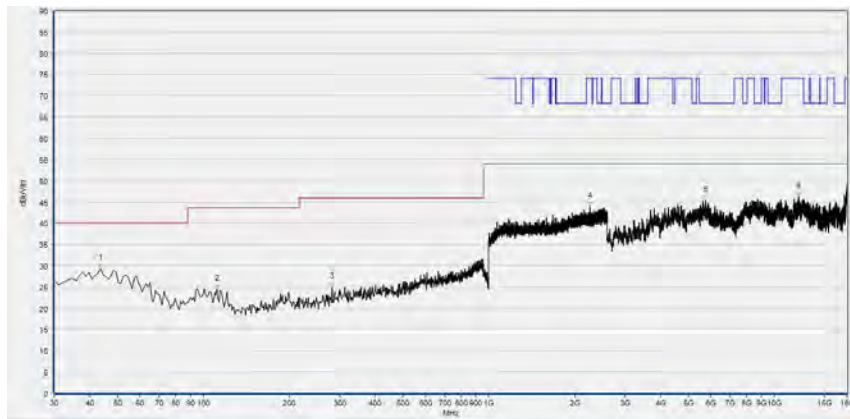

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.594	29.41	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
111.562	24.39	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
282.452	24.98	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2260.153	43.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5739.148	45.42	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12140.668	46.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

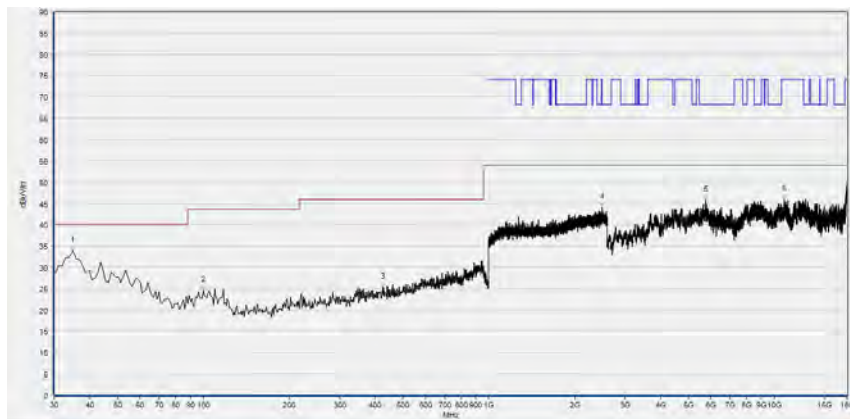

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
34.855	33.81	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
99.910	24.71	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
425.185	25.39	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2486.896	44.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5751.470	45.79	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
10840.648	45.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 48

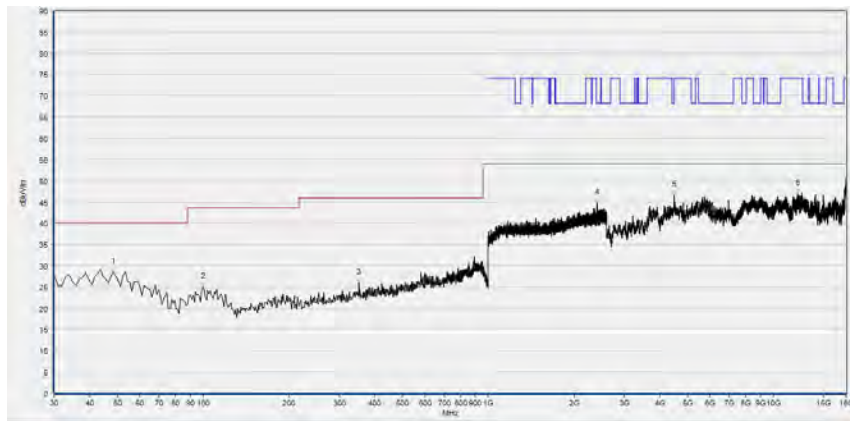

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.448	28.49	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
99.910	24.92	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
352.362	26.00	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2407.402	44.77	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
4485.337	46.54	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12196.119	46.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

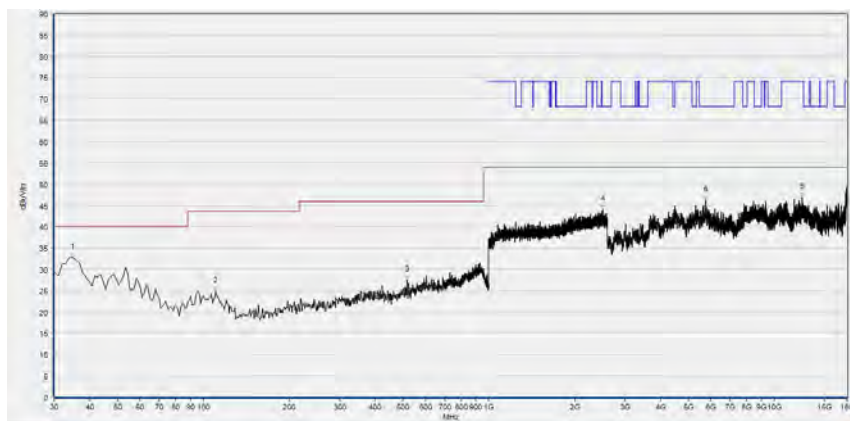

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
34.855	32.70	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
110.591	24.82	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
518.398	27.43	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2503.968	44.13	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5766.873	46.27	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12525.745	46.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 52

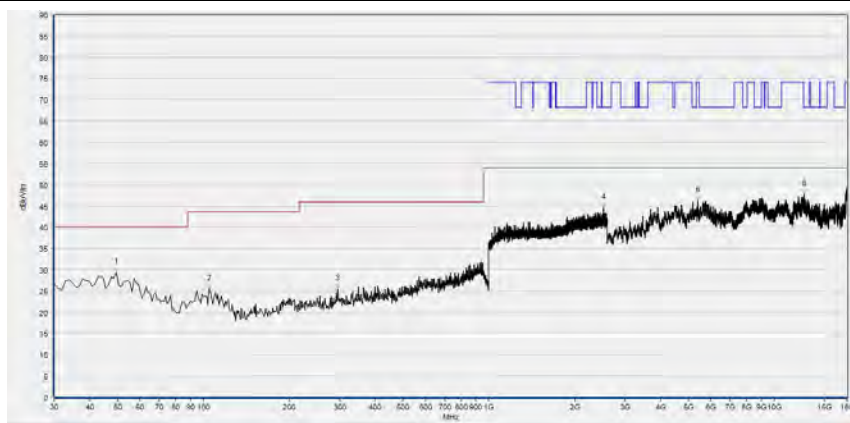

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
49.419	29.26	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.765	25.40	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
296.046	25.53	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2515.705	44.65	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5387.958	46.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12753.711	47.69	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

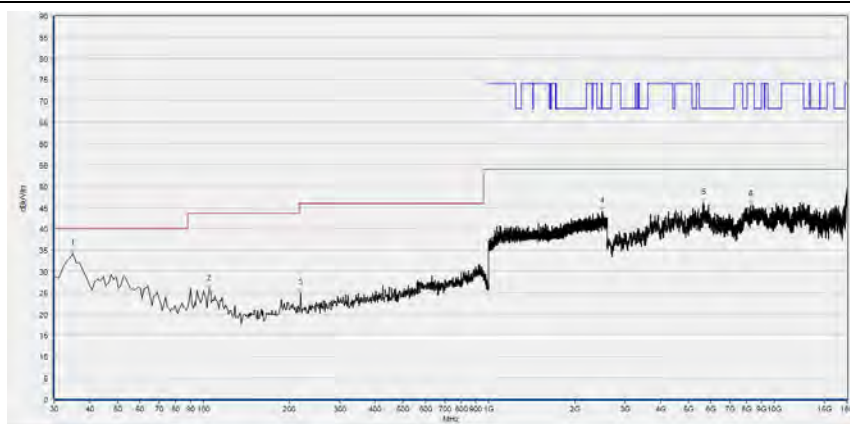

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
34.855	34.21	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.765	25.74	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
219.339	24.88	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2490.630	44.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5646.729	46.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8262.172	45.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 60

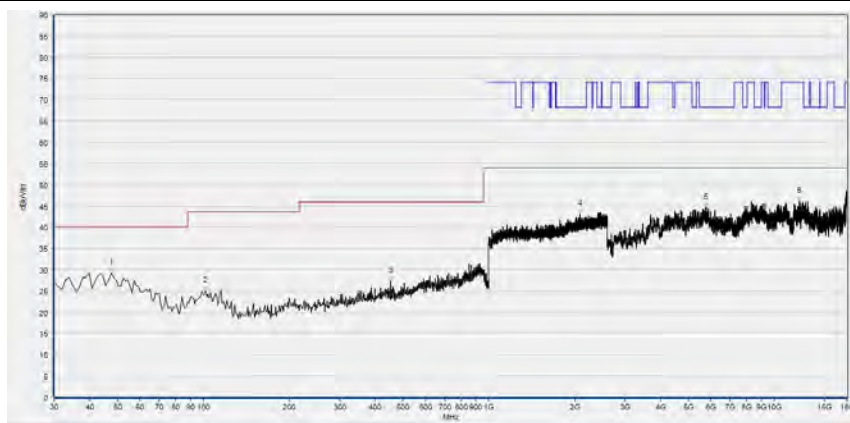

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
47.477	29.09	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
101.852	25.00	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
452.372	27.38	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2080.894	43.13	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5739.148	44.58	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12205.361	46.12	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

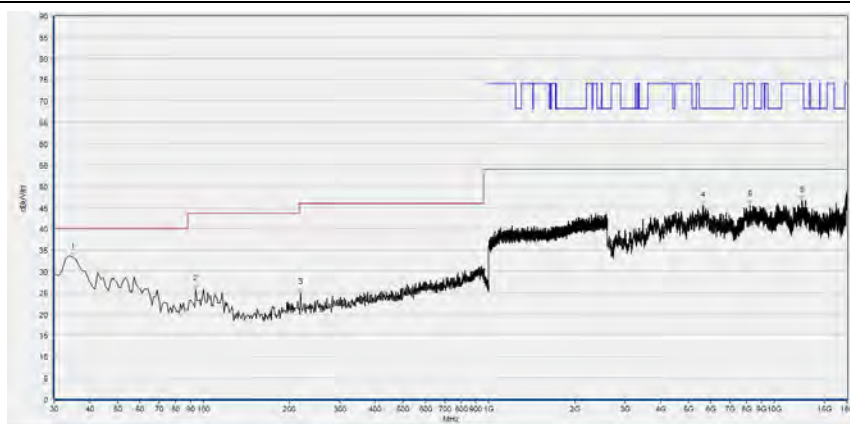


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
34.855	33.32	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
94.084	25.86	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
219.339	24.91	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
5634.407	45.34	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8240.608	45.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12507.261	46.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 64

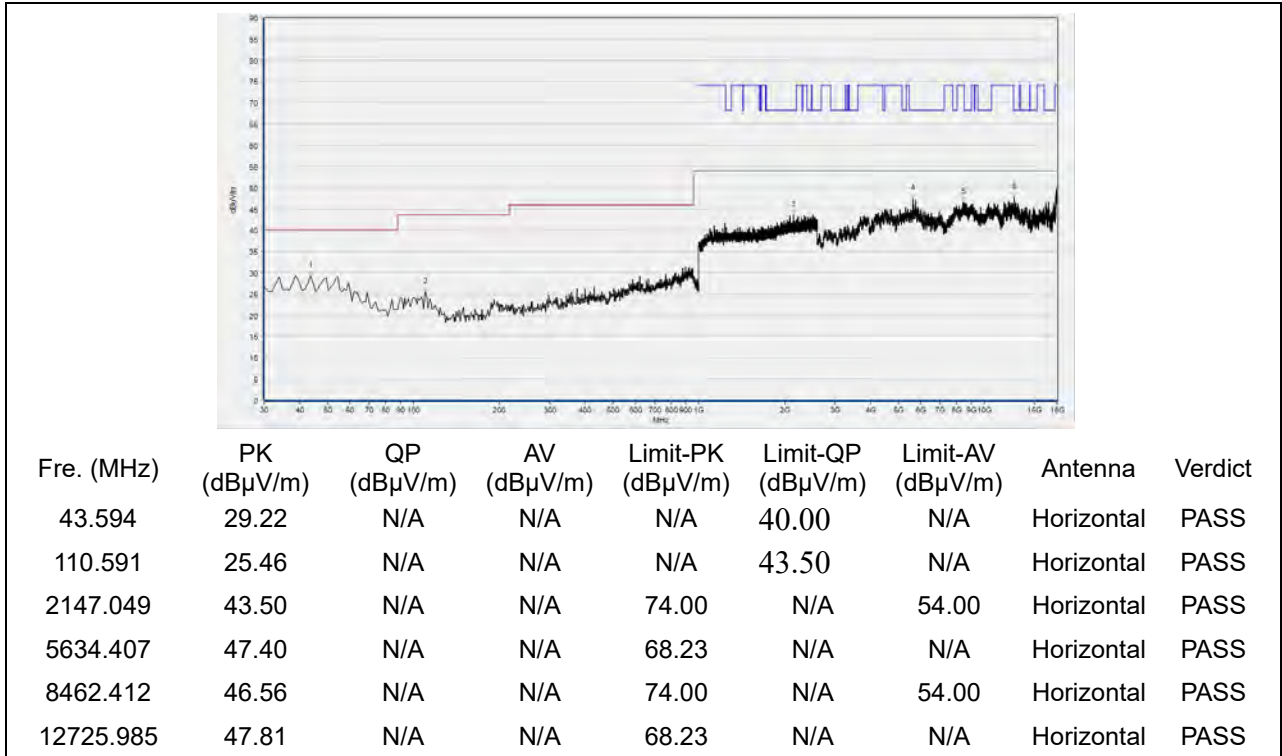


(Antenna Horizontal, 30MHz to 18GHz)

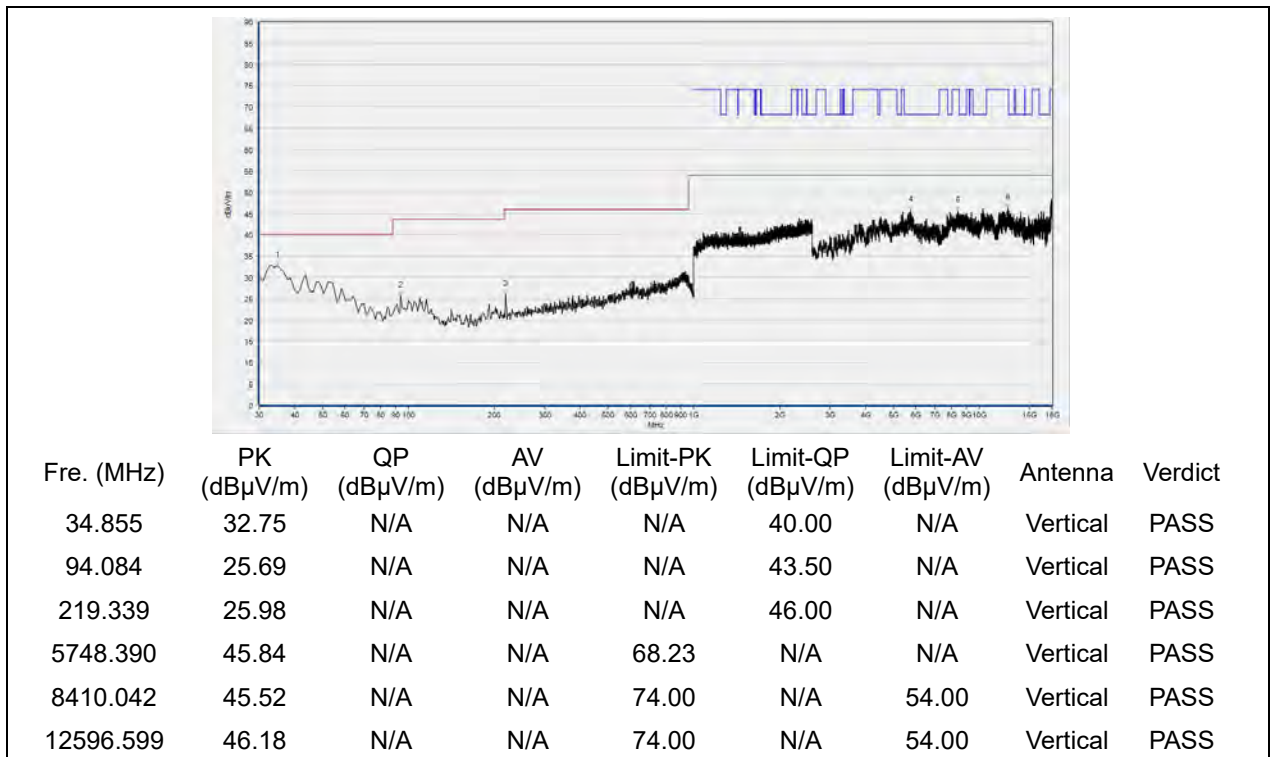


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 149

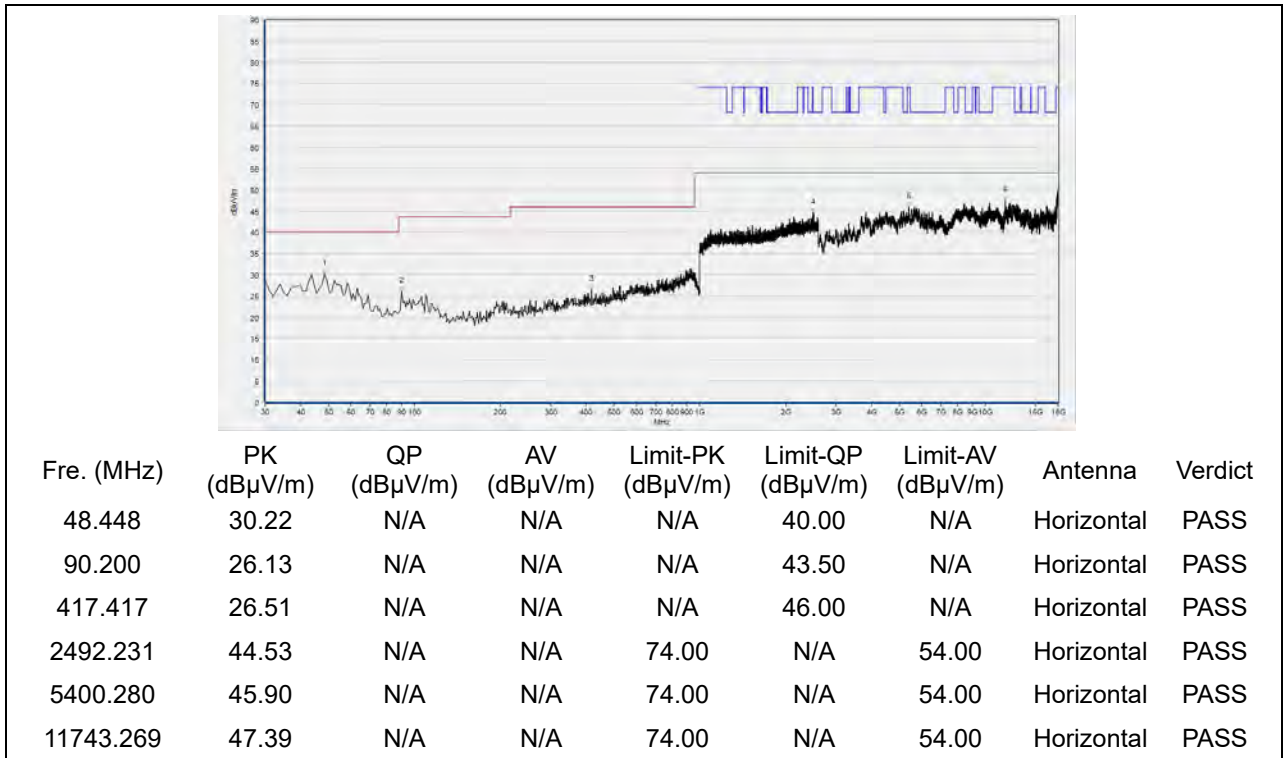


(Antenna Horizontal, 30MHz to 18GHz)

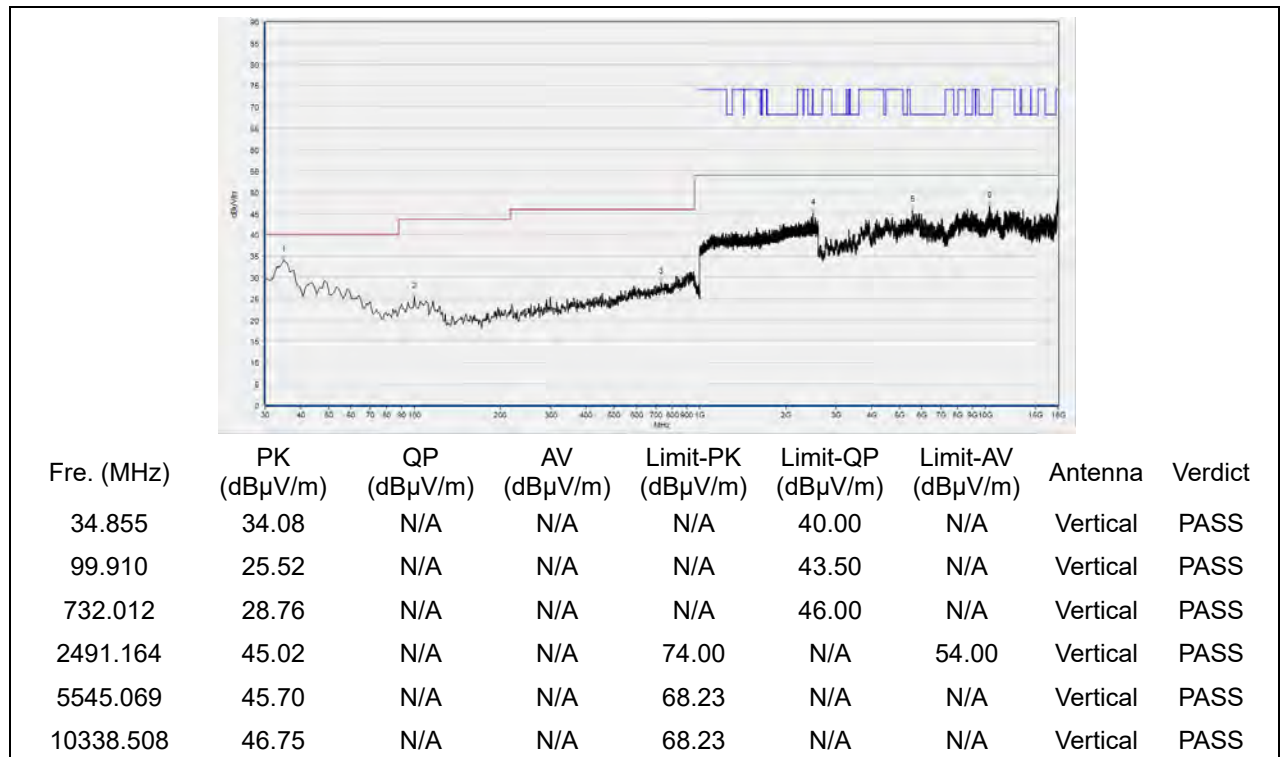


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 157

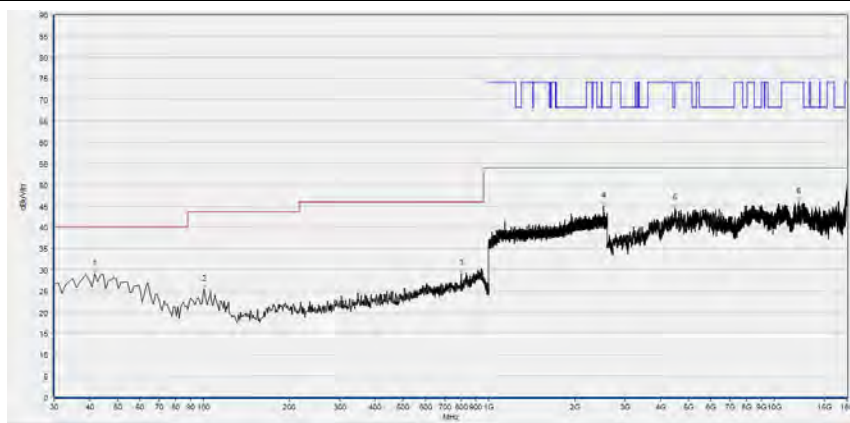

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
41.652	28.99	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
100.881	25.31	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
800.951	28.96	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2518.906	44.85	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
4488.418	44.38	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12152.991	45.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

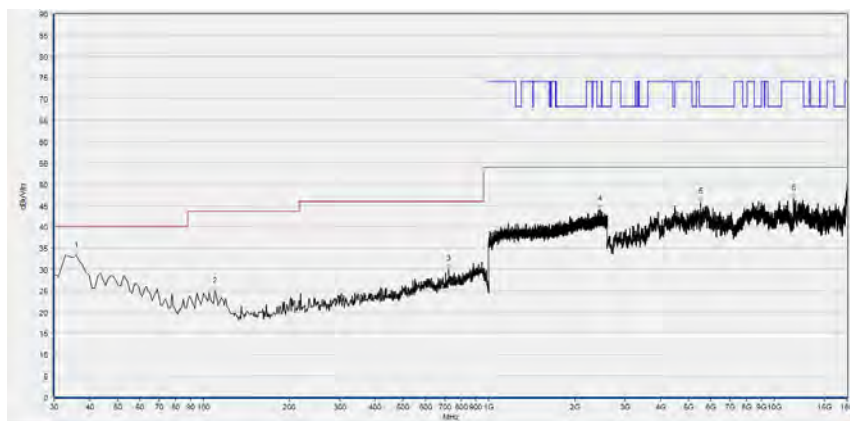

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
35.826	33.15	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
109.620	24.76	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
724.244	29.96	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2451.150	44.00	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5526.585	45.75	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11703.221	46.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 165

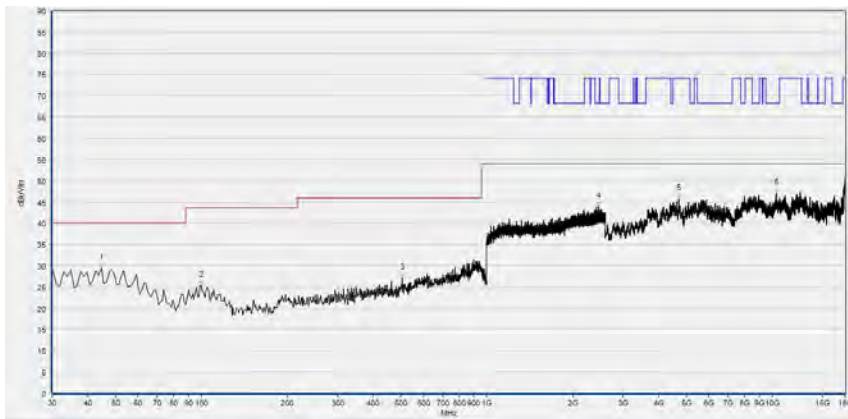

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.565	29.49	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
99.910	25.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
504.805	27.07	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2460.220	43.95	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
4713.303	45.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10323.105	47.10	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

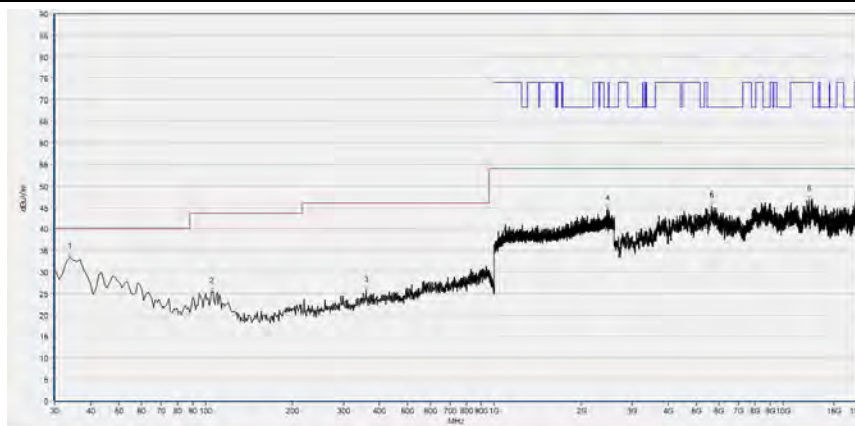

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
33.884	33.28	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.765	25.34	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
359.159	25.58	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2461.287	44.58	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5649.810	45.23	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12291.618	46.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Attenuator 1	N/A	10dB	Resnet	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Temperature Chamber	12108015	DTL-003S101	YOMA	2020.01.08	2021.01.07

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	812744	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Horn	BBHA9170 #774	BBHA 9170	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5150-5350	Wainwright	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5725-5850	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

END OF REPORT