

# TEST REPORT

**Reference No.** ..... : WTS19S02008374-2W V1  
**FCC ID**..... : ZLZ-EPM  
**Applicant**..... : Shenzhen Mindray BIO-Medical electronics Co.,LTD.  
**Address** ..... : Mindray Building, Keji 12th Road South,Hi-tech Ind, Shenzhen, China  
**Manufacturer** ..... : The same as above  
**Address** ..... : The same as above  
**Product Name** ..... : Patient Monitor  
**Model No.** ..... : ePM 15M, ePM 12M, ePM 10M, ePM 15, ePM 12, ePM 10  
**Brand** ..... : Mindray  
**Standards**..... : FCC CFR47 Part 15 E Section 15.407: 2018  
**Date of Receipt sample**..... : 2019-02-20  
**Date of Test**..... : 2019-02-21 to 2019-04-27  
**Date of Issue** ..... : 2019-05-17  
**Test Result** ..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.  
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China  
Tel :+86-755-83551033  
Fax:+86-755-83552400

Compiled by:

*Ford Wang*

Ford Wang / Project Engineer

Approved by:



*Philo Zhang*

Philo Zhang / Manager

## 2 Laboratories Introduction

**Waltek Services (Shenzhen) Co., Ltd** is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

**Test Facility:****A. Accreditations for Conformity Assessment (International)**

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. ISED CAB identifier: CN0013			

**B. TCBs and Notify Bodies Recognized Testing Laboratory.**

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 LABORATORIES INTRODUCTION</b> .....	<b>2</b>
<b>3 CONTENTS</b> .....	<b>4</b>
<b>4 REVISION HISTORY</b> .....	<b>6</b>
<b>5 GENERAL INFORMATION</b> .....	<b>7</b>
5.1 GENERAL DESCRIPTION OF E.U.T. ....	7
5.2 DETAILS OF E.U.T. ....	7
5.3 CHANNEL LIST.....	8
5.4 TEST MODE DESCRIPTION:.....	10
<b>6 EQUIPMENT USED DURING TEST</b> .....	<b>12</b>
6.1 EQUIPMENTS LIST.....	12
6.2 DESCRIPTION OF SUPPORT UNITS.....	13
6.3 MEASUREMENT UNCERTAINTY.....	13
6.4 TEST EQUIPMENT CALIBRATION.....	13
<b>7 TEST SUMMARY</b> .....	<b>14</b>
<b>8 CONDUCTED EMISSION</b> .....	<b>15</b>
8.1 E.U.T. OPERATION.....	15
8.2 EUT SETUP.....	15
8.3 MEASUREMENT DESCRIPTION.....	15
8.4 CONDUCTED EMISSION TEST RESULT.....	16
<b>9 RADIATED EMISSIONS</b> .....	<b>18</b>
9.1 EUT OPERATION.....	18
9.2 TEST SETUP.....	19
9.3 SPECTRUM ANALYZER SETUP.....	20
9.4 TEST PROCEDURE.....	21
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	21
9.6 SUMMARY OF TEST RESULTS.....	22
<b>10 DUTY CYCLE</b> .....	<b>31</b>
10.1 SUMMARY OF TEST RESULTS.....	31
<b>11 BAND EDGE</b> .....	<b>36</b>
11.1 TEST PRODUCE.....	36
11.2 TEST RESULT.....	37
<b>12 6 DB BANDWIDTH</b> .....	<b>45</b>
12.1 TEST PROCEDURE:.....	45
12.2 TEST RESULT:.....	45
<b>13 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</b> .....	<b>49</b>
13.1 TEST PROCEDURE:.....	49
13.2 TEST RESULT:.....	50
<b>14 CONDUCTED OUTPUT POWER</b> .....	<b>63</b>
14.1 TEST PROCEDURE:.....	63
14.2 TEST RESULT :.....	64
<b>15 POWER SPECTRAL DENSITY</b> .....	<b>77</b>
15.1 TEST PROCEDURE:.....	77

15.2	TEST RESULT: .....	78
<b>16</b>	<b>FREQUENCY STABILITY.....</b>	<b>91</b>
16.1	TEST PROCEDURE:.....	91
16.2	TEST RESULT: .....	92
<b>17</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>94</b>
<b>18</b>	<b>PHOTOGRAPHS OF TEST SETUP AND EUT.....</b>	<b>95</b>

## 4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS19S02008 374-2W	2019-02-20	2019-02-21 to 2019-04- 27	2019-04-28	original	-	Replaced
WTS19S02008 374-2W V1	2019-02-20	2019-02-21 to 2019-04- 27	2019-05-17	Version 1	Updated	Valid

## 5 General Information

### 5.1 General Description of E.U.T.

Product:	Patient Monitor
Model(s):	ePM 15M, ePM 12M, ePM 10M, ePM 15, ePM 12, ePM 10
Model Description:	Only the model names and antenna connect line length are different.
Wi-Fi Specification:	2.4G-802.11b/g/n HT20 5G-802.11a/ n HT20
Hardware Version:	2.0
Software Version:	01.06.00.01

### 5.2 Details of E.U.T.

Operation Frequency:	802.11a/n (HT20): U-NII-1: 5150-5250MHz, U-NII-2A: 5250-5350MHz(DFS), U-NII-2C: 5470-5725MHz(DFS), U-NII-3:5725-5850MHz
Max. RF output power:	19.78dBm
Type of Modulation:	DSSS, OFDM
Antenna installation:	internal permanent antenna
Antenna Gain:	3.38dBi
Ratings:	Input: AC 100~240V~ 50/60Hz, 2.0~0.9A

### 5.3 Channel List

U-NII-1 (5.15-5.25GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
44	5220	48	5240

U-NII-2A (5.25-5.35GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
52	5260	56	5280
60	5300	64	5320

U-NII-2C (5.47-5.725GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
100	5500	104	5520
108	5540	112	5560
116	5580	120	5600
124	5620	128	5640
132	5660	136	5680
140	5700		

U-NII-3 (5.725-5.85GHz)			
channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	153	5765
157	5785	161	5805
165	5825	/	/

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:



For 802.11a/n (HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	40	5200
48	5240		

channel	Frequency(MHz)	channel	Frequency(MHz)
52	5260	56	5280
64	5320		

channel	Frequency(MHz)	channel	Frequency(MHz)
100	5500	120	5600
140	5700		

channel	Frequency(MHz)	channel	Frequency(MHz)
149	5745	157	5785
165	5825		

#### 5.4 Test Mode Description:

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Transmitting duty cycle is no less 98%.

The software is installed in operation system, named "RFTestTool.apk", Version 1, date 20160518.

Test Items	Mode	Data Rate	Channel	TX/RX
Radiated Emissions	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
Duty Cycle	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
Band Edge	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
6dB Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
26dB Bandwidth and 99% Occupied Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX

	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
Conducted Output Power	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
Power Spectral Density	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX
Frequency Stability	Un-modulation	/	U-NII-1 36/40/48 U-NII-2A 52/56/64 U-NII-2C 100/120/140 U-NII-3 149/157/165	TX

## 6 Equipment Used during Test

### 6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2018-09-14	2019-09-13
2.	LISN	R&S	ENV216	101215	2018-09-14	2019-09-13
3.	Cable	Top	TYPE16(3.5M)	-	2018-09-14	2019-09-13
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2018-09-14	2019-09-13
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2018-09-14	2019-09-13
3.	Limitter	York	MTS-IMP-136	261115-001-0024	2018-09-14	2019-09-13
4.	Cable	LARGE	RF300	-	2018-09-14	2019-09-13
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	2018-09-14	2019-09-13
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018-09-14	2019-09-13
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018-09-14	2019-09-13
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2018-09-14	2019-09-13
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-09-14	2019-09-13
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-09-14	2019-09-13
7	Broadband Preampfier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-09-14	2019-09-13
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2018-09-14	2019-09-13
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-09-14	2019-09-13
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-09-14	2019-09-13
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2018-09-14	2019-09-13

4	Cable	HUBER+SUHNER	CBL2	525178	2018-09-14	2019-09-13
<b>RF Conducted Testing</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2018-09-14	2019-09-13
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2018-09-14	2019-09-13
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2018-09-14	2019-09-13

## 6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (30M~1000MHz)
	$\pm 5.47$ dB (1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)

## 6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 7 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	PASS
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	PASS
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

## 8 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

### 8.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

### 8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

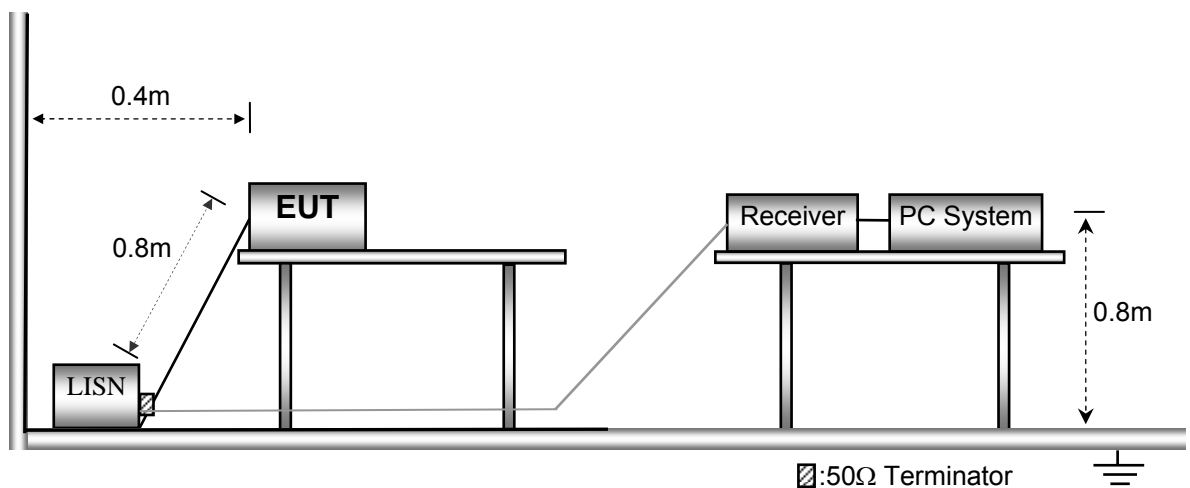


### 8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

## 8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Live line:

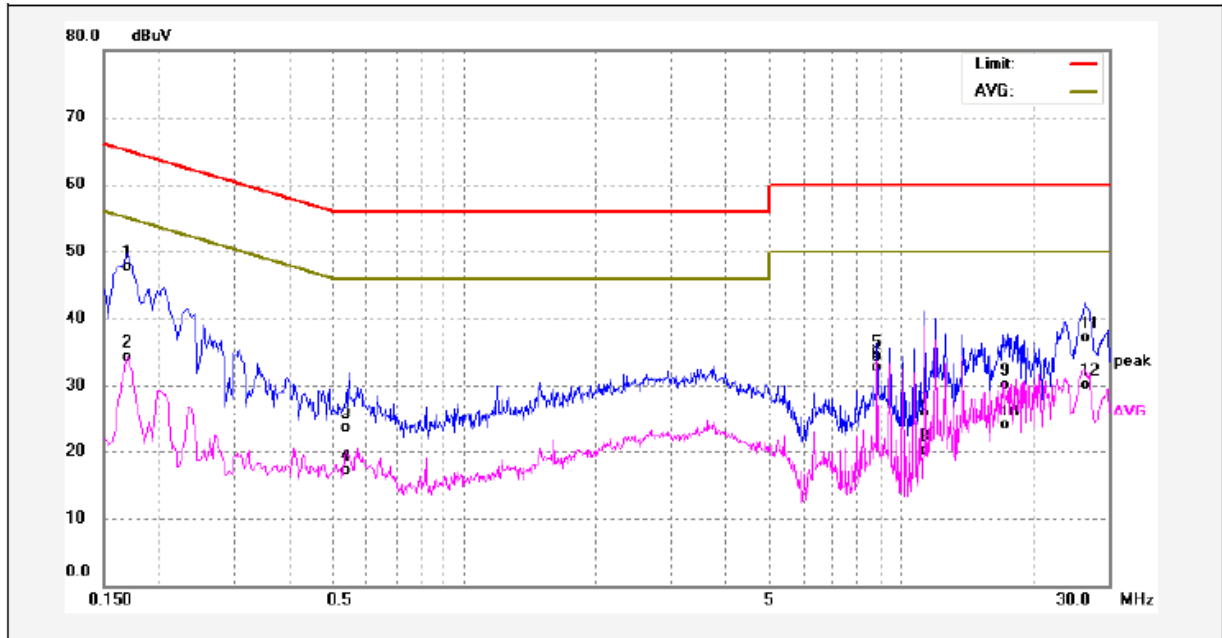

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1700	37.36	10.29	47.65	64.96	-17.31	QP	
2	0.1700	24.00	10.29	34.29	54.96	-20.67	AVG	
3	0.5460	13.14	10.45	23.59	56.00	-32.41	QP	
4	0.5460	6.62	10.45	17.07	46.00	-28.93	AVG	
5	8.8580	23.20	11.15	34.35	60.00	-25.65	QP	
6	8.8580	21.65	11.15	32.80	50.00	-17.20	AVG	
7	11.3780	14.69	11.13	25.82	60.00	-34.18	QP	
8	11.3780	8.89	11.13	20.02	50.00	-29.98	AVG	
9	17.6180	19.20	10.81	30.01	60.00	-29.99	QP	
10	17.6180	13.15	10.81	23.96	50.00	-26.04	AVG	
11	26.4340	26.62	10.44	37.06	60.00	-22.94	QP	
12	26.4340	19.76	10.44	30.20	50.00	-19.80	AVG	



Neutral line:

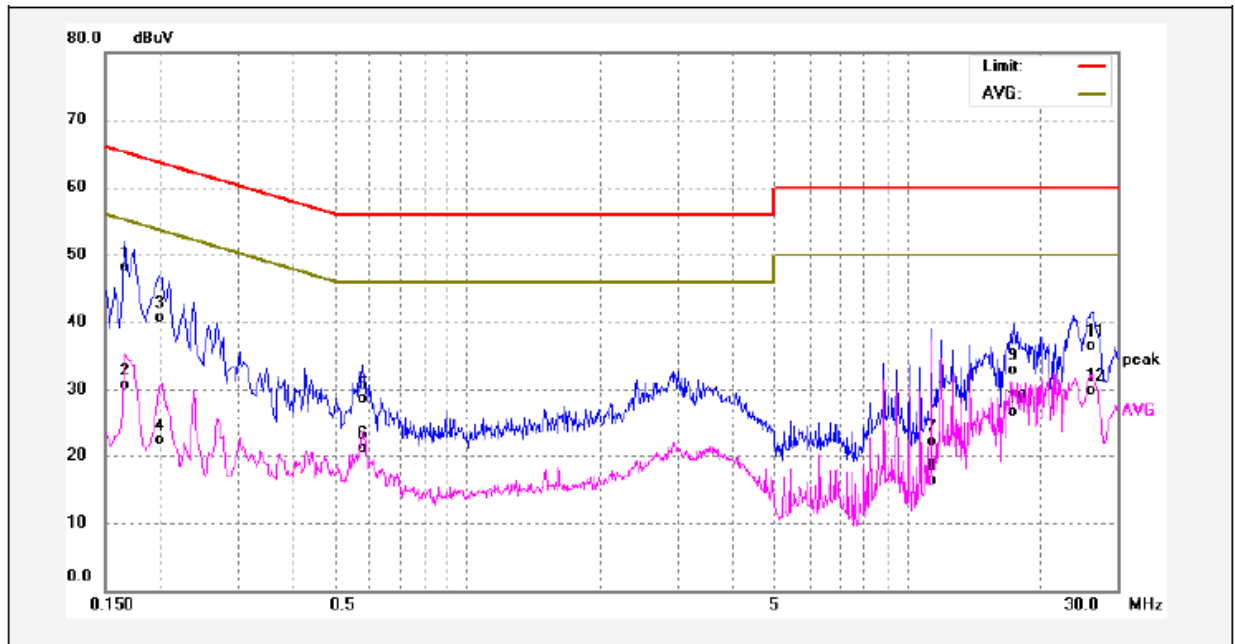

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1660	37.82	10.28	48.10	65.15	-17.05	QP	
2	0.1660	20.45	10.28	30.73	55.15	-24.42	AVG	
3	0.1980	30.37	10.32	40.69	63.69	-23.00	QP	
4	0.1980	11.97	10.32	22.29	53.69	-31.40	AVG	
5	0.5780	18.16	10.47	28.63	56.00	-27.37	QP	
6	0.5780	10.57	10.47	21.04	46.00	-24.96	AVG	
7	11.3540	10.87	11.14	22.01	60.00	-37.99	QP	
8	11.3540	5.22	11.14	16.36	50.00	-33.64	AVG	
9	17.4780	22.03	10.82	32.85	60.00	-27.15	QP	
10	17.4780	15.83	10.82	26.65	50.00	-23.35	AVG	
11	26.4500	26.04	10.44	36.48	60.00	-23.52	QP	
12	26.4500	19.43	10.44	29.87	50.00	-20.13	AVG	

## 9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


## 9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

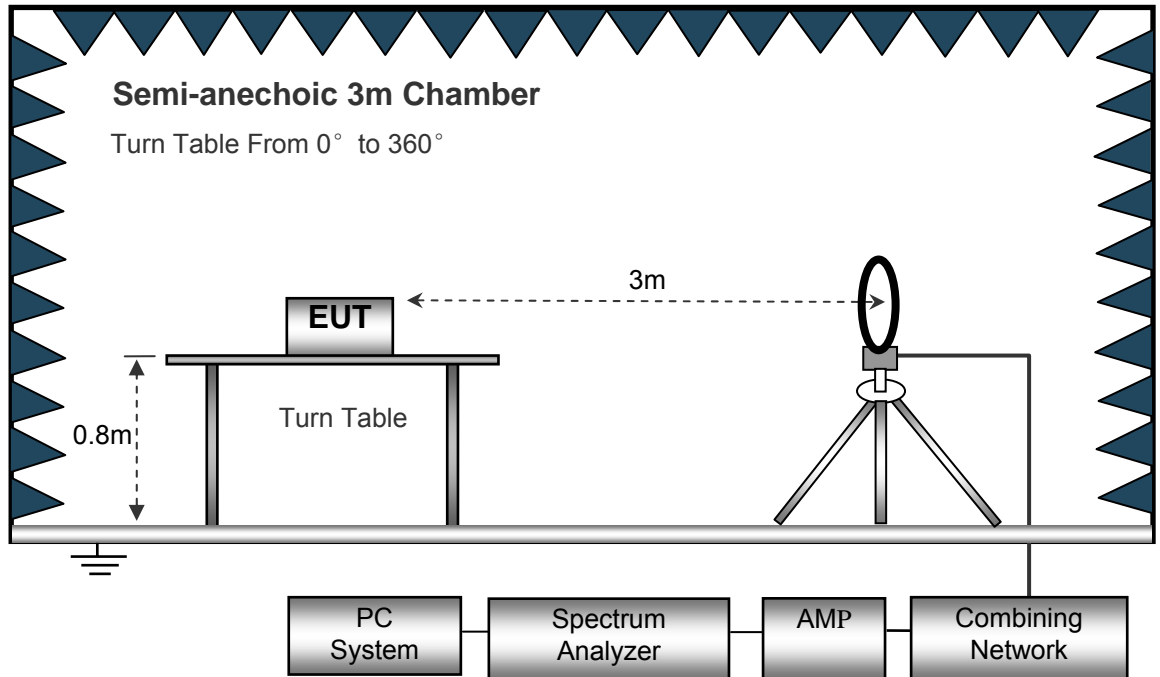

The test setup for emission measurement from 30 MHz to 1 GHz.

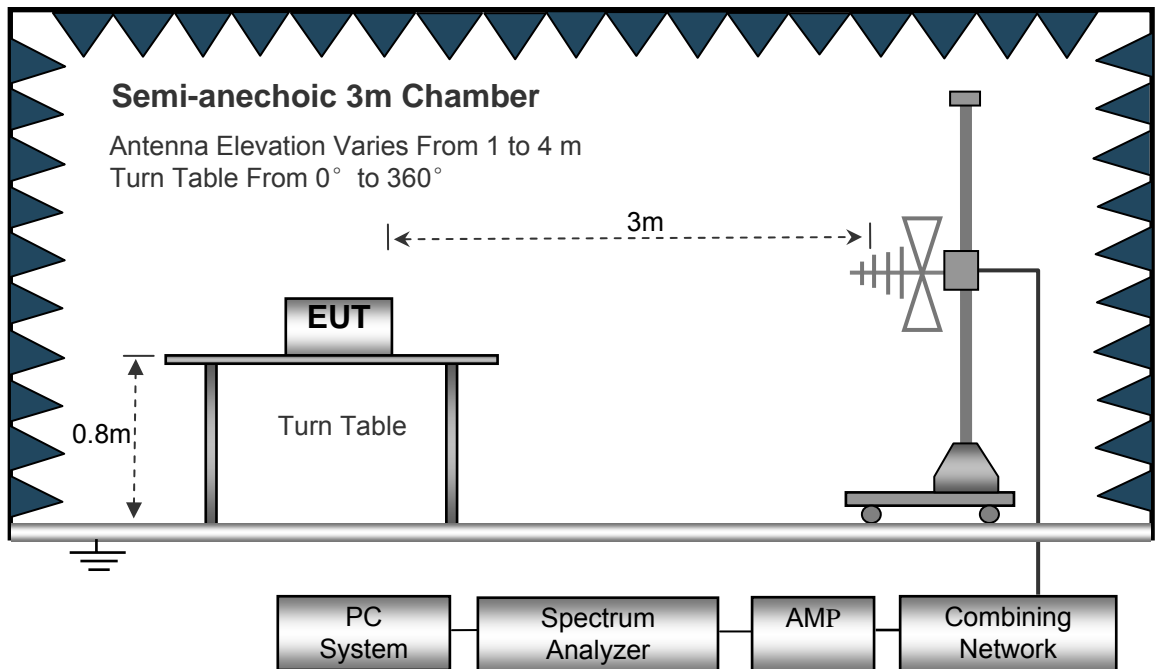

The test setup for emission measurement above 1 GHz.

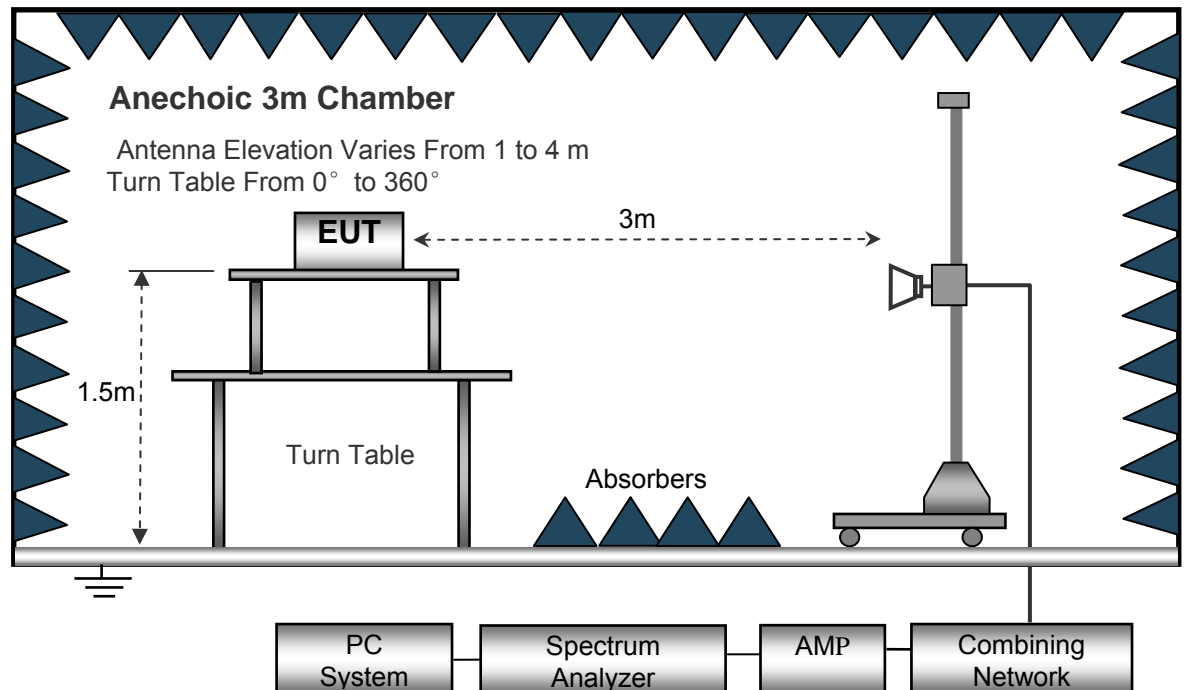

### 9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used druing radiated emissions above 1GHz measurement.

## 9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 9.6 Summary of Test Results

Remark: only the worst data (Long antenna prototype) were recorded.

**Test Frequency: 32.768kHz~30MHz**

Frequency (MHz)	Measurement results		Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
	dB $\mu$ V	@3m	PK/QP	dB/m	dB	dB $\mu$ V/m @30m	dB $\mu$ V/m @30m	dB
25.685	24.02		QP	20.55	40.00	4.57	29.54	-24.97

**Test Frequency : 30MHz ~ 18GHz**

Frequency (MHz)	Receiver Reading (dB $\mu$ V)	Detector (PK/QP/Ave)	Turn table Angle (Degree)	RX Antenna		Corrected Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC Part 15.407/209/205	
				Height (m)	Polar (H/V)			Limit (dB $\mu$ V/m)	Margin (dB)
802.11a U-NII-1 Low Channel 5180MHz									
223.45	39.99	QP	242	1.2	H	-11.62	28.37	46.00	-17.63
223.45	35.21	QP	57	1.3	V	-11.62	23.59	46.00	-22.41
4500.37	49.00	PK	109	1.8	H	-2.03	46.97	74.00	-27.03
4500.37	45.66	Ave	109	1.8	H	-2.03	43.63	54.00	-10.37
5116.05	51.75	PK	231	1.8	H	-1.02	50.73	74.00	-23.27
5116.05	49.12	Ave	231	1.8	H	-1.02	48.10	54.00	-5.90
10360.00	41.87	PK	359	1.3	H	5.33	47.20	74.00	-26.80
10360.00	36.00	Ave	359	1.3	H	5.33	41.33	54.00	-12.67
802.11a U-NII-1 middle channel 5200MHz									
223.45	40.79	QP	286	1.2	H	-11.62	29.17	46.00	-16.83
223.45	34.59	QP	164	1.2	V	-11.62	22.97	46.00	-23.03
4531.52	50.05	PK	246	1.8	H	-1.94	48.11	74.00	-25.89
4531.52	44.98	Ave	246	1.8	H	-1.94	43.04	54.00	-10.96
5120.05	53.58	PK	3	1.1	H	-1.06	52.52	74.00	-21.48
5120.05	50.80	Ave	3	1.1	H	-1.06	49.74	54.00	-4.26
10400.00	42.05	PK	110	1.6	H	5.21	47.26	74.00	-26.74
10400.00	36.17	Ave	110	1.6	H	5.21	41.38	54.00	-12.62

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-1 High channel 5240MHz									
223.45	39.33	QP	308	1.5	H	-11.62	27.71	46.00	-18.29
223.45	35.16	QP	48	1.8	V	-11.62	23.54	46.00	-22.46
4502.74	49.98	PK	298	1.7	H	-2.24	47.74	74.00	-26.26
4502.74	43.84	Ave	298	1.7	H	-2.24	41.60	54.00	-12.40
5148.25	54.67	PK	138	1.0	H	-1.09	53.58	74.00	-20.42
5148.25	50.36	Ave	138	1.0	H	-1.09	49.27	54.00	-4.73
10480.00	42.03	PK	118	1.4	H	5.14	47.17	74.00	-26.83
10480.00	35.42	Ave	118	1.4	H	5.14	40.56	54.00	-13.44
802.11a U-NII-2A Low Channel 5260MHz									
223.45	41.05	QP	250	1.5	H	-11.62	29.43	46.00	-16.57
223.45	36.26	QP	161	1.6	V	-11.62	24.64	46.00	-21.36
4529.48	50.44	PK	354	1.6	H	-2.03	48.41	74.00	-25.59
4529.48	46.32	Ave	354	1.6	H	-2.03	44.29	54.00	-9.71
5121.96	52.53	PK	283	1.9	H	-1.02	51.51	74.00	-22.49
5121.96	48.18	Ave	283	1.9	H	-1.02	47.16	54.00	-6.84
10520.00	41.08	PK	20	1.9	H	5.33	46.41	74.00	-27.59
10520.00	36.85	Ave	20	1.9	H	5.33	42.18	54.00	-11.82
802.11a U-NII-2A middle Channel 5280MHz									
223.45	41.07	QP	159	1.3	H	-11.62	29.45	46.00	-16.55
223.45	34.81	QP	85	1.2	V	-11.62	23.19	46.00	-22.81
4507.83	51.23	PK	53	1.3	H	-1.94	49.29	74.00	-24.71
4507.83	46.40	Ave	53	1.3	H	-1.94	44.46	54.00	-9.54
5130.80	54.33	PK	135	1.9	H	-1.06	53.27	74.00	-20.73
5130.80	49.84	Ave	135	1.9	H	-1.06	48.78	54.00	-5.22
10560.00	40.62	PK	321	1.9	H	5.21	45.83	74.00	-28.17
10560.00	37.32	Ave	321	1.9	H	5.21	42.53	54.00	-11.47

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-2A High Channel 5320MHz									
223.45	41.74	QP	117	1.4	H	-11.62	30.12	46.00	-15.88
223.45	33.43	QP	35	2.0	V	-11.62	21.81	46.00	-24.19
4511.60	50.49	PK	212	1.7	H	-2.24	48.25	74.00	-25.75
4511.60	45.27	Ave	212	1.7	H	-2.24	43.03	54.00	-10.97
5116.76	55.66	PK	77	1.1	H	-1.09	54.57	74.00	-19.43
5116.76	50.38	Ave	77	1.1	H	-1.09	49.29	54.00	-4.71
10640.00	40.12	PK	31	1.4	H	5.14	45.26	68.20	-22.94
10640.00	36.59	Ave	31	1.4	H	5.14	41.73	54.00	-12.27
802.11a U-NII-2C Low Channel 5500MHz									
223.45	41.02	QP	196	1.3	H	-11.62	29.40	46.00	-16.60
223.45	39.63	QP	43	1.7	V	-11.62	28.01	46.00	-17.99
4508.86	48.95	PK	30	1.7	H	-2.03	46.92	74.00	-27.08
4508.86	50.04	Ave	30	1.7	H	-2.03	48.01	54.00	-5.99
5112.36	52.53	PK	332	1.1	H	-1.02	51.51	74.00	-22.49
5112.36	48.18	Ave	332	1.1	H	-1.02	47.16	54.00	-6.84
11000.00	41.08	PK	308	1.6	H	5.33	46.41	68.20	-21.79
11000.00	36.85	Ave	308	1.6	H	5.33	42.18	54.00	-11.82
802.11a U-NII-2C Middle Channel 5600MHz									
223.45	42.15	QP	116	1.9	H	-11.62	30.53	46.00	-15.47
223.45	39.89	QP	2	1.7	V	-11.62	28.27	46.00	-17.73
4516.57	49.59	PK	32	1.7	H	-1.94	47.65	74.00	-26.35
4516.57	49.56	Ave	32	1.7	H	-1.94	47.62	54.00	-6.38
5115.36	52.84	PK	78	1.4	H	-1.06	51.78	74.00	-22.22
5115.36	50.02	Ave	78	1.4	H	-1.06	48.96	54.00	-5.04
11200.00	41.08	PK	142	1.1	H	5.21	46.29	68.20	-21.91
11200.00	37.95	Ave	142	1.1	H	5.21	43.16	54.00	-10.84



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-2C High Channel 5700MHz									
223.45	41.41	QP	297	2.0	H	-11.62	29.79	46.00	-16.21
223.45	39.62	QP	334	1.9	V	-11.62	28.00	46.00	-18.00
4513.11	50.53	PK	125	2.0	H	-2.24	48.29	74.00	-25.71
4513.11	50.18	Ave	125	2.0	H	-2.24	47.94	54.00	-6.06
5148.29	51.96	PK	67	1.2	H	-1.09	50.87	74.00	-23.13
5148.29	49.08	Ave	67	1.2	H	-1.09	47.99	54.00	-6.01
11400.00	40.40	PK	190	1.5	H	5.14	45.54	68.20	-22.66
11400.00	37.31	Ave	190	1.5	H	5.14	42.45	54.00	-11.55
802.11a U-NII-3 low Channel 5745MHz									
223.45	39.11	QP	339	1.4	H	-11.62	27.49	46.00	-18.51
223.45	33.84	QP	97	2.0	V	-11.62	22.22	46.00	-23.78
4504.10	49.22	PK	114	1.3	H	-2.06	47.16	74.00	-26.84
4504.10	44.02	Ave	114	1.3	H	-2.06	41.96	54.00	-12.04
11490.00	43.05	PK	327	1.5	H	5.93	48.98	74.00	-25.02
11490.00	37.22	Ave	327	1.5	H	5.93	43.15	54.00	-10.85
5352.43	46.70	PK	116	1.1	H	-1.25	45.45	74.00	-28.55
5352.43	37.57	Ave	116	1.1	H	-1.25	36.32	54.00	-17.68
802.11a U-NII-3 middle channel 5785MHz									
223.45	37.86	QP	197	1.2	H	-11.62	26.24	46.00	-19.76
223.45	33.33	QP	359	1.1	V	-11.62	21.71	46.00	-24.29
4505.68	49.64	PK	301	1.1	H	-2.03	47.61	74.00	-26.39
4505.68	44.19	Ave	301	1.1	H	-2.03	42.16	54.00	-11.84
11570.00	42.39	PK	67	1.2	H	5.81	48.20	74.00	-25.80
11570.00	37.03	Ave	67	1.2	H	5.81	42.84	54.00	-11.16

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-3 High channel 5825MHz									
223.45	36.43	QP	134	1.3	H	-11.62	24.81	46.00	-21.19
223.45	33.58	QP	238	1.1	V	-11.62	21.96	46.00	-24.04
4506.47	49.90	PK	27	1.2	H	-1.84	48.06	74.00	-25.94
4506.47	45.26	Ave	27	1.2	H	-1.84	43.42	54.00	-10.58
11650.00	40.65	PK	188	1.5	H	5.84	46.49	74.00	-27.51
11650.00	36.39	Ave	188	1.5	H	5.84	42.23	54.00	-11.77
5355.40	46.85	PK	4	1.3	H	-1.30	45.55	74.00	-28.45
5355.40	38.75	Ave	4	1.3	H	-1.30	37.45	54.00	-16.55
802.11n(HT20) U-NII-1 low Channel 5180MHz									
223.45	37.91	QP	161	1.6	H	-11.62	26.29	46.00	-19.71
223.45	34.78	QP	354	1.5	V	-11.62	23.16	46.00	-22.84
4501.82	48.54	PK	162	1.4	H	-2.14	46.40	74.00	-27.60
4501.82	45.07	Ave	162	1.4	H	-2.14	42.93	54.00	-11.07
5112.78	46.91	PK	258	1.3	H	-1.06	45.85	74.00	-28.15
5112.78	38.62	Ave	258	1.3	H	-1.06	37.56	54.00	-16.44
10360.00	42.12	PK	37	1.6	H	5.33	47.45	74.00	-26.55
10360.00	34.80	Ave	37	1.6	H	5.33	40.13	54.00	-13.87
802.11n(HT20) U-NII-1 middle channel 5200MHz									
223.45	39.01	QP	173	1.6	H	-11.62	27.39	46.00	-18.61
223.45	33.92	QP	233	1.9	V	-11.62	22.30	46.00	-23.70
4536.90	49.22	PK	143	1.5	H	-2.12	47.10	74.00	-26.90
4536.90	46.16	Ave	143	1.5	H	-2.12	44.04	54.00	-9.96
5140.65	46.27	PK	228	1.6	H	-1.06	45.21	74.00	-28.79
5140.65	38.03	Ave	228	1.6	H	-1.06	36.97	54.00	-17.03
10400.00	42.80	PK	21	1.9	H	5.21	48.01	74.00	-25.99
10400.00	36.07	Ave	21	1.9	H	5.21	41.28	54.00	-12.72

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-1 High channel 5240MHz									
223.45	39.96	QP	68	1.7	H	-11.62	28.34	46.00	-17.66
223.45	33.13	QP	22	1.1	V	-11.62	21.51	46.00	-24.49
4512.97	48.22	PK	257	1.6	H	-1.96	46.26	74.00	-27.74
4512.97	45.88	Ave	257	1.6	H	-1.96	43.92	54.00	-10.08
5117.00	46.13	PK	30	1.8	H	-1.06	45.07	74.00	-28.93
5117.00	37.05	Ave	30	1.8	H	-1.06	35.99	54.00	-18.01
10480.00	41.17	PK	162	1.4	H	5.14	46.31	74.00	-27.69
10480.00	36.78	Ave	162	1.4	H	5.14	41.92	54.00	-12.08
802.11n(HT20) U-NII-2A Low channel 5260MHz									
223.45	41.09	QP	187	1.5	H	-11.62	29.47	46.00	-16.53
223.45	40.34	QP	309	1.8	V	-11.62	28.72	46.00	-17.28
4536.17	35.22	PK	158	1.1	H	-2.03	33.19	74.00	-40.81
4536.17	45.39	Ave	158	1.1	H	-2.03	43.36	54.00	-10.64
5119.20	38.28	PK	23	1.6	H	-1.02	37.26	74.00	-36.74
5119.20	1.40	Ave	23	1.6	H	-1.02	0.38	54.00	-53.62
10520.00	40.66	PK	335	1.7	H	5.33	45.99	74.00	-28.01
10520.00	36.58	Ave	335	1.7	H	5.33	41.91	54.00	-12.09
802.11n(HT20) U-NII-2A Middle channel 5280MHz									
223.45	42.22	QP	95	1.4	H	-11.62	30.60	46.00	-15.40
223.45	41.42	QP	279	1.1	V	-11.62	29.80	46.00	-16.20
4531.21	36.33	PK	144	1.5	H	-1.94	34.39	74.00	-39.61
4531.21	45.29	Ave	144	1.5	H	-1.94	43.35	54.00	-10.65
5132.42	37.57	PK	64	1.5	H	-1.06	36.51	74.00	-37.49
5132.42	0.70	Ave	64	1.5	H	-1.06	-0.36	54.00	-54.36
10560.00	40.91	PK	353	1.7	H	5.21	46.12	74.00	-27.88
10560.00	35.28	Ave	353	1.7	H	5.21	40.49	54.00	-13.51

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-2A High channel 5320MHz									
223.45	43.43	QP	39	1.8	H	-11.62	31.81	46.00	-14.19
223.45	42.28	QP	349	1.5	V	-11.62	30.66	46.00	-15.34
4526.82	36.43	PK	122	1.8	H	-2.24	34.19	74.00	-39.81
4526.82	45.97	Ave	122	1.8	H	-2.24	43.73	54.00	-10.27
5134.59	36.82	PK	73	1.1	H	-1.09	35.73	74.00	-38.27
5134.59	1.05	Ave	73	1.1	H	-1.09	-0.04	54.00	-54.04
10640.00	40.70	PK	279	1.7	H	5.14	45.84	68.20	-22.36
10640.00	35.43	Ave	279	1.7	H	5.14	40.57	54.00	-13.43
802.11n(HT20) U-NII-2C Low channel 5500MHz									
223.45	42.27	QP	273	1.2	H	-11.62	30.65	46.00	-15.35
223.45	0.05	QP	12	1.0	V	-11.62	-11.57	46.00	-57.57
4522.60	42.49	PK	216	1.2	H	-2.03	40.46	74.00	-33.54
4522.60	35.72	Ave	216	1.2	H	-2.03	33.69	54.00	-20.31
5149.20	45.83	PK	95	1.9	H	-1.02	44.81	74.00	-29.19
5149.20	39.45	Ave	95	1.9	H	-1.02	38.43	54.00	-15.57
11000.00	0.99	PK	201	1.2	H	5.33	6.32	68.20	-61.88
11000.00	35.21	Ave	201	1.2	H	5.33	40.54	54.00	-13.46
802.11n(HT20) U-NII-2C Middle channel 5600MHz									
223.45	41.15	QP	208	1.4	H	-11.62	29.53	46.00	-16.47
223.45	1.25	QP	96	1.3	V	-11.62	-10.37	46.00	-56.37
4529.36	42.81	PK	11	1.9	H	-1.94	40.87	74.00	-33.13
4529.36	34.50	Ave	11	1.9	H	-1.94	32.56	54.00	-21.44
5127.77	45.15	PK	62	1.6	H	-1.06	44.09	74.00	-29.91
5127.77	39.56	Ave	62	1.6	H	-1.06	38.50	54.00	-15.50
11200.00	0.52	PK	118	2.0	H	5.21	5.73	68.20	-62.47
11200.00	34.38	Ave	118	2.0	H	5.21	39.59	54.00	-14.41

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-2C High channel 5700MHz									
223.45	40.48	QP	358	2.0	H	-11.62	28.86	46.00	-17.14
223.45	1.96	QP	274	1.8	V	-11.62	-9.66	46.00	-55.66
4520.35	41.80	PK	43	1.7	H	-2.24	39.56	74.00	-34.44
4520.35	33.06	Ave	43	1.7	H	-2.24	30.82	54.00	-23.18
5117.49	46.81	PK	144	1.6	H	-1.09	45.72	74.00	-28.28
5117.49	38.65	Ave	144	1.6	H	-1.09	37.56	54.00	-16.44
11400.00	-0.42	PK	338	1.4	H	5.14	4.72	68.20	-63.48
11400.00	36.00	Ave	338	1.4	H	5.14	41.14	54.00	-12.86
802.11n(HT20) U-NII-3 low Channel 5745MHz									
223.45	37.78	QP	100	1.1	H	-11.62	26.16	46.00	-19.84
223.45	53.66	QP	273	1.1	V	-11.62	42.04	46.00	-3.96
4521.54	42.93	PK	77	1.3	H	-2.06	40.87	74.00	-33.13
4521.54	49.05	Ave	77	1.3	H	-2.06	46.99	54.00	-7.01
11490.00	38.35	PK	36	1.1	H	5.93	44.28	68.20	-23.92
11490.00	43.33	Ave	36	1.1	H	5.93	49.26	54.00	-4.74
5368.86	46.38	PK	310	1.4	H	-1.25	45.13	74.00	-28.87
5368.86	39.95	Ave	310	1.4	H	-1.25	38.70	54.00	-15.30
802.11n(HT20) U-NII-3 middle channel 5785MHz									
223.45	38.19	QP	295	1.9	H	-11.62	26.57	46.00	-19.43
223.45	33.03	QP	303	1.2	V	-11.62	21.41	46.00	-24.59
4507.05	46.06	PK	219	1.9	H	-1.89	44.17	74.00	-29.83
4507.05	44.49	Ave	219	1.9	H	-1.89	42.60	54.00	-11.40
11570.00	42.16	PK	90	2.0	H	5.81	47.97	74.00	-26.03
11570.00	35.03	Ave	90	2.0	H	5.81	40.84	54.00	-13.16
5378.03	46.83	PK	189	1.6	H	-1.04	45.79	74.00	-28.21
5378.03	39.99	Ave	189	1.6	H	-1.04	38.95	54.00	-15.05

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-3 High channel 5825MHz									
223.45	37.19	QP	266	1.2	H	-11.62	25.57	46.00	-20.43
223.45	32.94	QP	238	1.6	V	-11.62	21.32	46.00	-24.68
4505.36	45.70	PK	182	1.4	H	-1.97	43.73	74.00	-30.27
4505.36	43.93	Ave	182	1.4	H	-1.97	41.96	54.00	-12.04
11650.00	42.30	PK	89	1.9	H	5.84	48.14	74.00	-25.86
11650.00	35.48	Ave	89	1.9	H	5.84	41.32	54.00	-12.68
5352.16	46.88	PK	109	1.3	H	-1.12	45.76	74.00	-28.24
5352.16	39.77	Ave	109	1.3	H	-1.12	38.65	54.00	-15.35

**Test Frequency: 18GHz~40GHz**

The measurements were more than 20 dB below the limit and not reported.

## 10 Duty cycle

Test Requirement:	47 CFR Part 15C 15.407 and 789033 D02 General UNII Test Procedures New Rules v02r01(December 14, 2017), Section (B)
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	Through Pre-scan, at lowest channel is the worst case. Only the worst case is recorded in the report.

### 10.1 Summary of Test Results

802.11a(HT20) mode(U-NII-1)			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
802.11n(HT20) mode(U-NII-1)			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100


802.11a(HT20) mode(U-NII-2A)			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
52	100	100	100
802.11n(HT20) mode(U-NII-2A)			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
52	100	100	100

802.11a(HT20) mode(U-NII-2C)			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
100	100	100	100
802.11n(HT20) mode(U-NII-2C)			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
100	100	100	100


802.11a(HT20) mode(U-NII-3)			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
149	100	100	100
802.11n(HT20) mode(U-NII-3)			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
149	100	100	100

Test result plots shown as follows:

802.11a U-NII-1 Low channel

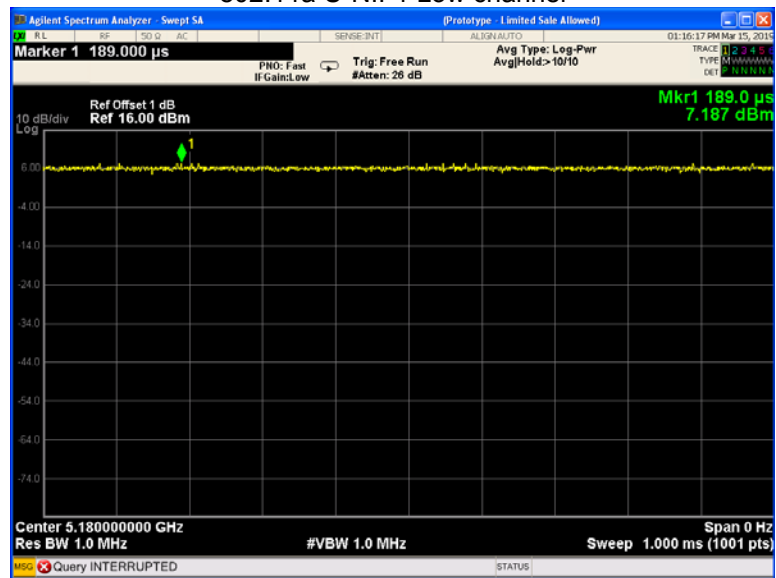


802.11n(HT20) U-NII-1 Low channel

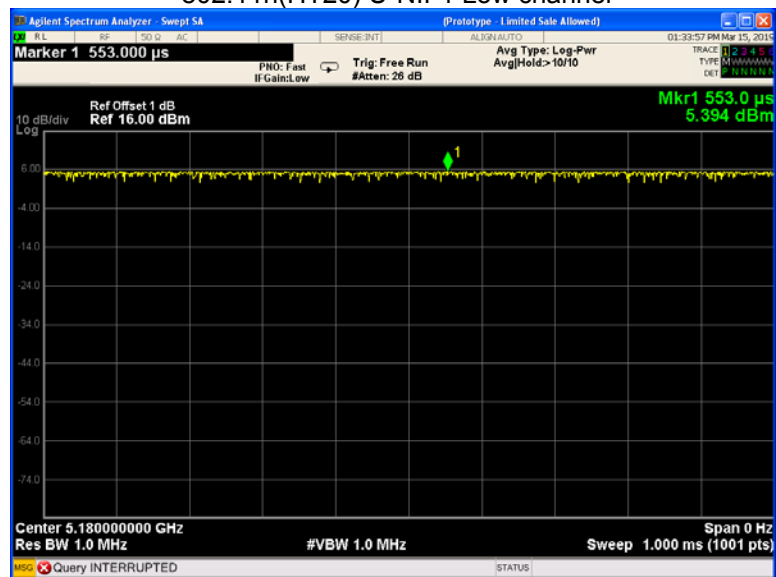





### 802.11a U-NII-2A Low channel

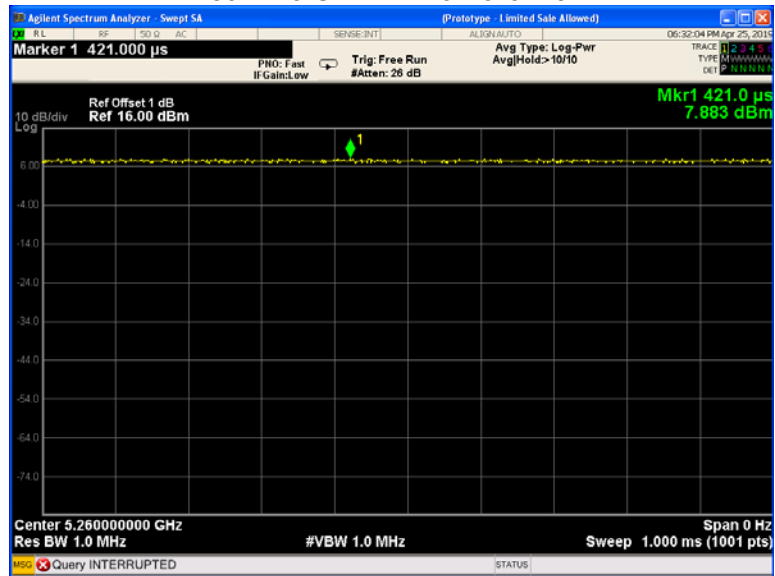


### 802.11n(HT20) U-NII-2A Low channel

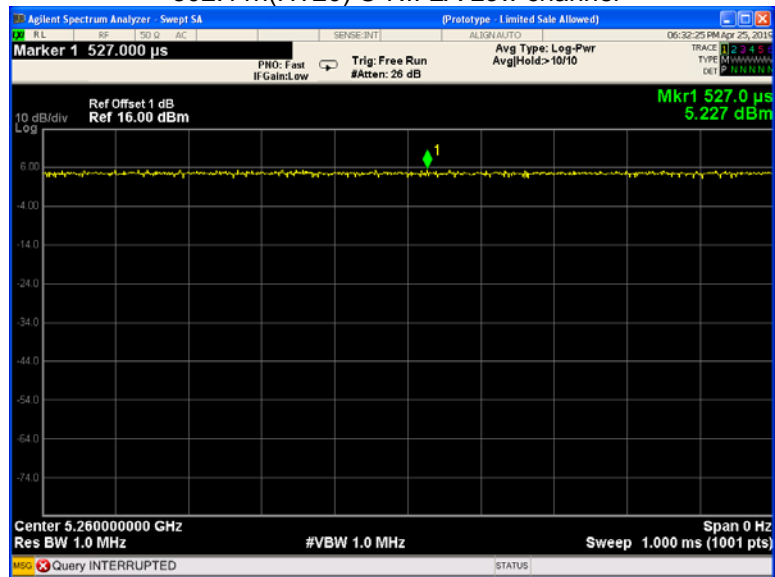


### 802.11a U-NII-2C Low channel

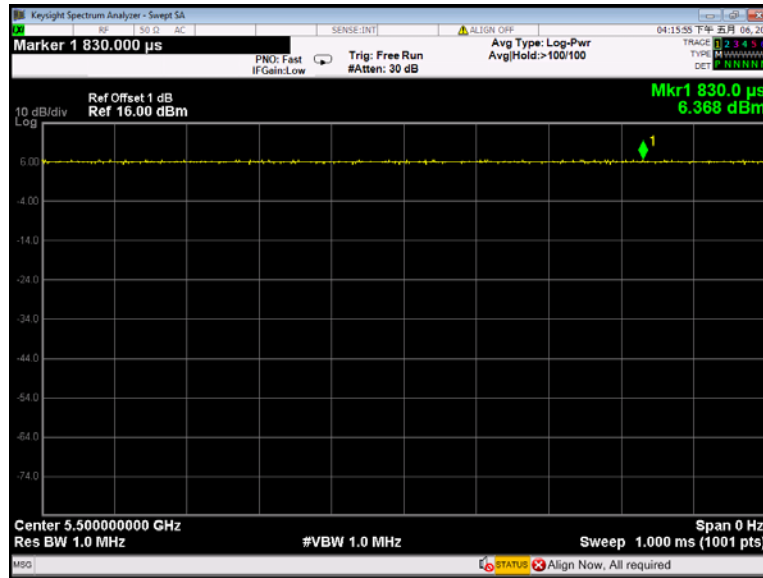


### 802.11n(HT20) U-NII-2C Low channel

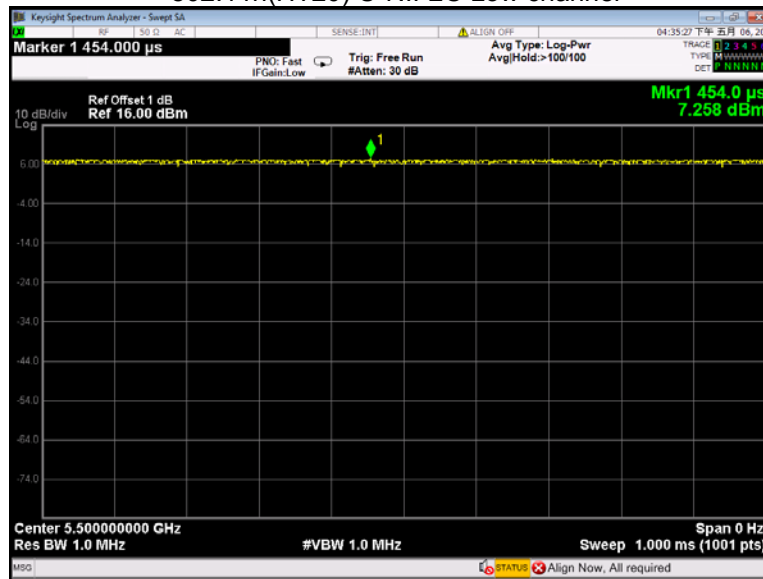

### 802.11a U-NII-3 Low channel

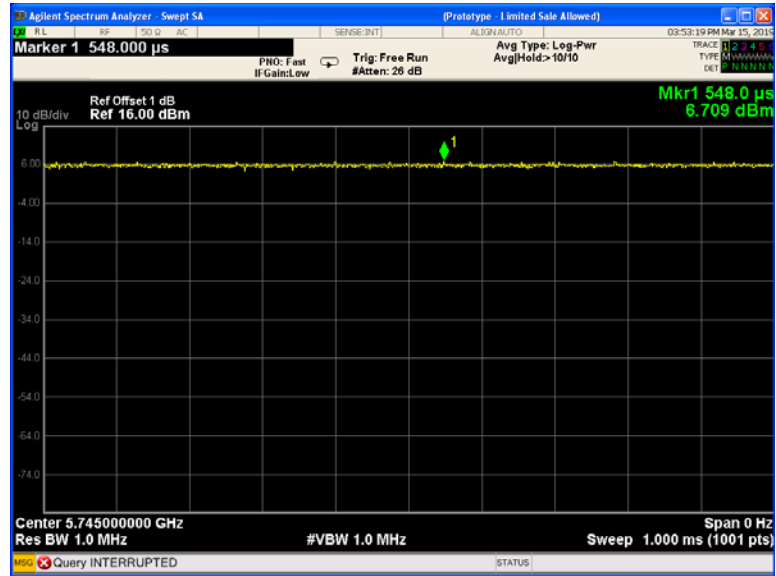

### 802.11n(HT20) U-NII-3 Low channel

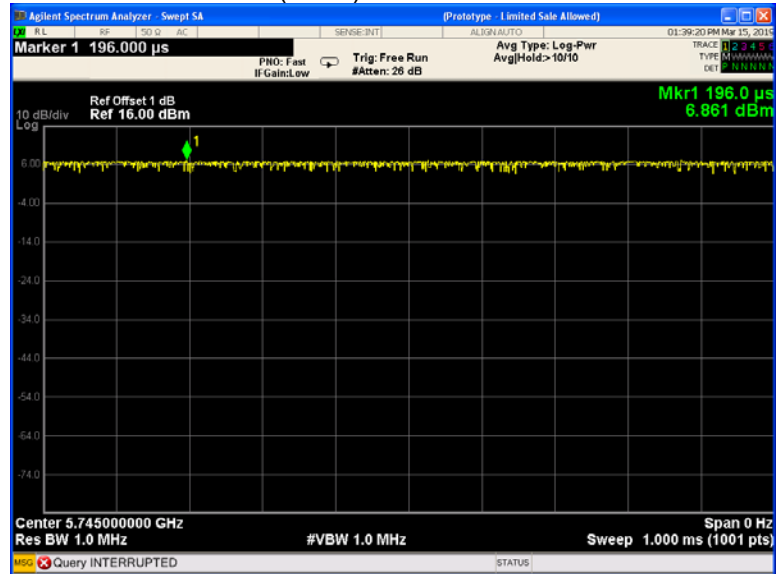

## 11 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2013
Test Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
Test Result:	PASS


### 11.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


### 11.2 Test Result

Test result plots shown as follows:


802.11a U-NII-1 Band edge-left side

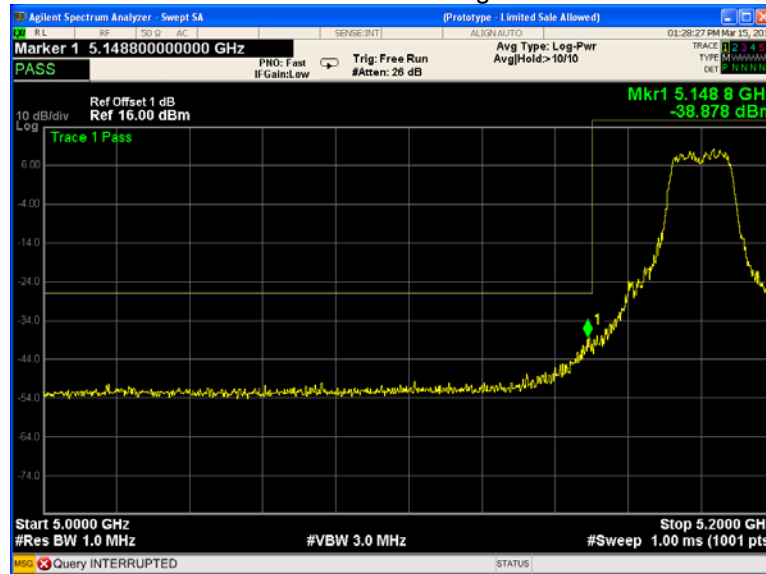


802.11a U-NII-1 Band edge-right side

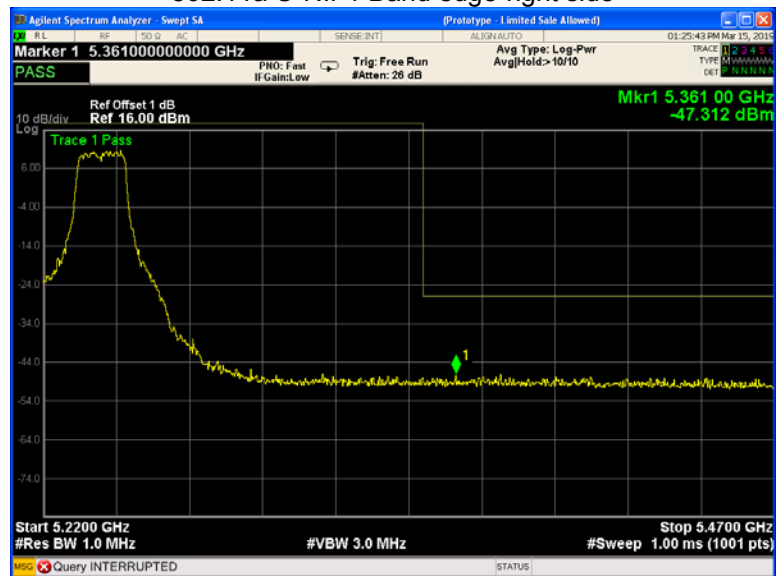


802.11a U-NII-2A Band edge-left side

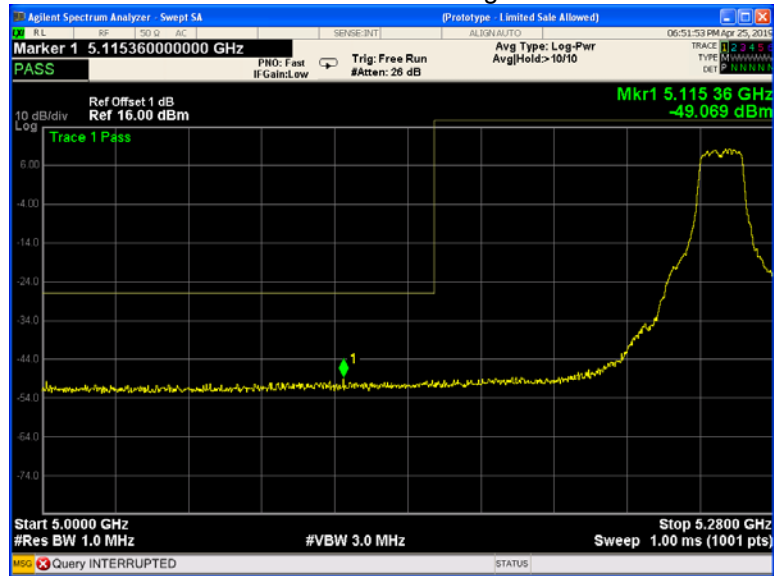


802.11a U-NII-2A Band edge-right side

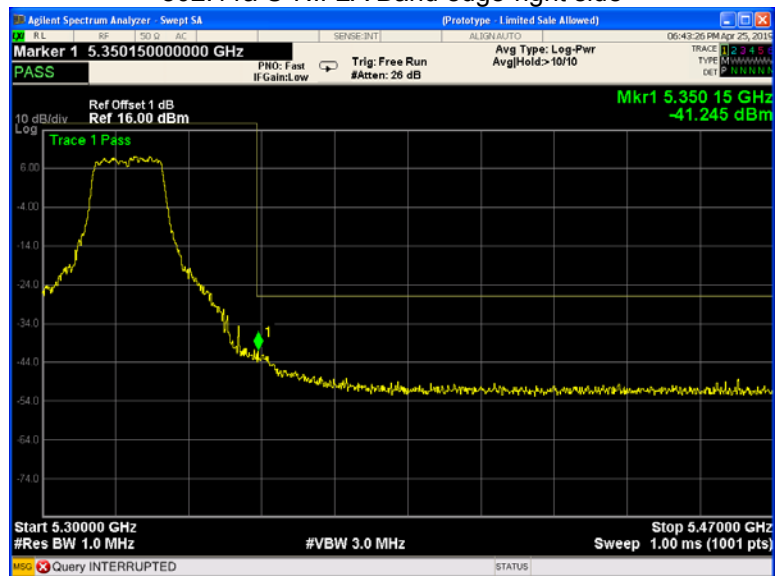


### 802.11a U-NII-2C Band edge-left side

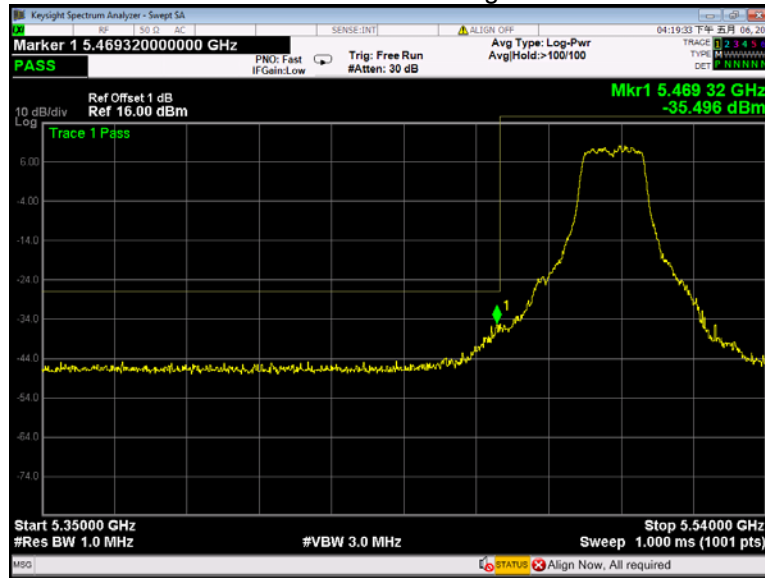


### 802.11a U-NII-2C Band edge-right side

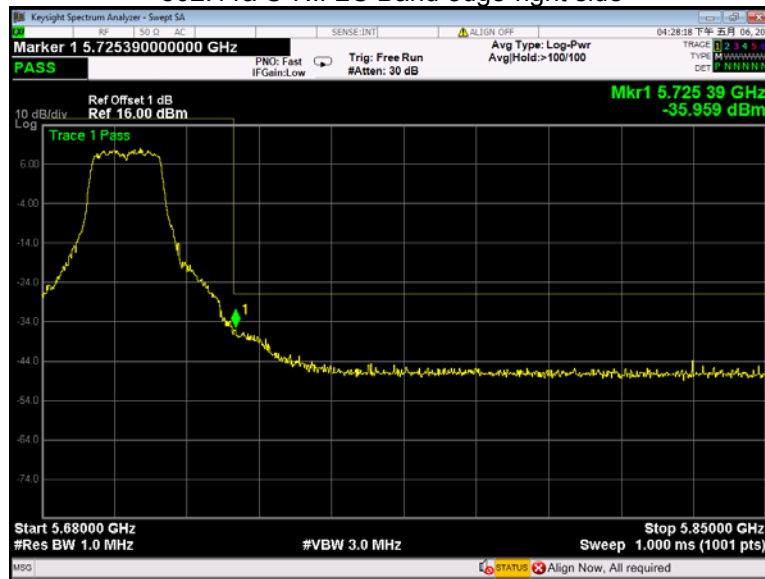

### 802.11a U-NII-3 Band edge-left side

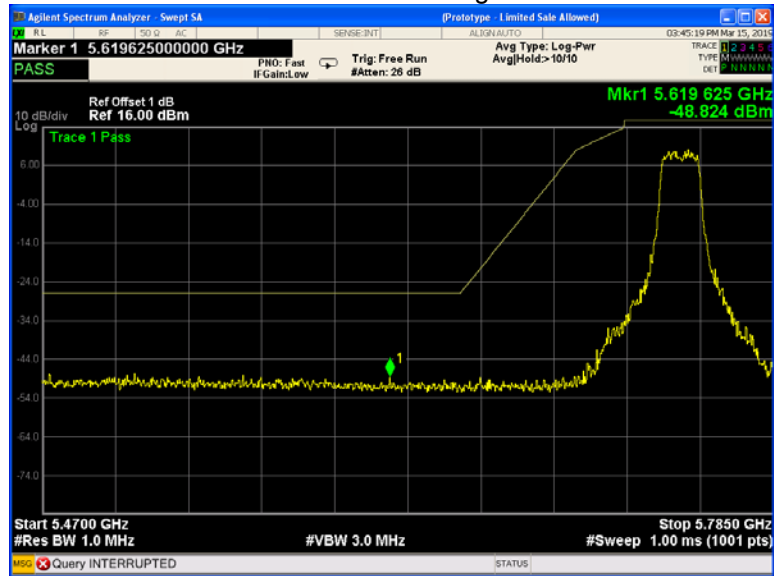


### 802.11a U-NII-3 Band edge-right side

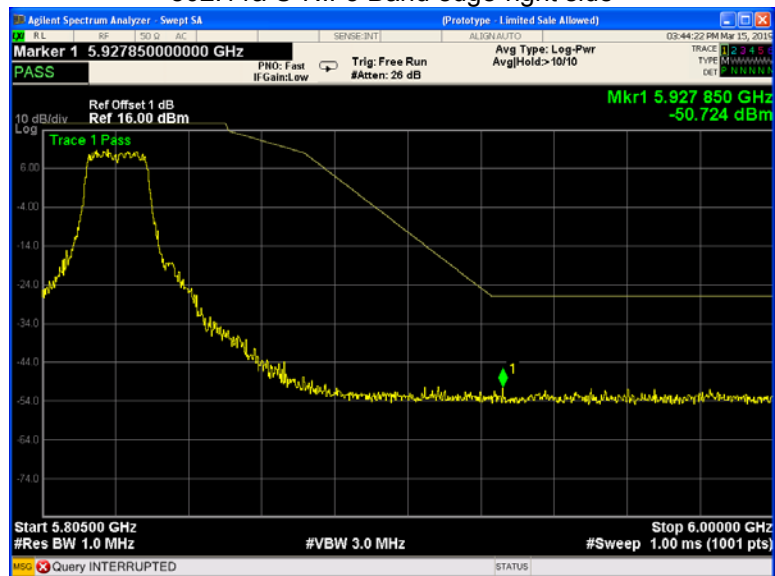





### 802.11n(HT20) U-NII-1 Band edge-left side

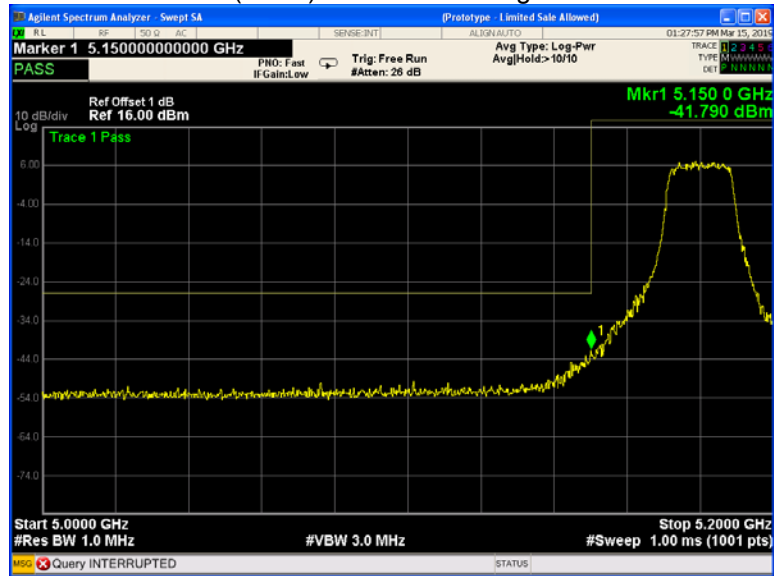


### 802.11n(HT20) U-NII-1 Band edge-right side

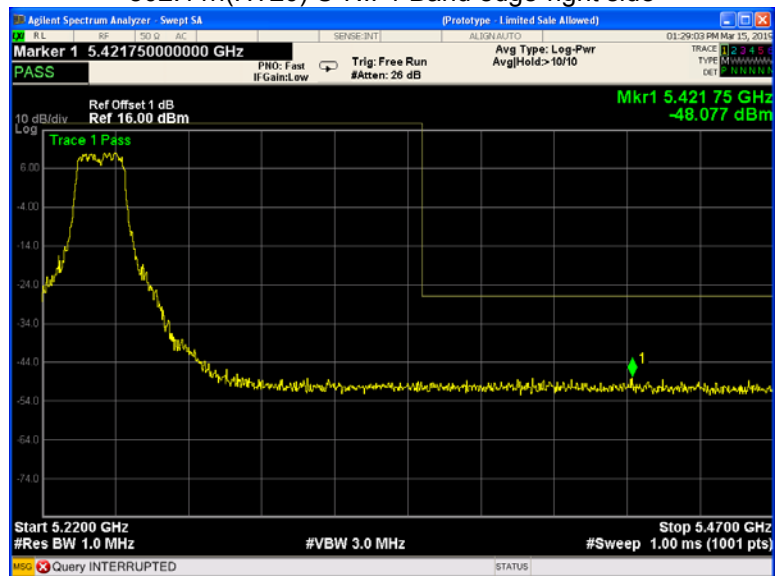


### 802.11n(HT20) U-NII-2A Band edge-left side

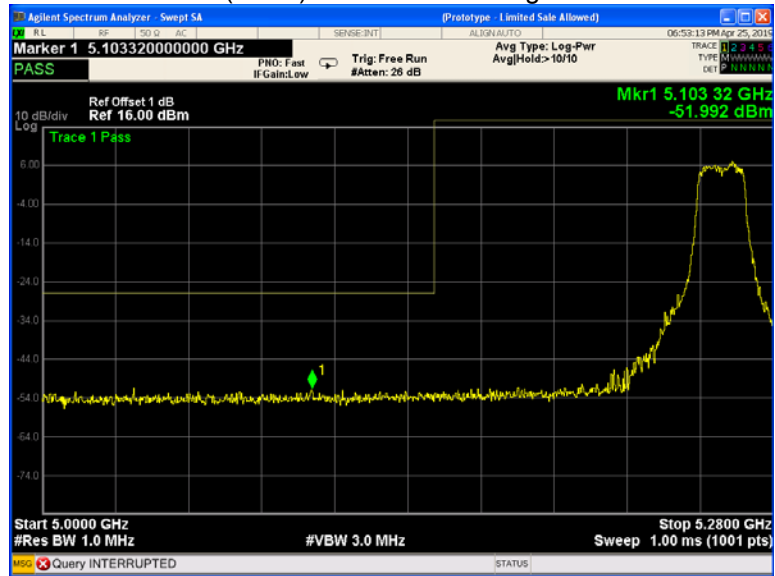


### 802.11n(HT20) U-NII-2A Band edge-right side

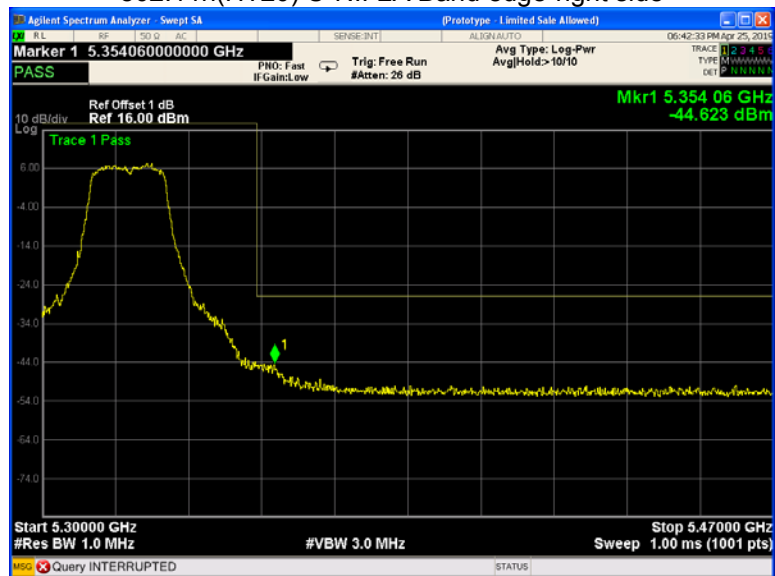


802.11n(HT20) U-NII-2C Band edge-left side

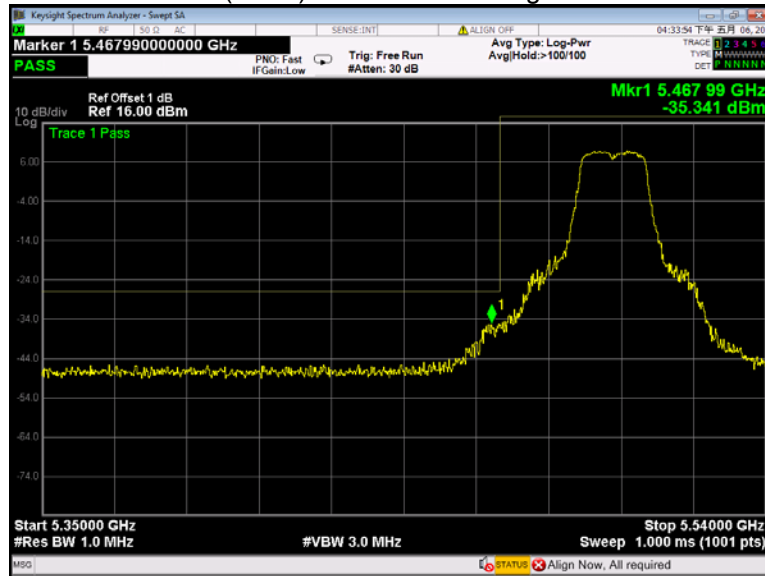


802.11n(HT20) U-NII-2C Band edge-right side

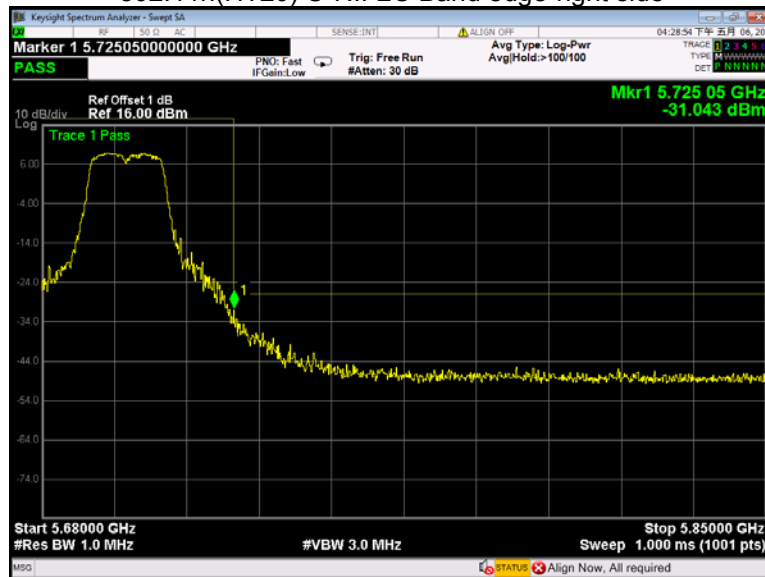

### 802.11n(HT20) U-NII-3 Band edge-left side

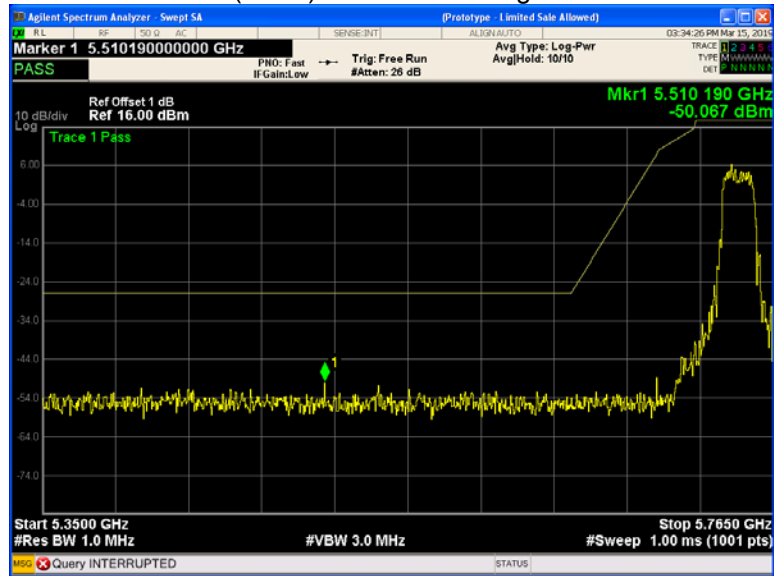

### 802.11n(HT20) U-NII-3 Band edge-right side

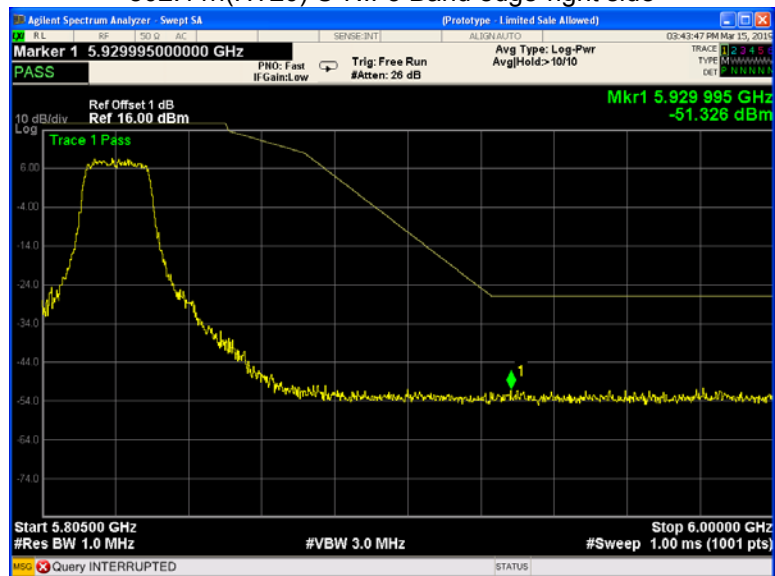

## 12 6 dB Bandwidth

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 (December 14, 2017) Section C
Test Limit:	≥ 500 kHz
Test Result:	PASS

### 12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 12.2 Test Result:


Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
U-NII-3	802.11a	16.40	16.43	16.43
	802.11n(HT20)	17.28	17.31	16.99

Test result plots shown as follows:


802.11a U-NII-3 Low channel

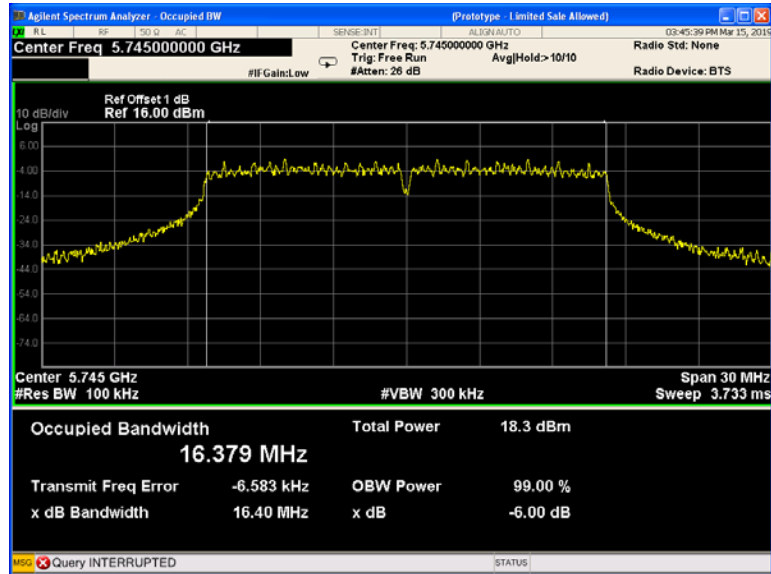


802.11a U-NII-3 Middle channel

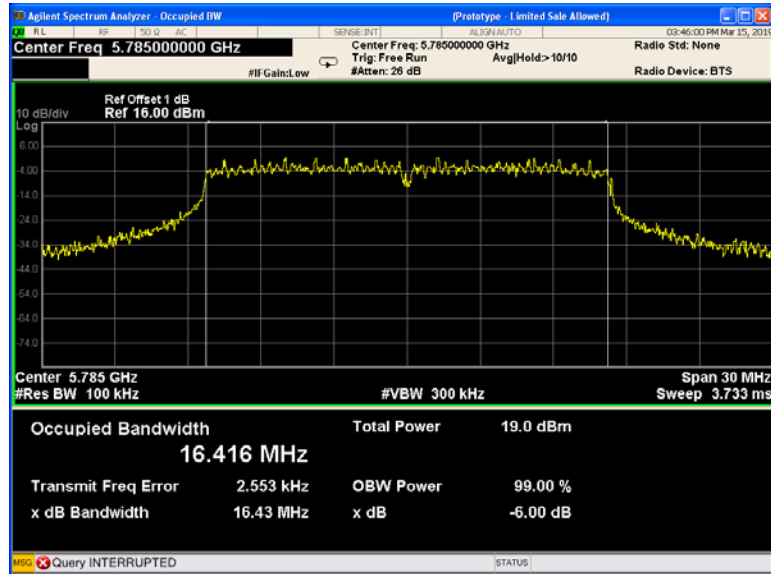


### 802.11a U-NII-3 High channel

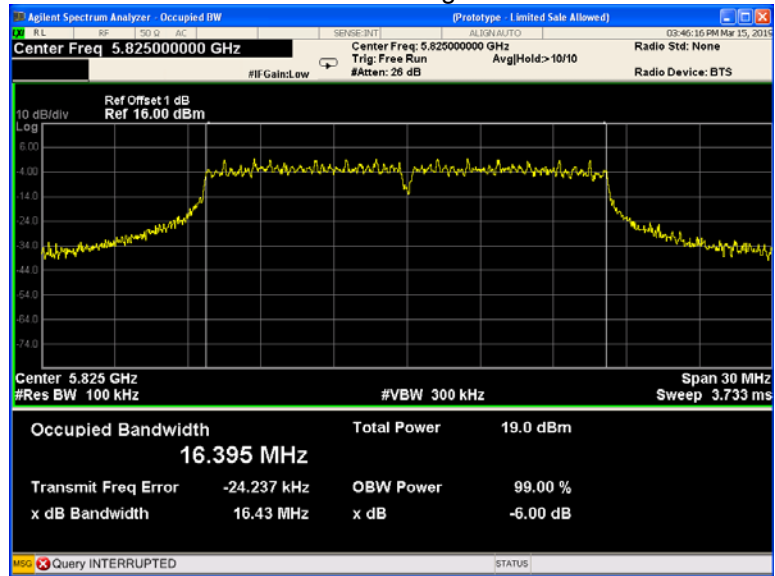


### 802.11n(HT20) U-NII-3 Low channel

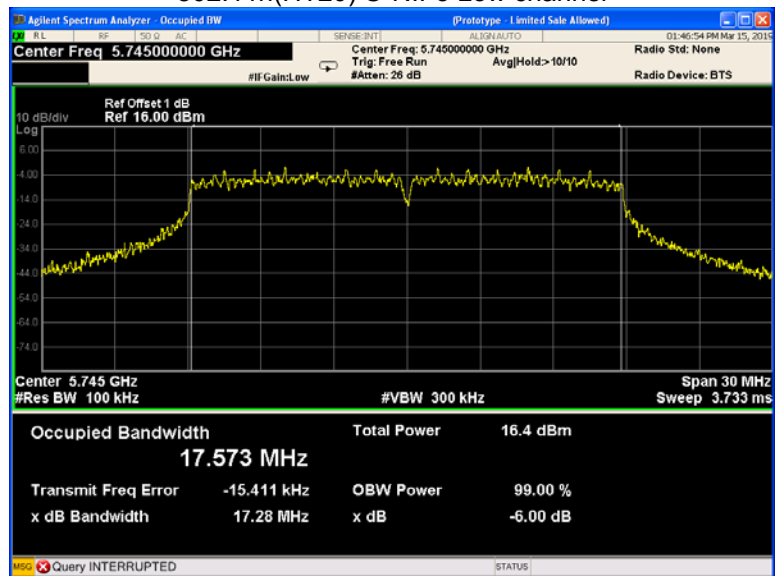

802.11n(HT20) U-NII-3 Middle channel

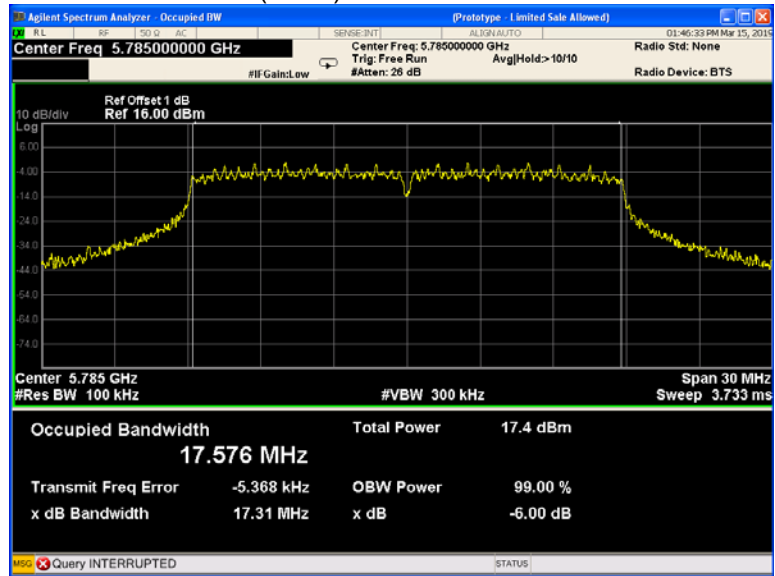

802.11n(HT20) U-NII-3 High channel

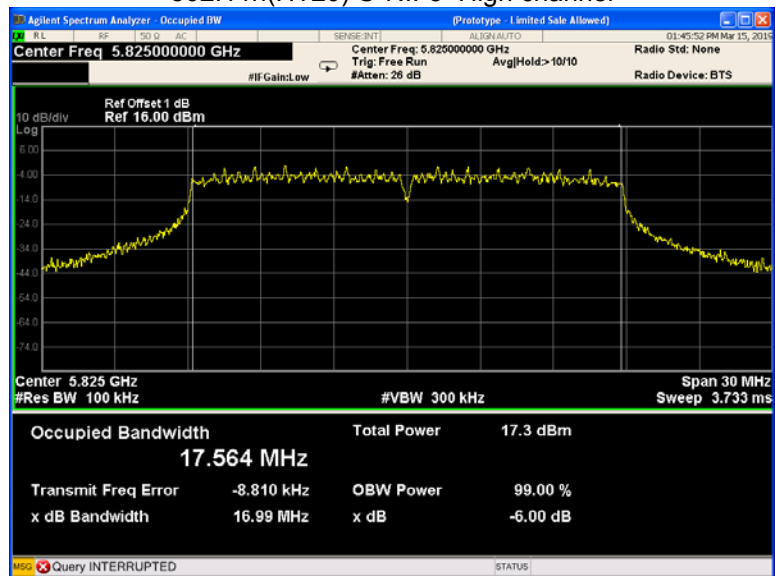



### **13 26 dB Bandwidth and 99% Occupied Bandwidth**

Test Requirement:	47 CFR Part 15C Section 15.407 (a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 (December 14, 2017)Section D
Test Limit:	No restriction limits
Test Result:	PASS

#### **13.1 Test Procedure:**


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

**13.2 Test Result:**


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	21.70	21.99	20.37	16.470	16.445	14.463
	802.11n(HT20)	21.39	21.12	21.15	17.631	17.614	17.631
U-NII-2A	802.11a	22.29	21.76	21.25	16.481	16.488	16.462
	802.11n(HT20)	21.21	20.87	21.36	17.619	17.617	17.575
U-NII-2C	802.11a	21.28	21.21	21.61	16.470	16.489	16.457
	802.11n(HT20)	22.16	23.72	22.11	17.674	17.682	17.675
U-NII-3	802.11a	20.87	21.24	21.43	16.463	16.486	16.474
	802.11n(HT20)	21.57	21.56	20.86	17.615	17.623	17.627

Test result plots shown as follows:


802.11a U-NII-1 Low channel

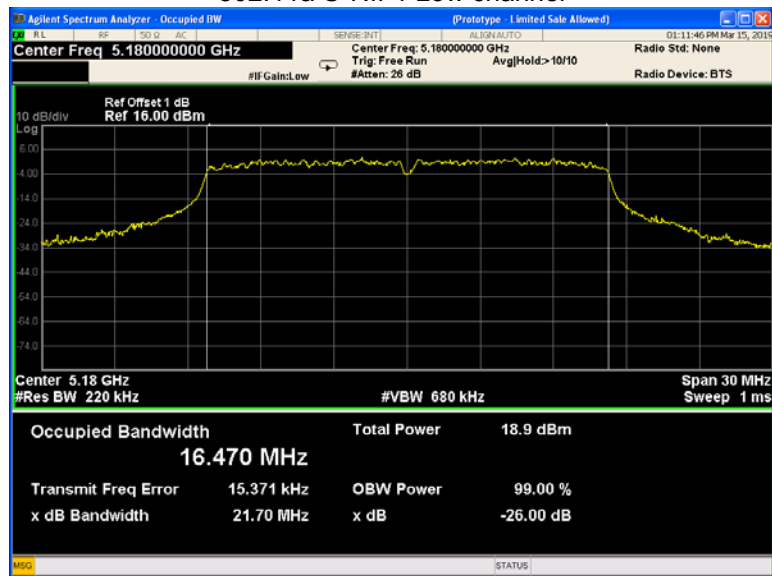


802.11a U-NII-1 Middle channel

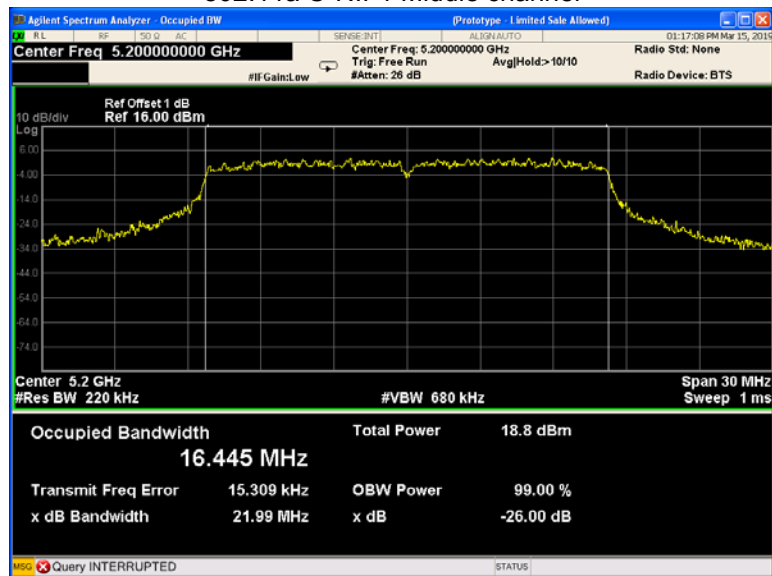


802.11a U-NII-1 High channel

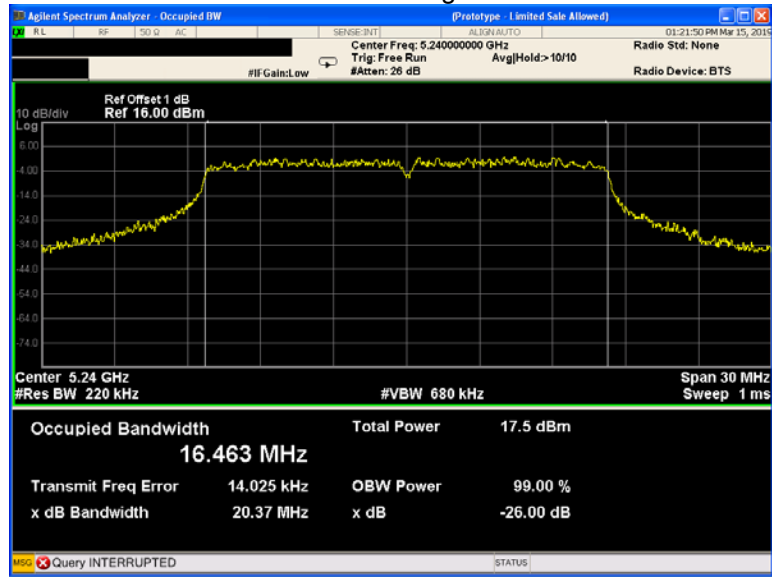


802.11n(HT20) U-NII-1 Low channel

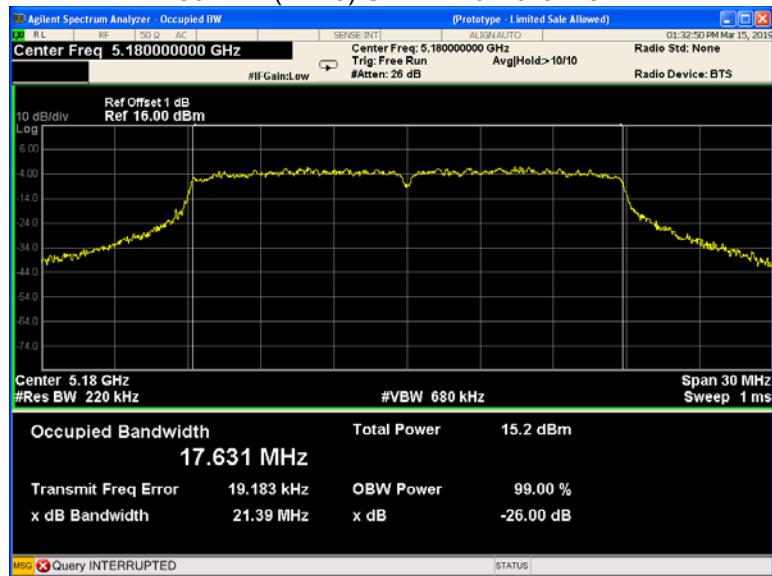


802.11n(HT20) U-NII-1 Middle channel

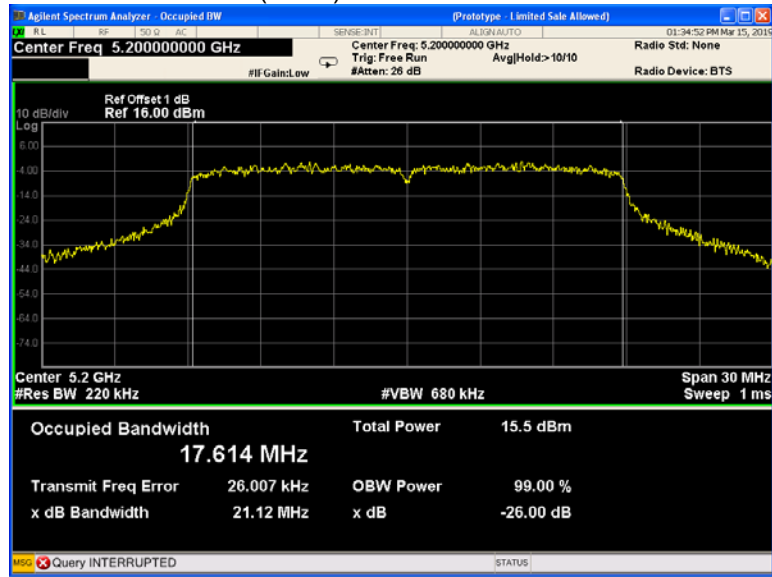


802.11n(HT20) U-NII-1 High channel

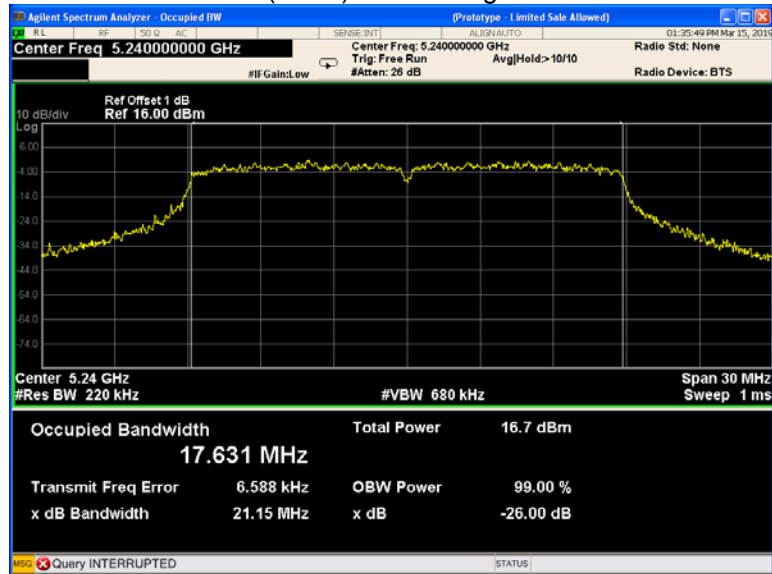


802.11a U-NII-2A Low channel

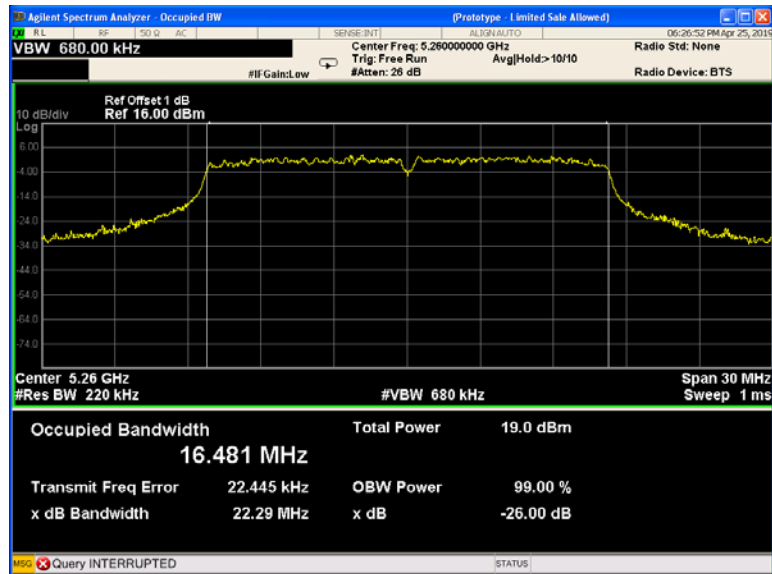


802.11a U-NII-2A Middle channel

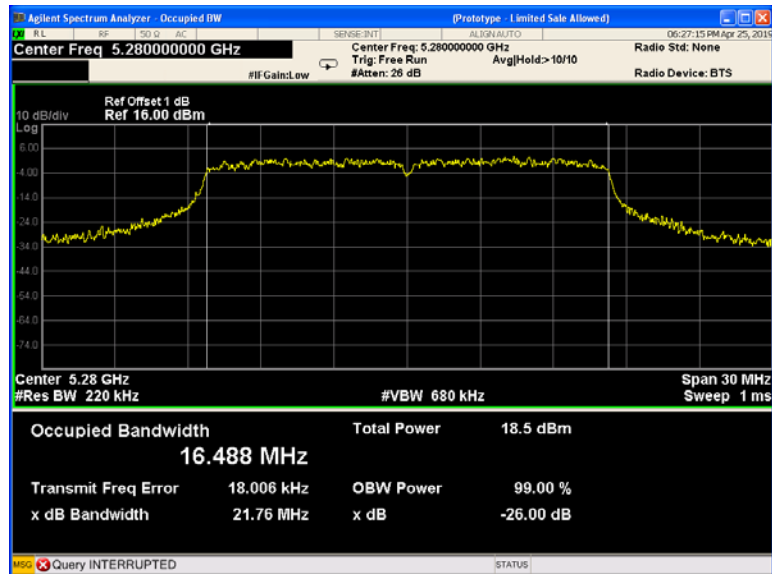


802.11a U-NII-2A High channel

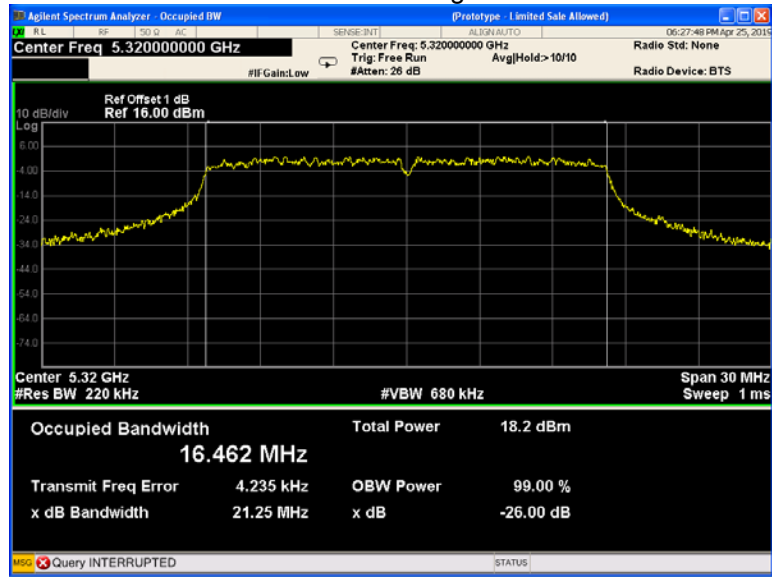


802.11n(HT20) U-NII-2A Low channel

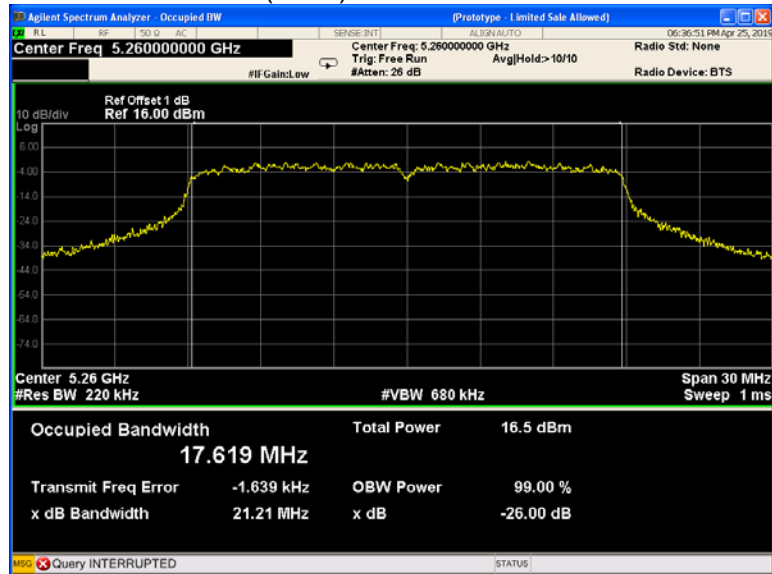

802.11n(HT20) U-NII-2A Middle channel

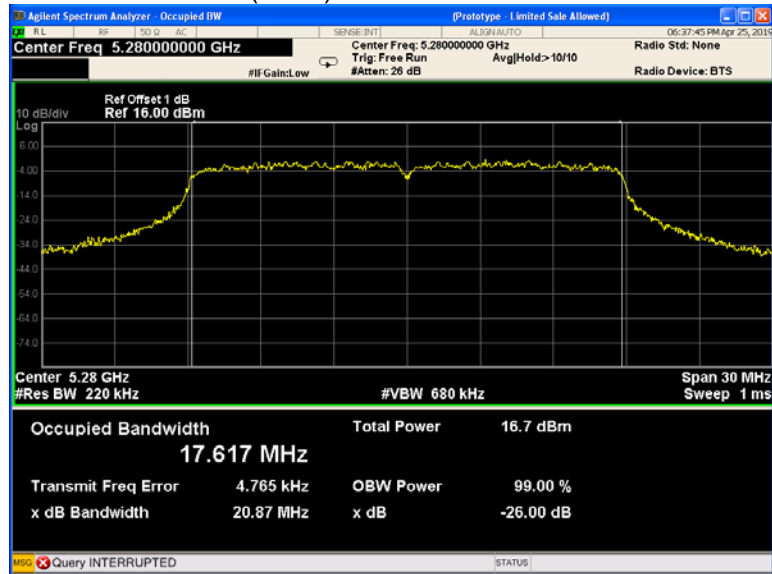


802.11n(HT20) U-NII-2A High channel

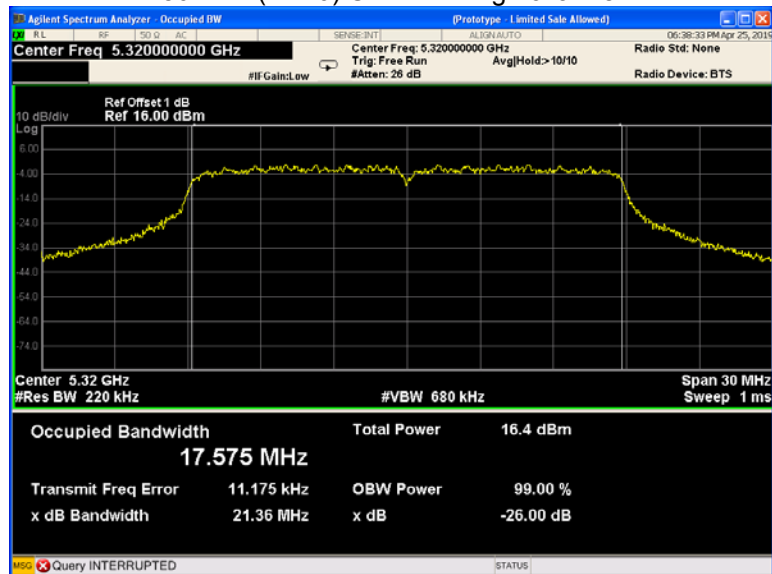





802.11a U-NII-2C Low channel

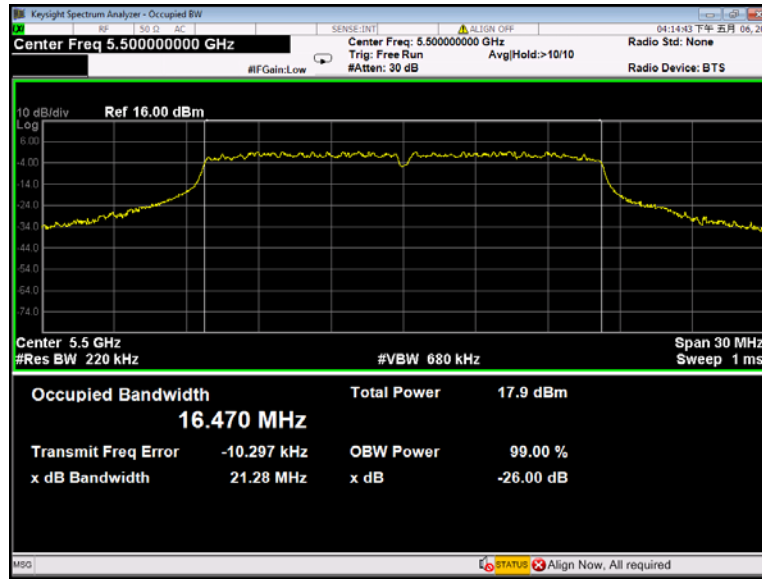


802.11a U-NII-2C Middle channel

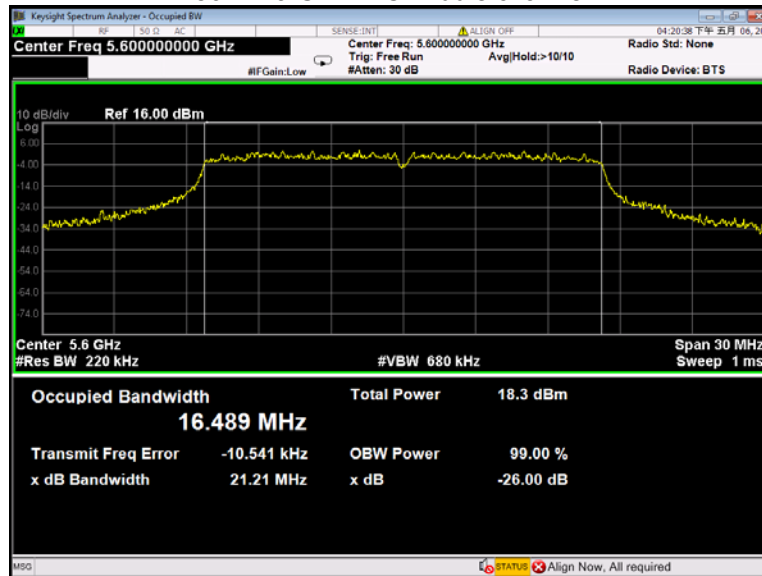


802.11a U-NII-2C High channel

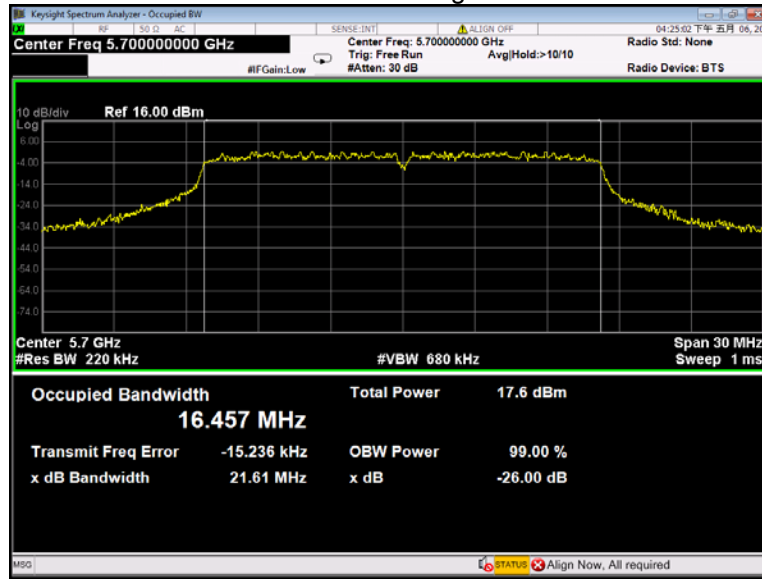

802.11n(HT20) U-NII-2C Low channel

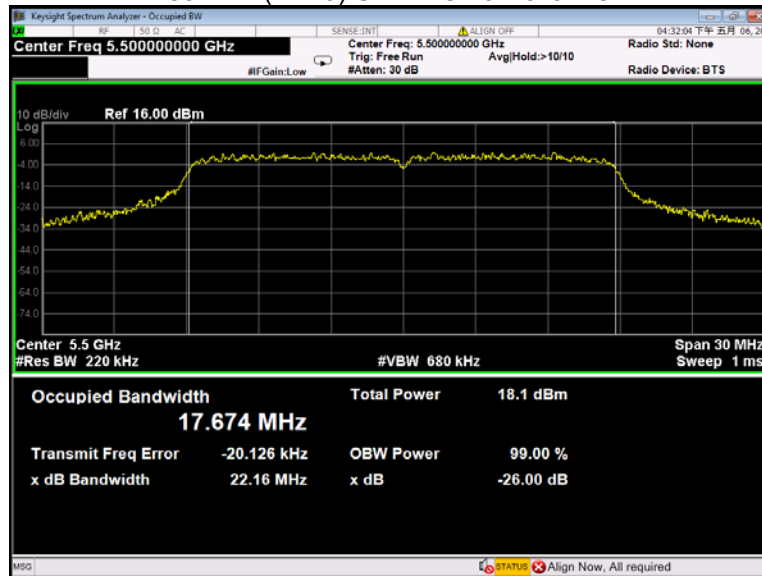

802.11n(HT20) U-NII-2C Middle channel

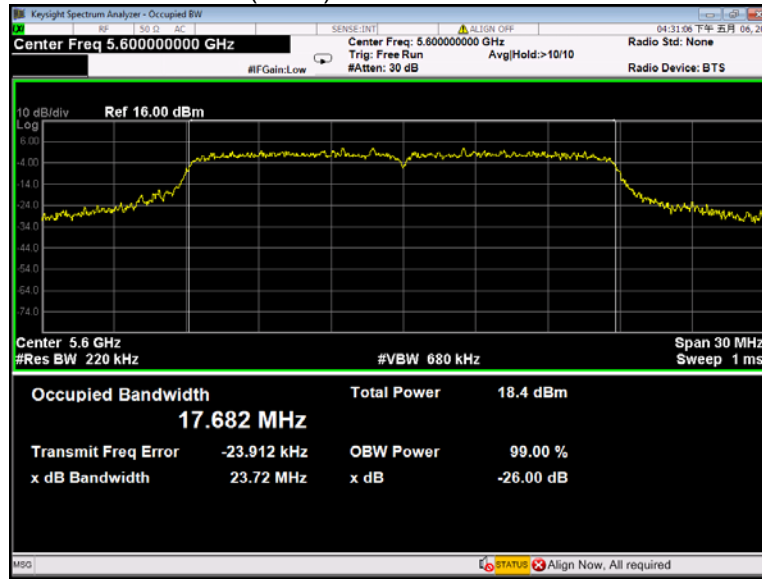

802.11n(HT20) U-NII-2C High channel

