


Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

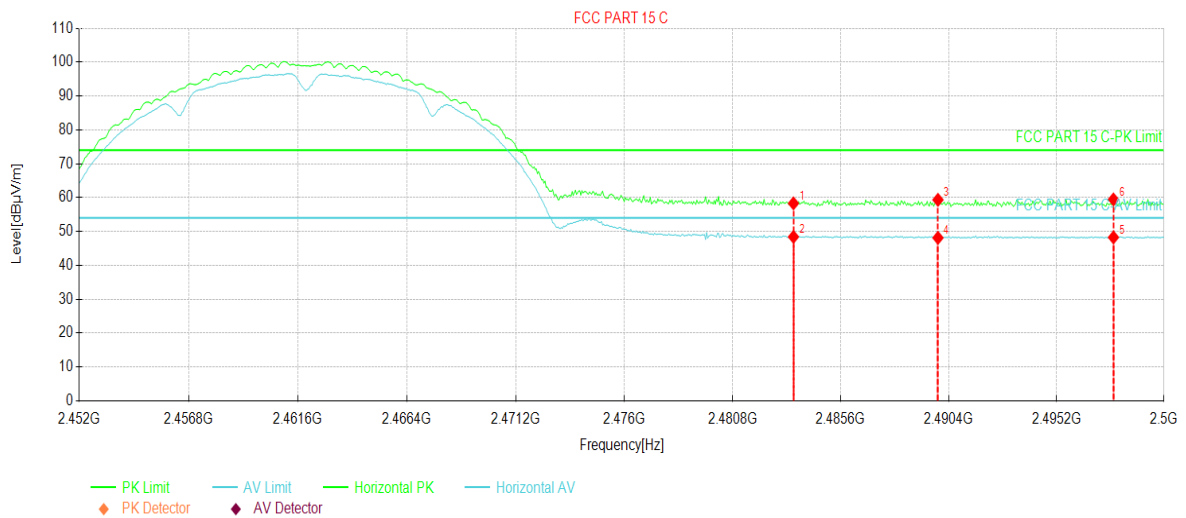


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.79	35.51	58.30	74.00	15.70	PK	Horizontal
2	2483.50	12.91	35.51	48.42	54.00	5.58	AV	Horizontal
3	2489.92	23.85	35.50	59.35	74.00	14.65	PK	Horizontal
4	2489.92	12.63	35.50	48.13	54.00	5.87	AV	Horizontal
5	2497.74	12.79	35.48	48.27	54.00	5.73	AV	Horizontal
6	2497.74	23.98	35.48	59.46	74.00	14.54	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

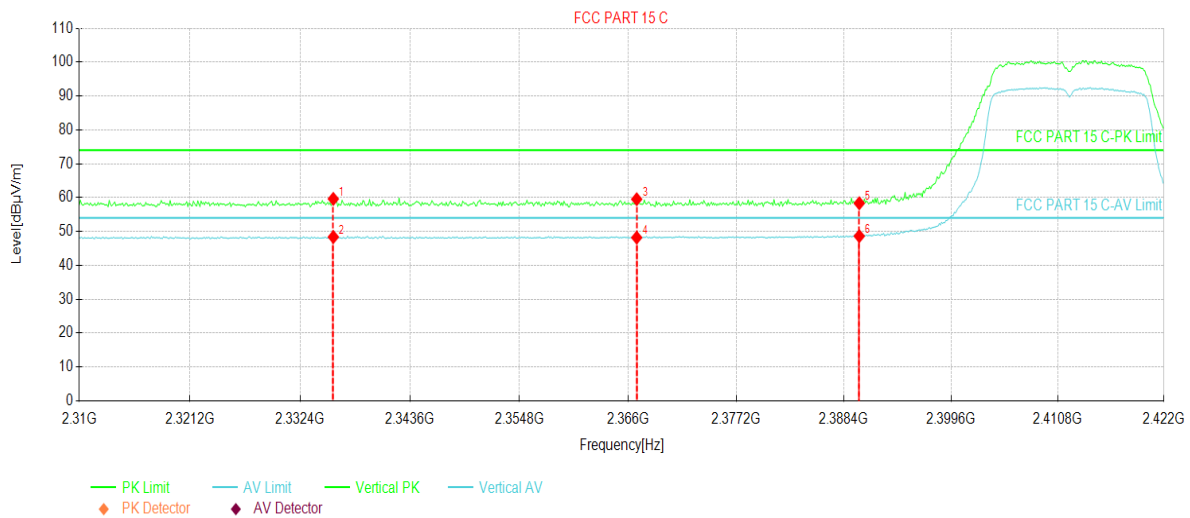


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2335.76	24.44	35.19	59.63	74.00	14.37	PK	Vertical
2	2335.76	13.19	35.19	48.38	54.00	5.62	AV	Vertical
3	2366.89	24.10	35.42	59.52	74.00	14.48	PK	Vertical
4	2366.89	12.79	35.42	48.21	54.00	5.79	AV	Vertical
5	2390.00	22.75	35.60	58.35	74.00	15.65	PK	Vertical
6	2390.00	13.04	35.60	48.64	54.00	5.36	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

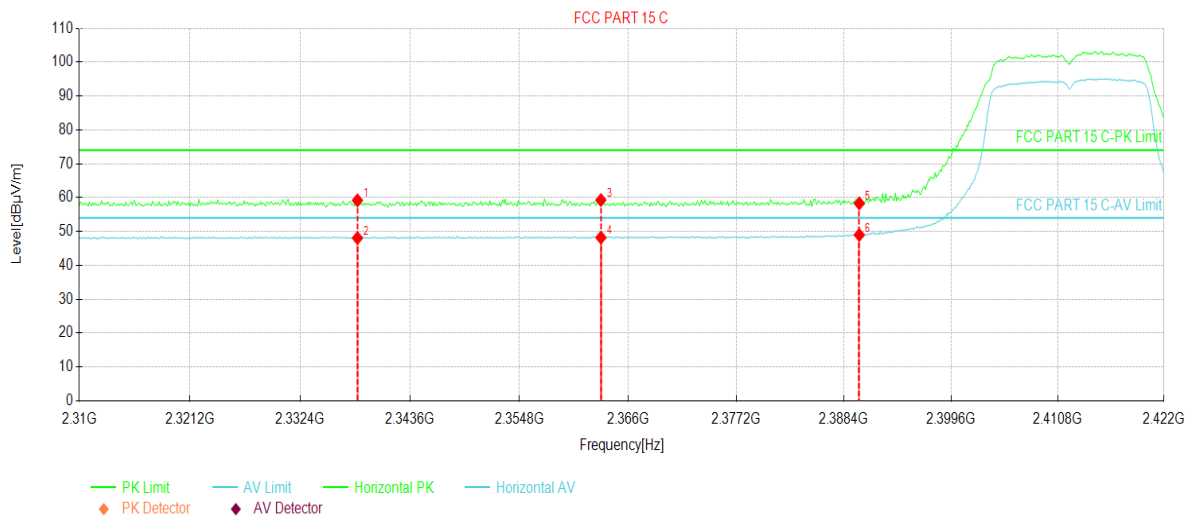


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2338.22	23.98	35.21	59.19	74.00	14.81	PK	Horizontal
2	2338.22	12.87	35.21	48.08	54.00	5.92	AV	Horizontal
3	2363.20	23.89	35.39	59.28	74.00	14.72	PK	Horizontal
4	2363.20	12.81	35.39	48.20	54.00	5.80	AV	Horizontal
5	2390.00	22.70	35.60	58.30	74.00	15.70	PK	Horizontal
6	2390.00	13.38	35.60	48.98	54.00	5.02	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

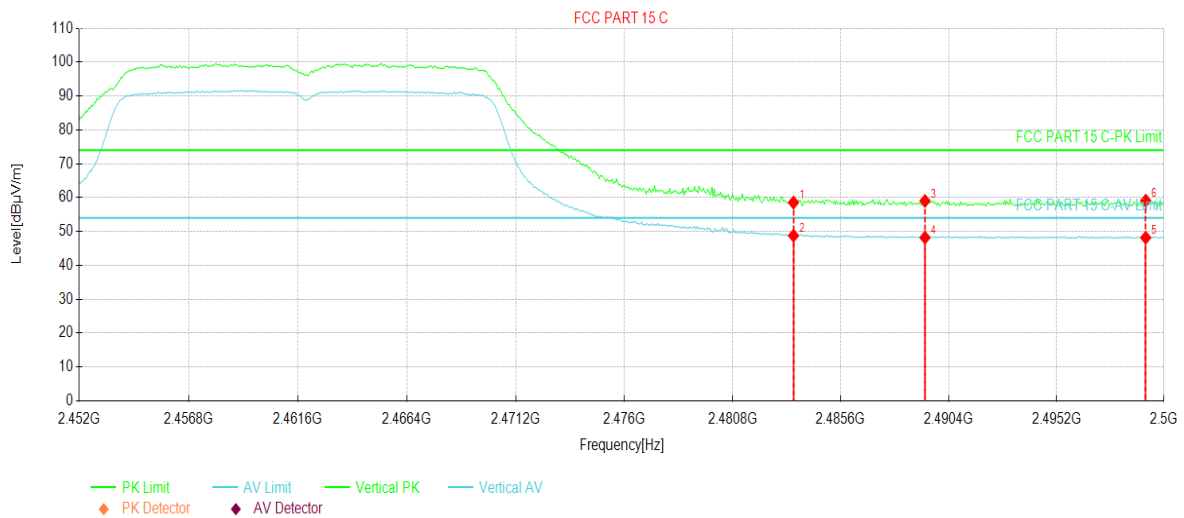


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.03	35.51	58.54	74.00	15.46	PK	Vertical
2	2483.50	13.27	35.51	48.78	54.00	5.22	AV	Vertical
3	2489.34	23.53	35.50	59.03	74.00	14.97	PK	Vertical
4	2489.34	12.70	35.50	48.20	54.00	5.80	AV	Vertical
5	2499.18	12.69	35.48	48.17	54.00	5.83	AV	Vertical
6	2499.18	23.61	35.48	59.09	74.00	14.91	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

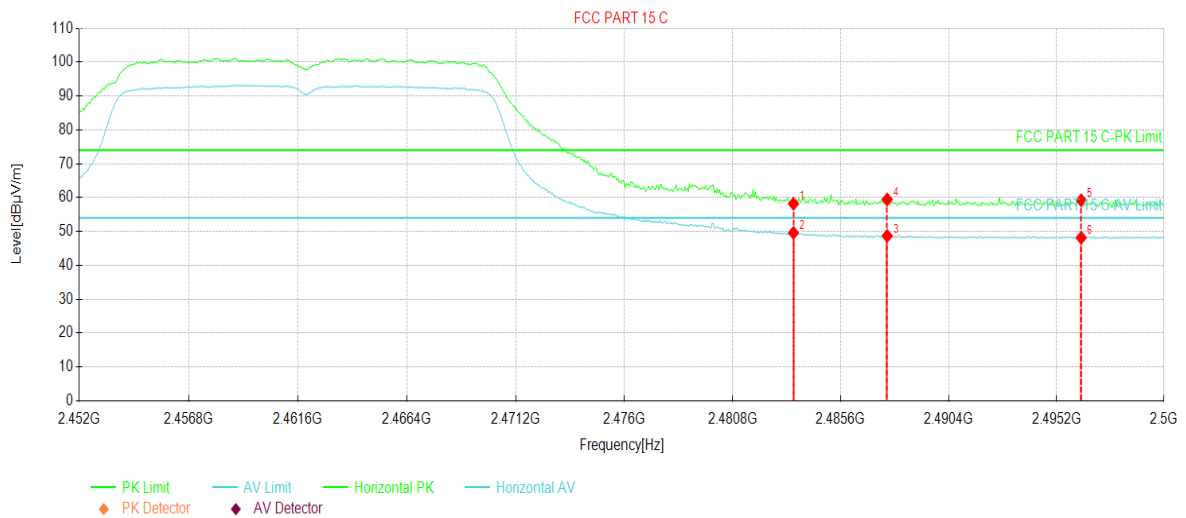


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.69	35.51	58.20	74.00	15.80	PK	Horizontal
2	2483.50	14.09	35.51	49.60	54.00	4.40	AV	Horizontal
3	2487.66	13.19	35.50	48.69	54.00	5.31	AV	Horizontal
4	2487.66	23.97	35.50	59.47	74.00	14.53	PK	Horizontal
5	2496.30	23.74	35.49	59.23	74.00	14.77	PK	Horizontal
6	2496.30	12.65	35.49	48.14	54.00	5.86	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

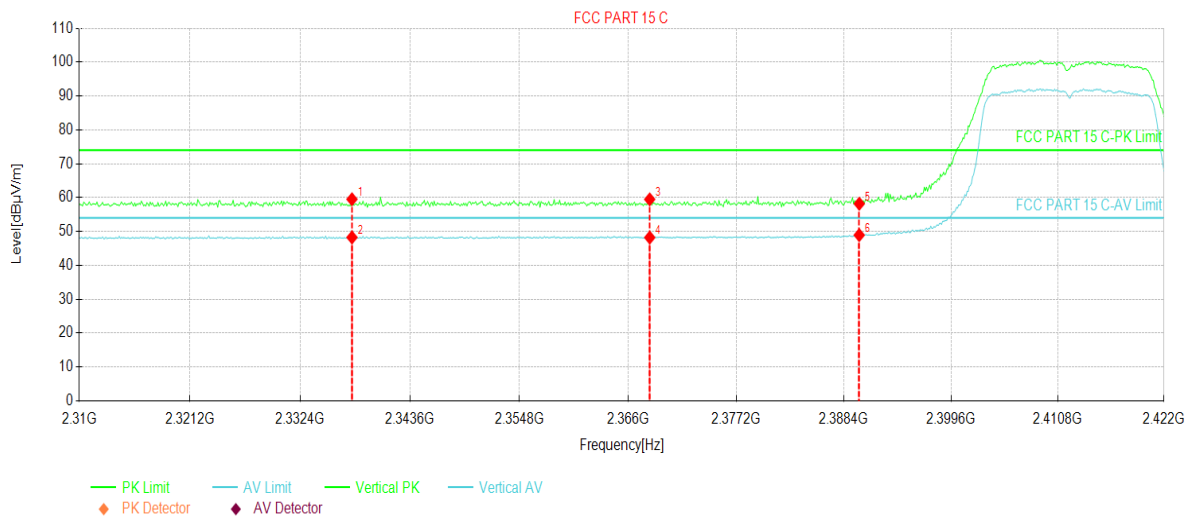


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2337.66	24.32	35.20	59.52	74.00	14.48	PK	Vertical
2	2337.66	13.06	35.20	48.26	54.00	5.74	AV	Vertical
3	2368.24	24.06	35.43	59.49	74.00	14.51	PK	Vertical
4	2368.24	12.79	35.43	48.22	54.00	5.78	AV	Vertical
5	2390.00	22.59	35.60	58.19	74.00	15.81	PK	Vertical
6	2390.00	13.34	35.60	48.94	54.00	5.06	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

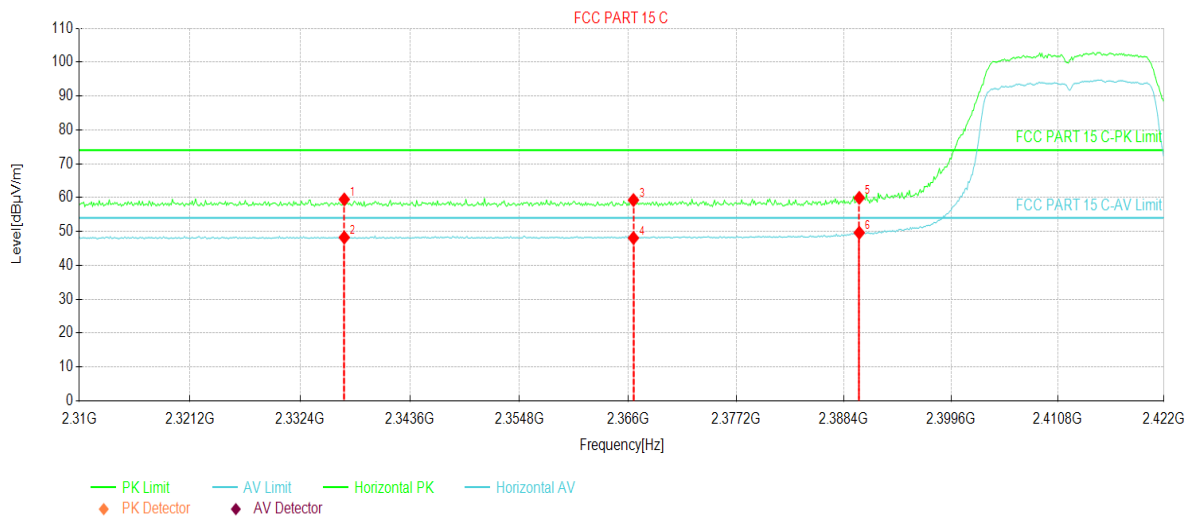


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2336.88	24.27	35.20	59.47	74.00	14.53	PK	Horizontal
2	2336.88	13.03	35.20	48.23	54.00	5.77	AV	Horizontal
3	2366.56	23.85	35.42	59.27	74.00	14.73	PK	Horizontal
4	2366.56	12.66	35.42	48.08	54.00	5.92	AV	Horizontal
5	2390.00	24.34	35.60	59.94	74.00	14.06	PK	Horizontal
6	2390.00	14.04	35.60	49.64	54.00	4.36	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

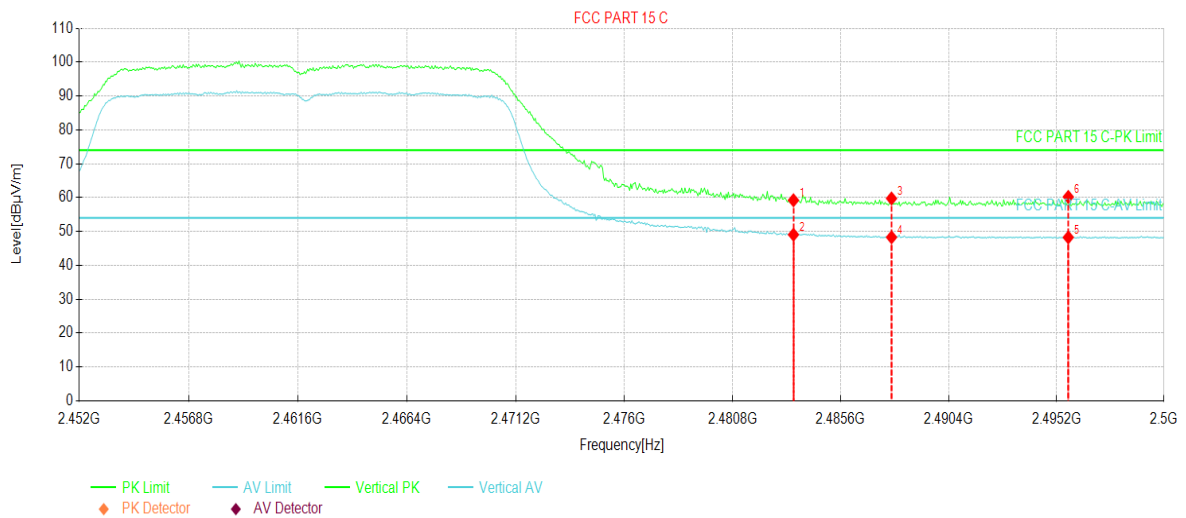


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.72	35.51	59.23	74.00	14.77	PK	Vertical
2	2483.50	13.55	35.51	49.06	54.00	4.94	AV	Vertical
3	2487.85	24.25	35.50	59.75	74.00	14.25	PK	Vertical
4	2487.85	12.79	35.50	48.29	54.00	5.71	AV	Vertical
5	2495.72	12.77	35.49	48.26	54.00	5.74	AV	Vertical
6	2495.72	24.73	35.49	60.22	74.00	13.78	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

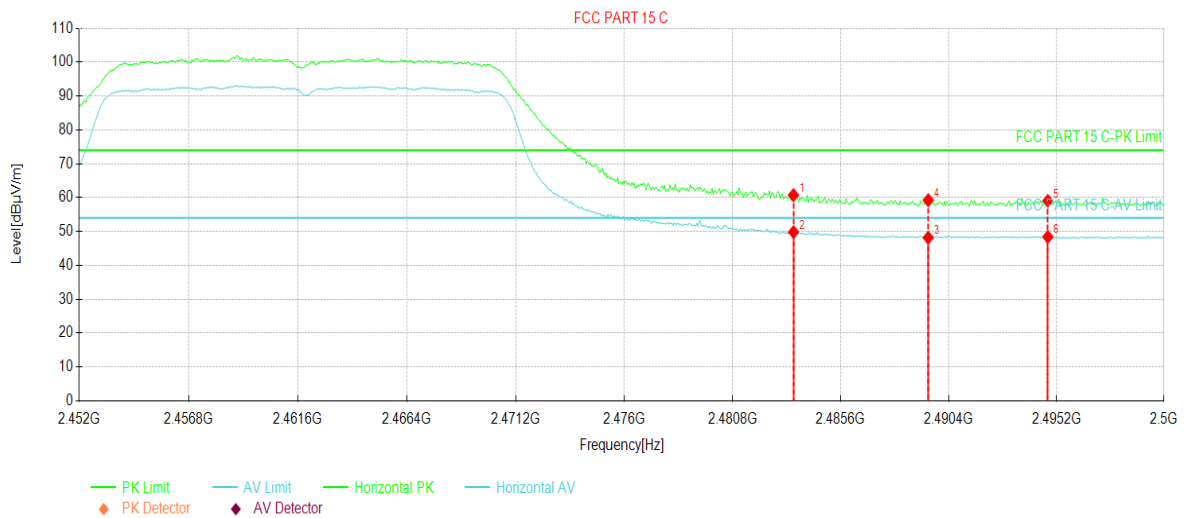


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	25.23	35.51	60.74	74.00	13.26	PK	Horizontal
2	2483.50	14.31	35.51	49.82	54.00	4.18	AV	Horizontal
3	2489.48	12.67	35.50	48.17	54.00	5.83	AV	Horizontal
4	2489.48	23.74	35.50	59.24	74.00	14.76	PK	Horizontal
5	2494.81	23.56	35.49	59.05	74.00	14.95	PK	Horizontal
6	2494.81	12.93	35.49	48.42	54.00	5.58	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

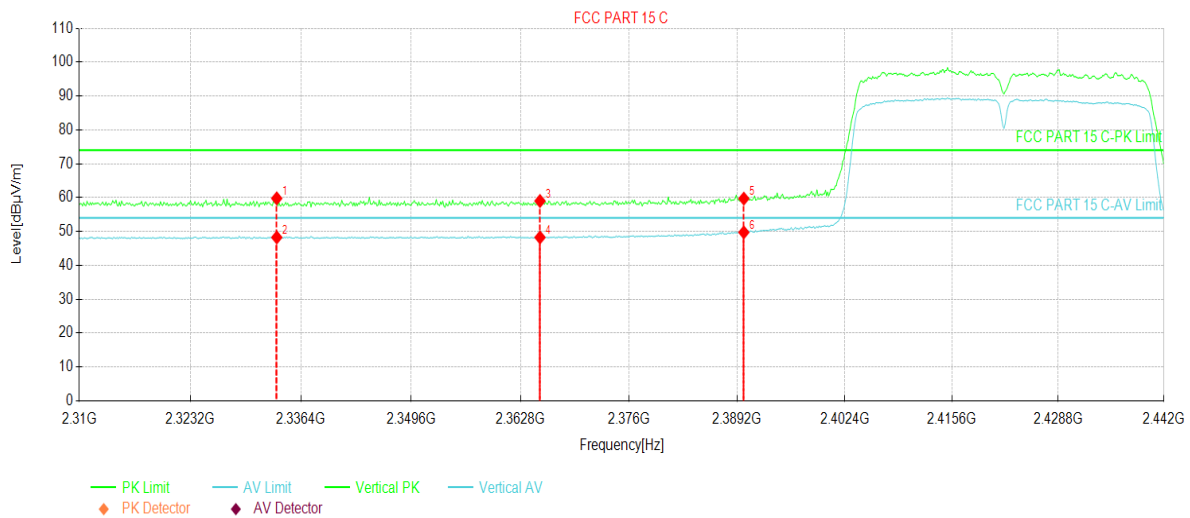


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2333.49	24.61	35.17	59.78	74.00	14.22	PK	Vertical
2	2333.49	13.08	35.17	48.25	54.00	5.75	AV	Vertical
3	2365.17	23.60	35.41	59.01	74.00	14.99	PK	Vertical
4	2365.17	12.85	35.41	48.26	54.00	5.74	AV	Vertical
5	2390.00	24.11	35.60	59.71	74.00	14.29	PK	Vertical
6	2390.00	14.14	35.60	49.74	54.00	4.26	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

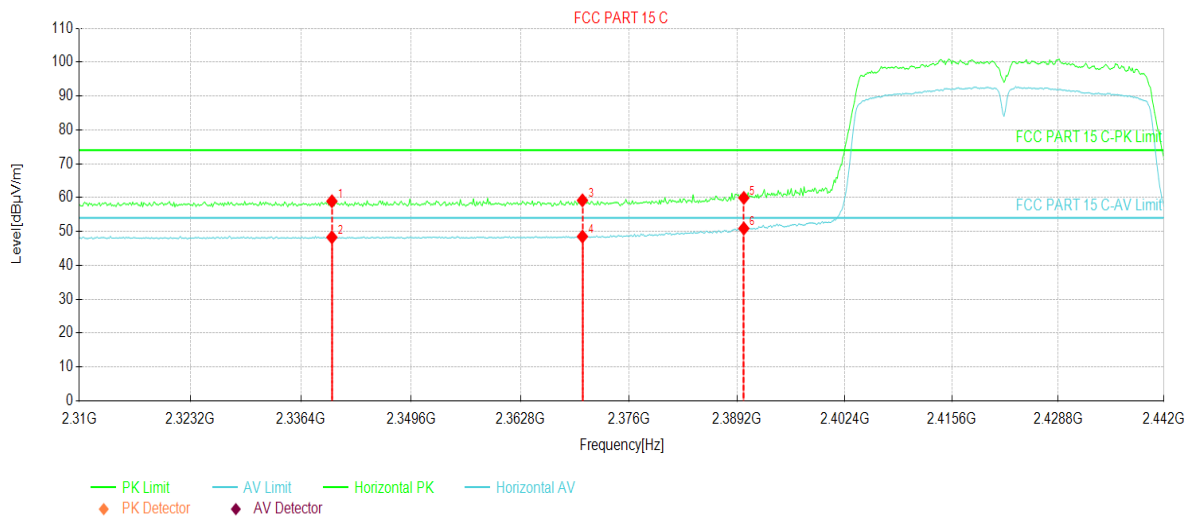


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2340.09	23.70	35.22	58.92	74.00	15.08	PK	Horizontal
2	2340.09	13.07	35.22	48.29	54.00	5.71	AV	Horizontal
3	2370.32	23.75	35.45	59.20	74.00	14.80	PK	Horizontal
4	2370.32	13.06	35.45	48.51	54.00	5.49	AV	Horizontal
5	2390.00	24.32	35.60	59.92	74.00	14.08	PK	Horizontal
6	2390.00	15.30	35.60	50.90	54.00	3.10	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

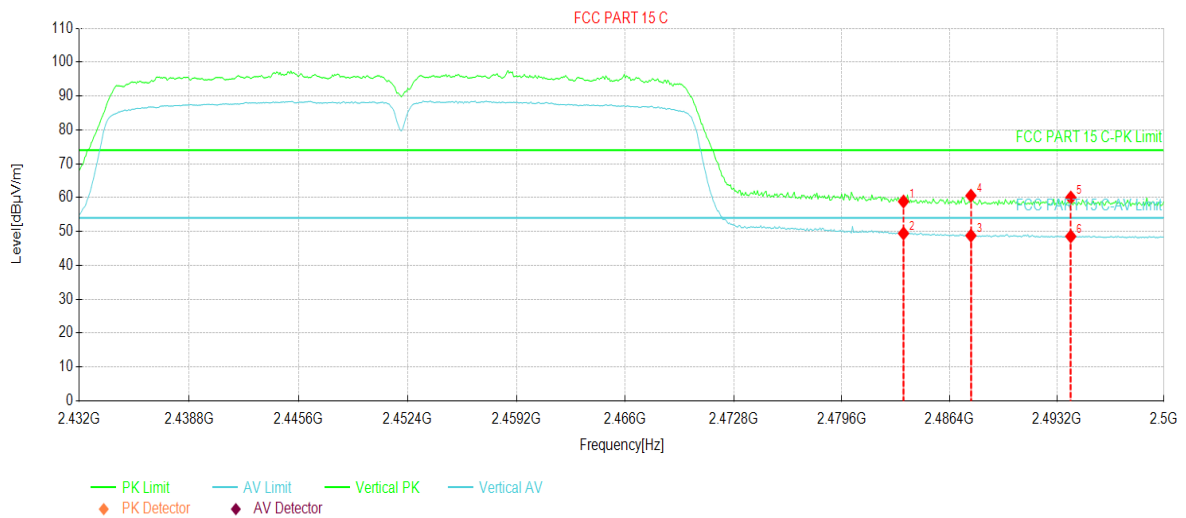


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.35	35.51	58.86	74.00	15.14	PK	Vertical
2	2483.50	13.92	35.51	49.43	54.00	4.57	AV	Vertical
3	2487.76	13.28	35.50	48.78	54.00	5.22	AV	Vertical
4	2487.76	25.07	35.50	60.57	74.00	13.43	PK	Vertical
5	2494.08	24.53	35.49	60.02	74.00	13.98	PK	Vertical
6	2494.08	13.07	35.49	48.56	54.00	5.44	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

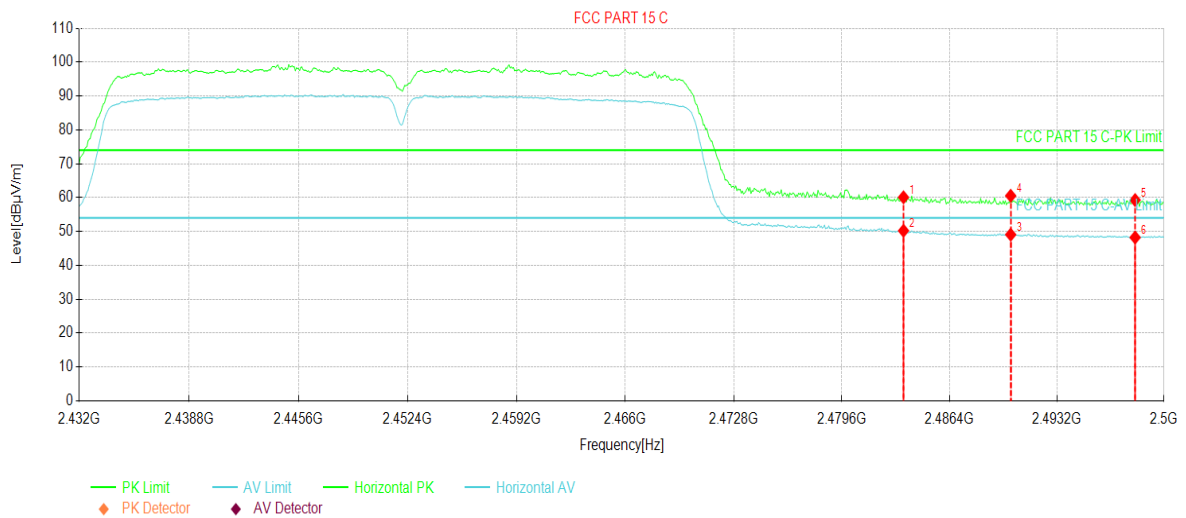


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	24.59	35.51	60.10	74.00	13.90	PK	Horizontal
2	2483.50	14.72	35.51	50.23	54.00	3.77	AV	Horizontal
3	2490.27	13.57	35.50	49.07	54.00	4.93	AV	Horizontal
4	2490.27	25.04	35.50	60.54	74.00	13.46	PK	Horizontal
5	2498.16	23.80	35.48	59.28	74.00	14.72	PK	Horizontal
6	2498.16	12.76	35.48	48.24	54.00	5.76	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

ANT 4:

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

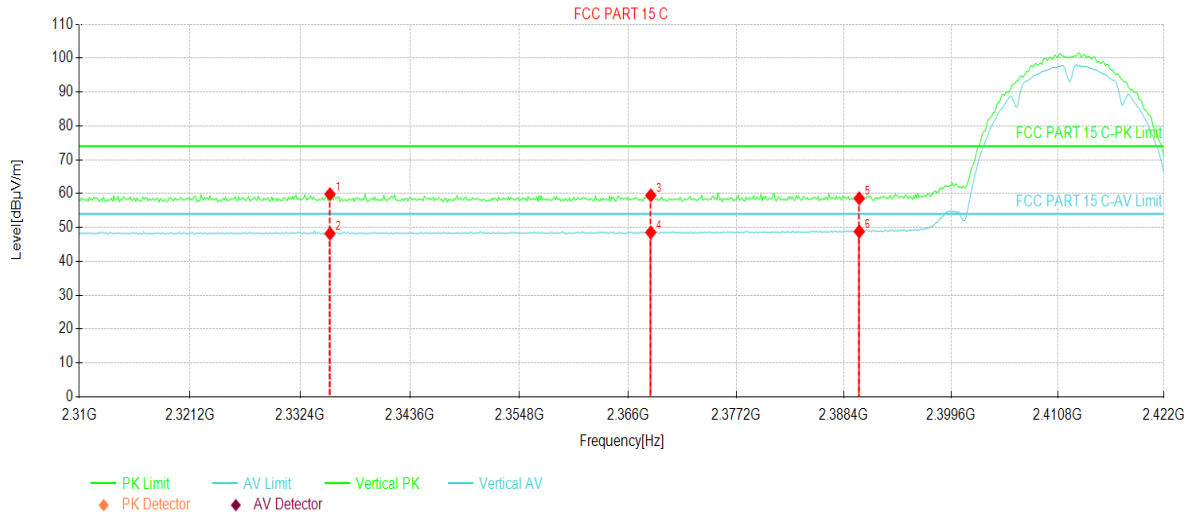


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2335.42	24.67	35.19	59.86	74.00	14.14	PK	Vertical
2	2335.42	13.01	35.19	48.20	54.00	5.80	AV	Vertical
3	2368.35	24.05	35.43	59.48	74.00	14.52	PK	Vertical
4	2368.35	13.12	35.43	48.55	54.00	5.45	AV	Vertical
5	2390.00	23.01	35.60	58.61	74.00	15.39	PK	Vertical
6	2390.00	13.22	35.60	48.82	54.00	5.18	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

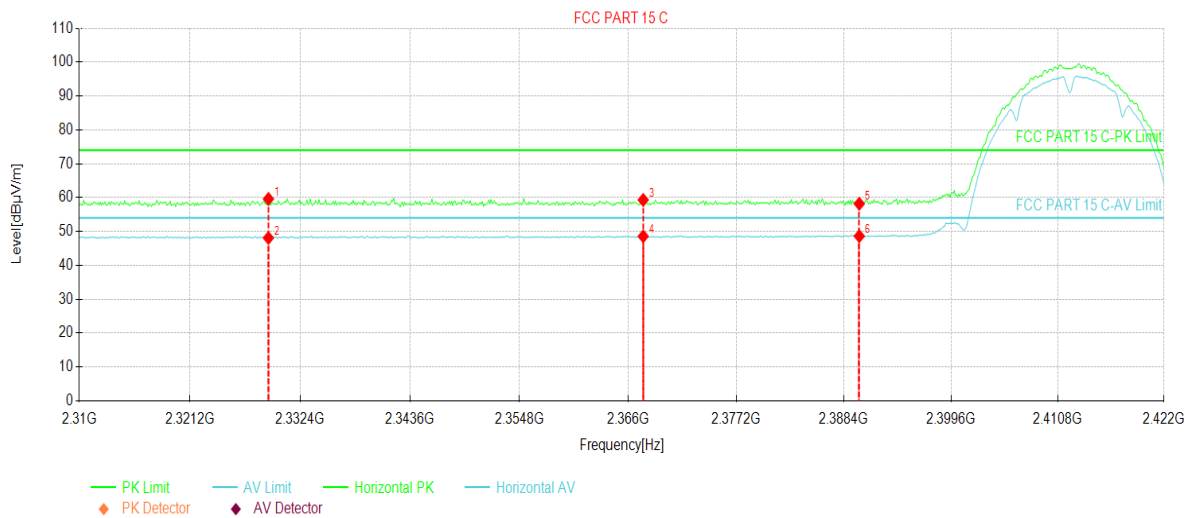


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2329.15	24.48	35.14	59.62	74.00	14.38	PK	Horizontal
2	2329.15	12.96	35.14	48.10	54.00	5.90	AV	Horizontal
3	2367.56	23.88	35.43	59.31	74.00	14.69	PK	Horizontal
4	2367.56	13.15	35.43	48.58	54.00	5.42	AV	Horizontal
5	2390.00	22.60	35.60	58.20	74.00	15.80	PK	Horizontal
6	2390.00	13.04	35.60	48.64	54.00	5.36	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

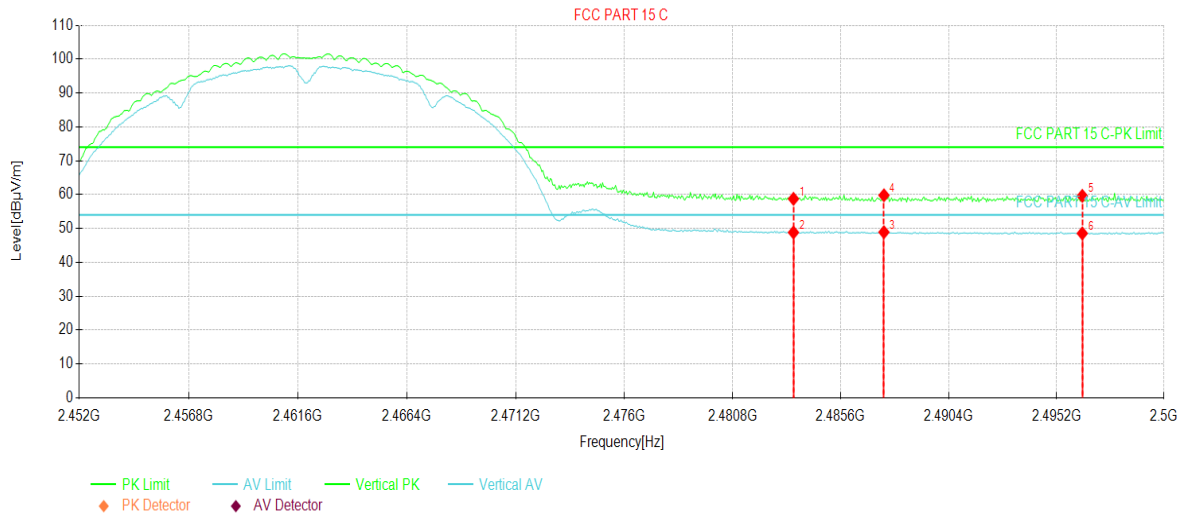


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.25	35.51	58.76	74.00	15.24	PK	Vertical
2	2483.50	13.32	35.51	48.83	54.00	5.17	AV	Vertical
3	2487.52	13.42	35.50	48.92	54.00	5.08	AV	Vertical
4	2487.52	24.31	35.50	59.81	74.00	14.19	PK	Vertical
5	2496.35	24.15	35.49	59.64	74.00	14.36	PK	Vertical
6	2496.35	13.08	35.49	48.57	54.00	5.43	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

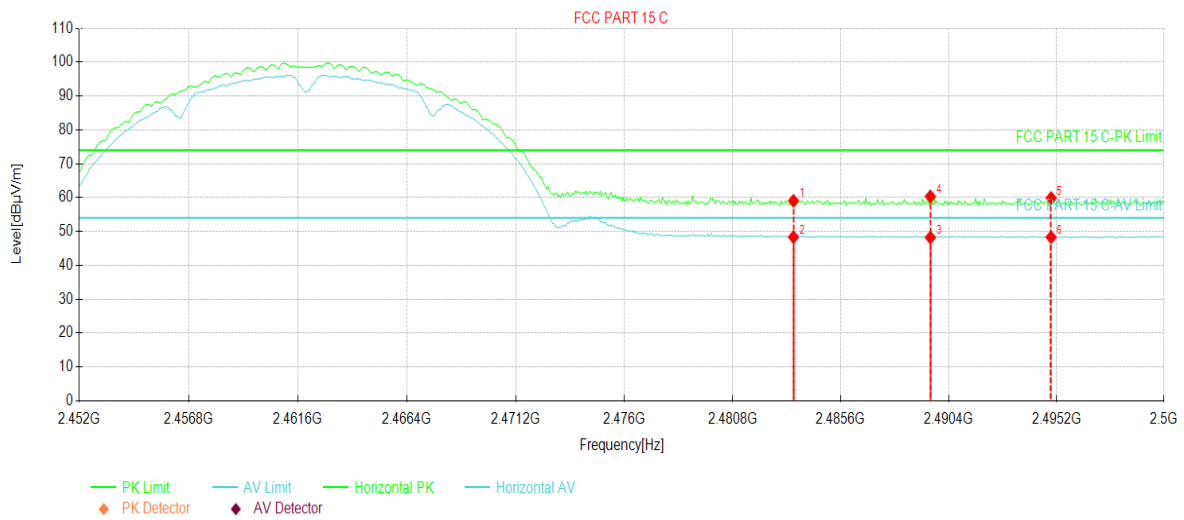


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.55	35.51	59.06	74.00	14.94	PK	Horizontal
2	2483.50	12.84	35.51	48.35	54.00	5.65	AV	Horizontal
3	2489.58	12.72	35.50	48.22	54.00	5.78	AV	Horizontal
4	2489.58	24.84	35.50	60.34	74.00	13.66	PK	Horizontal
5	2494.96	24.38	35.49	59.87	74.00	14.13	PK	Horizontal
6	2494.96	12.83	35.49	48.32	54.00	5.68	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

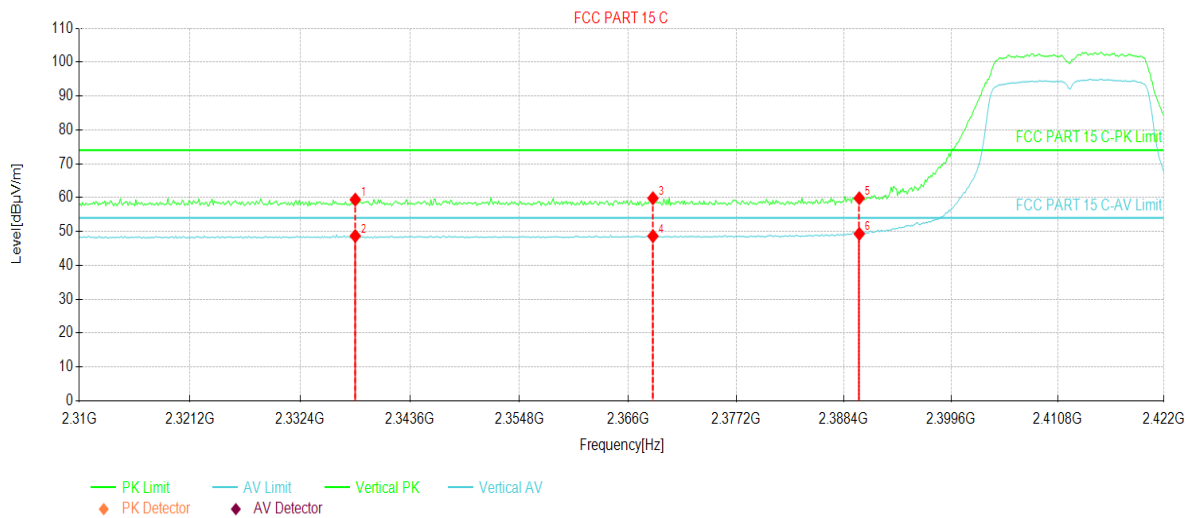


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2338.00	24.20	35.21	59.41	74.00	14.59	PK	Vertical
2	2338.00	13.48	35.21	48.69	54.00	5.31	AV	Vertical
3	2368.57	24.39	35.43	59.82	74.00	14.18	PK	Vertical
4	2368.57	13.20	35.43	48.63	54.00	5.37	AV	Vertical
5	2390.00	24.23	35.60	59.83	74.00	14.17	PK	Vertical
6	2390.00	13.71	35.60	49.31	54.00	4.69	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

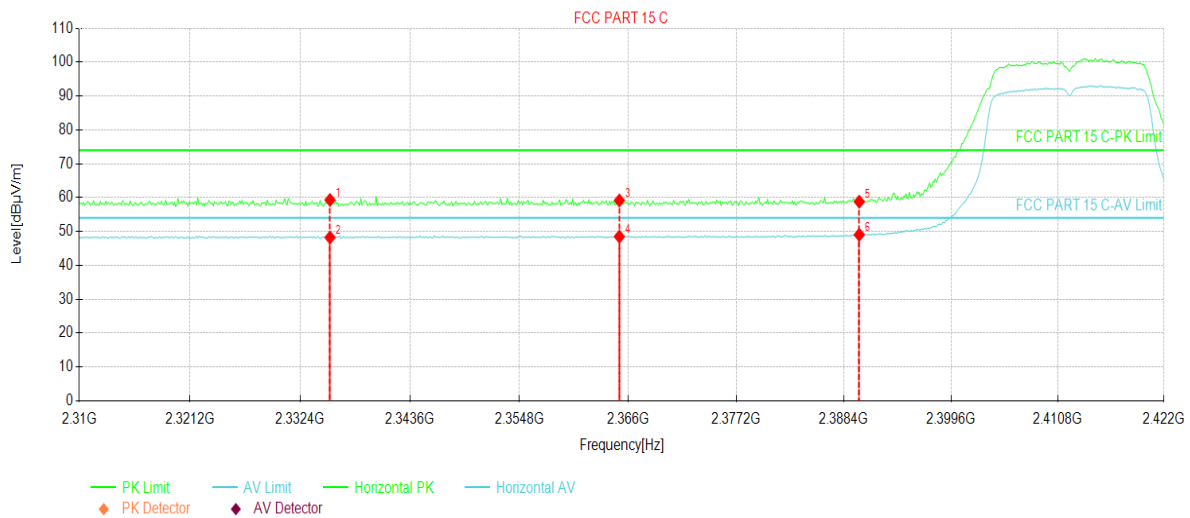


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2335.42	24.13	35.19	59.32	74.00	14.68	PK	Horizontal
2	2335.42	13.04	35.19	48.23	54.00	5.77	AV	Horizontal
3	2365.10	23.75	35.41	59.16	74.00	14.84	PK	Horizontal
4	2365.10	13.09	35.41	48.50	54.00	5.50	AV	Horizontal
5	2390.00	23.20	35.60	58.80	74.00	15.20	PK	Horizontal
6	2390.00	13.44	35.60	49.04	54.00	4.96	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

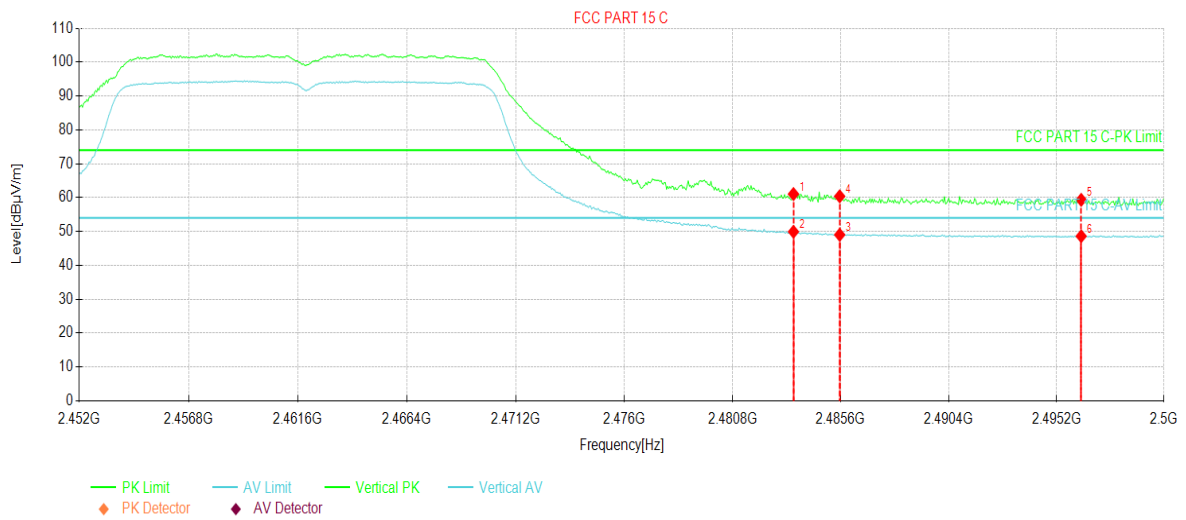


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	25.54	35.51	61.05	74.00	12.95	PK	Vertical
2	2483.50	14.41	35.51	49.92	54.00	4.08	AV	Vertical
3	2485.55	13.52	35.51	49.03	54.00	4.97	AV	Vertical
4	2485.55	24.88	35.51	60.39	74.00	13.61	PK	Vertical
5	2496.30	23.86	35.49	59.35	74.00	14.65	PK	Vertical
6	2496.30	13.13	35.49	48.62	54.00	5.38	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

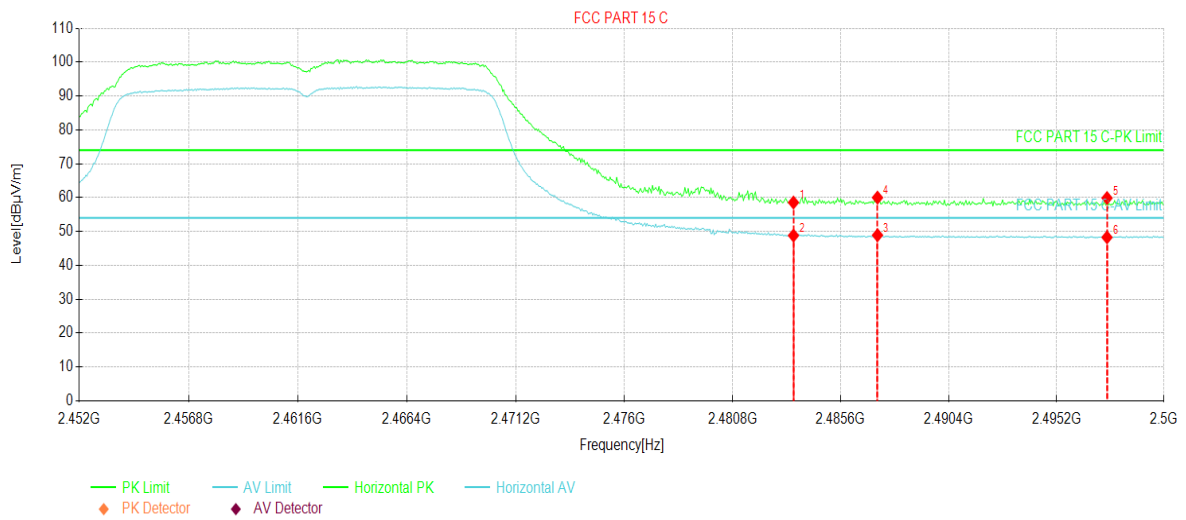


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.05	35.51	58.56	74.00	15.44	PK	Horizontal
2	2483.50	13.30	35.51	48.81	54.00	5.19	AV	Horizontal
3	2487.23	13.41	35.50	48.91	54.00	5.09	AV	Horizontal
4	2487.23	24.50	35.50	60.00	74.00	14.00	PK	Horizontal
5	2497.45	24.40	35.48	59.88	74.00	14.12	PK	Horizontal
6	2497.45	12.80	35.48	48.28	54.00	5.72	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

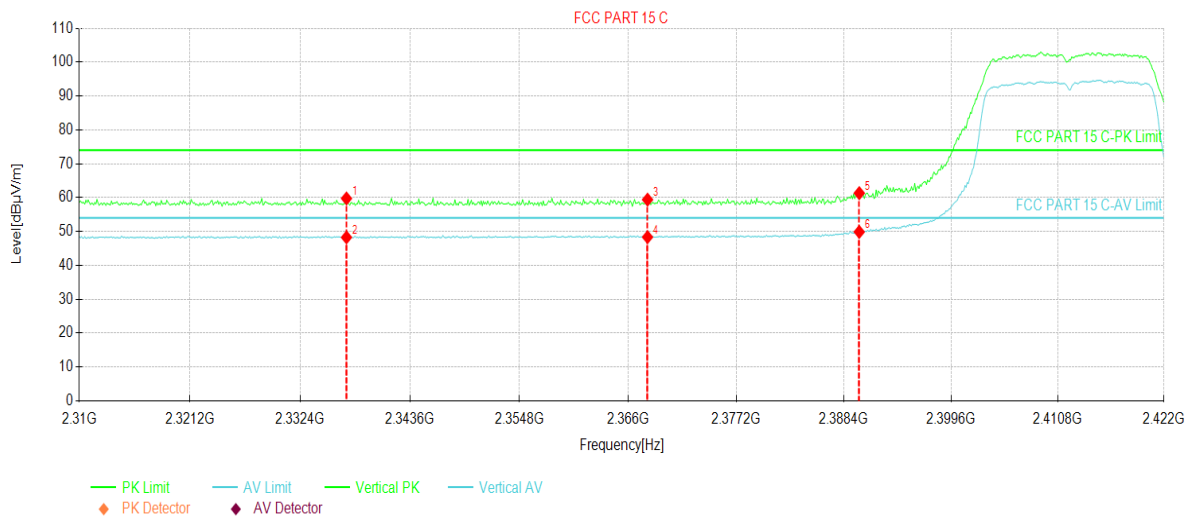


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2337.10	24.56	35.20	59.76	74.00	14.24	PK	Vertical
2	2337.10	13.06	35.20	48.26	54.00	5.74	AV	Vertical
3	2368.01	23.98	35.43	59.41	74.00	14.59	PK	Vertical
4	2368.01	12.91	35.43	48.34	54.00	5.66	AV	Vertical
5	2390.00	25.72	35.60	61.32	74.00	12.68	PK	Vertical
6	2390.00	14.28	35.60	49.88	54.00	4.12	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

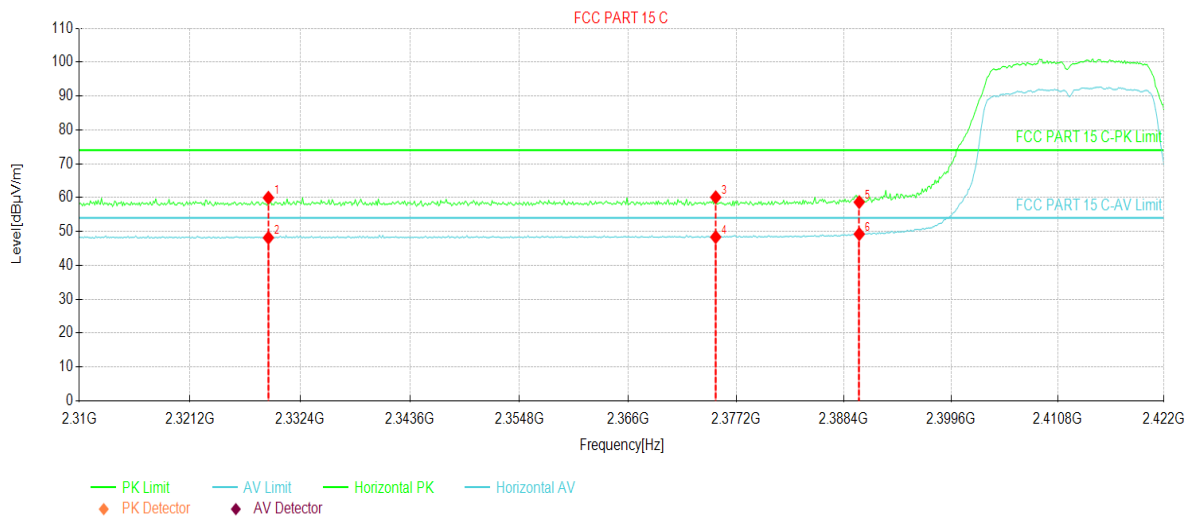


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2329.15	24.82	35.14	59.96	74.00	14.04	PK	Horizontal
2	2329.15	13.02	35.14	48.16	54.00	5.84	AV	Horizontal
3	2375.07	24.63	35.48	60.11	74.00	13.89	PK	Horizontal
4	2375.07	12.88	35.48	48.36	54.00	5.64	AV	Horizontal
5	2390.00	23.08	35.60	58.68	74.00	15.32	PK	Horizontal
6	2390.00	13.64	35.60	49.24	54.00	4.76	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

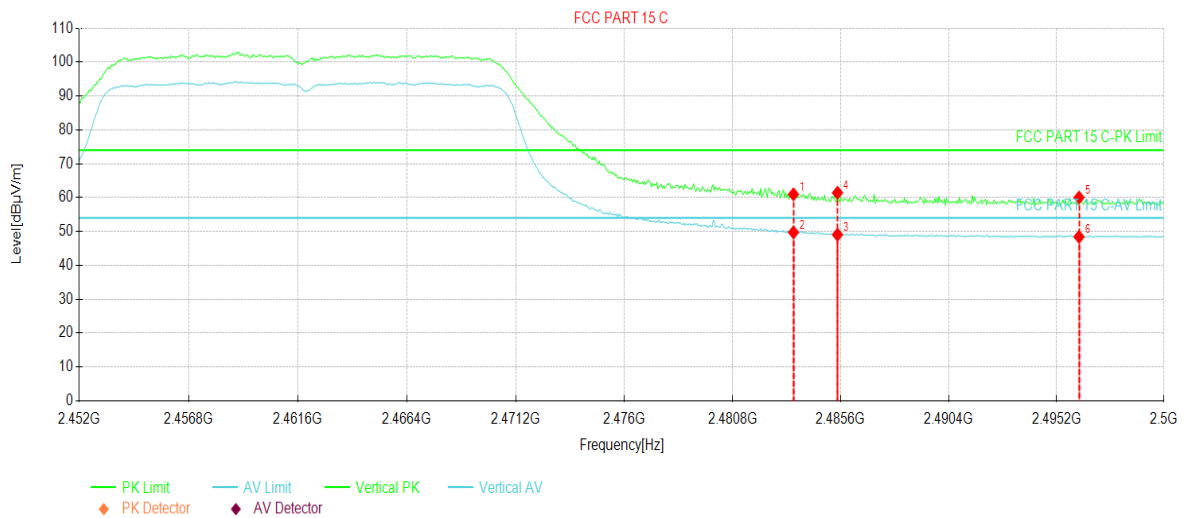


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	25.46	35.51	60.97	74.00	13.03	PK	Vertical
2	2483.50	14.24	35.51	49.75	54.00	4.25	AV	Vertical
3	2485.45	13.55	35.51	49.06	54.00	4.94	AV	Vertical
4	2485.45	25.92	35.51	61.43	74.00	12.57	PK	Vertical
5	2496.20	24.54	35.49	60.03	74.00	13.97	PK	Vertical
6	2496.20	12.93	35.49	48.42	54.00	5.58	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

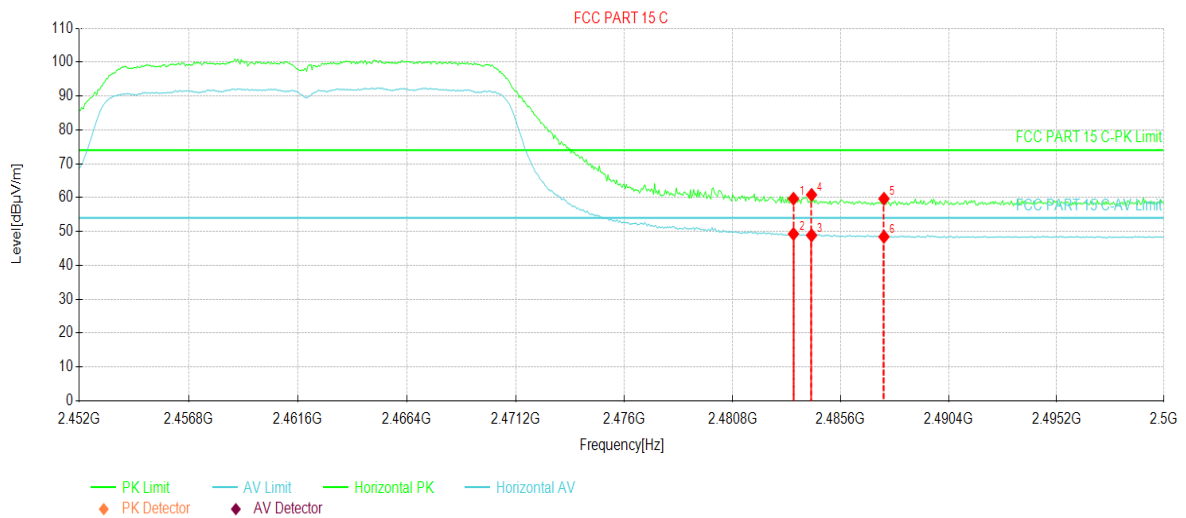


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	24.17	35.51	59.68	74.00	14.32	PK	Horizontal
2	2483.50	13.77	35.51	49.28	54.00	4.72	AV	Horizontal
3	2484.30	13.35	35.51	48.86	54.00	5.14	AV	Horizontal
4	2484.30	25.31	35.51	60.82	74.00	13.18	PK	Horizontal
5	2487.52	24.17	35.50	59.67	74.00	14.33	PK	Horizontal
6	2487.52	12.94	35.50	48.44	54.00	5.56	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

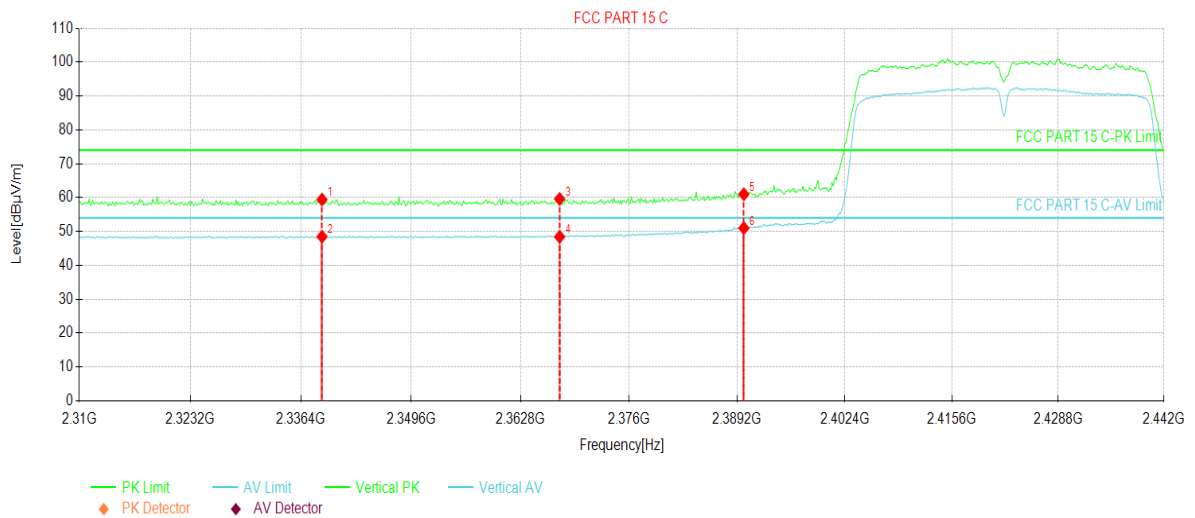


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2338.90	24.23	35.21	59.44	74.00	14.56	PK	Vertical
2	2338.90	13.27	35.21	48.48	54.00	5.52	AV	Vertical
3	2367.55	24.18	35.43	59.61	74.00	14.39	PK	Vertical
4	2367.55	12.99	35.43	48.42	54.00	5.58	AV	Vertical
5	2390.00	25.41	35.60	61.01	74.00	12.99	PK	Vertical
6	2390.00	15.39	35.60	50.99	54.00	3.01	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

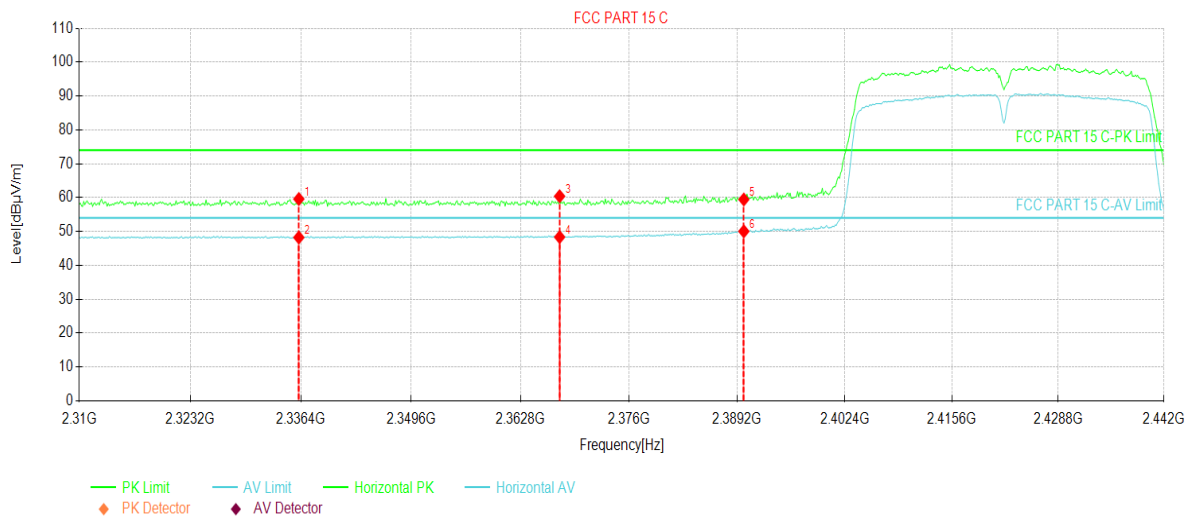


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2336.13	24.40	35.19	59.59	74.00	14.41	PK	Horizontal
2	2336.13	13.05	35.19	48.24	54.00	5.76	AV	Horizontal
3	2367.55	24.98	35.43	60.41	74.00	13.59	PK	Horizontal
4	2367.55	12.92	35.43	48.35	54.00	5.65	AV	Horizontal
5	2390.00	23.85	35.60	59.45	74.00	14.55	PK	Horizontal
6	2390.00	14.46	35.60	50.06	54.00	3.94	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

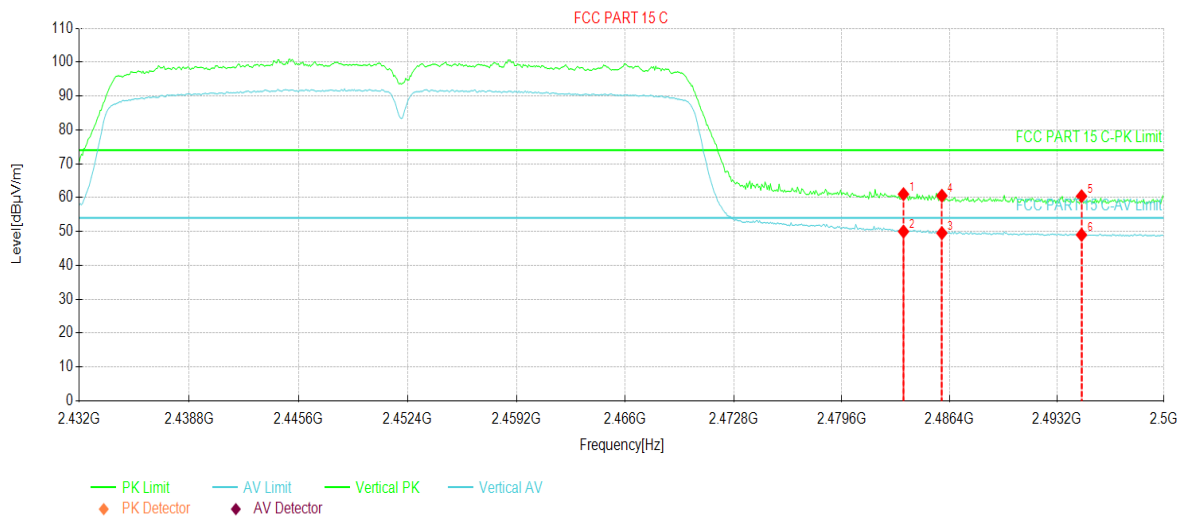


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	25.51	35.51	61.02	74.00	12.98	PK	Vertical
2	2483.50	14.48	35.51	49.99	54.00	4.01	AV	Vertical
3	2485.92	14.02	35.51	49.53	54.00	4.47	AV	Vertical
4	2485.92	25.05	35.51	60.56	74.00	13.44	PK	Vertical
5	2494.76	24.93	35.49	60.42	74.00	13.58	PK	Vertical
6	2494.76	13.51	35.49	49.00	54.00	5.00	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

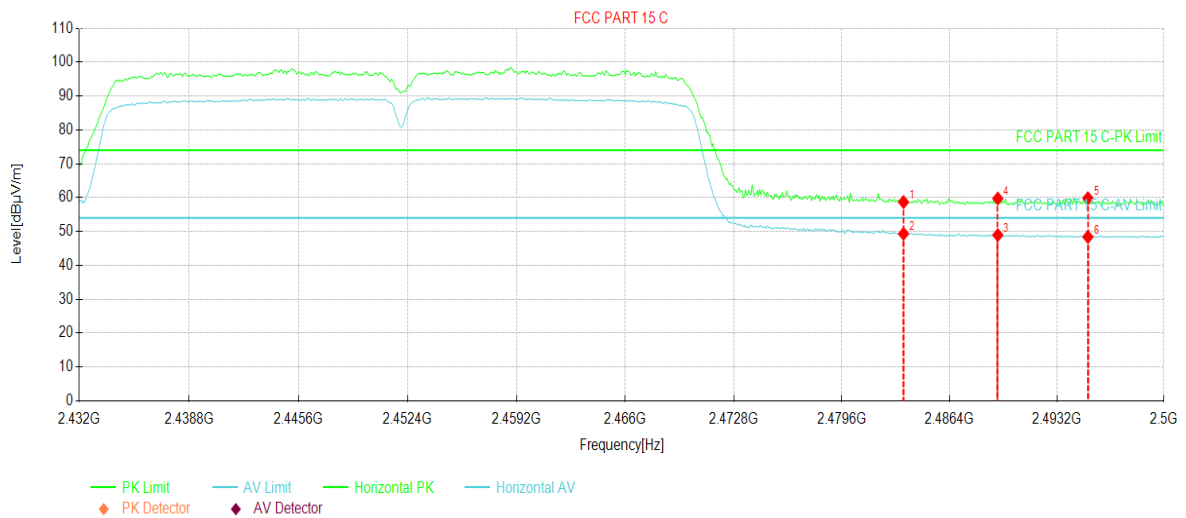


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.18	35.51	58.69	74.00	15.31	PK	Horizontal
2	2483.50	13.82	35.51	49.33	54.00	4.67	AV	Horizontal
3	2489.46	13.46	35.50	48.96	54.00	5.04	AV	Horizontal
4	2489.46	24.24	35.50	59.74	74.00	14.26	PK	Horizontal
5	2495.17	24.35	35.49	59.84	74.00	14.16	PK	Horizontal
6	2495.17	12.91	35.49	48.40	54.00	5.60	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

ANT 5:

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

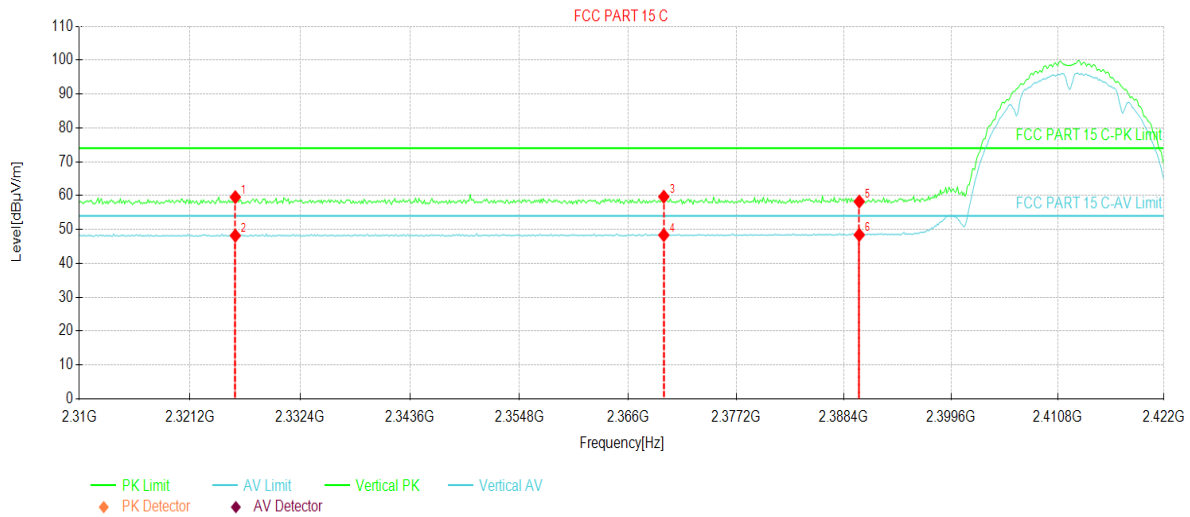


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2325.79	24.45	35.11	59.56	74.00	14.44	PK	Vertical
2	2325.79	13.08	35.11	48.19	54.00	5.81	AV	Vertical
3	2369.69	24.23	35.44	59.67	74.00	14.33	PK	Vertical
4	2369.69	12.90	35.44	48.34	54.00	5.66	AV	Vertical
5	2390.00	22.65	35.60	58.25	74.00	15.75	PK	Vertical
6	2390.00	12.82	35.60	48.42	54.00	5.58	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

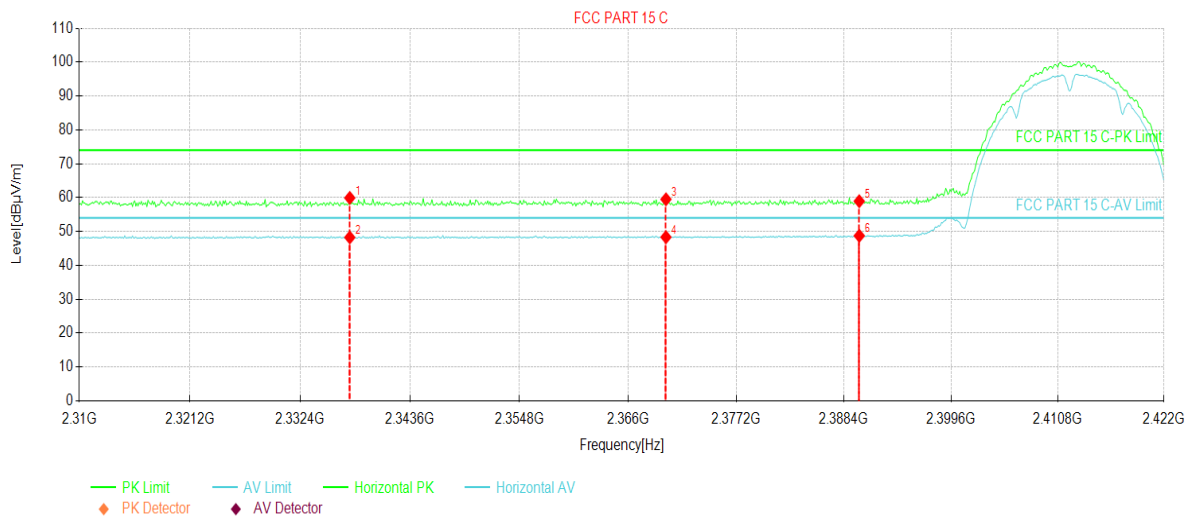


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2337.44	24.71	35.20	59.91	74.00	14.09	PK	Horizontal
2	2337.44	13.05	35.20	48.25	54.00	5.75	AV	Horizontal
3	2369.92	24.06	35.44	59.50	74.00	14.50	PK	Horizontal
4	2369.92	12.90	35.44	48.34	54.00	5.66	AV	Horizontal
5	2390.00	23.34	35.60	58.94	74.00	15.06	PK	Horizontal
6	2390.00	13.14	35.60	48.74	54.00	5.26	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

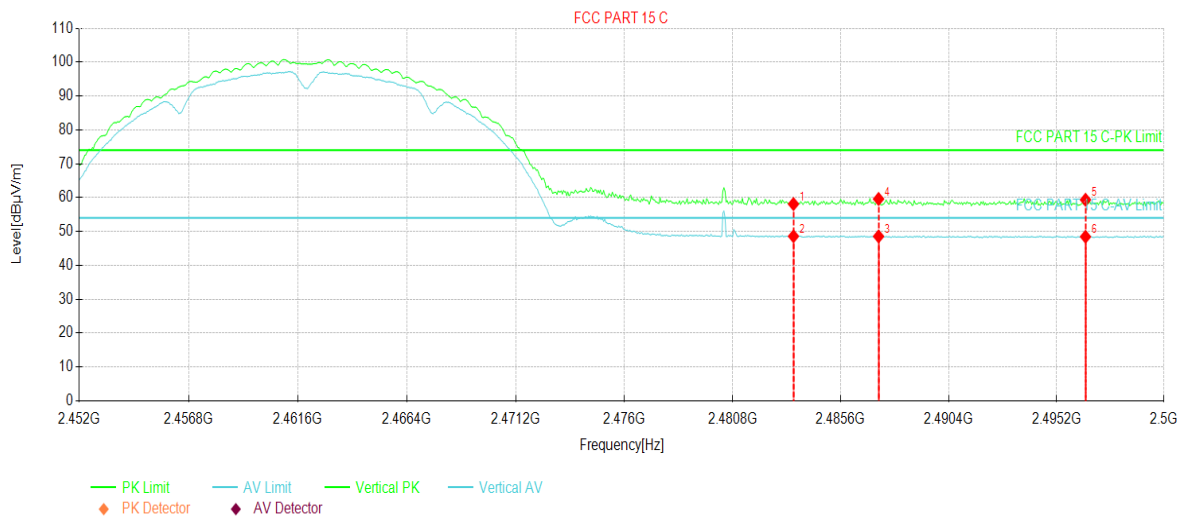


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.60	35.51	58.11	74.00	15.89	PK	Vertical
2	2483.50	13.09	35.51	48.60	54.00	5.40	AV	Vertical
3	2487.28	13.06	35.50	48.56	54.00	5.44	AV	Vertical
4	2487.28	24.10	35.50	59.60	74.00	14.40	PK	Vertical
5	2496.49	23.88	35.49	59.37	74.00	14.63	PK	Vertical
6	2496.49	12.97	35.49	48.46	54.00	5.54	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

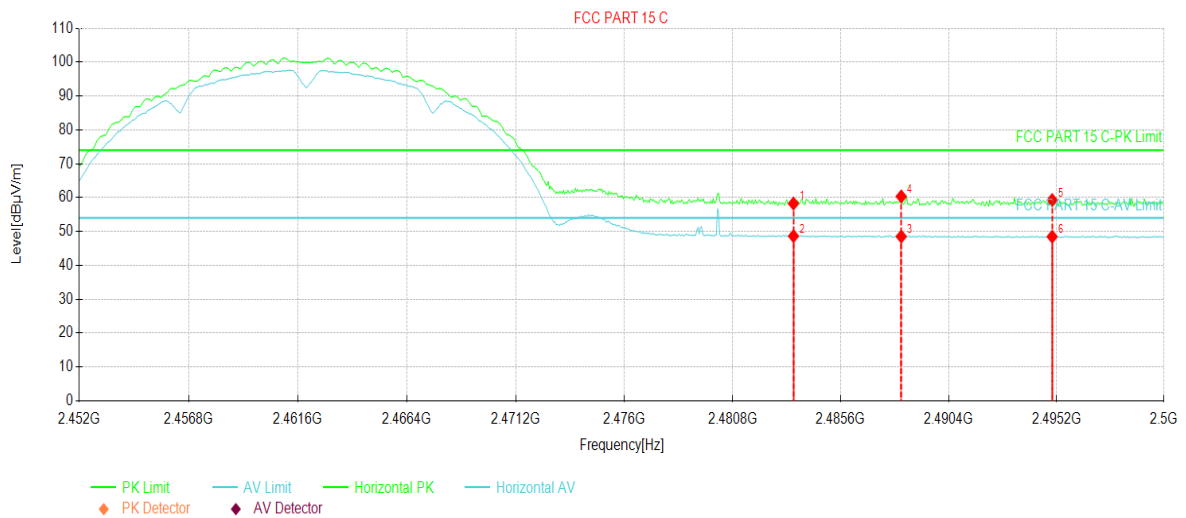


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.74	35.51	58.25	74.00	15.75	PK	Horizontal
2	2483.50	13.12	35.51	48.63	54.00	5.37	AV	Horizontal
3	2488.28	13.03	35.50	48.53	54.00	5.47	AV	Horizontal
4	2488.28	24.85	35.50	60.35	74.00	13.65	PK	Horizontal
5	2495.00	23.78	35.49	59.27	74.00	14.73	PK	Horizontal
6	2495.00	12.98	35.49	48.47	54.00	5.53	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

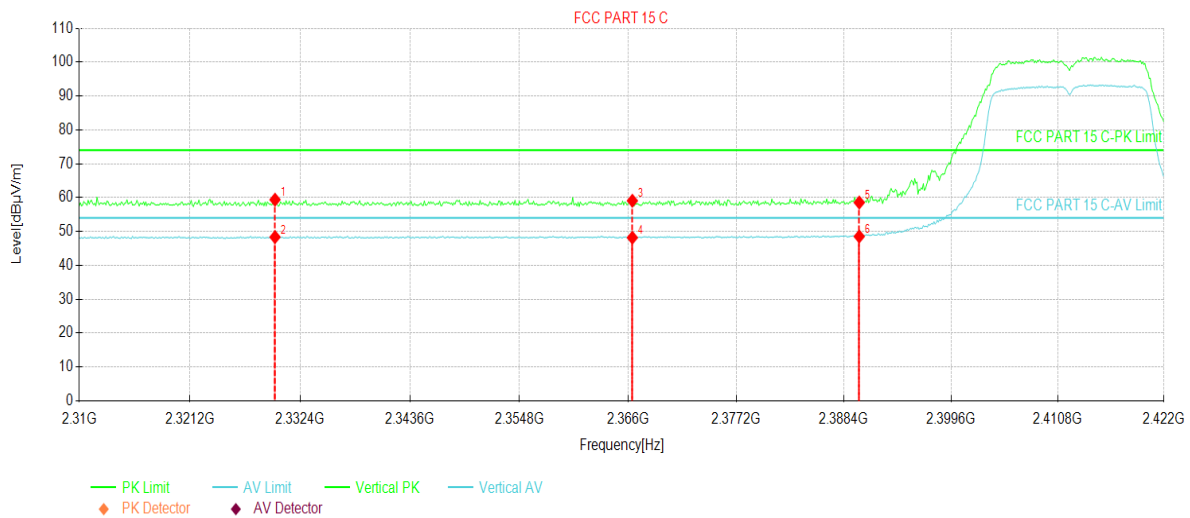


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2329.82	24.26	35.14	59.40	74.00	14.60	PK	Vertical
2	2329.82	13.22	35.14	48.36	54.00	5.64	AV	Vertical
3	2366.44	23.66	35.42	59.08	74.00	14.92	PK	Vertical
4	2366.44	12.77	35.42	48.19	54.00	5.81	AV	Vertical
5	2390.00	22.96	35.60	58.56	74.00	15.44	PK	Vertical
6	2390.00	12.94	35.60	48.54	54.00	5.46	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

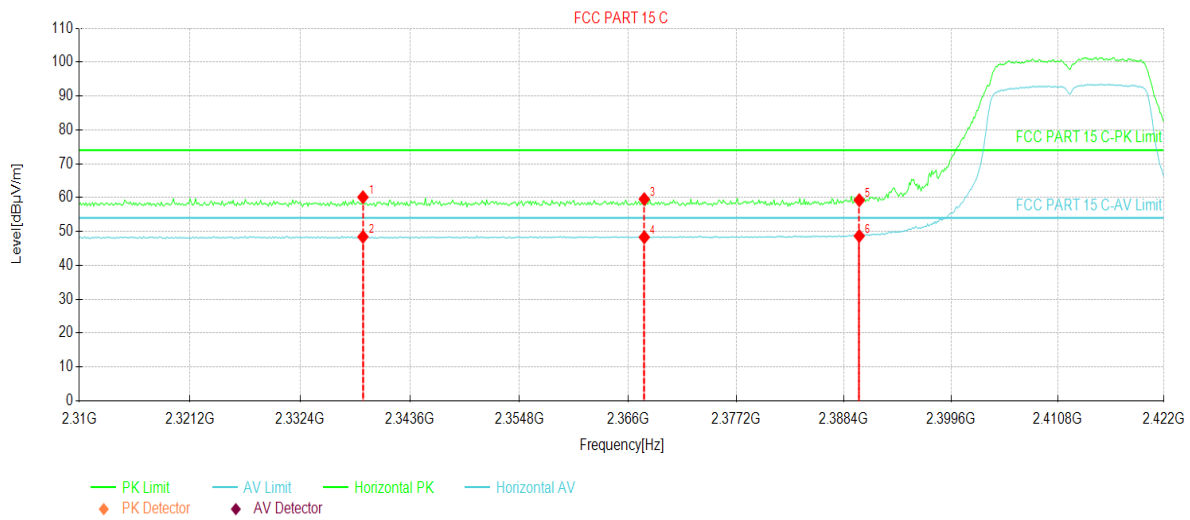


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2338.78	24.92	35.21	60.13	74.00	13.87	PK	Horizontal
2	2338.78	13.22	35.21	48.43	54.00	5.57	AV	Horizontal
3	2367.68	24.12	35.43	59.55	74.00	14.45	PK	Horizontal
4	2367.68	12.88	35.43	48.31	54.00	5.69	AV	Horizontal
5	2390.00	23.64	35.60	59.24	74.00	14.76	PK	Horizontal
6	2390.00	13.08	35.60	48.68	54.00	5.32	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

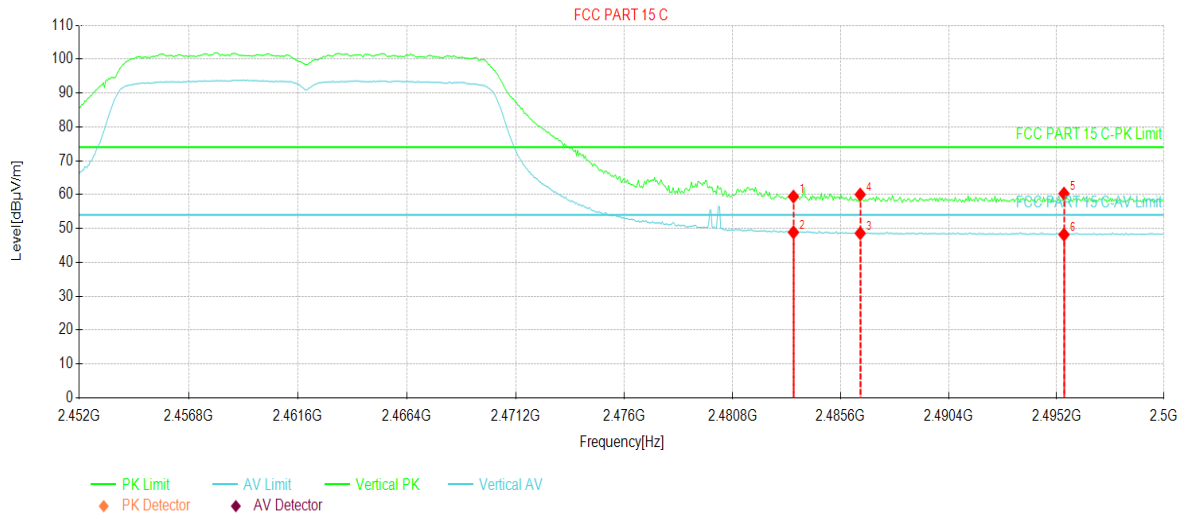


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.91	35.51	59.42	74.00	14.58	PK	Vertical
2	2483.50	13.36	35.51	48.87	54.00	5.13	AV	Vertical
3	2486.46	13.09	35.51	48.60	54.00	5.40	AV	Vertical
4	2486.46	24.53	35.51	60.04	74.00	13.96	PK	Vertical
5	2495.53	24.82	35.49	60.31	74.00	13.69	PK	Vertical
6	2495.53	12.72	35.49	48.21	54.00	5.79	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

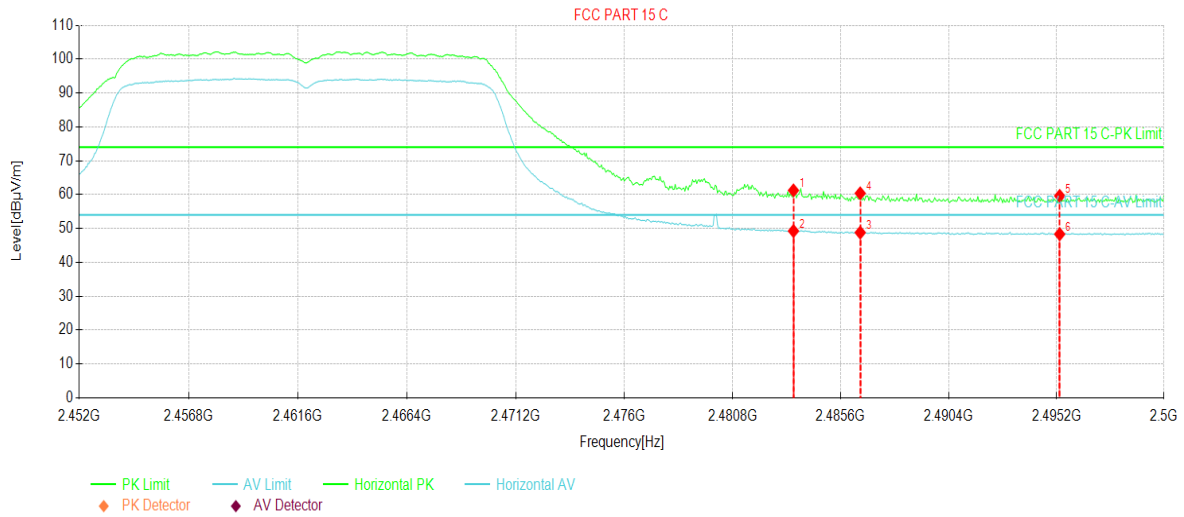


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	25.74	35.51	61.25	74.00	12.75	PK	Horizontal
2	2483.50	13.75	35.51	49.26	54.00	4.74	AV	Horizontal
3	2486.46	13.29	35.51	48.80	54.00	5.20	AV	Horizontal
4	2486.46	24.89	35.51	60.40	74.00	13.60	PK	Horizontal
5	2495.34	24.14	35.49	59.63	74.00	14.37	PK	Horizontal
6	2495.34	12.85	35.49	48.34	54.00	5.66	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

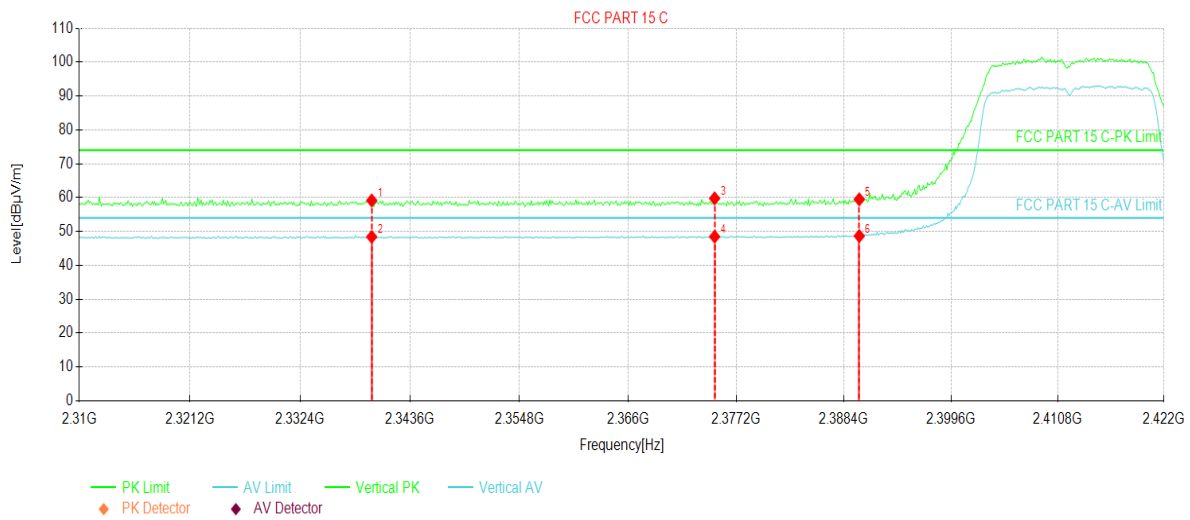


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2339.68	23.94	35.22	59.16	74.00	14.84	PK	Vertical
2	2339.68	13.21	35.22	48.43	54.00	5.57	AV	Vertical
3	2374.96	24.30	35.48	59.78	74.00	14.22	PK	Vertical
4	2374.96	12.99	35.48	48.47	54.00	5.53	AV	Vertical
5	2390.00	23.90	35.60	59.50	74.00	14.50	PK	Vertical
6	2390.00	13.07	35.60	48.67	54.00	5.33	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

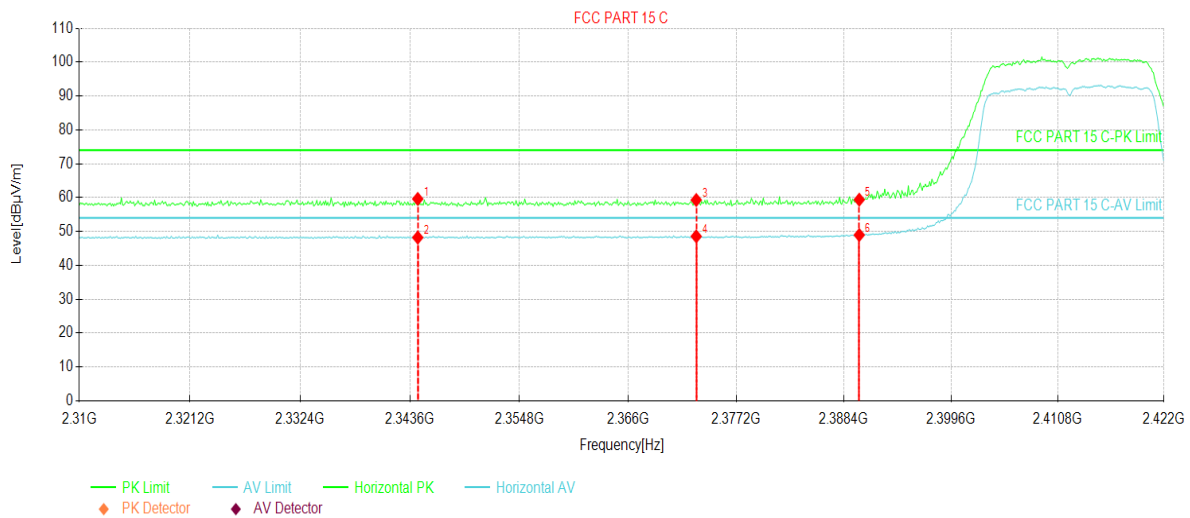


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2344.38	24.37	35.25	59.62	74.00	14.38	PK	Horizontal
2	2344.38	12.97	35.25	48.22	54.00	5.78	AV	Horizontal
3	2373.05	23.84	35.47	59.31	74.00	14.69	PK	Horizontal
4	2373.05	13.10	35.47	48.57	54.00	5.43	AV	Horizontal
5	2390.00	23.80	35.60	59.40	74.00	14.60	PK	Horizontal
6	2390.00	13.37	35.60	48.97	54.00	5.03	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

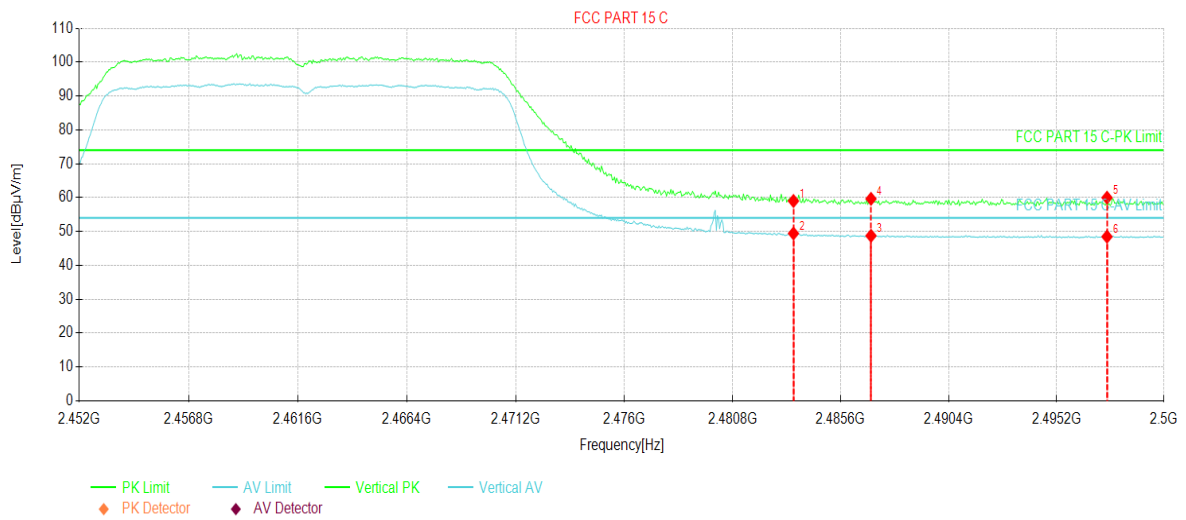


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.49	35.51	59.00	74.00	15.00	PK	Vertical
2	2483.50	13.92	35.51	49.43	54.00	4.57	AV	Vertical
3	2486.94	13.24	35.50	48.74	54.00	5.26	AV	Vertical
4	2486.94	24.15	35.50	59.65	74.00	14.35	PK	Vertical
5	2497.45	24.51	35.48	59.99	74.00	14.01	PK	Vertical
6	2497.45	12.99	35.48	48.47	54.00	5.53	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

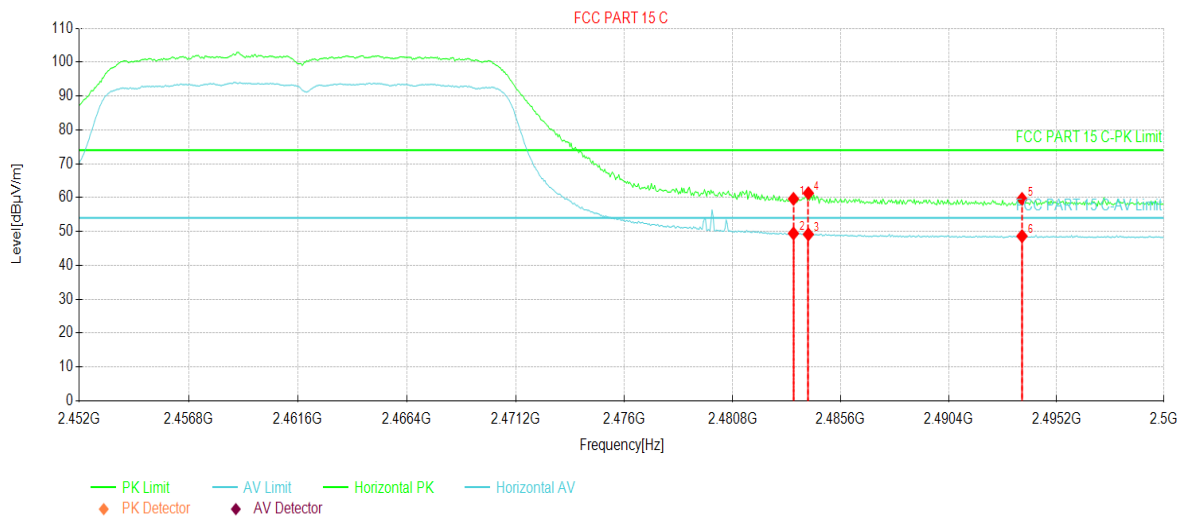


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	24.13	35.51	59.64	74.00	14.36	PK	Horizontal
2	2483.50	13.91	35.51	49.42	54.00	4.58	AV	Horizontal
3	2484.16	13.65	35.51	49.16	54.00	4.84	AV	Horizontal
4	2484.16	25.79	35.51	61.30	74.00	12.70	PK	Horizontal
5	2493.66	24.11	35.49	59.60	74.00	14.40	PK	Horizontal
6	2493.66	13.14	35.49	48.63	54.00	5.37	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

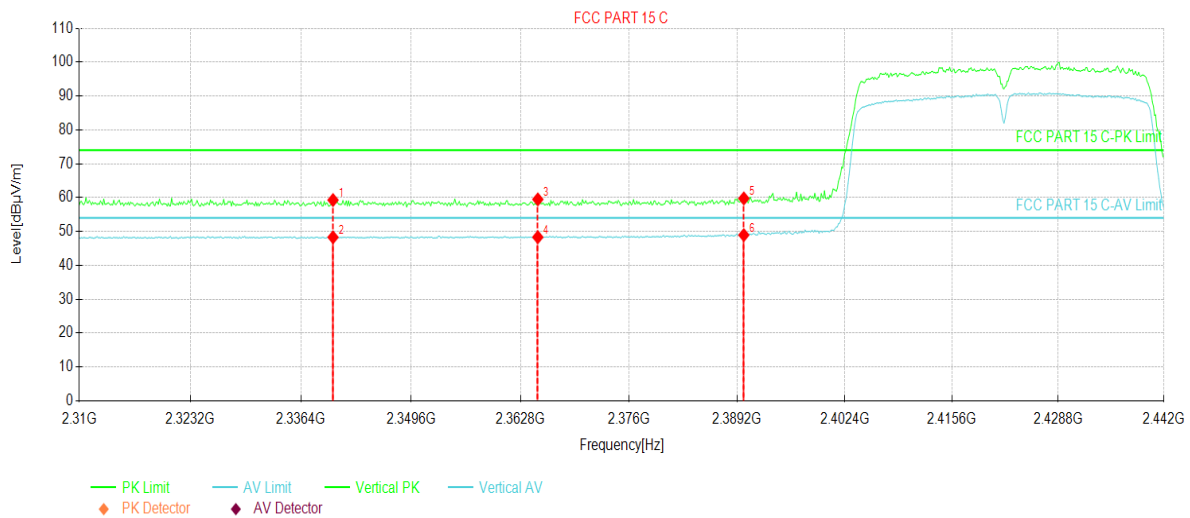


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2340.22	24.06	35.22	59.28	74.00	14.72	PK	Vertical
2	2340.22	13.08	35.22	48.30	54.00	5.70	AV	Vertical
3	2364.91	24.07	35.41	59.48	74.00	14.52	PK	Vertical
4	2364.91	12.92	35.41	48.33	54.00	5.67	AV	Vertical
5	2390.00	24.16	35.60	59.76	74.00	14.24	PK	Vertical
6	2390.00	13.36	35.60	48.96	54.00	5.04	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

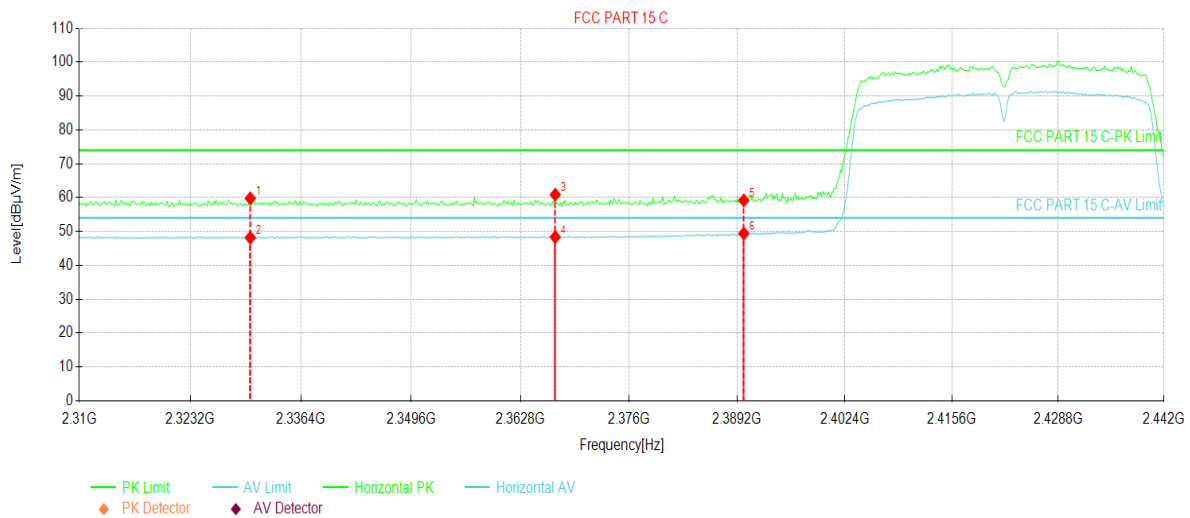


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2330.32	24.63	35.15	59.78	74.00	14.22	PK	Horizontal
2	2330.32	13.02	35.15	48.17	54.00	5.83	AV	Horizontal
3	2367.02	25.45	35.42	60.87	74.00	13.13	PK	Horizontal
4	2367.02	12.94	35.42	48.36	54.00	5.64	AV	Horizontal
5	2390.00	23.58	35.60	59.18	74.00	14.82	PK	Horizontal
6	2390.00	13.81	35.60	49.41	54.00	4.59	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

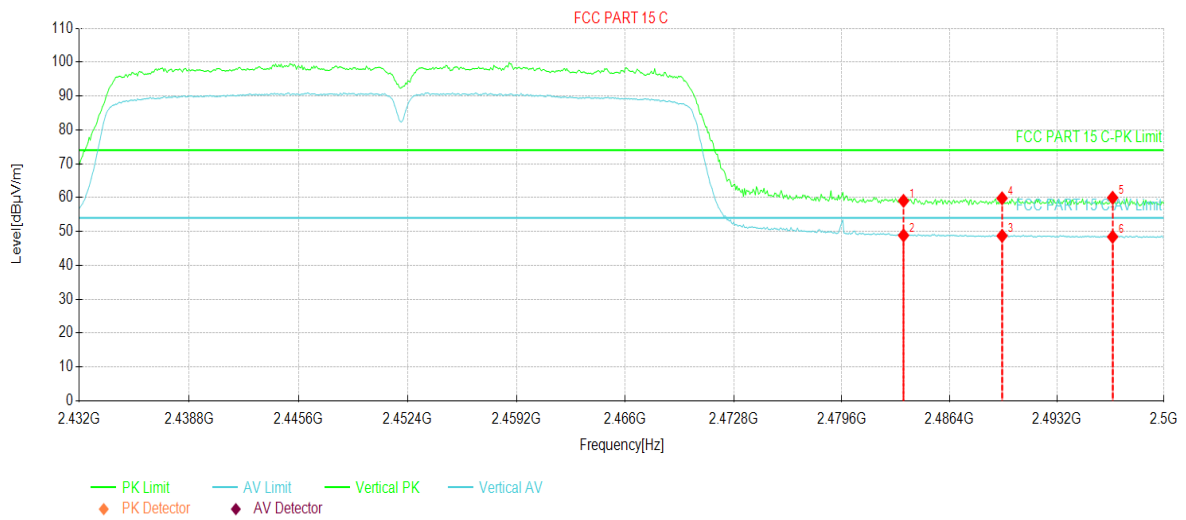


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.54	35.51	59.05	74.00	14.95	PK	Vertical
2	2483.50	13.34	35.51	48.85	54.00	5.15	AV	Vertical
3	2489.73	13.21	35.50	48.71	54.00	5.29	AV	Vertical
4	2489.73	24.30	35.50	59.80	74.00	14.20	PK	Vertical
5	2496.73	24.47	35.49	59.96	74.00	14.04	PK	Vertical
6	2496.73	12.93	35.49	48.42	54.00	5.58	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

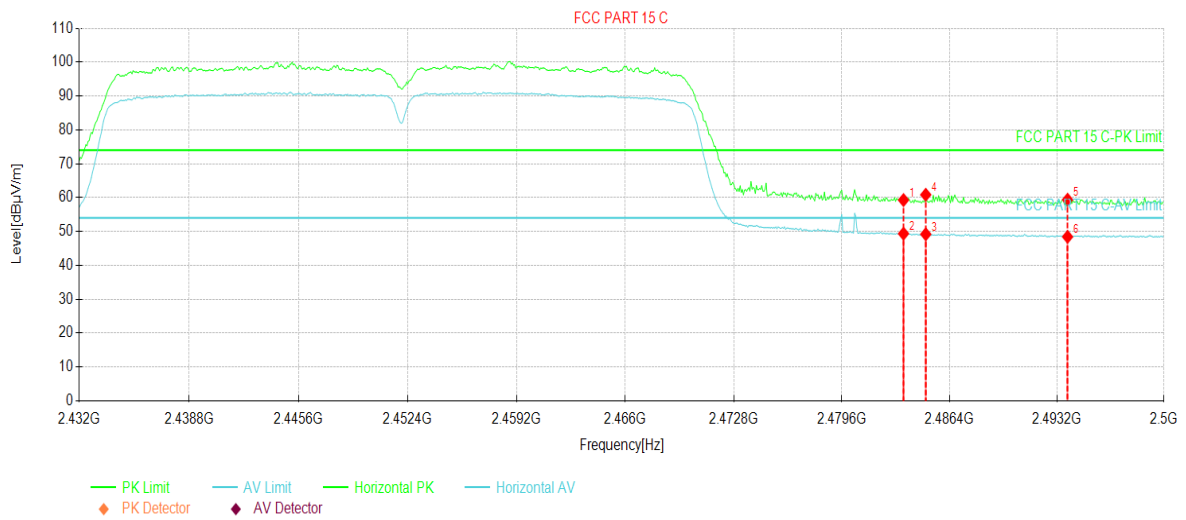

Suspected Data List


NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.77	35.51	59.28	74.00	14.72	PK	Horizontal
2	2483.50	13.85	35.51	49.36	54.00	4.64	AV	Horizontal
3	2484.90	13.68	35.51	49.19	54.00	4.81	AV	Horizontal
4	2484.90	25.34	35.51	60.85	74.00	13.15	PK	Horizontal
5	2493.88	23.89	35.49	59.38	74.00	14.62	PK	Horizontal
6	2493.88	12.94	35.49	48.43	54.00	5.57	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

ANT 6:

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

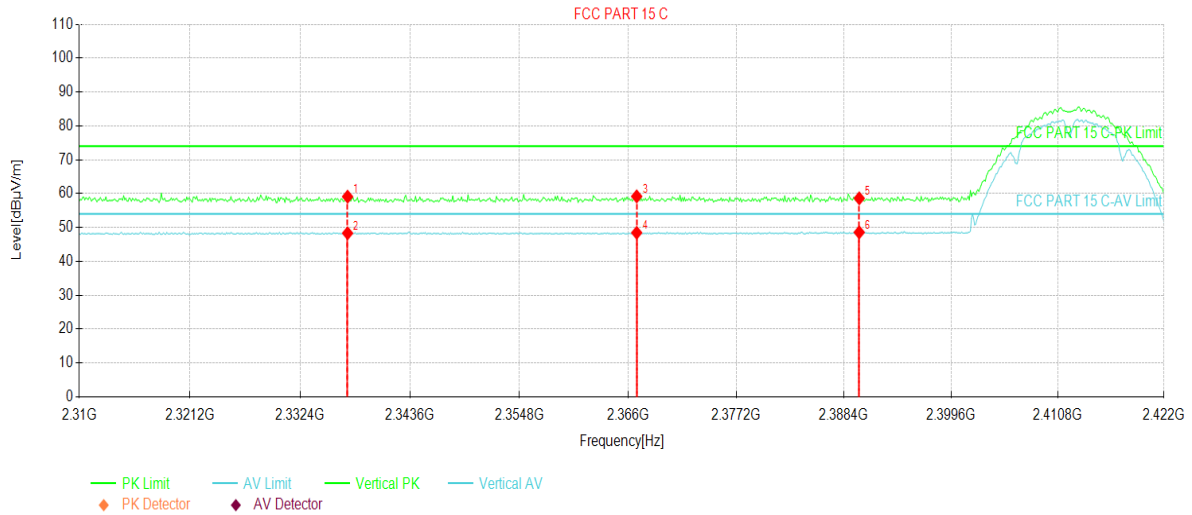


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2337.21	23.91	35.20	59.11	74.00	14.89	PK	Vertical
2	2337.21	13.12	35.20	48.32	54.00	5.68	AV	Vertical
3	2366.89	23.76	35.42	59.18	74.00	14.82	PK	Vertical
4	2366.89	13.03	35.42	48.45	54.00	5.55	AV	Vertical
5	2390.00	23.02	35.60	58.62	74.00	15.38	PK	Vertical
6	2390.00	12.98	35.60	48.58	54.00	5.42	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

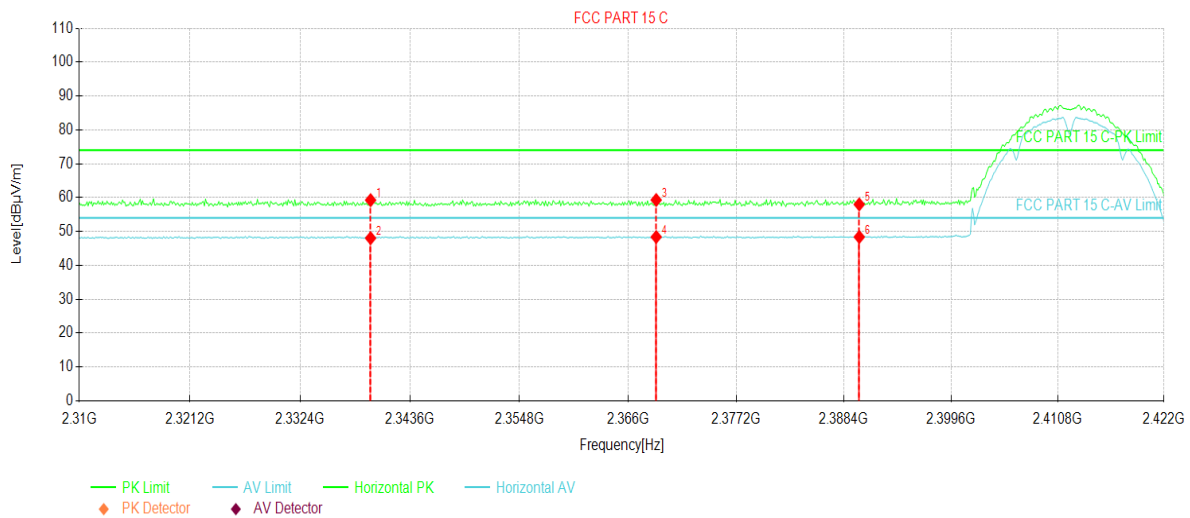


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2339.56	24.04	35.22	59.26	74.00	14.74	PK	Horizontal
2	2339.56	12.82	35.22	48.04	54.00	5.96	AV	Horizontal
3	2368.91	23.87	35.44	59.31	74.00	14.69	PK	Horizontal
4	2368.91	12.95	35.44	48.39	54.00	5.61	AV	Horizontal
5	2390.00	22.40	35.60	58.00	74.00	16.00	PK	Horizontal
6	2390.00	12.78	35.60	48.38	54.00	5.62	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

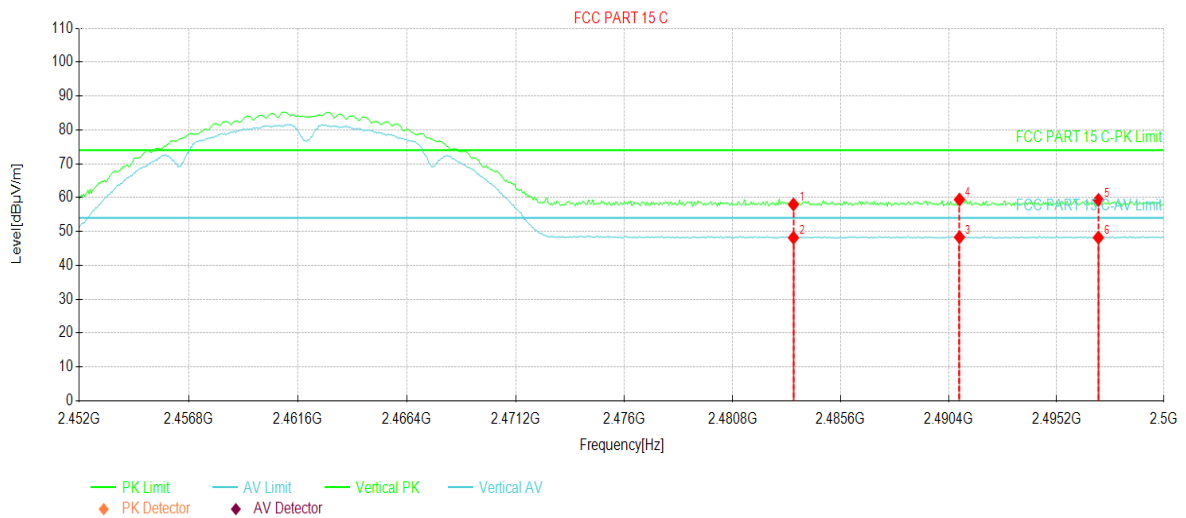


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.48	35.51	57.99	74.00	16.01	PK	Vertical
2	2483.50	12.66	35.51	48.17	54.00	5.83	AV	Vertical
3	2490.88	12.81	35.50	48.31	54.00	5.69	AV	Vertical
4	2490.88	23.92	35.50	59.42	74.00	14.58	PK	Vertical
5	2497.07	23.83	35.49	59.32	74.00	14.68	PK	Vertical
6	2497.07	12.71	35.49	48.20	54.00	5.80	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

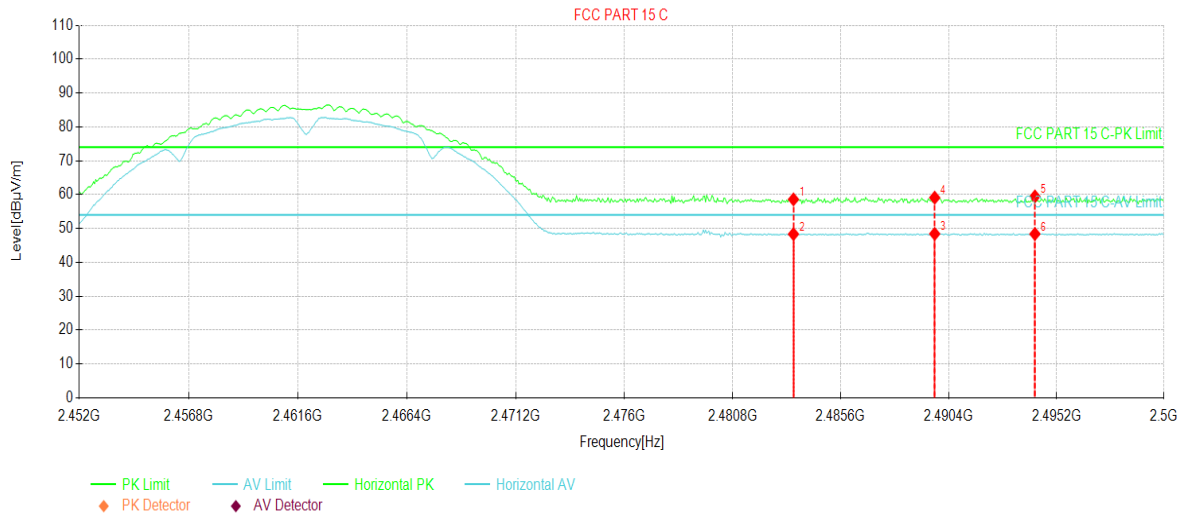


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.09	35.51	58.60	74.00	15.40	PK	Horizontal
2	2483.50	12.84	35.51	48.35	54.00	5.65	AV	Horizontal
3	2489.77	12.93	35.50	48.43	54.00	5.57	AV	Horizontal
4	2489.77	23.61	35.50	59.11	74.00	14.89	PK	Horizontal
5	2494.24	23.97	35.49	59.46	74.00	14.54	PK	Horizontal
6	2494.24	12.90	35.49	48.39	54.00	5.61	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

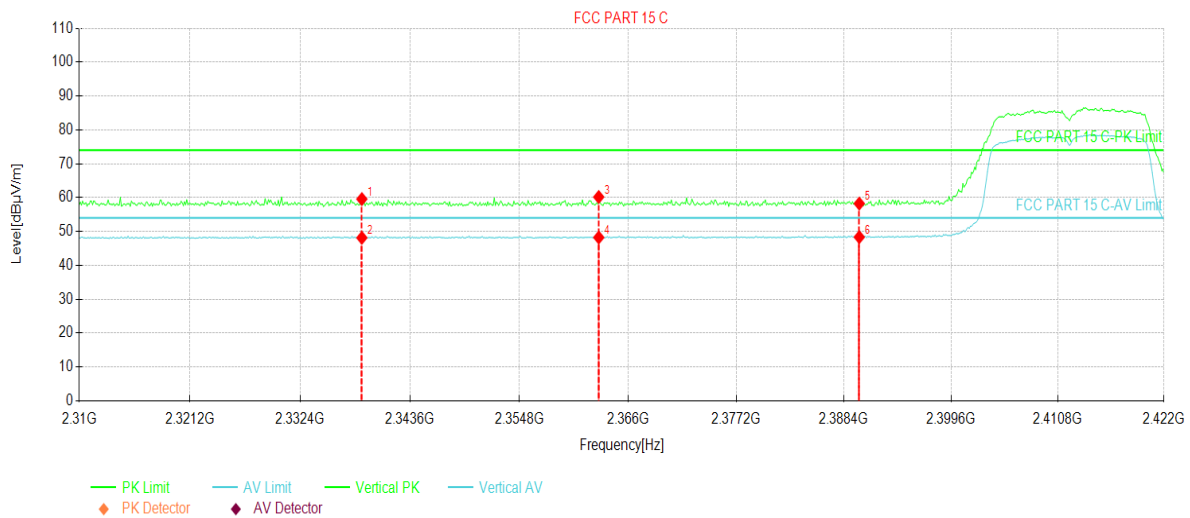


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2338.67	24.36	35.21	59.57	74.00	14.43	PK	Vertical
2	2338.67	12.93	35.21	48.14	54.00	5.86	AV	Vertical
3	2362.97	24.80	35.39	60.19	74.00	13.81	PK	Vertical
4	2362.97	12.84	35.39	48.23	54.00	5.77	AV	Vertical
5	2390.00	22.65	35.60	58.25	74.00	15.75	PK	Vertical
6	2390.00	12.74	35.60	48.34	54.00	5.66	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

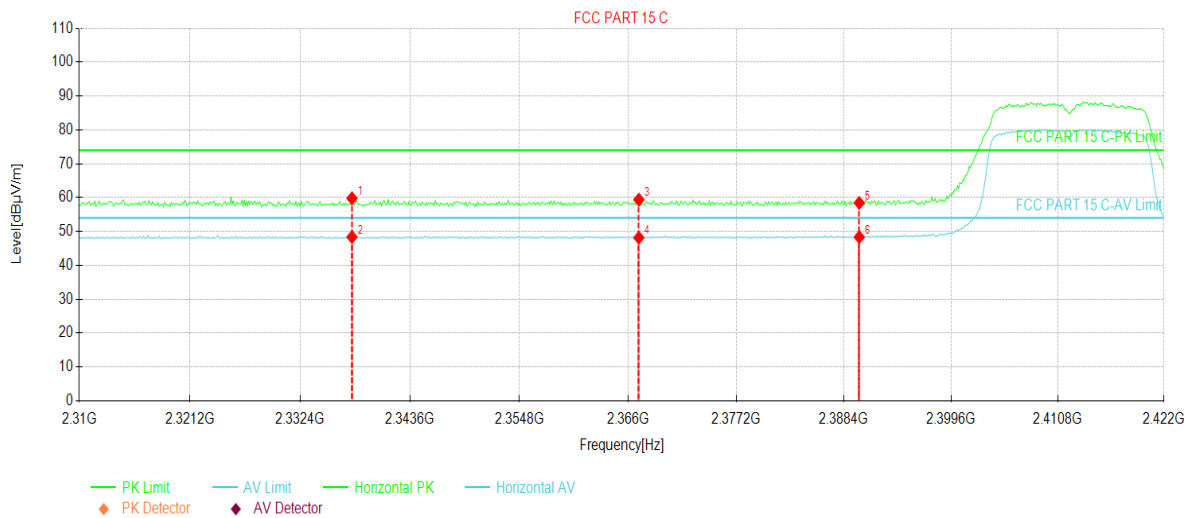


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2337.66	24.59	35.20	59.79	74.00	14.21	PK	Horizontal
2	2337.66	13.17	35.20	48.37	54.00	5.63	AV	Horizontal
3	2367.12	23.99	35.42	59.41	74.00	14.59	PK	Horizontal
4	2367.12	12.74	35.42	48.16	54.00	5.84	AV	Horizontal
5	2390.00	22.84	35.60	58.44	74.00	15.56	PK	Horizontal
6	2390.00	12.75	35.60	48.35	54.00	5.65	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

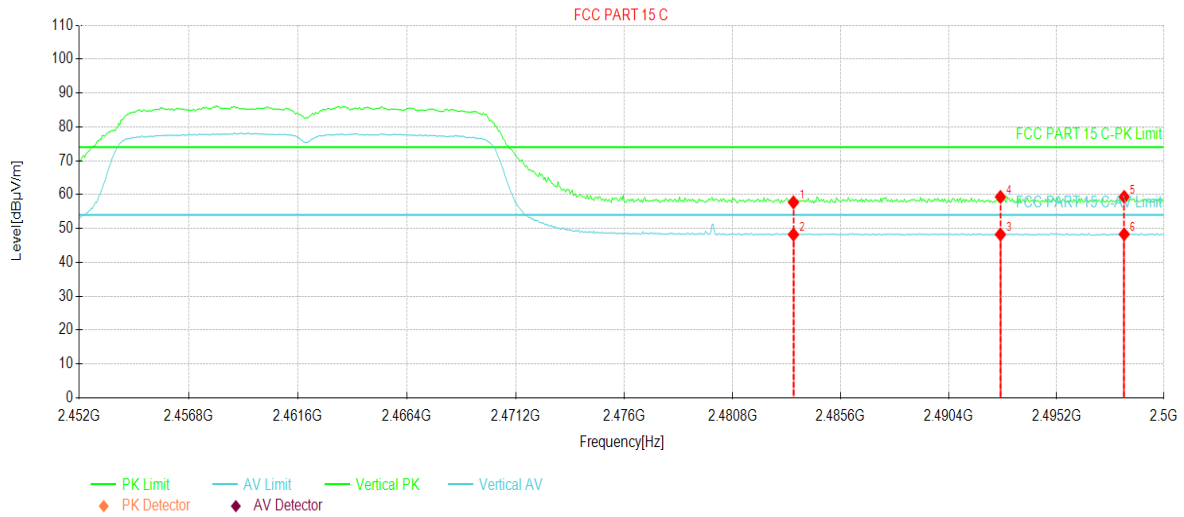


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.20	35.51	57.71	74.00	16.29	PK	Vertical
2	2483.50	12.71	35.51	48.22	54.00	5.78	AV	Vertical
3	2492.70	12.75	35.49	48.24	54.00	5.76	AV	Vertical
4	2492.70	23.83	35.49	59.32	74.00	14.68	PK	Vertical
5	2498.22	23.85	35.48	59.33	74.00	14.67	PK	Vertical
6	2498.22	12.83	35.48	48.31	54.00	5.69	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

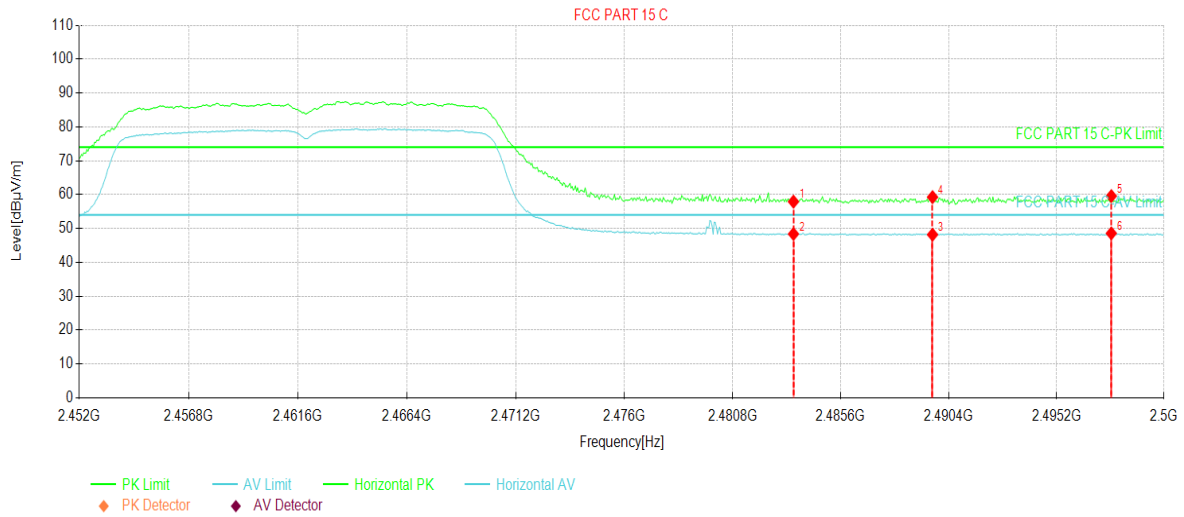


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.41	35.51	57.92	74.00	16.08	PK	Horizontal
2	2483.50	12.88	35.51	48.39	54.00	5.61	AV	Horizontal
3	2489.68	12.68	35.50	48.18	54.00	5.82	AV	Horizontal
4	2489.68	23.76	35.50	59.26	74.00	14.74	PK	Horizontal
5	2497.64	24.09	35.48	59.57	74.00	14.43	PK	Horizontal
6	2497.64	13.09	35.48	48.57	54.00	5.43	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

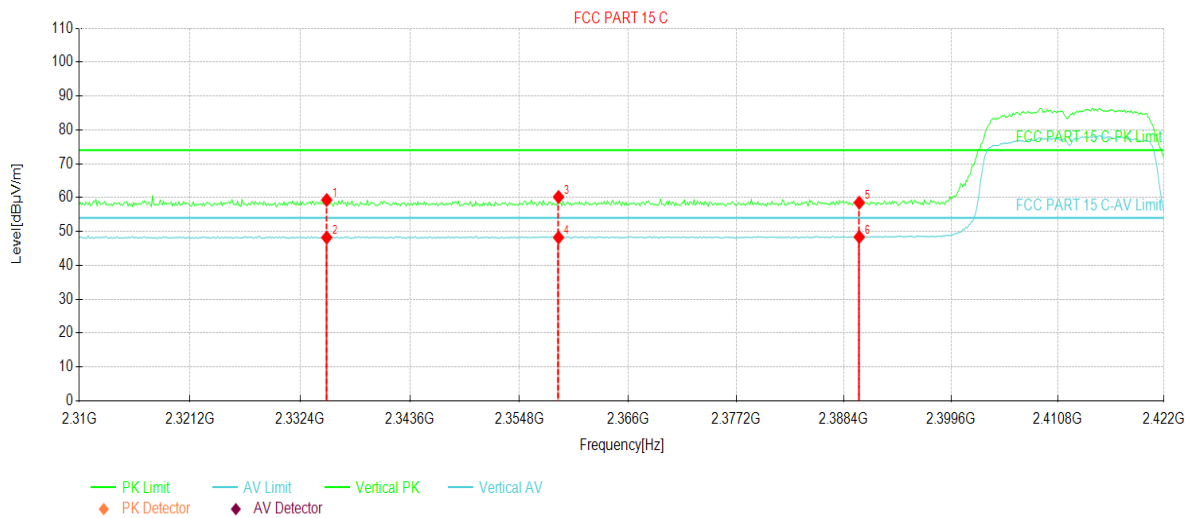


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2335.08	24.13	35.18	59.31	74.00	14.69	PK	Vertical
2	2335.08	13.04	35.18	48.22	54.00	5.78	AV	Vertical
3	2358.83	24.83	35.36	60.19	74.00	13.81	PK	Vertical
4	2358.83	12.87	35.36	48.23	54.00	5.77	AV	Vertical
5	2390.00	22.91	35.60	58.51	74.00	15.49	PK	Vertical
6	2390.00	12.78	35.60	48.38	54.00	5.62	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

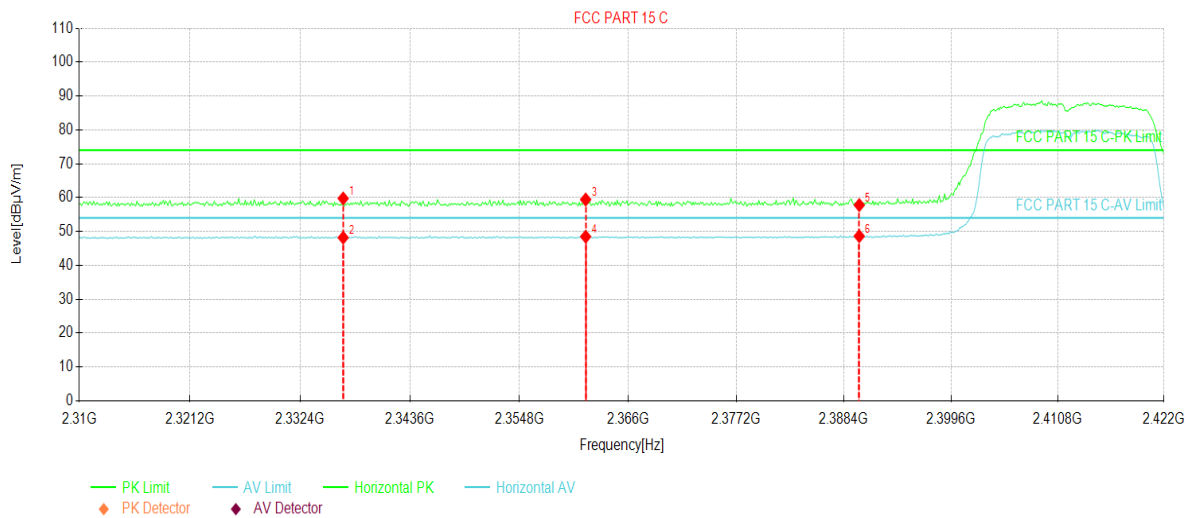


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2336.76	24.57	35.20	59.77	74.00	14.23	PK	Horizontal
2	2336.76	12.99	35.20	48.19	54.00	5.81	AV	Horizontal
3	2361.63	24.06	35.38	59.44	74.00	14.56	PK	Horizontal
4	2361.63	13.10	35.38	48.48	54.00	5.52	AV	Horizontal
5	2390.00	22.21	35.60	57.81	74.00	16.19	PK	Horizontal
6	2390.00	13.02	35.60	48.62	54.00	5.38	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

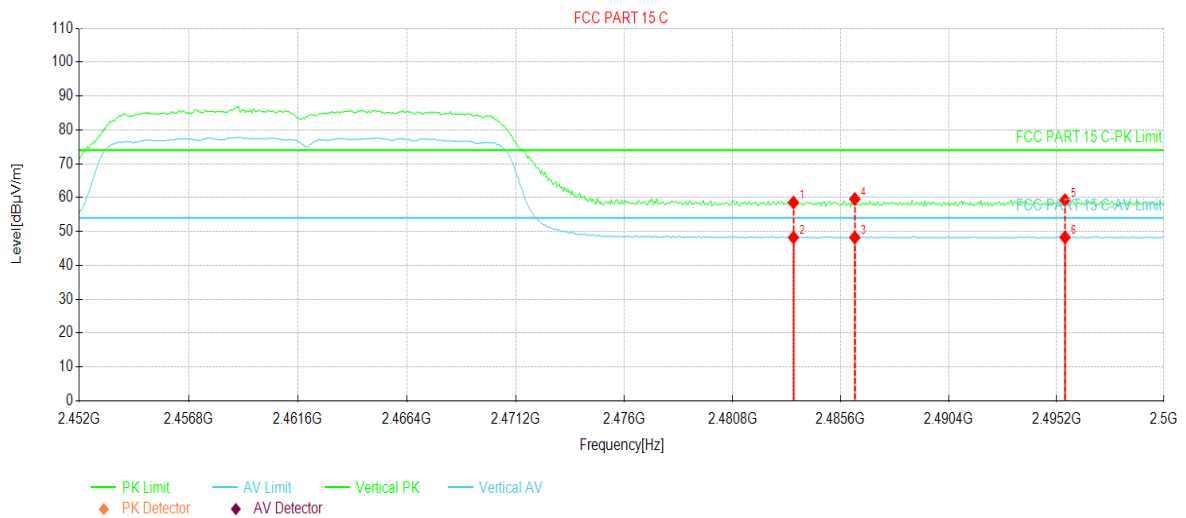


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.05	35.51	58.56	74.00	15.44	PK	Vertical
2	2483.50	12.73	35.51	48.24	54.00	5.76	AV	Vertical
3	2486.22	12.69	35.51	48.20	54.00	5.80	AV	Vertical
4	2486.22	24.09	35.51	59.60	74.00	14.40	PK	Vertical
5	2495.58	23.74	35.49	59.23	74.00	14.77	PK	Vertical
6	2495.58	12.77	35.49	48.26	54.00	5.74	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT20 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

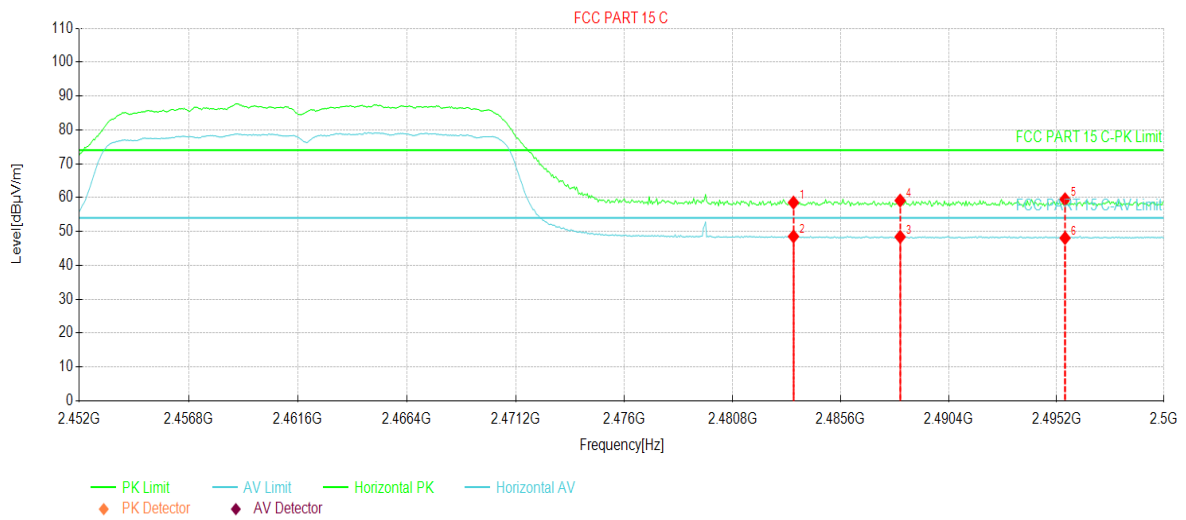


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	23.03	35.51	58.54	74.00	15.46	PK	Horizontal
2	2483.50	13.03	35.51	48.54	54.00	5.46	AV	Horizontal
3	2488.24	12.91	35.50	48.41	54.00	5.59	AV	Horizontal
4	2488.24	23.63	35.50	59.13	74.00	14.87	PK	Horizontal
5	2495.58	24.02	35.49	59.51	74.00	14.49	PK	Horizontal
6	2495.58	12.58	35.49	48.07	54.00	5.93	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

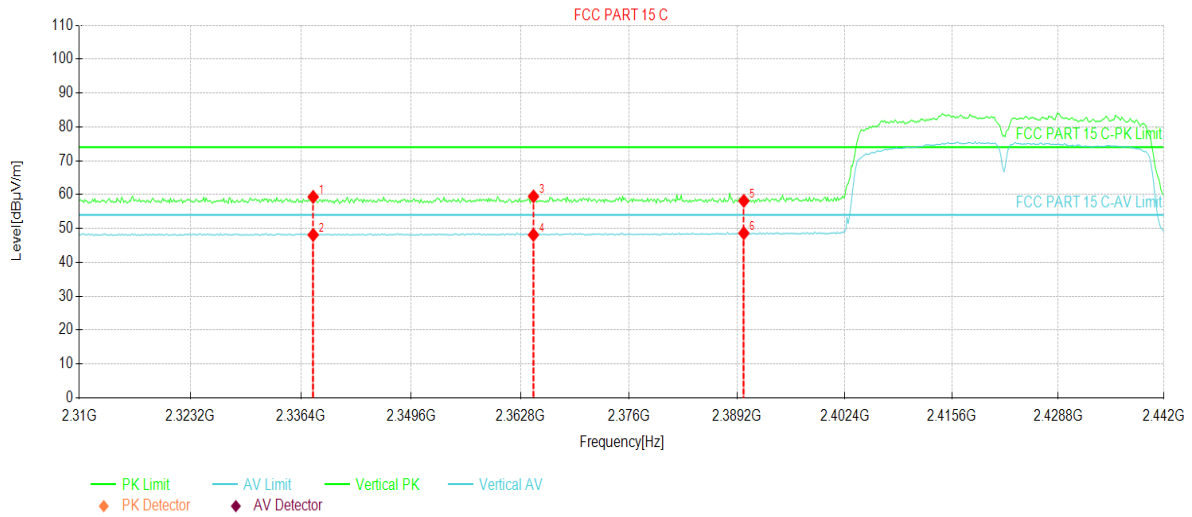


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2337.85	24.13	35.20	59.33	74.00	14.67	PK	Vertical
2	2337.85	12.92	35.20	48.12	54.00	5.88	AV	Vertical
3	2364.38	24.05	35.40	59.45	74.00	14.55	PK	Vertical
4	2364.38	12.71	35.40	48.11	54.00	5.89	AV	Vertical
5	2390.00	22.55	35.60	58.15	74.00	15.85	PK	Vertical
6	2390.00	13.01	35.60	48.61	54.00	5.39	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

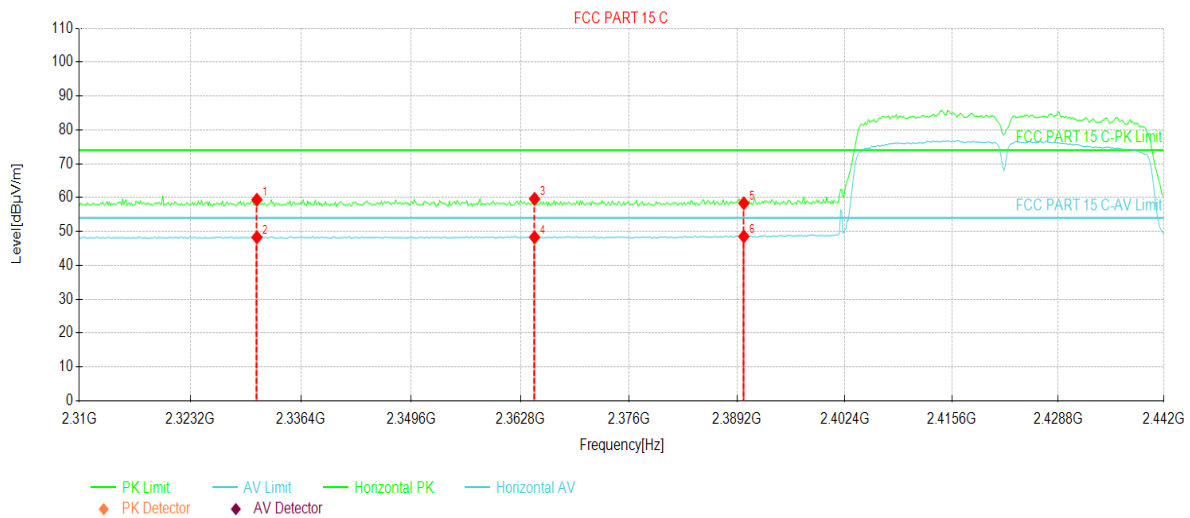


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2331.12	24.23	35.15	59.38	74.00	14.62	PK	Horizontal
2	2331.12	13.13	35.15	48.28	54.00	5.72	AV	Horizontal
3	2364.51	24.24	35.40	59.64	74.00	14.36	PK	Horizontal
4	2364.51	12.90	35.40	48.30	54.00	5.70	AV	Horizontal
5	2390.00	22.75	35.60	58.35	74.00	15.65	PK	Horizontal
6	2390.00	12.95	35.60	48.55	54.00	5.45	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 3.3V		

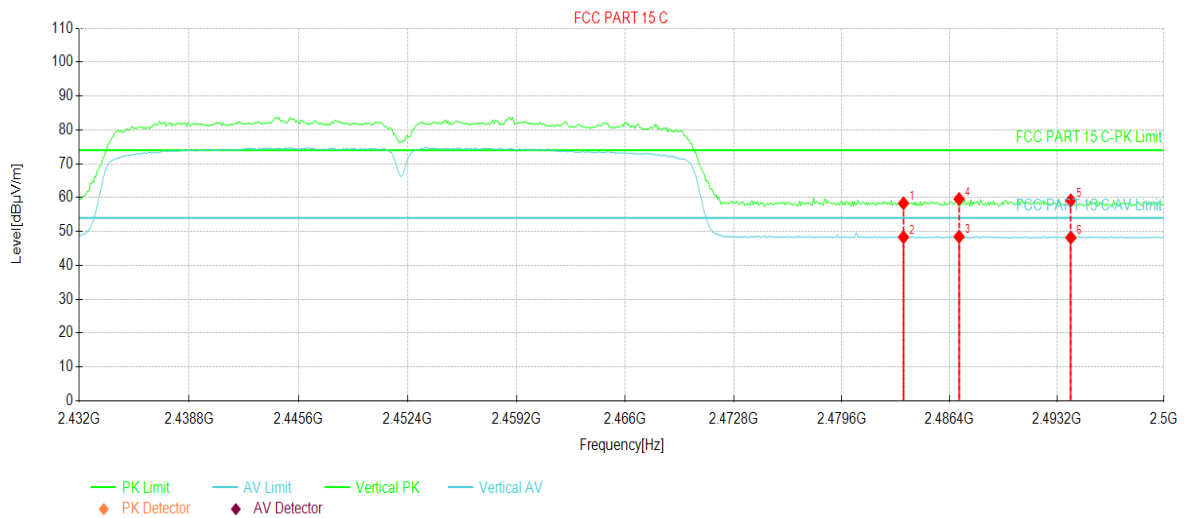


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.81	35.51	58.32	74.00	15.68	PK	Vertical
2	2483.50	12.82	35.51	48.33	54.00	5.67	AV	Vertical
3	2487.01	12.98	35.50	48.48	54.00	5.52	AV	Vertical
4	2487.01	24.10	35.50	59.60	74.00	14.40	PK	Vertical
5	2494.08	23.70	35.49	59.19	74.00	14.81	PK	Vertical
6	2494.08	12.70	35.49	48.19	54.00	5.81	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	802.11n-HT40 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

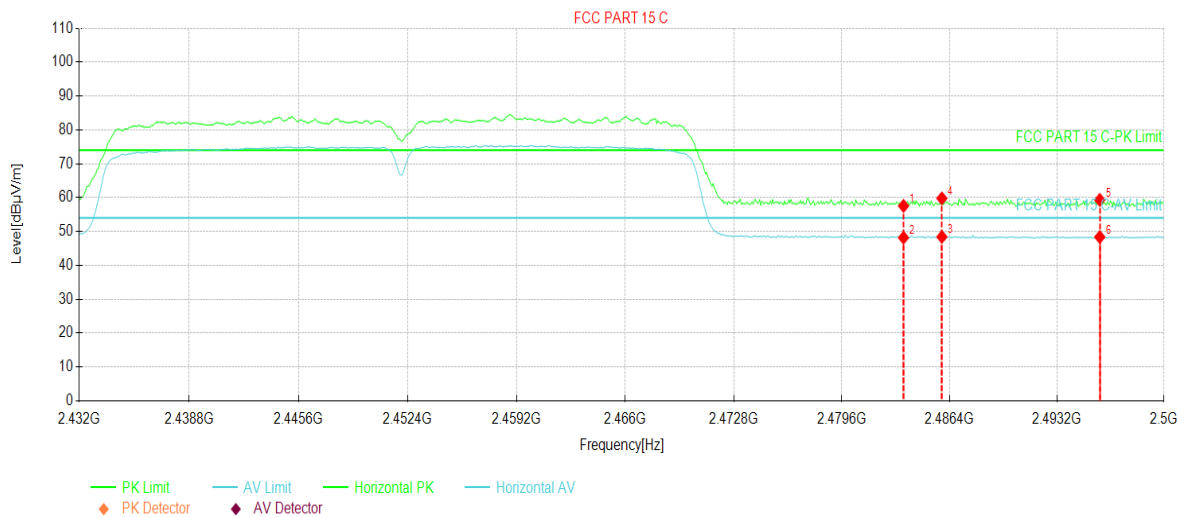

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2483.50	22.04	35.51	57.55	74.00	16.45	PK	Horizontal
2	2483.50	12.67	35.51	48.18	54.00	5.82	AV	Horizontal
3	2485.92	12.91	35.51	48.42	54.00	5.58	AV	Horizontal
4	2485.92	24.27	35.51	59.78	74.00	14.22	PK	Horizontal
5	2495.92	23.85	35.49	59.34	74.00	14.66	PK	Horizontal
6	2495.92	12.87	35.49	48.36	54.00	5.64	AV	Horizontal


Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

5.5 Emissions in Non-restricted Frequency Bands

Below 1GHz:

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	2.4G Wi-Fi mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 3.3V		

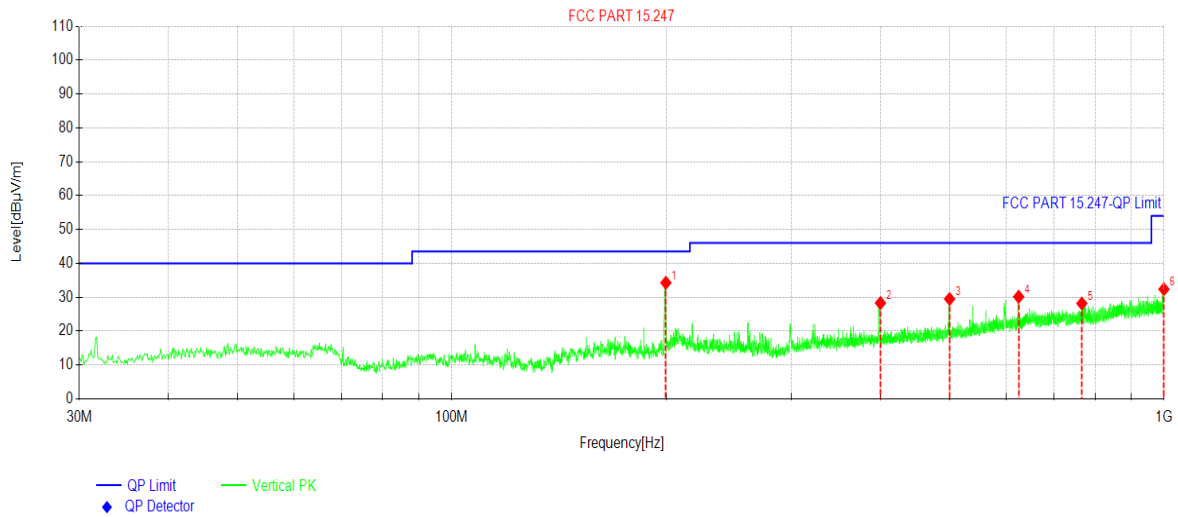


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	199.864	49.40	34.29	-15.11	43.50	9.21	PK	Vertical
2	399.898	39.10	28.30	-10.80	46.00	17.70	PK	Vertical
3	500.012	38.49	29.50	-8.99	46.00	16.50	PK	Vertical
4	625.057	36.47	30.15	-6.32	46.00	15.85	PK	Vertical
5	766.788	32.47	28.18	-4.29	46.00	17.82	PK	Vertical
6	999.806	34.10	32.37	-1.73	54.00	21.63	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss - Preamplifier Factor)

Product Name:	wireless module	Product Model:	WL6PR1101
Test By:	Mike	Test mode:	2.4G Wi-Fi mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 3.3V		

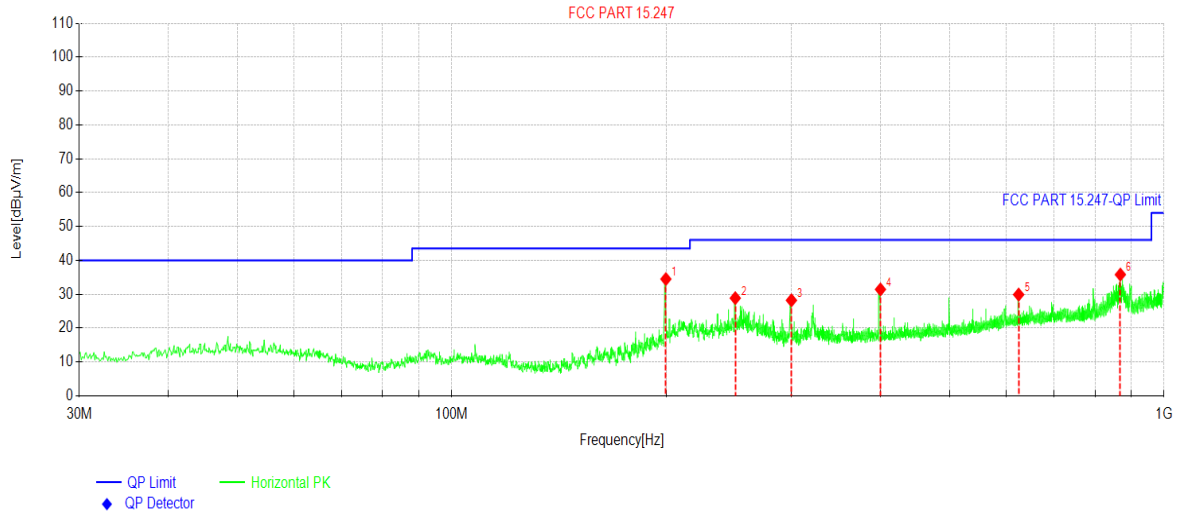

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	199.864	49.59	34.48	-15.11	43.50	9.02	PK	Horizontal
2	250.115	42.85	28.85	-14.00	46.00	17.15	PK	Horizontal
3	299.881	41.28	28.21	-13.07	46.00	17.79	PK	Horizontal
4	399.898	42.22	31.42	-10.80	46.00	14.58	PK	Horizontal
5	625.057	36.22	29.90	-6.32	46.00	16.10	PK	Horizontal
6	868.454	38.84	35.81	-3.03	46.00	10.19	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss - Preamplifier Factor)

Above 1GHz

ANT 1:

802.11b						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.56	-9.46	46.10	74.00	27.90	Vertical
4824.00	56.52	-9.46	47.06	74.00	26.94	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	50.47	-9.46	41.01	54.00	12.99	Vertical
4824.00	48.97	-9.46	39.51	54.00	14.49	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.26	-9.11	46.15	74.00	27.85	Vertical
4874.00	56.17	-9.11	47.06	74.00	26.94	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	50.30	-9.11	41.19	54.00	12.81	Vertical
4874.00	49.52	-9.11	40.41	54.00	13.59	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.14	-8.74	46.40	74.00	27.60	Vertical
4924.00	56.71	-8.74	47.97	74.00	26.03	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	50.15	-8.74	41.41	54.00	12.59	Vertical
4924.00	48.63	-8.74	39.89	54.00	14.11	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11g						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.16	-9.46	45.70	74.00	28.30	Vertical
4824.00	56.74	-9.46	47.28	74.00	26.72	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	50.14	-9.46	40.68	54.00	13.32	Vertical
4824.00	48.20	-9.46	38.74	54.00	15.26	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.13	-9.11	46.02	74.00	27.98	Vertical
4874.00	56.91	-9.11	47.80	74.00	26.20	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	50.41	-9.11	41.30	54.00	12.70	Vertical
4874.00	49.32	-9.11	40.21	54.00	13.79	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	54.20	-8.74	45.46	74.00	28.54	Vertical
4924.00	55.85	-8.74	47.11	74.00	26.89	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	49.60	-8.74	40.86	54.00	13.14	Vertical
4924.00	48.17	-8.74	39.43	54.00	14.57	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.13	-9.46	45.67	74.00	28.33	Vertical
4824.00	56.29	-9.46	46.83	74.00	27.17	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	50.31	-9.46	40.85	54.00	13.15	Vertical
4824.00	48.32	-9.46	38.86	54.00	15.14	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.80	-9.11	46.69	74.00	27.31	Vertical
4874.00	55.13	-9.11	46.02	74.00	27.98	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	50.13	-9.11	41.02	54.00	12.98	Vertical
4874.00	49.94	-9.11	40.83	54.00	13.17	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	54.13	-8.74	45.39	74.00	28.61	Vertical
4924.00	55.26	-8.74	46.52	74.00	27.48	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	49.32	-8.74	40.58	54.00	13.42	Vertical
4924.00	48.50	-8.74	39.76	54.00	14.24	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	55.47	-9.32	46.15	74.00	27.85	Vertical
4844.00	55.92	-9.32	46.60	74.00	27.40	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	50.49	-9.32	41.17	54.00	12.83	Vertical
4844.00	49.20	-9.32	39.88	54.00	14.12	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.17	-9.11	46.06	74.00	27.94	Vertical
4874.00	56.36	-9.11	47.25	74.00	26.75	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	50.06	-9.11	40.95	54.00	13.05	Vertical
4874.00	48.21	-9.11	39.10	54.00	14.90	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	55.50	-8.90	46.60	74.00	27.40	Vertical
4904.00	56.08	-8.90	47.18	74.00	26.82	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	49.21	-8.90	40.31	54.00	13.69	Vertical
4904.00	48.13	-8.90	39.23	54.00	14.77	Horizontal
Remark:						
1. <i>Level = Reading + Factor.</i>						
2. <i>Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.</i>						

ANT 2:

802.11b						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	54.10	-9.46	44.64	74.00	29.36	Vertical
4824.00	53.09	-9.46	43.63	74.00	30.37	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	47.69	-9.46	38.23	54.00	15.77	Vertical
4824.00	47.57	-9.46	38.11	54.00	15.89	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	54.16	-9.11	45.05	74.00	28.95	Vertical
4874.00	53.92	-9.11	44.81	74.00	29.19	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.65	-9.11	38.54	54.00	15.46	Vertical
4874.00	47.19	-9.11	38.08	54.00	15.92	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	54.06	-8.74	45.32	74.00	28.68	Vertical
4924.00	53.85	-8.74	45.11	74.00	28.89	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	47.13	-8.74	38.39	54.00	15.61	Vertical
4924.00	47.52	-8.74	38.78	54.00	15.22	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11g						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	54.95	-9.46	45.49	74.00	28.51	Vertical
4824.00	53.85	-9.46	44.39	74.00	29.61	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	47.16	-9.46	37.70	54.00	16.30	Vertical
4824.00	47.53	-9.46	38.07	54.00	15.93	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	54.13	-9.11	45.02	74.00	28.98	Vertical
4874.00	54.26	-9.11	45.15	74.00	28.85	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.53	-9.11	38.42	54.00	15.58	Vertical
4874.00	47.21	-9.11	38.10	54.00	15.90	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	54.67	-8.74	45.93	74.00	28.07	Vertical
4924.00	53.95	-8.74	45.21	74.00	28.79	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	47.53	-8.74	38.79	54.00	15.21	Vertical
4924.00	47.19	-8.74	38.45	54.00	15.55	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	54.43	-9.46	44.97	74.00	29.03	Vertical
4824.00	53.15	-9.46	43.69	74.00	30.31	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	47.22	-9.46	37.76	54.00	16.24	Vertical
4824.00	47.13	-9.46	37.67	54.00	16.33	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	54.28	-9.11	45.17	74.00	28.83	Vertical
4874.00	54.17	-9.11	45.06	74.00	28.94	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.95	-9.11	38.84	54.00	15.16	Vertical
4874.00	46.53	-9.11	37.42	54.00	16.58	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	54.10	-8.74	45.36	74.00	28.64	Vertical
4924.00	53.88	-8.74	45.14	74.00	28.86	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	47.06	-8.74	38.32	54.00	15.68	Vertical
4924.00	47.15	-8.74	38.41	54.00	15.59	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	54.77	-9.32	45.45	74.00	28.55	Vertical
4844.00	54.06	-9.32	44.74	74.00	29.26	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	48.14	-9.32	38.82	54.00	15.18	Vertical
4844.00	47.03	-9.32	37.71	54.00	16.29	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	54.53	-9.11	45.42	74.00	28.58	Vertical
4874.00	54.13	-9.11	45.02	74.00	28.98	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.15	-9.11	38.04	54.00	15.96	Vertical
4874.00	47.32	-9.11	38.21	54.00	15.79	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	54.09	-8.90	45.19	74.00	28.81	Vertical
4904.00	54.15	-8.90	45.25	74.00	28.75	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	47.53	-8.90	38.63	54.00	15.37	Vertical
4904.00	47.11	-8.90	38.21	54.00	15.79	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANT 3:

802.11b						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.28	-9.46	45.82	74.00	28.18	Vertical
4824.00	54.64	-9.46	45.18	74.00	28.82	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	47.07	-9.46	37.61	54.00	16.39	Vertical
4824.00	47.89	-9.46	38.43	54.00	15.57	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.16	-9.11	46.05	74.00	27.95	Vertical
4874.00	54.39	-9.11	45.28	74.00	28.72	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.13	-9.11	38.02	54.00	15.98	Vertical
4874.00	47.26	-9.11	38.15	54.00	15.85	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.85	-8.74	47.11	74.00	26.89	Vertical
4924.00	54.49	-8.74	45.75	74.00	28.25	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	47.16	-8.74	38.42	54.00	15.58	Vertical
4924.00	47.53	-8.74	38.79	54.00	15.21	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11g						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.13	-9.46	45.67	74.00	28.33	Vertical
4824.00	54.83	-9.46	45.37	74.00	28.63	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	47.15	-9.46	37.69	54.00	16.31	Vertical
4824.00	47.56	-9.46	38.10	54.00	15.90	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.92	-9.11	46.81	74.00	27.19	Vertical
4874.00	54.17	-9.11	45.06	74.00	28.94	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.06	-9.11	37.95	54.00	16.05	Vertical
4874.00	47.85	-9.11	38.74	54.00	15.26	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.93	-8.74	47.19	74.00	26.81	Vertical
4924.00	54.16	-8.74	45.42	74.00	28.58	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	47.83	-8.74	39.09	54.00	14.91	Vertical
4924.00	47.05	-8.74	38.31	54.00	15.69	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.69	-9.46	46.23	74.00	27.77	Vertical
4824.00	54.16	-9.46	44.70	74.00	29.30	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	47.06	-9.46	37.60	54.00	16.40	Vertical
4824.00	47.52	-9.46	38.06	54.00	15.94	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.13	-9.11	46.02	74.00	27.98	Vertical
4874.00	54.19	-9.11	45.08	74.00	28.92	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.16	-9.11	38.05	54.00	15.95	Vertical
4874.00	47.24	-9.11	38.13	54.00	15.87	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.98	-8.74	47.24	74.00	26.76	Vertical
4924.00	54.73	-8.74	45.99	74.00	28.01	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	47.06	-8.74	38.32	54.00	15.68	Vertical
4924.00	47.51	-8.74	38.77	54.00	15.23	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	55.74	-9.32	46.42	74.00	27.58	Vertical
4844.00	54.93	-9.32	45.61	74.00	28.39	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	47.81	-9.32	38.49	54.00	15.51	Vertical
4844.00	47.13	-9.32	37.81	54.00	16.19	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.09	-9.11	45.98	74.00	28.02	Vertical
4874.00	54.74	-9.11	45.63	74.00	28.37	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.85	-9.11	38.74	54.00	15.26	Vertical
4874.00	47.63	-9.11	38.52	54.00	15.48	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	55.16	-8.90	46.26	74.00	27.74	Vertical
4904.00	54.84	-8.90	45.94	74.00	28.06	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	47.61	-8.90	38.71	54.00	15.29	Vertical
4904.00	47.22	-8.90	38.32	54.00	15.68	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANT 4:

802.11b						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.52	-9.46	46.06	74.00	27.94	Vertical
4824.00	54.00	-9.46	44.54	74.00	29.46	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	49.06	-9.46	39.60	54.00	14.40	Vertical
4824.00	47.41	-9.46	37.95	54.00	16.05	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.16	-9.11	46.05	74.00	27.95	Vertical
4874.00	54.09	-9.11	44.98	74.00	29.02	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	49.16	-9.11	40.05	54.00	13.95	Vertical
4874.00	47.51	-9.11	38.40	54.00	15.60	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.41	-8.74	46.67	74.00	27.33	Vertical
4924.00	54.78	-8.74	46.04	74.00	27.96	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	49.52	-8.74	40.78	54.00	13.22	Vertical
4924.00	47.63	-8.74	38.89	54.00	15.11	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11g						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.84	-9.46	46.38	74.00	27.62	Vertical
4824.00	54.06	-9.46	44.60	74.00	29.40	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	49.74	-9.46	40.28	54.00	13.72	Vertical
4824.00	47.14	-9.46	37.68	54.00	16.32	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.41	-9.11	46.30	74.00	27.70	Vertical
4874.00	54.13	-9.11	45.02	74.00	28.98	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	49.85	-9.11	40.74	54.00	13.26	Vertical
4874.00	47.56	-9.11	38.45	54.00	15.55	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.96	-8.74	47.22	74.00	26.78	Vertical
4924.00	54.72	-8.74	45.98	74.00	28.02	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	49.34	-8.74	40.60	54.00	13.40	Vertical
4924.00	47.52	-8.74	38.78	54.00	15.22	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.24	-9.46	45.78	74.00	28.22	Vertical
4824.00	54.09	-9.46	44.63	74.00	29.37	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	49.24	-9.46	39.78	54.00	14.22	Vertical
4824.00	47.52	-9.46	38.06	54.00	15.94	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.92	-9.11	46.81	74.00	27.19	Vertical
4874.00	54.71	-9.11	45.60	74.00	28.40	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	49.27	-9.11	40.16	54.00	13.84	Vertical
4874.00	47.31	-9.11	38.20	54.00	15.80	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.90	-8.74	47.16	74.00	26.84	Vertical
4924.00	54.93	-8.74	46.19	74.00	27.81	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	49.26	-8.74	40.52	54.00	13.48	Vertical
4924.00	47.18	-8.74	38.44	54.00	15.56	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	55.13	-9.32	45.81	74.00	28.19	Vertical
4844.00	54.71	-9.32	45.39	74.00	28.61	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	49.27	-9.32	39.95	54.00	14.05	Vertical
4844.00	47.52	-9.32	38.20	54.00	15.80	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.43	-9.11	46.32	74.00	27.68	Vertical
4874.00	54.93	-9.11	45.82	74.00	28.18	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	49.52	-9.11	40.41	54.00	13.59	Vertical
4874.00	47.51	-9.11	38.40	54.00	15.60	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	55.63	-8.90	46.73	74.00	27.27	Vertical
4904.00	54.16	-8.90	45.26	74.00	28.74	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	49.14	-8.90	40.24	54.00	13.76	Vertical
4904.00	47.55	-8.90	38.65	54.00	15.35	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANT 5:

802.11b						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.09	-9.46	45.63	74.00	28.37	Vertical
4824.00	54.37	-9.46	44.91	74.00	29.09	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	47.70	-9.46	38.24	54.00	15.76	Vertical
4824.00	47.90	-9.46	38.44	54.00	15.56	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.19	-9.11	46.08	74.00	27.92	Vertical
4874.00	54.23	-9.11	45.12	74.00	28.88	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.09	-9.11	37.98	54.00	16.02	Vertical
4874.00	47.52	-9.11	38.41	54.00	15.59	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.92	-8.74	47.18	74.00	26.82	Vertical
4924.00	54.16	-8.74	45.42	74.00	28.58	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	47.62	-8.74	38.88	54.00	15.12	Vertical
4924.00	47.15	-8.74	38.41	54.00	15.59	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11g						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.63	-9.46	46.17	74.00	27.83	Vertical
4824.00	54.13	-9.46	44.67	74.00	29.33	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	47.92	-9.46	38.46	54.00	15.54	Vertical
4824.00	47.15	-9.46	37.69	54.00	16.31	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.92	-9.11	46.81	74.00	27.19	Vertical
4874.00	54.73	-9.11	45.62	74.00	28.38	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.53	-9.11	38.42	54.00	15.58	Vertical
4874.00	47.52	-9.11	38.41	54.00	15.59	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.47	-8.74	46.73	74.00	27.27	Vertical
4924.00	54.71	-8.74	45.97	74.00	28.03	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	47.26	-8.74	38.52	54.00	15.48	Vertical
4924.00	47.22	-8.74	38.48	54.00	15.52	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	55.25	-9.46	45.79	74.00	28.21	Vertical
4824.00	54.63	-9.46	45.17	74.00	28.83	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	47.15	-9.46	37.69	54.00	16.31	Vertical
4824.00	47.53	-9.46	38.07	54.00	15.93	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.74	-9.11	46.63	74.00	27.37	Vertical
4874.00	54.26	-9.11	45.15	74.00	28.85	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.15	-9.11	38.04	54.00	15.96	Vertical
4874.00	47.63	-9.11	38.52	54.00	15.48	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	55.92	-8.74	47.18	74.00	26.82	Vertical
4924.00	54.74	-8.74	46.00	74.00	28.00	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	47.64	-8.74	38.90	54.00	15.10	Vertical
4924.00	47.06	-8.74	38.32	54.00	15.68	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	55.92	-9.32	46.60	74.00	27.40	Vertical
4844.00	54.71	-9.32	45.39	74.00	28.61	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	47.16	-9.32	37.84	54.00	16.16	Vertical
4844.00	47.85	-9.32	38.53	54.00	15.47	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.92	-9.11	46.81	74.00	27.19	Vertical
4874.00	54.91	-9.11	45.80	74.00	28.20	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	47.06	-9.11	37.95	54.00	16.05	Vertical
4874.00	47.51	-9.11	38.40	54.00	15.60	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	55.74	-8.90	46.84	74.00	27.16	Vertical
4904.00	54.23	-8.90	45.33	74.00	28.67	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	47.85	-8.90	38.95	54.00	15.05	Vertical
4904.00	47.50	-8.90	38.60	54.00	15.40	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANT 6:

802.11b						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	53.96	-9.46	44.50	74.00	29.50	Vertical
4824.00	54.18	-9.46	44.72	74.00	29.28	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	48.05	-9.46	38.59	54.00	15.41	Vertical
4824.00	47.27	-9.46	37.81	54.00	16.19	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	53.95	-9.11	44.84	74.00	29.16	Vertical
4874.00	54.09	-9.11	44.98	74.00	29.02	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	48.54	-9.11	39.43	54.00	14.57	Vertical
4874.00	47.29	-9.11	38.18	54.00	15.82	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	53.41	-8.74	44.67	74.00	29.33	Vertical
4924.00	54.82	-8.74	46.08	74.00	27.92	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	48.13	-8.74	39.39	54.00	14.61	Vertical
4924.00	47.55	-8.74	38.81	54.00	15.19	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11g						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	53.09	-9.46	43.63	74.00	30.37	Vertical
4824.00	54.52	-9.46	45.06	74.00	28.94	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	48.16	-9.46	38.70	54.00	15.30	Vertical
4824.00	47.30	-9.46	37.84	54.00	16.16	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	53.95	-9.11	44.84	74.00	29.16	Vertical
4874.00	54.16	-9.11	45.05	74.00	28.95	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	48.92	-9.11	39.81	54.00	14.19	Vertical
4874.00	47.62	-9.11	38.51	54.00	15.49	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	53.26	-8.74	44.52	74.00	29.48	Vertical
4924.00	54.18	-8.74	45.44	74.00	28.56	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	48.92	-8.74	40.18	54.00	13.82	Vertical
4924.00	47.55	-8.74	38.81	54.00	15.19	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	53.46	-9.46	44.00	74.00	30.00	Vertical
4824.00	54.79	-9.46	45.33	74.00	28.67	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	48.63	-9.46	39.17	54.00	14.83	Vertical
4824.00	47.15	-9.46	37.69	54.00	16.31	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	53.91	-9.11	44.80	74.00	29.20	Vertical
4874.00	54.27	-9.11	45.16	74.00	28.84	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	48.62	-9.11	39.51	54.00	14.49	Vertical
4874.00	47.43	-9.11	38.32	54.00	15.68	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	53.74	-8.74	45.00	74.00	29.00	Vertical
4924.00	54.26	-8.74	45.52	74.00	28.48	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	48.16	-8.74	39.42	54.00	14.58	Vertical
4924.00	47.23	-8.74	38.49	54.00	15.51	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	53.14	-9.32	43.82	74.00	30.18	Vertical
4844.00	54.07	-9.32	44.75	74.00	29.25	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	48.24	-9.32	38.92	54.00	15.08	Vertical
4844.00	47.63	-9.32	38.31	54.00	15.69	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	53.13	-9.11	44.02	74.00	29.98	Vertical
4874.00	54.71	-9.11	45.60	74.00	28.40	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	48.93	-9.11	39.82	54.00	14.18	Vertical
4874.00	47.14	-9.11	38.03	54.00	15.97	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	53.06	-8.90	44.16	74.00	29.84	Vertical
4904.00	54.74	-8.90	45.84	74.00	28.16	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	48.92	-8.90	40.02	54.00	13.98	Vertical
4904.00	47.47	-8.90	38.57	54.00	15.43	Horizontal
Remark:						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

-----End of report-----