

TEST REPORT

Reference No...... : WTD21D04037657W001
FCC ID : ZLZ-WMTSN1
Applicant..... : Shenzhen Mindray BIO-Medical electronics Co.,LTD.
Address..... : Mindray Building, Keji 12th Road South, Hi-tech Ind, Shenzhen, China
Manufacturer : Shenzhen Mindray BIO-Medical electronics Co.,LTD.
Address..... : 1203 Nanhuan Avenue, Guangming District, Shenzhen, PEOPLE'S REPUBLIC OF CHINA
Product..... : patient monitor
Model(s) : BeneVision N1
Brand Name..... : Mindray
Standards..... : FCC CFR47 Part 95 Subpart H
Date of Receipt sample : 2021-04-23
Date of Test : 2021-04-23 to 2021-04-28
Date of Issue..... : 2021-06-01
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China
Tel: +86-769-2267 6998
Fax: +86-769-2267 6828

Compiled by:



Andy Feng / Project Engineer

Approved by:



Daniel Liu / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.	4
4.3 TEST MODE	5
5 TEST SUMMARY	6
6 TEST FACILITY	7
7 EQUIPMENT USED DURING TEST	7
7.1 EQUIPMENTS LIST	8
7.2 MEASUREMENT UNCERTAINTY	9
7.3 TEST EQUIPMENT CALIBRATION	9
8 FIELD STRENGTH OF FUNDAMENTAL.....	10
8.1 EUT OPERATION.....	10
8.2 TEST PROCEDURE	10
8.3 TEST LIMITS	10
8.4 TEST RESULT	11
9 FIELD STRENGTH OF SPURIOUS EMISSIONS	12
9.1 EUT OPERATION.....	12
9.2 TEST SETUP	12
9.3 SPECTRUM ANALYZER SETUP	14
9.4 TEST PROCEDURE	15
9.5 SUMMARY OF TEST RESULTS	16
10 OCCUPIED BANDWIDTH.....	19
10.1 EUT OPERATION.....	19
10.2 TEST PROCEDURE.....	19
10.3 TEST RESULT	20
11 FREQUENCY STABILITY.....	26
11.1 EUT OPERATION.....	26
11.2 TEST PROCEDURE.....	26
11.3 TEST RESULT	27
12 RF EXPOSURE.....	32
13 PHOTOGRAPHS OF TEST SETUP AND EUT.....	33

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD21D04037 657W001	2021-04-23	2021-04-23 to 2021-04-28	2021-06-01	original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	patient monitor
Model(s):	BeneVision N1
Model Description:	N/A
Support:	WMTS
Hardware Version:	1.0
Software Version:	01.23.00.01

4.2 Details of E.U.T.

Operation Frequency:	608MHz(608-614MHz) 1.4GHz(1395-1400MHz) 1.4GHz(1427-1432MHz)
Max. RF output power:	ANT 1:608MHz:103.05dBuv/m ,1.4GHz: 100.60 dBuv/m ANT 2: 608MHz: 103.23 dBuv/m, 1.4GHz: 99.70 dBuv/m
Type of Modulation:	GFSK
Antenna Gain:	ANT 1:608MHz:-0.83dBi,1.4GHz: 1.45dBi ANT 2:608MHz:-0.51dBi,1.4GHz: 1.13dBi
Antenna installation:	WMTS: External antenna
Ratings:	Battery DC 7.2V, 2500mAh DC 12V, 2.5A, charging from adapter or Dock (Adapter Input: 100-240V~50/60Hz 0.6-1A) (Dock Input: 100-240V~50/60Hz 0.35-0.65A)
Adapter:	Manufacturer: FSP GROUP INC. Model No.: FSP030-RCAM-G

4.3 Test Mode

All channels and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Support Band	Channel Frequency
608-614MHz	608.66 MHz
	611.06 MHz
	613.46 MHz
1395-1400MHz and 1427-1432 MHz(wide band)	1395.5 MHz
	1399.5 MHz
	1431.5 MHz
1395-1400MHz and 1427-1432 MHz(narrow band)	1395.4 MHz
	1399.6 MHz
	1431.6 MHz

5 Test Summary

Test Items	Test Requirement	Result
FIELD STRENGTH OF FUNDAMENTAL	95.2369(a)(b)	PASS
FIELD STRENGTH OF SPURIOUS EMISSIONS	95.2379(a)(b)	PASS
OCCUPIED BANDWIDTH	2.1049	PASS
FREQUENCY STABILITY	95.2365	PASS

6 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Testing Group Co., Ltd. EMC Laboratory ` has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Testing Group Co., Ltd. EMC Laboratory ` has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

7 Equipment Used during Test

7.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2020-04-20 2021-04-19	2021-04-19 2022-04-18
2	LARGE LOOP ANTENNA	Laplace	RF300	9057	2020-07-30	2021-07-29
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-08-22	2021-08-21
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2019-04-28	2020-04-27
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2020-04-25 2021-04-24	2021-04-24 2022-04-23
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2020-04-20 2021-04-19	2021-04-19 2022-04-18
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2020-08-26	2021-08-25
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2020-08-26	2021-08-25
10	Signal Generator	R&S	SMR20	100046	2020-08-26	2021-08-25
11	Smart Antenna	SCHWARZBECK	HA08	-	2020-08-26	2021-08-25
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2020-04-20 2021-04-19	2021-04-19 2022-04-18
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020-04-25 2021-04-24	2021-04-24 2022-04-23
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2020-04-25 2021-04-24	2021-04-24 2022-04-23
4	Cable	HUBER+SUHNER	CBL2	525178	2020-04-20 2021-04-19	2021-04-19 2022-04-18
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2020-04-20 2021-04-19	2021-04-19 2022-04-18

7.2 Measurement Uncertainty

Parameter	Uncertainty
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
Confidence interval: 95%. Confidence factor:k=2	

7.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

8 FIELD STRENGTH OF FUNDAMENTAL

Test Requirement:	95.2369(a)(b)
Test Method:	ANSI/TIA-603-E-2016
Test Mode:	TX transmitting

8.1 EUT Operation

Operating Environment :

Temperature:	22.5 °C
Humidity:	52.1 % RH
Atmospheric Pressure:	101.2kPa

8.2 Test Procedure

Radiated method:

1. The setup of EUT is according with per TIA/EIA/EIA Standard 603-C.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

8.3 Test limits

(a) For WMTS transmitter types operating in the 608-614 MHz band, the field strength of the transmitted signal must not exceed 200 mV/m, measured at a distance of 3 meters, using instrumentation with a CISPR quasi-peak detector.

(b) For WMTS transmitter types operating in the 1395-1400 MHz and 1427-1432 MHz bands, the field strength of the transmitted signal must not exceed 740 mV/m, measured at 3 meters, using instrumentation with an averaging detector and a 1MHz reference bandwidth.

8.4 Test Result**FIELD STRENGTH OF FUNDAMENTAL****ANT 1**

Test channels(MHz)	Field Strength(dBuv/m)	limits(dBuv/m)	Result
608.66 MHz	102.20	106	PASS
611.06 MHz	98.60	106	PASS
613.46 MHz	103.05	106	PASS
1395.5 MHz(WB)	100.11	117.4	PASS
1399.5 MHz(WB)	100.39	117.4	PASS
1431.5 MHz(WB)	100.60	117.4	PASS
1395.4 MHz(NB)	98.08	117.4	PASS
1399.6 MHz(NB)	98.13	117.4	PASS
1431.6 MHz(NB)	100.35	117.4	PASS

ANT 2(CO2)

Test channels(MHz)	Field Strength(dBuv/m)	limits(dBuv/m)	Result
608.66 MHz	102.10	106	PASS
611.06 MHz	98.06	106	PASS
613.46 MHz	103.23	106	PASS
1395.5 MHz(WB)	98.53	117.4	PASS
1399.5 MHz(WB)	97.74	117.4	PASS
1431.5 MHz(WB)	99.70	117.4	PASS
1395.4 MHz(NB)	97.74	117.4	PASS
1399.6 MHz(NB)	97.97	117.4	PASS
1431.6 MHz(NB)	99.70	117.4	PASS

9 FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Requirement:	95.2379(a)(b)
Test Method:	ANSI/TIA-603-E-2016
Test Mode:	TX transmitting


9.1 EUT Operation

Operating Environment :


Temperature:	23.5 °C
Humidity:	52.1 % RH
Atmospheric Pressure:	101.2kPa

9.2 Test Setup


The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site. The test setup for emission measurement below 30MHz.

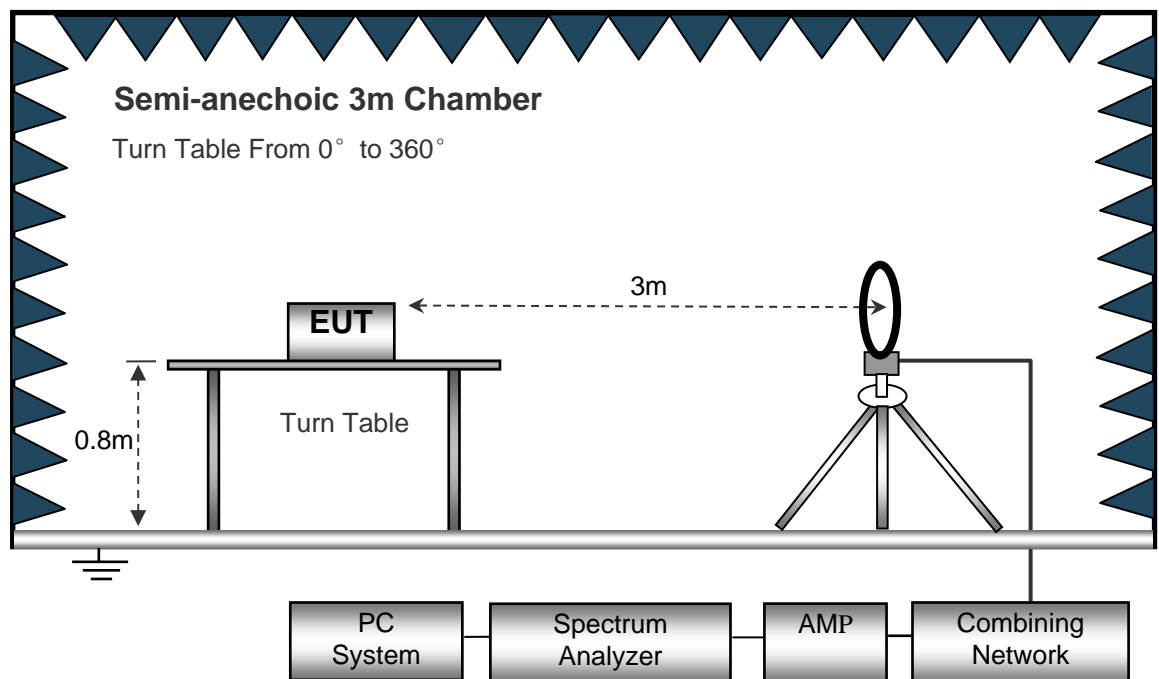

The test setup for emission measurement from 30 MHz to 1 GHz.

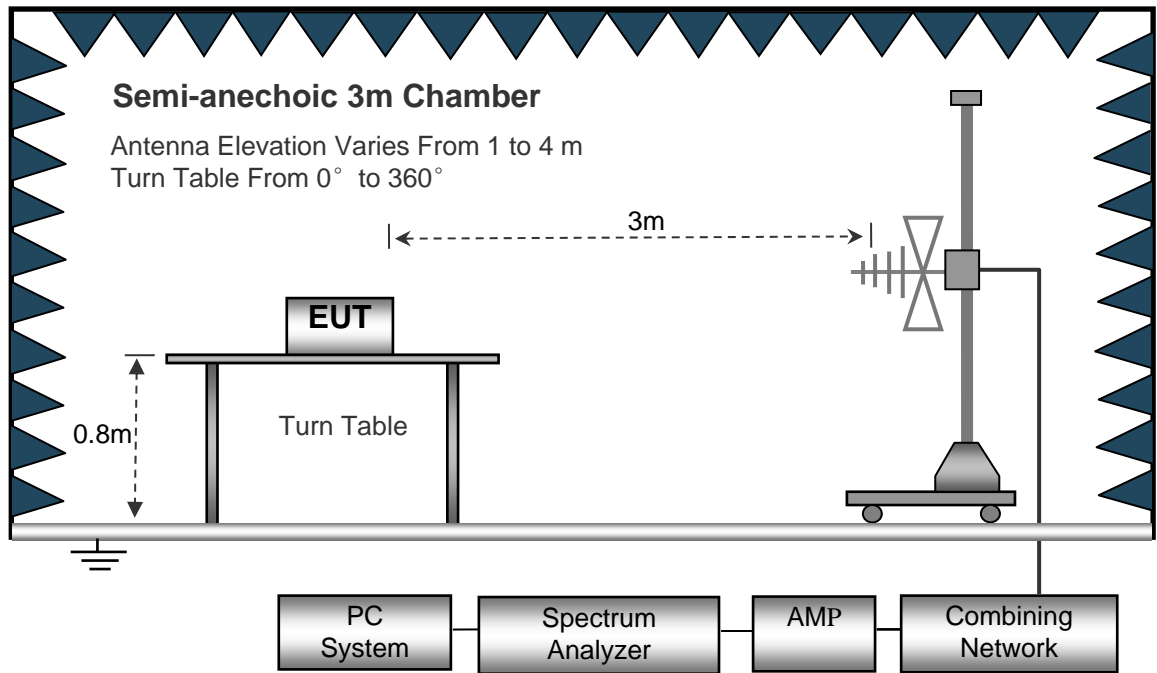

The test setup for emission measurement above 1 GHz.

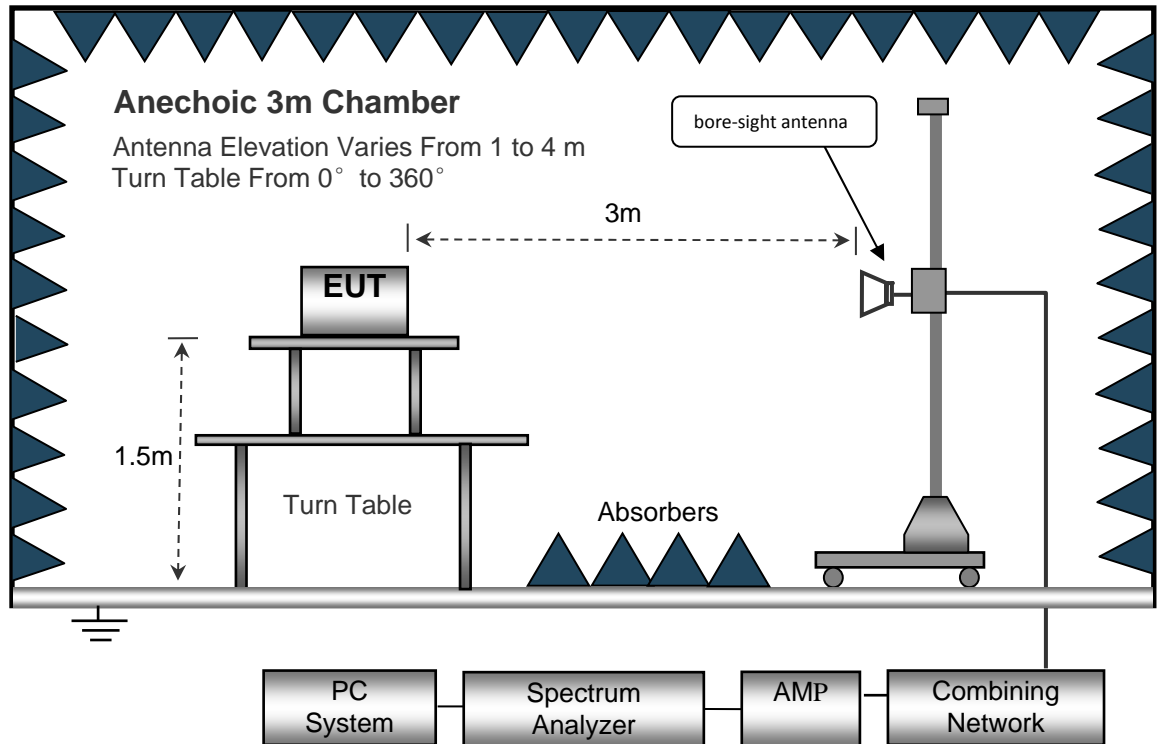

9.3 Spectrum Analyzer Setup

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz
 Detector QP.
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m for below 1GHz and 1.5m for above 1GHz above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from 30MHz up to the tenth harmonic of the highest fundamental frequency.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.
7. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level
Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$
8. Repeat above procedures until the measurements for all frequencies are completed.

9.5 Summary of Test Results

For 26MHz~30MHz,

The measurements were more than 20 dB below the limit and not reported.

Remark: Test performed from 30MHz to 10th harmonics with low/middle/high channels at ANT 1 and ANT 2(CO2).

ANT 1 Low channel(1395.5MHz WB)

Freq (MHz)	Reading (dBuv/m)	Factor (dB)	Polar (V/H)	Result (dBuv/m)	Limit (dBuv/m)	Margin (dB)	Detector
603.4268	44.21	-7.89	V	36.32	46.00	-9.68	QP
841.0253	42.16	-3.89	V	38.27	46.00	-7.73	QP
612.2355	44.70	-7.62	H	37.08	46.00	-8.92	QP
862.3560	42.45	-3.54	H	38.91	46.00	-7.09	QP
2792.000	57.47	-11.31	V	46.16	54.00	-7.84	AV
4178.000	42.29	-6.26	V	36.03	54.00	-17.97	AV
2792.000	45.08	-7.59	H	37.49	54.00	-16.51	AV
4178.000	40.19	-6.17	H	34.02	54.00	-19.98	AV

ANT 1 Low channel(1395.4MHz NB)

Freq (MHz)	Reading (dBuv/m)	Factor (dB)	Polar (V/H)	Result (dBuv/m)	Limit (dBuv/m)	Margin (dB)	Detector
607.6218	44.32	-7.77	V	36.55	46.00	-9.45	QP
862.2358	41.58	-3.54	V	38.04	46.00	-7.96	QP
607.4282	43.09	-7.77	H	35.32	46.00	-10.68	QP
859.2134	41.41	-3.59	H	37.82	46.00	-8.18	QP
2792.000	59.97	-11.31	V	48.66	54.00	-5.34	AV
4178.000	48.96	-6.26	V	42.70	54.00	-11.30	AV
2792.000	46.28	-7.59	H	38.69	54.00	-15.31	AV
4178.000	37.79	-6.17	H	31.62	54.00	-22.38	AV

ANT 1 Low channel(608.66MHz)

Freq (MHz)	Reading (dBuv/m)	Factor (dB)	Polar (V/H)	Result (dBuv/m)	Limit (dBuv/m)	Margin (dB)	Detector
680.2130	42.88	-5.95	V	36.93	46.00	-9.07	QP
813.3600	41.22	-4.21	V	37.01	46.00	-8.99	QP
632.2536	43.29	-7.07	H	36.22	46.00	-9.78	QP
815.3600	41.98	-4.21	H	37.77	46.00	-8.23	QP
1216.000	45.83	-15.29	V	30.54	54.00	-23.46	AV
1732.000	43.65	-12.17	V	31.48	54.00	-22.52	AV
1216.000	45.75	-13.07	H	32.68	54.00	-21.32	AV
1825.000	36.88	-9.63	H	27.25	54.00	-26.75	AV

Note: Margin = Limit-Result

ANT 2 Low channel(1395.5MHz WB)

Freq (MHz)	Reading (dBuv/m)	Factor (dB)	Polar (V/H)	Result (dBuv/m)	Limit (dBuv/m)	Margin (dB)	Detector
601.4265	45.43	-7.97	V	37.46	46.00	-8.54	QP
853.1584	42.83	-3.65	V	39.18	46.00	-6.82	QP
605.6592	45.06	-7.83	H	37.23	46.00	-8.77	QP
854.0247	44.36	-7.83	H	40.72	46.00	-5.28	QP
1896.000	57.34	-11.07	V	46.27	54.00	-7.73	AV
2792.000	55.54	-11.31	V	44.23	54.00	-9.77	AV
2428.000	52.64	-8.01	H	44.63	54.00	-9.37	AV
2792.000	49.03	-7.59	H	41.44	54.00	-12.56	AV

ANT 2 Low channel(1395.4MHz NB)

Freq (MHz)	Reading (dBuv/m)	Factor (dB)	Polar (V/H)	Result (dBuv/m)	Limit (dBuv/m)	Margin (dB)	Detector
607.2570	44.93	-7.78	V	37.15	46.00	-8.85	QP
854.0247	42.98	-3.64	V	39.34	46.00	-6.66	QP
625.0778	45.20	-7.22	H	37.98	46.00	-8.02	QP
801.7862	45.71	-4.15	H	41.56	46.00	-4.44	QP
2624.000	40.54	-11.82	V	28.72	54.00	-25.28	AV
5116.000	38.14	-1.78	V	36.36	54.00	-17.64	AV
1700.000	54.11	-10.40	H	43.71	54.00	-10.29	AV
5116.000	40.18	-3.80	H	36.38	54.00	-17.62	AV

ANT 2 Low channel(608.66MHz)

Freq (MHz)	Reading (dBuv/m)	Factor (dB)	Polar (V/H)	Result (dBuv/m)	Limit (dBuv/m)	Margin (dB)	Detector
673.9598	44.43	-5.87	V	38.56	46.00	-7.44	QP
798.3873	44.35	-4.21	V	40.14	46.00	-5.86	QP
679.5979	44.91	-5.93	H	38.98	46.00	-7.02	QP
801.7863	43.84	-4.15	H	39.69	46.00	-6.31	QP
2624.000	43.73	-11.82	V	31.91	54.00	-22.09	AV
4094.000	38.07	-6.52	V	31.55	54.00	-22.45	AV
1896.000	45.35	-9.20	H	36.15	54.00	-17.85	AV
2624.000	41.93	-7.77	H	34.16	54.00	-19.84	AV

Note: Margin = Limit-Result

10 OCCUPIED BANDWIDTH

Test Requirement:	2.1049
Test Method:	ANSI/TIA-603-E-2016
Test Mode:	TX transmitting

10.1 EUT Operation

Operating Environment :	
Temperature:	23.5 °C
Humidity:	52.3 % RH
Atmospheric Pressure:	101.3kPa

10.2 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 10kHz, VBW = 30kHz

10.3 Test Result

Test Channel	Bandwidth(KHz)
608.66 MHz	422.00
611.06 MHz	426.00
613.46 MHz	422.00
1395.5 MHz(WB)	784.00
1399.5 MHz(WB)	780.00
1431.5 MHz(WB)	768.00
1395.4 MHz(NB)	422.00
1399.6 MHz(NB)	422.00
1431.6 MHz(NB)	424.00


Test plots

608.66 MHz

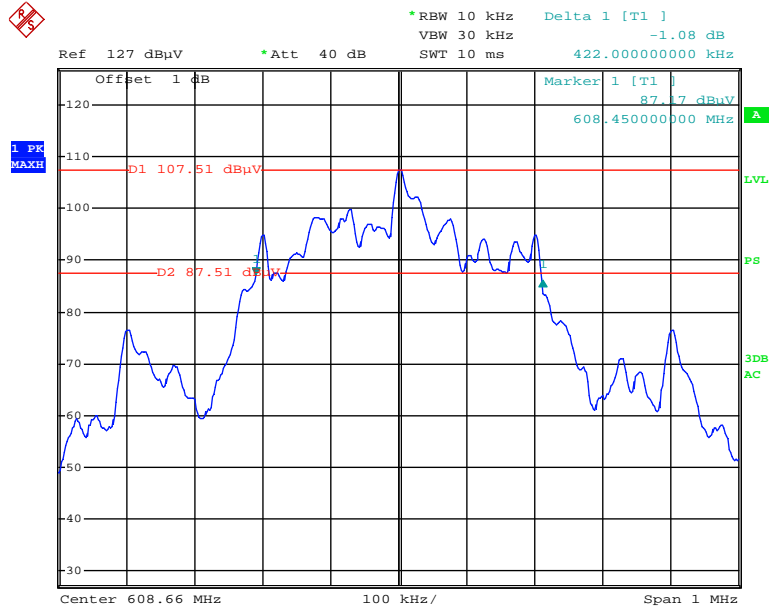


Date: 25.APR.2021 02:43:22


611.06MHz

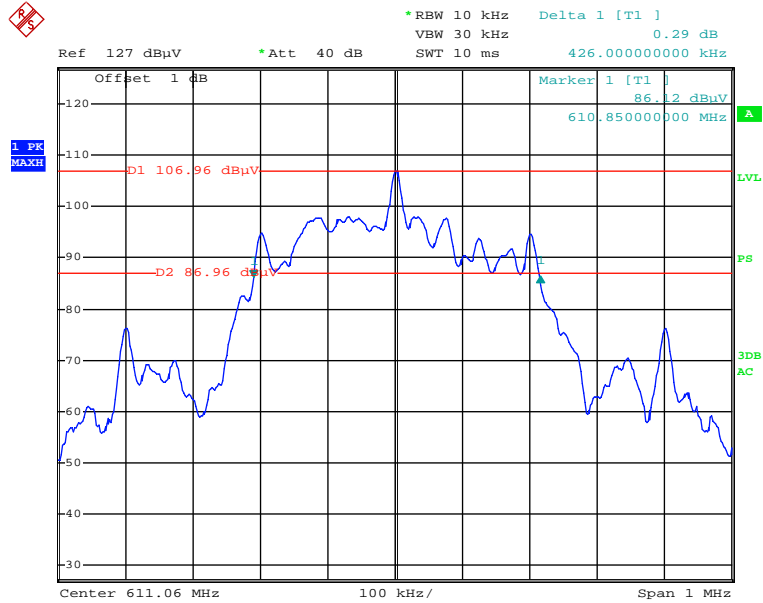


Date: 25.APR.2021 07:10:30

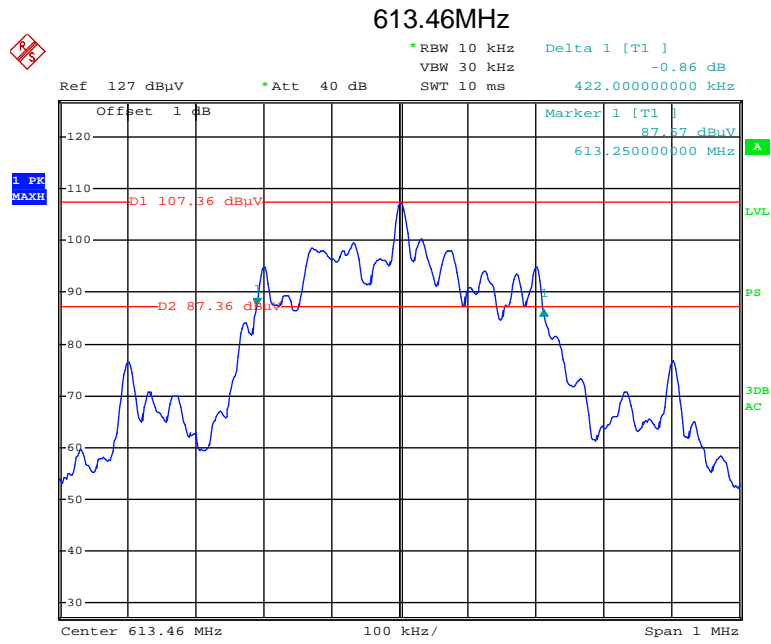


Date: 25.APR.2021 07:06:59

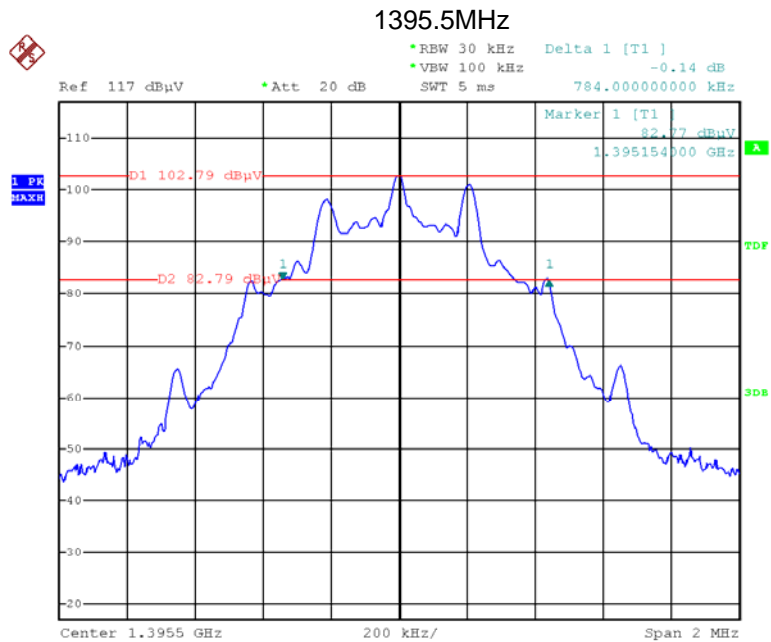


Date: 28.APR.2021 18:29:36

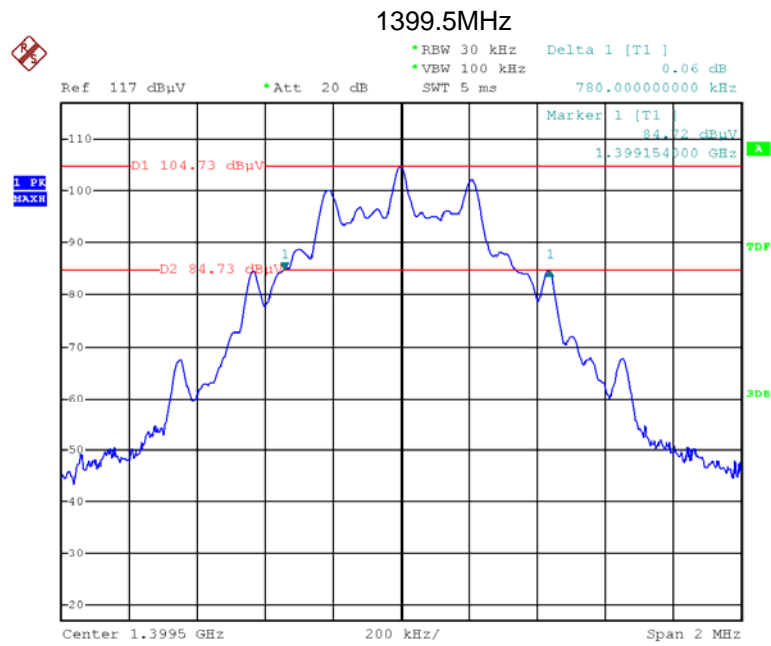


Date: 28.APR.2021 18:31:27

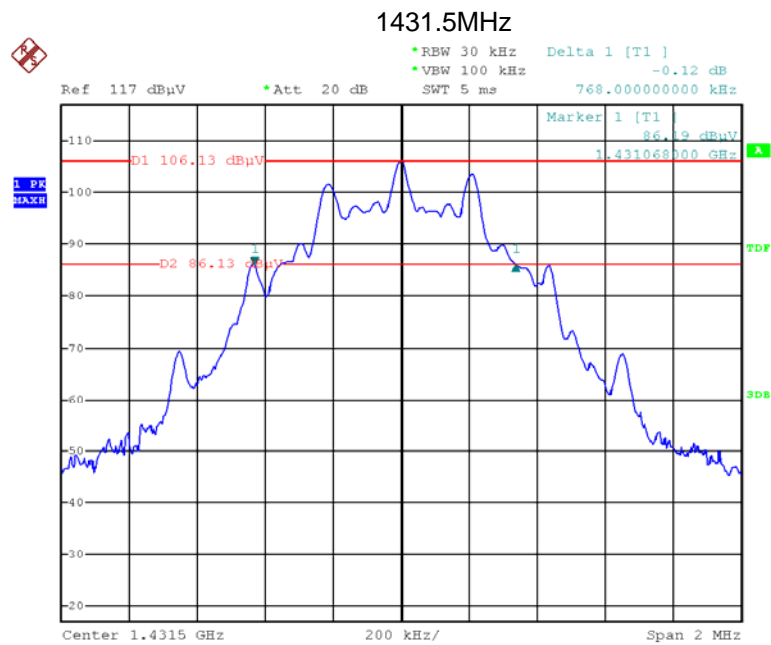


Date: 28.APR.2021 18:33:26

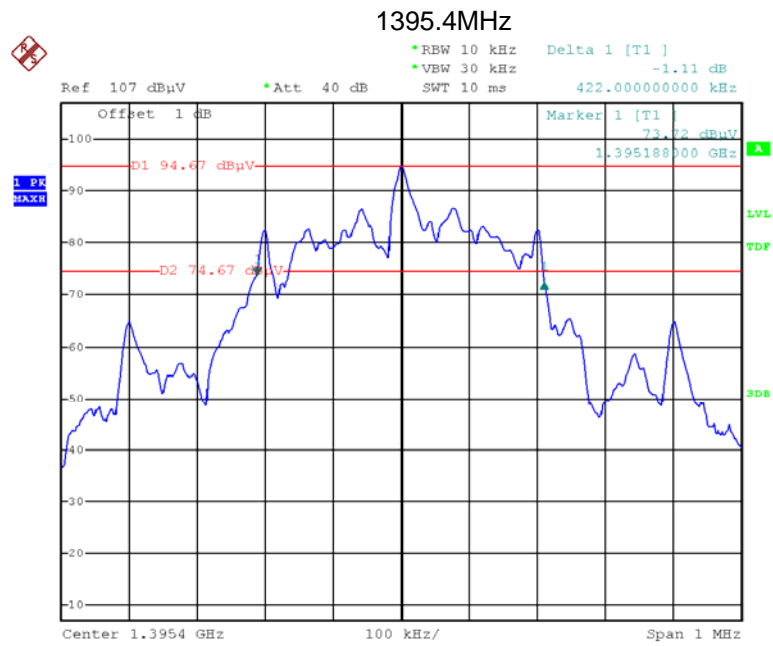

Date: 26.APR.2021 10:30:36

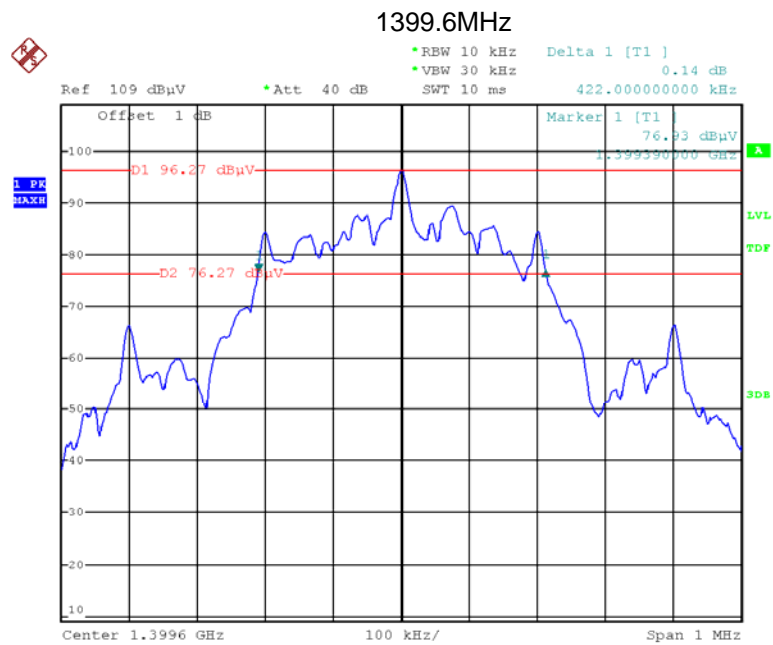

Date: 26.APR.2021 11:17:56

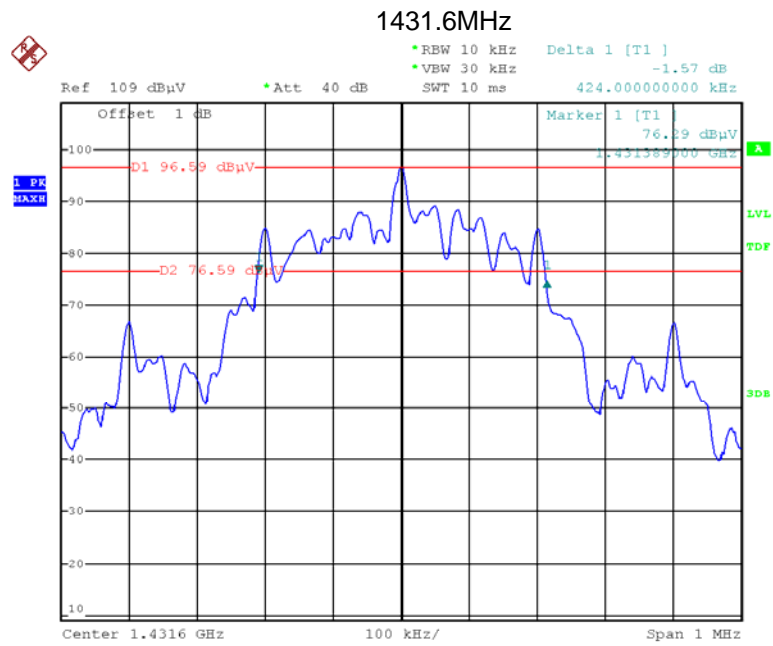

Date: 26.APR.2021 11:20:53

11 FREQUENCY STABILITY

Test Requirement:	FCC Part 2.1055
Test Method:	ANSI/TIA-603-E-2016 ANSI C63.26:2015
Test Mode:	TX transmitting
Note:	N/A

11.1 EUT Operation


Operating Environment :	
Temperature:	22.9 °C
Humidity:	52.0 % RH
Atmospheric Pressure:	101.3kPa

11.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

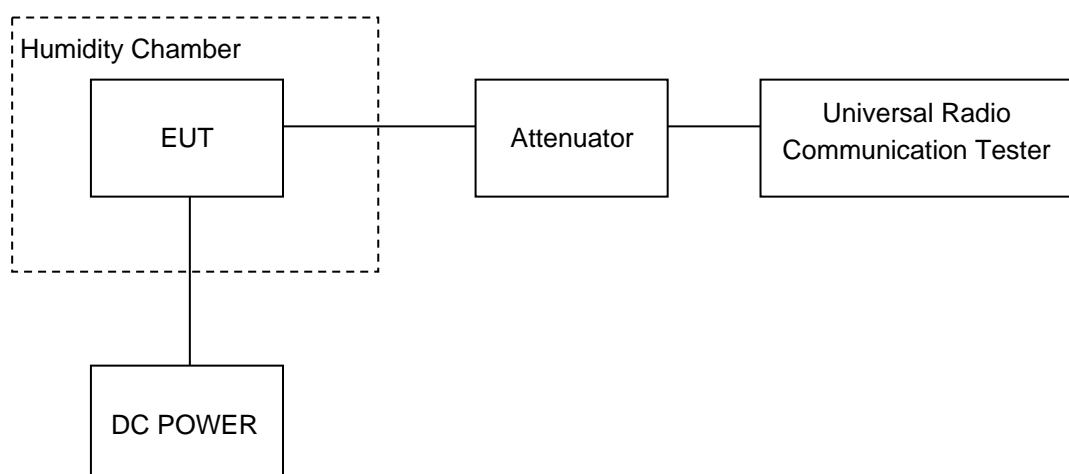

11.3 Test Result

Test Frequency:1395.5MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	7.2	15	0.0107	100
40		2	0.0014	100
30		10	0.0072	100
20		9	0.0064	100
10		8	0.0057	100
0		11	0.0079	100
-10		12	0.0086	100
-20		13	0.0093	100
-30		11	0.0079	100
20		6.50	5	0.0036
20	8.30	4	0.0029	100

Test Frequency:1399.5MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	7.2	11	0.0079	100
40		2	0.0014	100
30		15	0.0107	100
20		10	0.0071	100
10		8	0.0057	100
0		9	0.0064	100
-10		11	0.0079	100
-20		7	0.0050	100
-30		3	0.0021	100
20		6.50	4	0.0029
20	8.30	7	0.0050	100

Test Frequency:1431.5MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	7.2	14	0.0098	100
40		10	0.0070	100
30		2	0.0014	100
20		3	0.0021	100
10		8	0.0056	100
0		7	0.0049	100
-10		10	0.0070	100
-20		11	0.0077	100
-30		12	0.0084	100
20		6.50	15	0.0105
20	8.30	8	0.0056	100

Test Frequency:1431.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	7.2	8	0.0056	100
40		3	0.0021	100
30		10	0.0070	100
20		5	0.0035	100
10		6	0.0042	100
0		7	0.0049	100
-10		12	0.0084	100
-20		14	0.0098	100
-30		17	0.0119	100
20		6.50	7	0.0049
20	8.30	6	0.0042	100

Test Frequency:1395.4MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	7.2	12	0.0086	100
40		10	0.0072	100
30		9	0.0064	100
20		7	0.0050	100
10		2	0.0014	100
0		3	0.0021	100
-10		5	0.0036	100
-20		8	0.0057	100
-30		11	0.0079	100
20		6.50	10	0.0072
20	8.30	9	0.0064	100

Test Frequency:1399.6MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	7.2	14	0.0100	100
40		11	0.0079	100
30		10	0.0071	100
20		5	0.0036	100
10		6	0.0043	100
0		7	0.0050	100
-10		8	0.0057	100
-20		3	0.0021	100
-30		2	0.0014	100
20		6.50	5	0.0036
20	8.30	14	0.0100	100

Test Frequency:608.66MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	7.2	7	0.0115	100
40		8	0.0131	100
30		11	0.0181	100
20		12	0.0197	100
10		10	0.0164	100
0		14	0.0230	100
-10		10	0.0164	100
-20		7	0.0115	100
-30		2	0.0033	100
20		6.50	10	0.0164
20	8.30	11	0.0181	100

Test Frequency:611.06MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	7.2	15	0.0245	100
40		4	0.0065	100
30		3	0.0049	100
20		7	0.0115	100
10		11	0.0180	100
0		14	0.0229	100
-10		10	0.0163	100
-20		15	0.0245	100
-30		4	0.0065	100
20		6.50	20	0.0327
20	8.30	14	0.0229	100

Test Frequency:613.46MHz				
Temperature (°C)	Power Supply (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	7.2	12	0.0196	100
40		5	0.0082	100
30		8	0.0130	100
20		9	0.0147	100
10		11	0.0179	100
0		10	0.0163	100
-10		8	0.0130	100
-20		6	0.0098	100
-30		5	0.0082	100
20		6.50	7	0.0114
20	8.30	5	0.0082	100

12 RF Exposure

Remark: refer to MPE test report: WTD21D04037657W002

13 Photographs of test setup and EUT.

Note: Please refer to appendix-BeneVision N1-Photo.

===== End of Report =====