

SAR Compliance Test Report

Date of Report	23/04/2024	Client's Contact person:	Nikolaj Haahr Korshøj
Number of pages:	38	Responsible Test engineer:	Kirsi Kyllönen
Testing laboratory:	Verkotan Oy Elektroniikkatie 17 90590 Oulu Finland	Client:	Trackunit Aps Gasværksvej 24 4. sal 9000 Aalborg Denmark
Tested device	Access Control Unit: Pass		
Related reports:	-		
Testing has been carried out in accordance with:	47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices FCC published RF exposure KDB procedures IEC/IEEE 62209-1528, 2020 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices RSS-102, Issue 6, 2023 Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signatures:	23.04.2024		

Laboratory Manager

Miia Nurkkala

TABLE OF CONTENTS

1. SUMMARY OF SAR TEST REPORT	3
1.1 TEST DETAILS	3
1.2 MAXIMUM RESULTS	4
1.2.1 Standalone SAR	4
1.2.2 Simultaneous Transmission SAR	4
1.2.3 Maximum Drift	5
1.2.4 Measurement Uncertainty	5
2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)	6
2.1 SUPPORTED FREQUENCY BANDS AND OPERATIONAL MODES	7
3. OUTPUT POWER	8
3.1 MAXIMUM SPECIFIED CONDUCTED OUTPUT POWER	8
3.2 TESTED CONDUCTED POWER	8
4. TEST EQUIPMENT	10
4.1 TEST EQUIPMENT LIST	11
4.1.1 Isotropic E-field Probe Type EX3DV4	12
4.2 PHANTOMS	12
4.3 TISSUE SIMULANTS	12
4.4 SYSTEM VALIDATION STATUS	13
4.5 SYSTEM CHECK	13
4.5.1 Tissue Simulant Verification	13
5. TEST PROCEDURE	14
5.1 DEVICE HOLDER	14
5.2 TEST POSITIONS	15
5.2.1 Body-worn Configuration, 0mm separation distance	15
5.2.2 Extremity Configuration, 0mm separation distance	15
5.3 SCAN PROCEDURES	16
5.4 SAR AVERAGING METHODS	16
6. MEASUREMENT UNCERTAINTY	17
7. TEST RESULTS	19
7.1 SAR RESULTS FOR BODY EXPOSURE CONDITION WITH 0MM SEPARATION	19
7.2 SAR RESULTS FOR EXTREMITY EXPOSURE CONDITION 0MM SEPARATION	20
7.3 SIMULTANEOUS TRANSMISSION ANALYSIS	21
APPENDIX A: PHOTOS OF THE DUT	22
APPENDIX B: SYSTEM CHECK SCAN	25
APPENDIX C: MEASUREMENT SCANS	28
APPENDIX D: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS	31
APPENDIX E: RELEVANT PAGES FROM DIPOLE CALIBRATION REPORTS	35

1. SUMMARY OF SAR TEST REPORT

1.1 Test Details

Equipment under Test (DUT):

Product:	Pass
Manufacturer:	Trackunit Aps
Model:	K300
Serial Number:	15000029, 15000020
FCC ID Number:	ZMF-K300, contains: ZMF-TUBLEWIM01
ISED ID Number:	9746A-K300, contains: 9746A-TUBLEWIM01
DUT Number:	20815, 20814
Battery Type used in testing:	External power source
State of the Sample:	Pre-production sample

Testing information:

Testing performed:	6.3.2024-8.3.2024
Notes:	-
Document history:	Initial version
Document ID:	FCC_SAR report_TripleID_ID6267_22042024.docx
Temperature °C	22±2 / Controlled
Humidity RH%	30±20 / Controlled
Measurement performed by:	Miia Nurkkala, Kirsi Kyllönen
FCC Test Firm Designation Number:	F10005
ISED Company Number:	22218

1.2 Maximum Results

The maximum reported* SAR values for Body-worn and Extremity-configuration for transmitting systems are shown in a table below. The device conforms to the requirements of the standards when the maximum reported SAR value is less than or equal to the limit. The SAR limit specified in FCC 47 CFR part 2 (2.1093) and Health Canada's RF exposure guideline, Safety Code 6 for Head/Body SAR_{1g} is 1.6 W/kg and for Extremity SAR_{10g} is 4.0 W/kg.

1.2.1 Standalone SAR

System	Highest Reported* SAR _{1g} (W/kg) in Body-Worn Exposure Condition, 0mm separation distance	Highest Reported* SAR _{10g} (W/kg) in Extremity Exposure Condition, 0mm separation distance	Result
NFC	0.06	0.03	PASS
Bluetooth	1.07	0.45	PASS
2.4 GHz WLAN	1.47	0.62	PASS

* Reported SAR Values are scaled to upper limit of power tuning tolerance.

1.2.2 Simultaneous Transmission SAR

Highest Simultaneous Transmission SAR	SAR _{1g} (W/kg) in Body-Worn Exposure Condition	SAR _{10g} (W/kg) in Extremity Exposure Condition	Result
2.4 GHz WLAN + NFC	1.53	0.65	PASS

1.2.3 Maximum Drift

Maximum Drift During Measurements	-0.83 dB*
--	-----------

*Larger than 5% drifts included to scaling factors

1.2.4 Measurement Uncertainty

SAR 1g: 4 MHz – 300 MHz:

Expanded Uncertainty (k=2) 95 %	±22.9 %
--	---------

SAR 10g: 4 MHz – 300 MHz:

Expanded Uncertainty (k=2) 95 %	±22.6 %
--	---------

SAR 1g: 0.3 – 3 GHz:

Expanded Uncertainty (k=2) 95 %	±22.1 %
--	---------

SAR 10g: 0.3 – 3 GHz:

Expanded Uncertainty (k=2) 95 %	±21.9 %
--	---------

2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)

K300 is an access control device. It is installed to the machines, and vehicles including heavy equipment, service vans, trailers, and structures (including containers) to control access via PIN code, NFC card presented to the device, or the use of an application connecting over Bluetooth/BLE and/or Wifi.



Figure 1 The front of the K300.

Device Category	Portable
Exposure Environment	General population uncontrolled

2.1 Supported Frequency Bands and Operational Modes

TX Frequency bands	Modes of Operation	Transmitter Frequency Range [MHz]
	NFC	13.56
	2.4GHz WLAN	2412 – 2462
	Bluetooth	2402 – 2480

3. OUTPUT POWER

3.1 Maximum specified conducted output power

From the customer, including tune-up tolerances;

2.4GHz WLAN	Max Output Power [dBm]
802.11b	16

Bluetooth	Max Output Power [dBm]
Bluetooth LE	14

NFC	Max Output Power [dBm]
13.56 MHz	30

3.2 Tested conducted power

Measured conducted output power at transmitting antenna connector;

2.4 GHz WLAN:

Standard	Transmission mode	Data rate [Mbps]	Output power [dBm]		
			CH 1 2412 MHz	CH 6 2437 MHz	CH 11 2462 MHz
802.11b	DSSS	1	15.96	15.19	15.66

Bluetooth:

Standard	Output power [dBm]		
	CH 37 2402 MHz	CH 17 2440 MHz	CH 39 2480 MHz
BLE	13.15	12.1	11.92

NFC:

NFC	Max Output Power [dBm]
13.56 MHz	27.82

4. TEST EQUIPMENT

Dasy52 near field scanning system, manufactured by SPEAG was used for SAR testing. The test system consists of high precision robotics system (Staubli), robot controller, computer, near-field probe, probe alignment sensor, and a phantom containing the tissue equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location of maximum electromagnetic field.

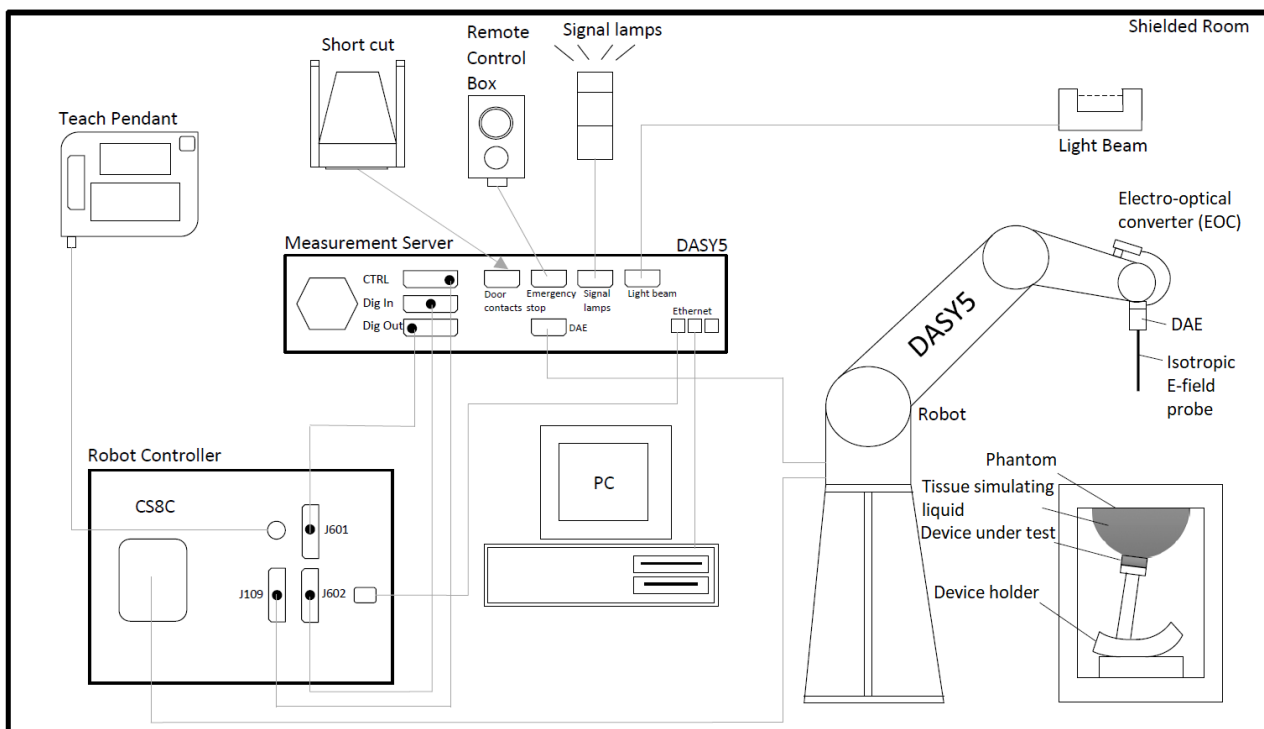


Figure 2 Schematic Laboratory Picture

4.1 Test Equipment List

Main used test system components are listed below. For full equipment list and calibration intervals, please contact the testing laboratory.

Test Equipment	Model	Serial Number	Calibration Date	Interval [years]
Amplifier, 0.5-1000MHz	TVA-R5-13A+	2202002	NA	NA
Amplifier, 800-4200MHz, 50W	5163F	1022	NA	NA
DAE4, converter	DAE4	705	04/2023	1
Inline Peak Power Sensor	MA24105A	2102058	10/2023	1
Isotropic DOS probe	EX3DV4	3852	10/2023	1
Power Sensor	NRP-Z11	100265	01/2024	2
System validation dipole	D2450V2	729	07/2022	3
System validation dipole	CLA13	1012	10/2023	3
Vector Signal Generator	MG3710A	6201502519	NA	1
DASY5 Software	52.8.8.1258	-	NA	NA

Dipole calibration period supporting data:

Dipole and serial number	Frequency [MHz]	Measured on 09/2023			Calibrated		
		Return loss [dB]	Impedance [Ω]		Return loss [dB]	Impedance [Ω]	
D2450V2-729	2450	-30.1	53.1	0.8	-24.7	54.3	4.3

4.1.1 Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to > 6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g, Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 10 mm Body diameter: 12 mm
Application	General dosimetry up to 6 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

4.2 Phantoms

Eli Phantom:

The phantom used in SAR tests was an ELI phantom, manufactured by SPEAG. ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 4 MHz to 6 GHz. The phantom conforms to the requirements of IEC/IEEE 62209-1528 and FCC published RF Exposure KDB Procedures.

4.3 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEC/IEEE 62209-1528 and FCC published RF Exposure KDB Procedures. The dielectric parameters of the used tissue simulants were within $\pm 10\%$ of the recommended values at frequencies under 3GHz. A liquid compensation algorithm was used in DASY5 with which measured peak average SAR values were corrected for the deviation of used liquid. Depth of the tissue simulant was at least 15.0 cm from the inner surface of the flat phantom.

Tissue simulant liquid Ingredients
Deionized Water, tween, salt

4.4 System Validation Status

Frequency [MHz]	Dipole Type / SN	Probe Type / SN	Calibrated Signal Type	DAE Unit / SN	Dielectric Constant [ϵ']	Conductivity σ [S/m]	Date
13	CLA 13 - SN: 1012	EX3DV4 - SN: 3852	CW	DAE 4 / 710	51.35	0.71	11/2023
2450	D2450V2 - SN: 758	EX3DV4 - SN: 3852	CW	DAE 4 / 710	38.16	1.68	11/2023
2450	D2450V2 - SN: 758	EX3DV4 - SN: 3852	CW	DAE 4 / 710	38.16	1.68	11/2023

4.5 System Check

Date	Tissue Type	Tissue Temp. [°C]	Frequency [MHz]	Input Power [mW]	Measured SAR _{1g} [W/kg]	1 W Target SAR _{1g} [W/kg]	1 W Normalized SAR _{1g} [W/kg]	Deviation [%]	Plot #
06.03.2024	WB Head	22	13	250	0.124	0.542	0.496	-8.5	1
07.03.2024	WB Head	22	2450	250	12.2	52.3	48.8	-6.7	2
08.03.2024	WB Head	22	2450	250	12.3	52.3	49.2	-5.9	3

4.5.1 Tissue Simulant Verification

Date	Tissue Type	Tissue Temp [°C]	Frequency [MHz]	Target		Measured		Deviation	
				Dielectric Constant [ϵ']	Conductivity σ [S/m]	Dielectric Constant [ϵ']	Conductivity σ [S/m]	ϵ [%]	σ [%]
06.03.2024	WB Head	22.6	13	55.0	0.75	52.1	0.68	-5.3	-8.9
06.03.2024	WB Head	22.6	13.56	55.0	0.75	51.92	0.68	-5.6	-8.9
07.03.2024	WB Head	22	2402	39.28	1.76	35.95	1.7	-8.5	-3.5
07.03.2024	WB Head	22	2440	39.22	1.79	35.89	1.72	-8.5	-4.0
07.03.2024	WB Head	22	2450	39.2	1.8	35.87	1.73	-8.5	-4.1
07.03.2024	WB Head	22	2480	39.16	1.83	35.8	1.75	-8.6	-4.7
08.03.2024	WB Head	22	2412	39.27	1.77	35.95	1.66	-8.4	-6.2
08.03.2024	WB Head	22	2437	39.22	1.79	35.92	1.67	-8.4	-6.5
08.03.2024	WB Head	22	2450	39.2	1.8	35.88	1.68	-8.5	-6.6
08.03.2024	WB Head	22	2462	39.18	1.81	35.86	1.69	-8.5	-6.8

5. TEST PROCEDURE

Testing was carried out in accordance with FCC KDB Publications 447498 D04 Interim General RF Exposure Guidance v01, 248227 D01 802.11 Wi-Fi SAR and RSS-102, Issue 6.

Low, mid and high frequency channels for the configuration with the highest SAR value were tested as per ISED notice 2016-DRS001.

Control software for WLAN, Bluetooth and NFC was used to set the DUT to transmit at maximum power and duty cycle.

The WLAN transmission modes for testing were selected according to largest channel bandwidth configuration, lowest order modulation and lowest data rate. 2.4GHz WLAN was tested with 802.11b standard with data rate of 1Mbit/s.

According to the manufacturer the duty cycle for the NFC is in very low in normal use as NFC transmits only when a user and card is detected. The transmission of NFC to read a card is 175ms.

In the maximum case the card is read once per 400ms giving duty cycle $175\text{ms}/400\text{ms} = 0.438$.

The SAR testing for NFC was done with 100% duty cycle and the measured results were scaled to the maximum possible duty cycle in use.

5.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

5.2 Test Positions

5.2.1 Body-worn Configuration, 0mm separation distance

Body SAR was tested from the front, top and sides of the device. The device was placed in the SPEAG holder on the top of a Rohacell and lifted towards the phantom until the distance between the phantom and the device was 0mm.

Photos of the test positions are presented in appendix A

5.2.2 Extremity Configuration, 0mm separation distance

Extremity SAR was tested from the front, top and sides of the device. The device was placed in the SPEAG holder on the top of a Rohacell and lifted towards the phantom until the distance between the phantom and the device was 0mm.

Photos of the test positions are presented in appendix A

5.3 Scan Procedures

First, area scans were used for determination of the field distribution. Next, a zoom scan was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

5.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within Dasy52 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighboring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

6. MEASUREMENT UNCERTAINTY

DASY5 Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 4MHz - 300MHz range)								
Symbol	Error Description	Uncert. value	Prob. Dist.	Div.	(c) 1g	(c) 10g	Std. Unc. (1g)	Std. Unc. (10g)
Measurement System Errors								
CF	Probe Calibration	±13.3%	N	√2	1	1	±6.65%	±6.65%
CF _{drift}	Probe Calibration Drift	±1.7%	R	√3	1	1	±1.0%	±1.0%
LIN	Probe Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%
BBS	Broadband Signal	±0.8%	R	√3	1	1	±0.5%	±0.5%
ISO	Probe Isotropy	±7.6%	R	3	1	1	±4.4%	±4.4%
DAE	Data Acquisition	±0.3%	N	1	1	1	±0.3%	±0.3%
AMB	RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Δ _{sys}	Probe Positioning	±3.9%	N	1	0.14	0.14	±0.5%	±0.5%
DAT	Data Processing	±1.2%	N	1	1	1	±1.2%	±1.2%
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) ^{DAK}	±2.5%	N	√1	0.78	0.71	±2.0%	±1.8%
LIQ(T _σ)	Conductivity (temp.) ^{BB}	±5.4%	R	√3	0.78	0.71	±2.4%	±2.2%
EPS	Phantom Permittivity	±14.0%	R	3	0	0	±0%	±0%
DIS	Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
D _{xyz}	Device Positioning (±0.5mm)	±1.0%	N	1	1	1	±1.0%	±1.0%
H	Device Holder	±3.6%	N	√1	1	1	±3.6%	±3.6%
MOD	DUT Modulation ^m	±2.4%	R	√3	1	1	±1.4%	±1.4%
TAS	Time-average SAR	±2.6%	R	3	1	1	±1.5%	±1.5%
RF _{drift}	DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
VAL	Val Antenna Unc. ^{val}	±0.0%	N	1	1	1	±0%	±0%
RF _{in}	Unc. Input Power ^{val}	±0.0%	N	1	1	1	±0%	±0%
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9%	N	√1	1	0.84	±1.9%	±1.6%
C(R)	SAR scaling ^p	±0%	R	3	1	1	±0%	±0%
u(ΔSAR)	Combined Uncertainty						±11.4%	±11.3%
U	Expanded Uncertainty						±22.9%	±22.6%

DASY5 Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 300MHz - 3GHz range)								
Symbol	Error Description	Uncert. value	Prob. Dist.	Div.	(c) 1g	(c) 10g	Std. Unc. (1g)	Std. Unc. (10g)
Measurement System Errors								
CF	Probe Calibration	±12.0%	N	√2	1	1	±6.0%	±6.0%
CF _{drift}	Probe Calibration Drift	±1.7%	R	√3	1	1	±1.0%	±1.0%
LIN	Probe Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%
BBS	Broadband Signal	±3.0%	R	√3	1	1	±1.7%	±1.7%
ISO	Probe Isotropy	±7.6%	R	3	1	1	±4.4%	±4.4%
DAE	Data Acquisition	±0.3%	N	1	1	1	±0.3%	±0.3%
AMB	RF Ambient	±1.8%	N	1	1	1	±1.8%	±1.8%
Δ _{sys}	Probe Positioning	±3.9%	N	1	0.14	0.14	±0.5%	±0.5%
DAT	Data Processing	±1.2%	N	1	1	1	±1.2%	±1.2%
Phantom and Device Errors								
LIQ(σ)	Conductivity (meas.) ^{DAK}	±2.5%	N	√1	0.78	0.71	±2.0%	±1.8%
LIQ(T _a)	Conductivity (temp.) ^{BB}	±3.3%	R	√3	0.78	0.71	±1.5%	±1.4%
EPS	Phantom Permittivity	±14.0%	R	3	0	0	±0%	±0%
DIS	Distance DUT - TSL	±2.0%	N	1	2	2	±4.0%	±4.0%
D _{xyz}	Device Positioning (±0.5mm)	±1.0%	N	1	1	1	±1.0%	±1.0%
H	Device Holder	±3.6%	N	√1	1	1	±3.6%	±3.6%
MOD	DUT Modulation ^m	±2.4%	R	√3	1	1	±1.4%	±1.4%
TAS	Time-average SAR	±2.6%	R	3	1	1	±1.5%	±1.5%
RF _{drift}	DUT drift	±2.5%	N	1	1	1	±2.5%	±2.5%
VAL	Val Antenna Unc. ^{val}	±0.0%	N	1	1	1	±0%	±0%
RF _{in}	Unc. Input Power ^{val}	±0.0%	N	1	1	1	±0%	±0%
Correction to the SAR results								
C(ε, σ)	Deviation to Target	±1.9%	N	√1	1	0.84	±1.9%	±1.6%
C(R)	SAR scaling ^p	±0%	R	3	1	1	±0%	±0%
u(ΔSAR)	Combined Uncertainty						±11.0%	±10.9%
U	Expanded Uncertainty						±22.1%	±21.9%

7. TEST RESULTS

7.1 SAR Results for Body Exposure Condition with 0mm separation

2.4GHz WLAN:

Standard	Data Rate [Mbps]	Frequency [MHz]	Channel	Maximum Power [dBm]	Conducted Power [dBm]	Test Position	Measured SAR _{1g} [W/kg]	Power Drift [dB]	Scaling Factor	Duty Cycle	Reported SAR _{1g} [W/kg]	Plot #
802.11b	1	2412	1	16	15.96	Front	1.21	-0.15	1.01	1:1	1.22	
802.11b	1	2412	1	16	15.96	Right	0.103	-0.2	1.01	1:1	0.10	
802.11b	1	2412	1	16	15.96	Left	0.66	0	1.01	1:1	0.66	
802.11b	1	2412	1	16	15.96	Top	0.047	-0.23*	1.06	1:1	0.05	
802.11b	1	2437	6	16	15.19	Front	1.21	0.02	1.21	1:1	1.46	
802.11b	1	2462	11	16	15.66	Front	1.13	-0.24*	1.14	1:1	1.29	
802.11b	1	2437	6	16	15.19	Front repeat	1.22	-0.06	1.21	1:1	1.47	4

*Larger than 5% drifts included to scaling factors

Bluetooth LE:

Mode	Frequency [MHz]	Channel	Test position	Maximum Power [dBm]	Conducted Power [dBm]	Measured SAR _{1g} [W/kg]	Power Drift [dB]	Scaling Factor	Duty Cycle	Reported SAR _{1g} [W/kg]	Plot #
BLE	2402	37	Front	14	13.35	0.76	-0.83*	1.41	1:1	1.07	5
BLE	2402	37	Right	14	13.35	0.04	-0.19	1.16	1:1	0.05	
BLE	2402	37	Left	14	13.35	0.40	0.08	1.16	1:1	0.47	
BLE	2402	37	Top	14	13.35	0.028	-0.25*	1.23	1:1	0.035	
BLE	2440	17	Front	14	12.1	0.57	-0.44*	1.71	1:1	0.97	
BLE	2480	39	Front	14	11.92	0.43	-0.76*	1.92	1:1	0.82	

*Larger than 5% drifts included to scaling factors

NFC:

Band	Frequency [MHz]	Maximum Power [dBm]	Conducted Power [dBm]	Test position	Measured SAR _{1g} [W/kg]	Power Drift [dB]	Maximum Operation Duty Cycle	Power Scaling Factor	Reported SAR _{1g} [W/kg]	Plot #
NFC	13.56	30	27.82	Front	0.083	-0.19	44%	1.65	0.06	6
NFC	13.56	30	27.82	Right	0.015	0.34*	44%	1.79	0.01	
NFC	13.56	30	27.82	Left	0.016	0.31*	44%	1.77	0.01	
NFC	13.56	30	27.82	Top	0.0038	0.38*	44%	1.80	0.003	

*Larger than 5% drifts included to scaling factors

7.2 SAR Results for Extremity Exposure Condition 0mm separation

2.4GHz WLAN:

Mode	Data Rate [Mbps]	Frequency [MHz]	Channel	Test position	Maximum Power [dBm]	Conducted Power [dBm]	Measured SAR _{10g} [W/kg]	Power Drift** [dB]	Scaling Factor	Duty Cycle	Reported SAR _{10g} [W/kg]	Plot #
802.11b	1	2412	1	Front	16	15.96	0.52	-0.15	1.01	1:1	0.53	
802.11b	1	2412	1	Right	16	15.96	0.05	-0.2	1.01	1:1	0.05	
802.11b	1	2412	1	Left	16	15.96	0.31	0	1.01	1:1	0.31	
802.11b	1	2412	1	Top	16	15.96	0.027	-0.23*	1.06	1:1	0.029	
802.11b	1	2437	6	Front	16	15.19	0.52	0.02	1.21	1:1	0.62	
802.11b	1	2462	11	Front	16	15.66	0.48	-0.24*	1.14	1:1	0.55	
802.11b	1	2437	6	Front repeat	16	15.19	0.52	-0.06	1.21	1:1	0.62	4

*Larger than 5% drifts included to scaling factors

Bluetooth:

Mode	Frequency [MHz]	Channel	Test position	Maximum Power [dBm]	Conducted Power [dBm]	Measured SAR _{1g} [W/kg]	Power Drift [dB]	Scaling Factor	Duty Cycle	Reported SAR _{1g} [W/kg]	Plot #
BLE	2402	37	Front	14	13.35	0.32	-0.83*	1.41	1:1	0.45	5
BLE	2402	37	Right	14	13.35	0.017	-0.19	1.16	1:1	0.02	
BLE	2402	37	Left	14	13.35	0.2	0.08	1.16	1:1	0.23	
BLE	2402	37	Top	14	13.35	0.016	-0.25*	1.23	1:1	0.02	
BLE	2440	17	Front	14	12.1	0.24	-0.44*	1.71	1:1	0.41	
BLE	2480	39	Front	14	11.92	0.18	-0.76*	1.92	1:1	0.35	

*Larger than 5% drifts included to scaling factors

NFC:

Band	Frequency [MHz]	Maximum Power [dBm]	Conducted Power [dBm]	Test position	Measured SAR _{10g} [W/kg]	Power Drift [dB]	Maximum Operation Duty Cycle	Power Scaling Factor	Reported SAR _{10g} [W/kg]	Plot #
NFC	13.56	30	27.82	Front	0.038	-0.19	44%	1.65	0.03	6
NFC	13.56	30	27.82	Right	0.0068	0.34*	44%	1.79	0.01	
NFC	13.56	30	27.82	Left	0.0070	0.31*	44%	1.77	0.01	
NFC	13.56	30	27.82	Top	0.0022	0.38*	44%	1.80	0.002	

*Larger than 5% drifts included to scaling factors

7.3 Simultaneous Transmission Analysis

Simultaneous transmission analysis for the maximum BT/WLAN SAR and NFC SAR is in the table below. Direct summation of SAR results was performed.

Body SAR 1g:

Exposure Condition	Body SAR _{1g} [W/kg]			
	Test Position	Front	Right	Left
2.4GHz WLAN	1.47	0.10	0.66	0.05
Bluetooth LE	1.07	0.05	0.47	0.035
Maximum WLAN 2.4GHz / Bluetooth LE	1.47	0.10	0.66	0.06
NFC	0.06	0.01	0.01	0.003
SAR Summation:	1.53	0.11	0.67	0.06

Extremity SAR 1g:

Exposure Condition	Extremity SAR _{10g} [W/kg]			
	Test Position	Front	Right	Left
2.4GHz WLAN	0.62	0.05	0.31	0.03
Bluetooth LE	0.45	0.02	0.23	0.02
Maximum WLAN 2.4GHz / Bluetooth LE	0.62	0.05	0.31	0.03
NFC	0.03	0.01	0.01	0.002
SAR Summation:	0.65	0.06	0.32	0.03

APPENDIX A: PHOTOS OF THE DUT

Size of the DUT is: 65 x 118 x 15 mm



Figure 3 The front of the K300.



Figure 4 The front of the DUT against the phantom with 0mm separation

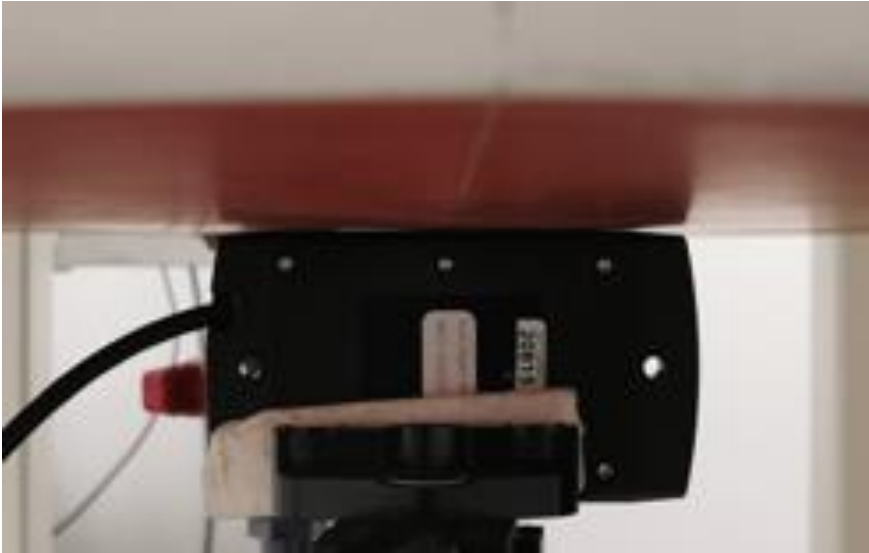


Figure 5 The right of the DUT against the phantom with 0mm separation



Figure 6 The left of the DUT against the phantom with 0mm separation



Figure 7 The top of the DUT against the phantom with 0mm separation

APPENDIX B: SYSTEM CHECK SCAN

Plot 1

Date/Time: 6.3.24 10:27:42

Test Laboratory: Verkotan Oy


DUT: CLA-13 - SN1012; Type: CLA-13; Serial: SN1012

Communication System: UID 0, CW (0); Communication System Band: CW; Frequency: 13 MHz;
Communication System PAR: 0 dB;
Medium parameters used: $f = 13$ MHz; $\sigma = 0.683$ S/m; $\epsilon_r = 52.099$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC)

DASY Configuration:

- Probe: EX3DV4 - SN3852; ConvF(13.94, 13.94, 13.94) @ 13 MHz; Calibrated: 23.10.23
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 31.0, -4.0$
 - Electronics: DAE4 Sn705; Calibrated: 14.4.23
 - Phantom: SAR1_Phantom1_ELI_left; Type: QD OVA 002 AA;
 - DASYS2 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/System check 13MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm
Reference Value = 15.35 V/m; Power Drift = -0.44 dB
Peak SAR (extrapolated) = 0.214 W/kg
SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.078 W/kg (SAR corrected for target medium)
Smallest distance from peaks to all points 3 dB below = 15.7 mm
Ratio of SAR at M2 to SAR at M1 = 55.2%
Maximum value of SAR (measured) = 0.174 W/kg
Configuration/System check 13MHz/Area Scan (181x181x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.174 W/kg

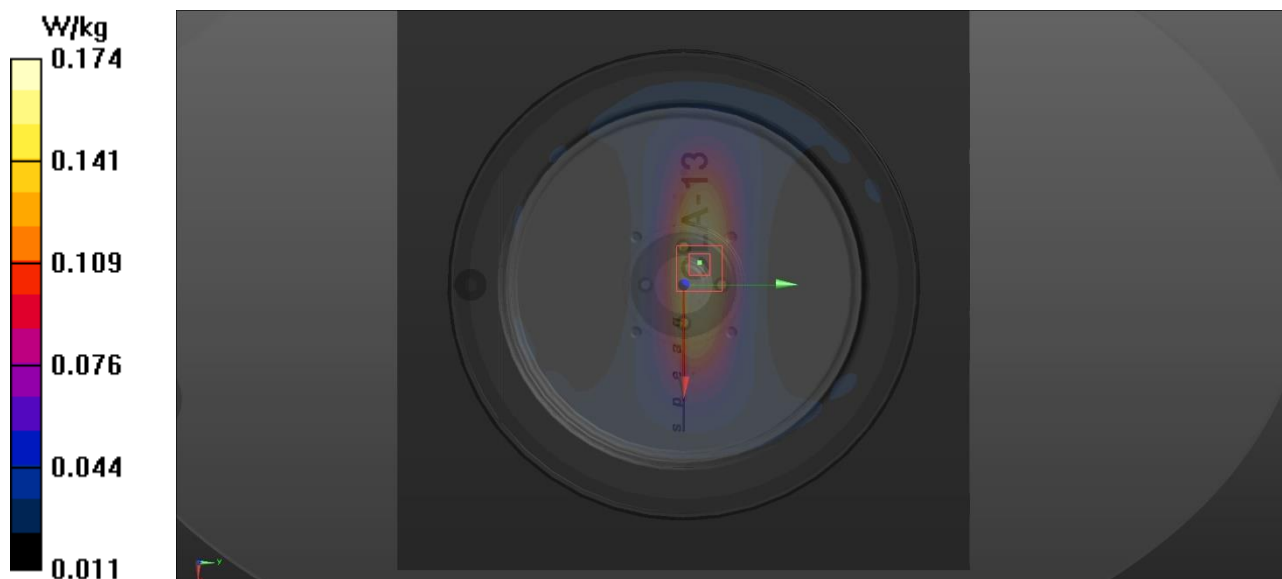

Plot 2

Date/Time: 7.3.24 09:55:12

Test Laboratory: Verkotan Oy

DUT: D2450V2 - SN729; Type: D2450V2; Serial: SN729

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz;
 Communication System PAR: 0 dB;
 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.726$ S/m; $\epsilon_r = 35.869$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY Configuration:

- Probe: EX3DV4 - SN3852; ConvF(7.07, 7.09, 7.16) @ 2450 MHz; Calibrated: 23.10.23
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 31.0, -4.0$
 - Electronics: DAE4 Sn705; Calibrated: 14.4.23
 - Phantom: SAR1_Phantom1_ELI_left; Type: QD OVA 002 AA;
 - DASYS2 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/system check 2450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 112.7 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 24.0 W/kg

SAR(1 g) = 12.2 W/kg; SAR(10 g) = 5.76 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 51.3%


Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 19.7 W/kg

Configuration/system check 2450/Area Scan (121x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 20.2 W/kg

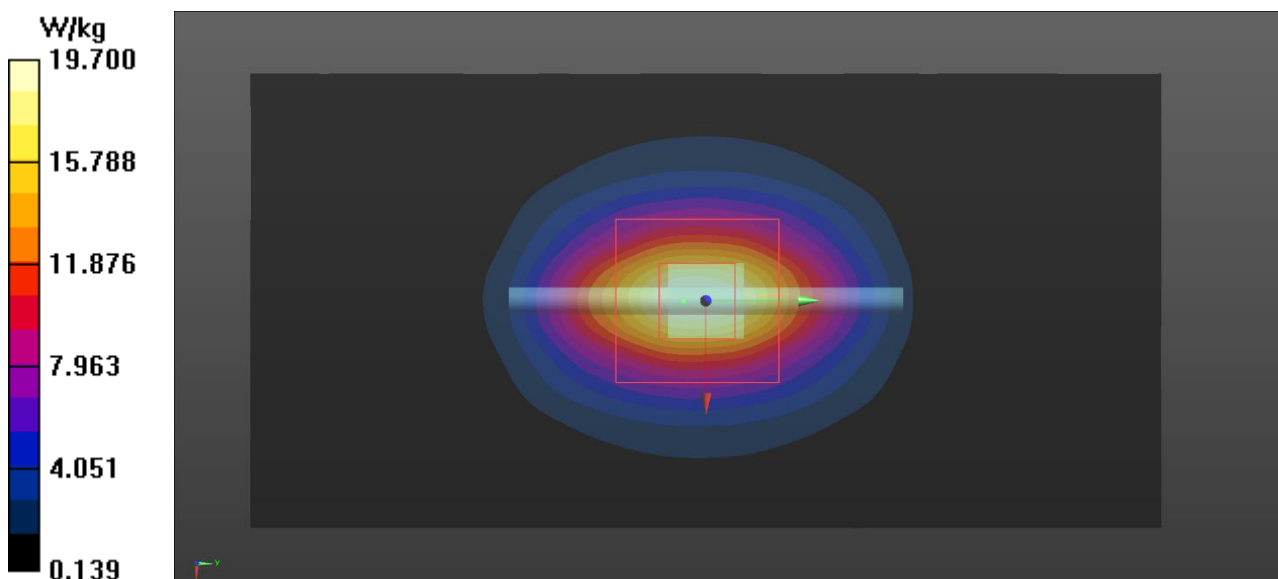

Plot 3

Date/Time: 8.3.24 10:27:19

Test Laboratory: Verkotan Oy

DUT: D2450V2 - SN729; Type: D2450V2; Serial: SN729

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz;
 Communication System PAR: 0 dB;
 Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.682$ S/m; $\epsilon_r = 35.881$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY Configuration:

- Probe: EX3DV4 - SN3852; ConvF(7.07, 7.09, 7.16) @ 2450 MHz; Calibrated: 23.10.23
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 31.0, -4.0$
 - Electronics: DAE4 Sn705; Calibrated: 14.4.23
 - Phantom: SAR1_Phantom1_ELI_left; Type: QD OVA 002 AA;
 - DASYS2 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/system check 2450/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 118.2 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 23.3 W/kg

SAR(1 g) = 12.3 W/kg; SAR(10 g) = 5.77 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%


Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 19.2 W/kg

Configuration/system check 2450/Area Scan (121x61x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 19.0 W/kg

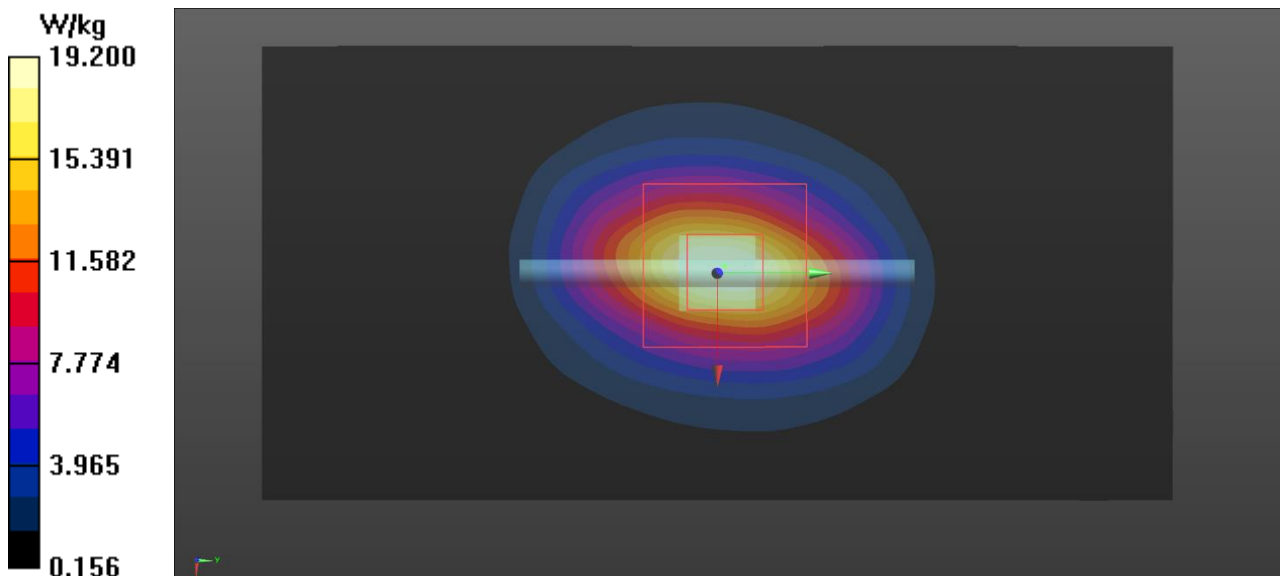

APPENDIX C: MEASUREMENT SCANS

Plot 4

Date/Time: 8.3.24 13:46:16

Test Laboratory: Verkotan Oy

DUT: K300; TripleID

Communication System: UID 0, WLAN 2.4 (0); Communication System Band: WLAN2.4GHz; Frequency: 2437 MHz;

Communication System PAR: 0 dB;

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.673$ S/m; $\epsilon_r = 35.921$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC)

DASY Configuration:

- Probe: EX3DV4 - SN3852; ConvF(7.07, 7.09, 7.16) @ 2437 MHz; Calibrated: 23.10.23
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -4.0, 16.0$
 - Electronics: DAE4 Sn705; Calibrated: 14.4.23
 - Phantom: SAR1_Phantom1_ELI_left; Type: QD OVA 002 AA;
 - DASYS2 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/WLAN Front, 0 mm repeat/Area Scan (101x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 2.14 W/kg

Configuration/WLAN Front, 0 mm repeat/Zoom Scan (8x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 15.20 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 2.89 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.516 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 41.6%

Maximum value of SAR (measured) = 2.26 W/kg

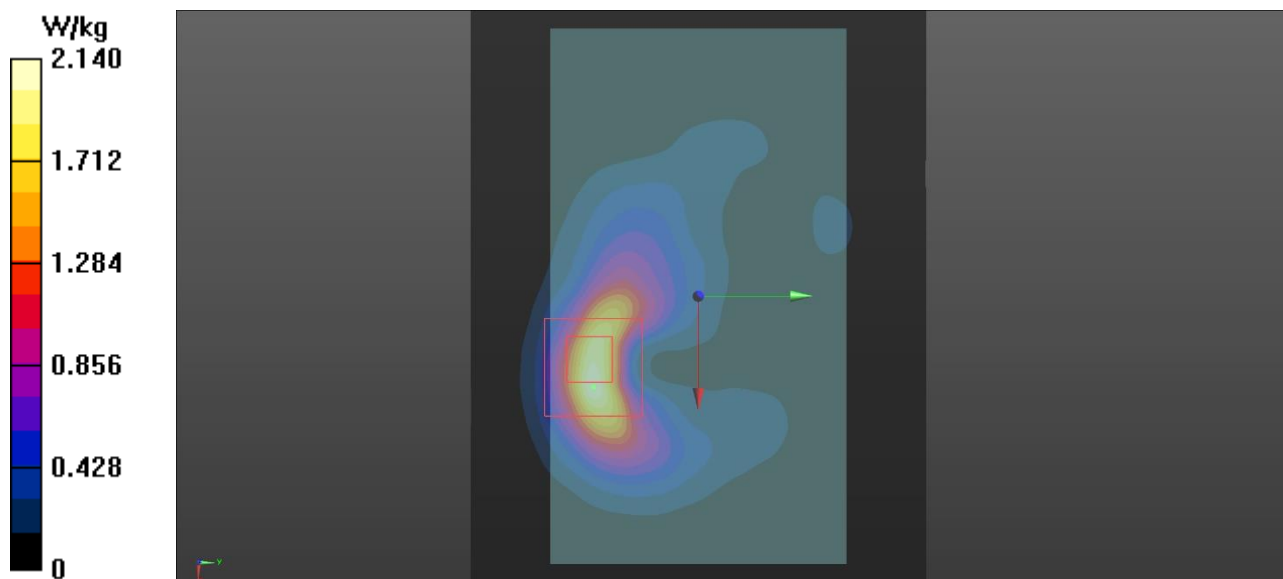

Plot 5

Date/Time: 7.3.24 13:24:11

Test Laboratory: Verkotan Oy

DUT: K300; TripleID

Communication System: UID 0, Bluetooth (0); Communication System Band: Bluetooth; Frequency: 2402 MHz;
 Communication System PAR: 3.98 dB;
 Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.695$ S/m; $\epsilon_r = 35.95$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY Configuration:

- Probe: EX3DV4 - SN3852; ConvF(7.07, 7.09, 7.16) @ 2402 MHz; Calibrated: 23.10.23
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 16.0, -4.0$
 - Electronics: DAE4 Sn705; Calibrated: 14.4.23
 - Phantom: SAR1_Phantom1_ELI_left; Type: QD OVA 002 AA;
 - DASYS2 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/BLE Front, 0 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.201 V/m; Power Drift = -0.83 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.324 W/kg (SAR corrected for target medium)


Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 41.7%.

Maximum value of SAR (measured) = 1.42 W/kg

Configuration/BLE Front, 0 mm/Area Scan (101x151x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.37 W/kg

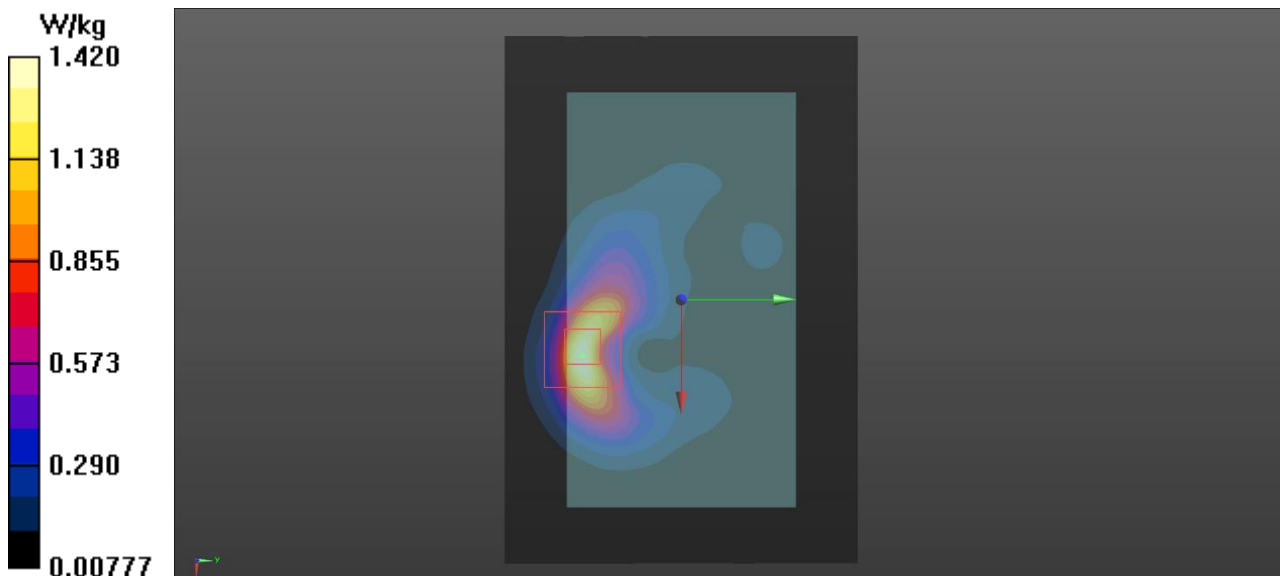

Plot 6

Date/Time: 06/03/2024 13:37:45

Test Laboratory: Verkotan Oy

DUT: K300; TripleID

Communication System: UID 0, NFC 13.56MHz (0); Communication System Band: NFC; Frequency: 13.56 MHz;
 Communication System PAR: 0 dB;
 Medium parameters used: $f = 14$ MHz; $\sigma = 0.683$ S/m; $\epsilon_r = 51.917$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section
 Measurement Standard: DASYS (IEEE/IEC)

DASY Configuration:

- Probe: EX3DV4 - SN3852; ConvF(13.94, 13.94, 13.94) @ 13.56 MHz; Calibrated: 23/10/2023
 - Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -4.0, 31.0$
 - Electronics: DAE4 Sn705; Calibrated: 14/04/2023
 - Phantom: SAR1_Phantom1_ELI_left; Type: QD OVA 002 AA;
 - DASYS2 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/NFC Front, 0 mm/Area Scan (71x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.140 W/kg

Configuration/NFC Front, 0 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 10.93 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.038 W/kg (SAR corrected for target medium)

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 35.4%

Maximum value of SAR (measured) = 0.144 W/kg

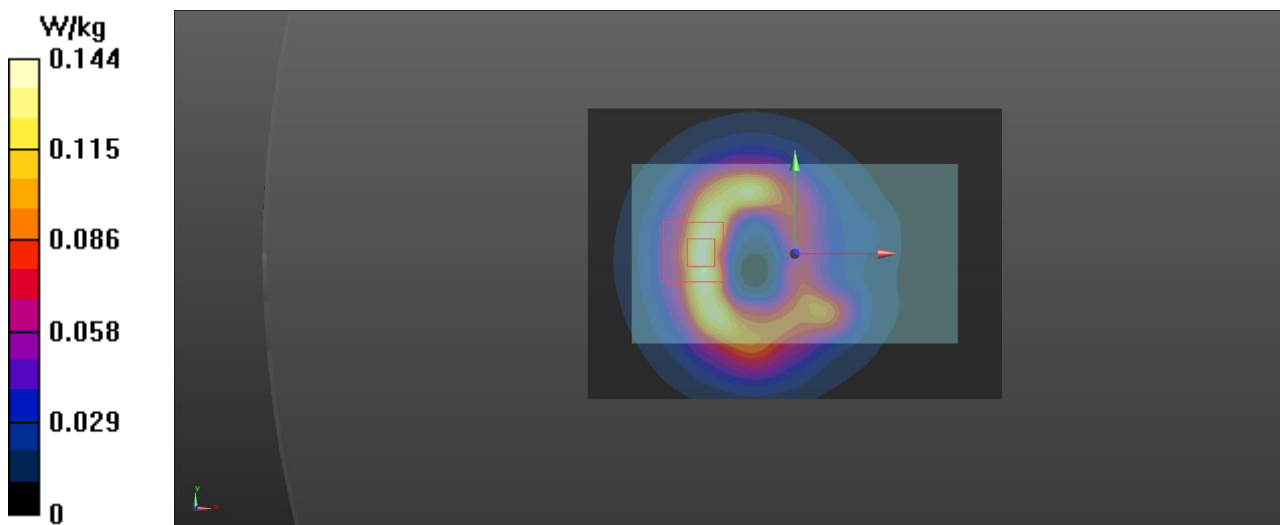

APPENDIX D: RELEVANT PAGES FROM PROBE CALIBRATION REPORTS

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Verkotan**
Oulu, Finland

Certificate No. **EX-3852_Oct23**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3852**

Calibration procedure(s) **QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6,
QA CAL-25.v8
Calibration procedure for dosimetric E-field probes**

Calibration date **October 23, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.
Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-291	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
DCP DAK-3.5 (weighted)	SN: 1249	05-Oct-23 (DCP-DAK3.5-1249_Oct23)	Oct-24
DCP DAK-12	SN: 1016	05-Oct-23 (DCP-DAK12-1016_Oct23)	Oct-24
Reference 20 dB Attenuator	SN: CC2552 (20x)	30-Mar-23 (No. 217-03808)	Mar-24
DAE4	SN: 660	16-Mar-23 (No. DAE4-660_Mar23)	Mar-24
Reference Probe ES3DV2	SN: 3013	06-Jan-23 (No. ES3-3013_Jan23)	Jan-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8649C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Signature
Calibrated by	Joanna Lieshaj	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	

Issued: October 23, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

EX3DV4 - SN:3852

October 23, 2023

Parameters of Probe: EX3DV4 - SN:3852

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.42	0.40	0.47	$\pm 10.1\%$
DCP (mV) ^B	102.6	101.5	101.2	$\pm 4.7\%$

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Max Unc ^E k = 2
0	CW	X	0.00	0.00	1.00	0.00	148.1	$\pm 1.2\%$	$\pm 4.7\%$
		Y	0.00	0.00	1.00		135.0		
		Z	0.00	0.00	1.00		125.7		
10352	Pulse Waveform (200Hz, 10%)	X	20.00	88.23	18.81	10.00	80.0	$\pm 2.9\%$	$\pm 9.6\%$
		Y	15.83	86.04	18.58		60.0		
		Z	20.00	89.60	19.58		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	20.00	89.81	18.49	6.99	80.0	$\pm 1.6\%$	$\pm 9.6\%$
		Y	20.00	89.05	18.11		80.0		
		Z	20.00	91.94	19.69		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	20.00	94.09	19.25	3.98	95.0	$\pm 1.2\%$	$\pm 9.6\%$
		Y	20.00	88.35	16.15		95.0		
		Z	20.00	93.97	19.35		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	20.00	100.39	20.91	2.22	120.0	$\pm 1.2\%$	$\pm 9.6\%$
		Y	2.38	71.76	9.70		120.0		
		Z	20.00	97.37	19.68		120.0		
10387	QPSK Waveform, 1 MHz	X	1.64	66.74	15.13	1.00	150.0	$\pm 2.8\%$	$\pm 9.6\%$
		Y	1.57	65.66	14.38		150.0		
		Z	1.68	66.38	15.01		150.0		
10388	QPSK Waveform, 10 MHz	X	2.18	68.09	15.84	0.00	150.0	$\pm 0.9\%$	$\pm 9.6\%$
		Y	2.13	67.56	15.26		150.0		
		Z	2.26	68.28	15.80		150.0		
10396	64-QAM Waveform, 100 kHz	X	2.80	70.45	18.83	3.01	150.0	$\pm 0.7\%$	$\pm 9.6\%$
		Y	2.67	68.53	17.69		150.0		
		Z	2.75	69.32	18.17		150.0		
10399	64-QAM Waveform, 40 MHz	X	3.46	67.10	15.80	0.00	150.0	$\pm 2.2\%$	$\pm 9.6\%$
		Y	3.46	66.99	15.61		150.0		
		Z	3.55	67.36	15.87		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	4.78	65.85	15.56	0.00	150.0	$\pm 4.1\%$	$\pm 9.6\%$
		Y	4.86	65.73	15.56		150.0		
		Z	4.73	65.20	15.31		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Page 5).

^B Uncertainty parameter uncertainty for maximum specified field strength.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4 - SN:3852

October 23, 2023

Parameters of Probe: EX3DV4 - SN:3852

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $ms V^{-2}$	T2 $ms V^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
x	40.1	298.39	35.39	12.42	0.00	5.06	1.30	0.18	1.01
y	45.2	342.83	36.51	8.80	0.45	5.06	0.00	0.49	1.01
z	44.9	336.32	35.73	13.60	0.00	5.08	0.53	0.35	1.01

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	-56.9°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

EX3DV4 - SN:3852

October 23, 2023

Parameters of Probe: EX3DV4 - SN:3852

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k = 2)
6	55.0	0.75	14.87	14.87	14.87	0.00	1.25	±13.3%
13	55.0	0.75	13.94	13.94	13.94	0.00	1.25	±13.3%
30	55.0	0.75	12.97	12.97	12.97	0.00	1.25	±13.3%
64	54.2	0.75	11.54	11.54	11.54	0.00	1.25	±13.3%
128	52.8	0.76	11.14	11.14	11.14	0.00	1.25	±13.3%
220	49.0	0.81	10.56	10.56	10.56	0.00	1.25	±13.3%
450	43.5	0.87	9.99	9.99	9.99	0.16	1.30	±13.3%
1300	40.8	1.14	8.19	7.92	8.28	0.48	1.27	±12.0%
1450	40.5	1.20	8.04	7.77	8.01	0.46	1.27	±12.0%
1640	40.2	1.31	8.04	7.69	8.00	0.43	1.27	±12.0%
1810	40.0	1.40	7.69	7.64	7.66	0.28	1.27	±12.0%
1900	40.0	1.40	7.75	7.66	7.73	0.28	1.27	±12.0%
2450	39.2	1.80	7.07	7.09	7.16	0.31	1.27	±12.0%
3300	38.2	2.71	6.76	6.56	6.80	0.32	1.27	±14.0%
3500	37.9	2.91	6.75	6.56	6.76	0.33	1.27	±14.0%
3700	37.7	3.12	6.56	6.40	6.58	0.34	1.27	±14.0%
3900	37.5	3.32	6.52	6.37	6.54	0.34	1.27	±14.0%
4100	37.2	3.53	6.23	6.14	6.27	0.35	1.27	±14.0%
5250	35.9	4.71	4.99	4.95	5.05	0.37	1.53	±14.0%
5600	35.5	5.07	4.54	4.50	4.60	0.37	1.75	±14.0%
5750	35.4	5.22	4.62	4.57	4.67	0.38	1.84	±14.0%

^C Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4–8 MHz, and ConvF assessed at 13 MHz is 9–19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

^F The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ and σ by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainties are 11.1% for 0.7–3 GHz and 13.1% for 3–6 GHz.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.

APPENDIX E: RELEVANT PAGES FROM DIPOLE CALIBRATION REPORTS

Calibration Laboratory of Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Verkotan**
Oulu, Finland

Certificate No. **CLA13-1012_Oct23**

CALIBRATION CERTIFICATE

Object: **CLA13 - SN: 1012**

Calibration procedure(s): **QA CAL-15.v10**
Calibration Procedure for SAR Validation Sources below 700 MHz

Calibration date: **October 20, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
Power sensor NRP-Z91	SN: 103245	30-Mar-23 (No. 217-03805)	Mar-24
Reference 20 dB Attenuator	SN: CC2552 (20x)	30-Mar-23 (No. 217-03809)	Mar-24
Type-N mismatch combination	SN: 310982 / 06327	30-Mar-23 (No. 217-03810)	Mar-24
Reference Probe EX3DV4	SN: 3877	06-Jan-23 (No. EX3-3877_Jan23)	Jan-24
DAE4	SN: 654	27-Jan-23 (No. DAE4-654_Jan23)	Jan-24
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter NRP2	SN: 107193	08-Nov-21 (in house check Dec-22)	In house check: Dec-24
Power sensor NRP-Z91	SN: 100922	15-Dec-09 (in house check Dec-22)	In house check: Dec-24
Power sensor NRP-Z91	SN: 100418	01-Jan-04 (in house check Dec-22)	In house check: Dec-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by: **Jeton Kastrell** (Name), **Laboratory Technician** (Function), *[Signature]* (Signature)

Approved by: **Sven Köhn** (Name), **Technical Manager** (Function), *[Signature]* (Signature)

Issued: **October 23, 2023**

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	EL14 Flat Phantom	Shell thickness: 2 ± 0.2 mm
EUT Positioning	Touch Position	
Zoom Scan Resolution	$dx, dy = 4.0$ mm, $dz = 1.4$ mm	Graded Ratio = 1.4 (Z direction)
Frequency	13 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	55.0	0.75 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	53.8 ± 6 %	0.72 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	1 W input power	0.527 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	0.542 W/kg ± 18.4 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	1 W input power	0.327 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	0.336 W/kg ± 18.0 % (k=2)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Verkotan**

Certificate No: **D2450V2-729_Jul22**

CALIBRATION CERTIFICATE

Object: **D2450V2 - SN:729**

Calibration procedure(s): **QA CAL-05.v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **July 15, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
Power sensor NRP-Z91	SN: 103245	04-Apr-22 (No. 217-03525)	Apr-23
Reference 20 dB Attenuator	SN: BH9394 (20k)	04-Apr-22 (No. 217-03527)	Apr-23
Type-N mismatch combination	SN: 310982 / 06327	04-Apr-22 (No. 217-03528)	Apr-23
Reference Probe EX3DV4	SN: 7349	31-Dec-21 (No. EX3-7349_Dec21)	Dec-22
DAE4	SN: 801	02-May-22 (No. DAE4-801_May22)	May-23
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37262783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41093315	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

Calibrated by:	Name: Aldonis Georgiadou	Function: Laboratory Technician	Signature:
Approved by:	Name: Niels Kuster	Function: Quality Manager	Signature:

Issued: July 19, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	37.9 \pm 6 %	1.85 mho/m \pm 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.3 W/kg \pm 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.21 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg \pm 16.5 % (k=2)