

Report No.: SEWM2207000119RG01

Rev.: 01 Page: 1 of 38

TEST REPORT

Application No.: SEWM2207000119RG **Applicant:** Fibocom Wireless Inc

Address of Applicant: 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi

1st Rd, Nanshan, Shenzhen, China

Manufacturer: Fibocom Wireless Inc

Address of Manufacturer: 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi

1st Rd, Nanshan, Shenzhen, China

EUT Description: CAT-M module

Model No.: FB520

Trade Mark: Fibocom

FCC ID: ZMOFB520

Standards: 47 CFR Part 2
47 CFR Part 22

47 CFR Part 22 47 CFR Part 24 47 CFR Part 27 47 CFR Part 90

Date of Receipt: 2022/07/14

Date of Test: 2022/07/20 to 2022/08/15

Date of Issue: 2022/08/15

Test Result : PASS *

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and. for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Conditions-and-Conditions-And-Cond

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 v t (86–512) 62992980 s

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2207000119RG01

Rev.: Page: 2 of 38

Version 1

		Revision Record		
Version	Chapter	Date	Modifier	Remark
01		2022/08/15		Original

Prepared By	weller lin
	(Weller Liu) / Test Engineer
Checked By	well wei
	(Well Wei) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 3 of 38

Contents

1	Versi	on	2
2	Test	Summary	5
	2.1	GSM850/LTE Cat-M1 Band 5/ LTE Cat-M1 Band 26(824~849 MHz)	5
	2.2	GSM 1900/LTE Cat-M1 Band 2 / LTE Cat-M1 Band25	6
	2.3	LTE Cat-M1 Band 4 / LTE Cat-M1 Band 66	7
	2.4	LTE Cat-M1 Band 12/ LTE Cat-M1 Band 85	8
	2.5	LTE Cat-M1 Band 13	9
	2.6	LTE Cat-M1 Band 14	10
	2.7	LTE Cat-M1 Band 26(814~824 MHz)	12
3	Gene	eral Information	13
	3.1	Details of Client	13
	3.2	Test Location	13
	3.3	Test Facility	13
	3.4	General Description of EUT	14
	3.5	Test Mode	15
	3.6	Test Environment	15
	3.7	Description of Support Units	15
	3.8	Technical Specification	16
	3.9	Test Frequencies	19
4	Desc	ription of Tests	23
	4.1	Conducted Output Power	23
	4.2	Effective (Isotropic) Radiated Power of Transmitter	24
	4.3	Occupied Bandwidth	25
	4.4	Band Edge at Antenna Terminals	26
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	27
	4.6	Peak-Average Ratio	28
	4.7	Field Strength of Spurious Radiation	29
	4.8	Frequency Stability / Temperature Variation	30
	4.9	Test Setups	31
		4.9.1 Test Setup 1	31
		4.9.2 Test Setup 2	31



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG0

Rev.:	01
Page:	4 of 38

	4.9.3 Test Setup 3	32
	4.10 Test Conditions	33
5	Main Test Instruments	35
6	Measurement Uncertainty	37
7	Appendixes	38



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sold responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) later standle(s) are reflected for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ess.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 5 of 38

2 Test Summary

2.1 GSM850/LTE Cat-M1 Band 5/ LTE Cat-M1 Band 26(824~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP ≤ 7 W	Section 1 of Appendix B.1&4&10	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.1&4&10	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.1&4&10	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.1&4&10	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1&4&10	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.1&4&10	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.1&4&10	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	≤ ±2.5ppm.	Section 8 of Appendix B.1&4&10	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.ags, and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-en/Document.ags.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction forcement cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) \$3071443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 6 of 38

2.2 GSM 1900/LTE Cat-M1 Band 2 / LTE Cat-M1 Band25

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.1&2&8	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 2 of Appendix B.1&2&8	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.1&2&8	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.1&2&8	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1&2&8	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.1&2&8	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.1&2&8	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.1&2&8	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: Page: 7 of 38

2.3 LTE Cat-M1 Band 4 / LTE Cat-M1 Band 66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 1 of Appendix B.3&11	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.3&11	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.3&11	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.3&11	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.3&11	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.3&11	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.3&11	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.3&11	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 8 of 38

2.4 LTE Cat-M1 Band 12/ LTE Cat-M1 Band 85

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.5&12	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.5&12	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.5&12	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.5&12	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.5&12	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.5&12	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.5&12	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.5&12	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 9 of 38

2.5 LTE Cat-M1 Band 13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Section 1 of Appendix B.6	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.6	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.6	Pass
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.6	Pass
Band Edges Compliance	§2.1051, §27.53(c)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.6	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	 ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. 	Section 6 of Appendix B.6	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B.6	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.6	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 10 of 38

2.6 LTE Cat-M1 Band 14

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective	1 00 1101	no de la como de la co	1 oot Hoodit	7 01 0101
(Isotropic)	§2.1046	ERP ≤ 3 W.	Section 1 of	Pass
Radiated Power	§90.542(d)	LINE 25 VV.	Appendix B.7	F 033
Output Data				
Peak-Average		Limit≤13 dB	Section 2 of	Pass
Ratio			Appendix B.7	
Modulation			Section 3 of	_
Characteristics	§2.1047	Digital modulation		Pass
			Appendix B.7	
Bandwidth	§2.1049	OBW: No limit.	Section 4 of	Pass
	0	EBW: No limit.	Appendix B.7	
Emission Mask	§2.1051 §90.210(n)	Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards (b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows: (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 35 percent of the authorized bandwidth: At least 35 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.	Section 5 of Appendix B.7	Pass
Band Edges Compliance	§2.1051 §90.543(e)(2)(3)	(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations.(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations.(3) On any frequency between 775-788 MHz, above 805 MHz,	Section 6 of Appendix B.7	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6月厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 11 of 38

rage.				
		and below 758 MHz, by at least 43 + 10 log (P) dB.		
Spurious Emission at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B.7	Pass
Field Strength of Spurious Radiation	§2.1053, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559– 1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and - 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 8 of Appendix B.7	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Section 9 of Appendix B.7	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 12 of 38

2.7 LTE Cat-M1 Band 26(814~824 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter Conducted Power Output	§2.1046, §90.635(b)	< 100 W.	Section 1 of Appendix B.9	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.9	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.9	Pass
			Appendix 6.9	
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of	Pass
		EDVV. NO IIITIIC.	Appendix B.9	
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Section 5 of Appendix B.9	Pass
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out-of- band emissions	Section 6 of Appendix B.9	Pass
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out-of- band emissions	Section 7 of Appendix B.9	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.9	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 13 of 38

3 General Information

3.1 Details of Client

Applicant:	Fibocom Wireless Inc		
Address of Applicant:	1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China		
Manufacturer:	Fibocom Wireless Inc		
Address of Manufacturer:	1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China		

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address: South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park Area, China (Jiangsu) Pilot Free Trade Zone	
Post code:	215000
Test engineer:	Weller Liu, Tizzy Song

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law longer of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be pro



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 14 of 38

3.4 General Description of EUT

CLIT Description	CAT M modulo					
EUT Description:	CAT-M module					
Model No.:	FB520					
Trade Mark:	Fibocom					
Hardware Version:	V1.4					
Software Version:	69400.1000.00.02.01.01	1				
IMEI:	865803050030593					
Antenna Type:	External Antenna					
	⊠Provided by client					
	GSM850:	3dBi	GSM1900:		3dBi	
	LTE Cat-M1 Band 2:	3dBi	LTE Cat-M1	Band 4:	3dBi	
Antenna Gain*:	LTE Cat-M1 Band 5:	3dBi	LTE Cat-M1	Band 12:	3dBi	
	LTE Cat-M1 Band 13:	3dBi	LTE Cat-M1	Band 14:	3dBi	
	LTE Cat-M1 Band 25:	3dBi	LTE Cat-M1 Band 26:		3dBi	
	LTE Cat-M1 Band 66:	3dBi	LTE Cat-M1 Band 85:		3dBi	
DE Cable	0.8dB(Below 1GHz)	1.0dB(1.0~2	2.4GHz)	1.2dB(2.4	I~3.4GHz)	
RF Cable:	1.5dB(Above 3.4GHz)	•		•		
	•					

Note: *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information , SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law longer of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be pro



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 15 of 38

3.5 Test Mode

Test Mode Test Modes Description				
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation			
GSM/TM2 GSM system, EGPRS, 8PSK modulation				
LTE/TM1 LTE system, QPSK modulation				
Remark: The test mode(s) are selected according to relevant radio technology specifications.				

3.6 Test Environment

Environment Parameter	101.0 kPa Selected Values During Tests			
Relative Humidity	44-46 % RH Ambient			
Value	Temperature(°C)	Voltage(V)		
NTNV	22~23	3.3		
LTLV	-30	3.14		
LTHV	-30	3.64		
HTLV	50	3.14		
HTHV	50	3.64		
	v Extreme Test Voltage v Extreme Test Temperature	HV: High Extreme Test Voltage HT: High Extreme Test Temperature		

3.7 Description of Support Units

Description	Manufacturer	Model No.				
Mother board	Fibocom	EVB-M2 V1.2				
Remark: all above the information of table are provided by client.						



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at http://www.sgs.com/en/Terms-en/Conditions/Terms-en/Comments/Terms



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 16 of 38

3.8 Technical Specification

Characteristics	Description								
Radio System Type	☐ GSM ☐ LTE								
	Band		T	(RX		
	GSM850		82	824 to 849 MHz		869 to	869 to 894 MHz		
	GSM1900		18	50 to 19	10 MH:	Z	1930 t	1930 to 1990 MHz	
	LTE Cat-M1 Band 2		18	1850 to 1910 MHz		1930 t	1930 to 1990 MHz		
	LTE Cat-M1 B	and 4	17	10 to 17	55 MH	Z	2110 t	o 2155 MHz	
	LTE Cat-M1 B	and 5	82	4 to 849	MHz		869 to	894 MHz	
	LTE Cat-M1 B	and 12	69	9 to 716	MHz		729 to	746 MHz	
Supported Frequency Range	LTE Cat-M1 B	and 13	77	7 to 787	MHz		746 to	756 MHz	
Supported Frequency Harige	LTE Cat-M1 B	and 14	78	8 to 798	MHz		758 to	768 MHz	
	LTE Cat-M1 B	and 25	18	50 to 19	15MHz		1930 t	o 1995 MHz	
	LTE Cat-M1 Band 26 (814 to 824 MHz)		814 to 824MHz		859 to	859 to 869 MHz			
	LTE Cat-M1 Band 26 (824 to 849 MHz)		824 to 849 MHz		869 to	869 to 894 MHz			
	LTE Cat-M1 Band 66		1710 to 1780 MHz		2110 t	o 2200 MHz			
	LTE Cat-M1 Band 85		698 to 716 MHz		728 to	746 MHz			
	GSM system:		⊠0.2 MHz						
	LTE Cat-M1 B	and 2	M	☑ 1.4 ☑3 MHz ☑5 MHz MHz		Z			
	LTE Cat-M1 B	and 4	M	1.4 Hz	⊠3 I	MHz	⊠5 MH	Z	
	LTE Cat-M1 B	and 5		1.4 Hz	⊠3 I	MHz	⊠5 MH	Z	
Supported Channel Bandwidth	LTE Cat-M1 B	and 12		⊠ 1.4 ⊠3 MHz ⊠5 MHz		Z			
	LTE Cat-M1 B	and 13	\boxtimes	5 MHz					
	LTE Cat-M1 B	and 14	⊠5 MHz						
	LTE Cat-M1 B	and 25	M	1.4 Hz	⊠3 I	MHz	⊠5 MH	z	
	LTE Cat-M1 B (814 to 824 M		M	1.4 Hz	⊠3 I	MHz	⊠5 MH	Z	
	LTE Cat-M1 B	and 26	\boxtimes	1.4	⊠3 I	MHz	⊠5 MH	Z	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 17 of 38

	Page: 17 of 38				
	(824 to 849 MHz)	MHz			
	LTE Cat-M1 Band 66	□ 1.4			
	LTE Cat-M1 Band 85	⊠5MHz			
Characteristics	Description				
	GSM:	GMSK 8PSK			
	GSM850	247KGXW 247KG7W			
	GSM1900	249KGXW 249KG7W			
	E-UTRA:	QPSK			
		1M10G7D			
	LTE Cat-M1 Band 2	1M12G7D			
		1M13G7D			
		1M09G7D			
	LTE Cat-M1 Band 4	1M11G7D			
		1M13G7D			
		1M10G7D			
	LTE Cat-M1 Band 5	1M11G7D			
Designation of Emissions		1M13G7D			
(Remark: the necessary bandwidth of which is the		1M10G7D			
worst value from the measured occupied	LTE Cat-M1 Band 12	1M11G7D			
bandwidths for each type of		1M13G7D			
channel bandwidth configuration.)	LTE Cat-M1 Band 13	1M13G7D			
coringulation.)	LTE Cat-M1 Band 14	1M13G7D			
		1M10G7D			
	LTE Cat-M1 Band 25	1M11G7D			
		1M13G7D			
	LTE O-1 M4 D 100	1M09G7D			
	LTE Cat-M1 Band 26 (814-824)	1M11G7D			
	(014-024)	1M13G7D			
	175 0 114 5 100	1M09G7D			
	LTE Cat-M1 Band 26	1M13G7D			
	(824-849)	1M14G7D			
	1.75 0	1M10G7D			
	LTE Cat-M1 Band 66	1M11G7D			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, orgeny or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are tested for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or semile CAD Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000中国 - 苏州 - 中国(五芥)自由贸易试验区苏州片区苏州工业园区沟胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 18 of 38

	1M13G7D
LTE Cat-M1 Band 85	1M13G7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com

or email: CM.Docetheck@sgs.com South of No Fleat, No. 1, Runsheng Rosel, Subru Indistrial Part, Suzhou, Area, China (Jangsu) Plot Free Trade Zone 中国 - 苏州 - 中国 - 江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号约6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: Page: 19 of 38

3.9 Test Frequencies

Test Mode	TX / RX	RF Channel			
i est ivioue	IA/ NA	Low (L)	Middle (M)	High (H)	
	GSM850 TX -	Channel 128	Channel 190	Channel 251	
GSM850		824.2MHz	836.6 MHz	848.8 MHz	
		Channel 128	Channel 190	Channel 251	
		869.2 MHz	881.6 MHz	893.8 MHz	

Test Mode	TX / RX	TY / PY RF Channel				
rest widde	IA/NA	Low (L)	Middle (M)	High (H)		
	TX	Channel 512	Channel 661	Channel 810		
CCM4000		1850.2MHz	1880.0 MHz	1909.8 MHz		
GSM1900 -	DV	Channel 512	Channel 661	Channel 810		
	RX	1930.2 MHz	1960.0 MHz	1989.8 MHz		

Toot Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Danawiath	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
		TX	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193
		KX	1930.7 MHz	1960 MHz	1989.3 MHz
		TX	Channel 18615	Channel 18900	Channel 19185
LTE Cat-M1			1851.5 MHz	1880 MHz	1908.5 MHz
Band 2	3MHz	RX	Channel 615	Channel 900	Channel 1185
		KA.	1931.5 MHz	1960 MHz	1988.5 MHz
			Channel 18625	Channel 18900	Channel 19175
		TX	1852.5 MHz	1880 MHz	1907.5 MHz
	5MHz R>	DV	Channel 625	Channel 900	Channel1175
		KA	1932.5 MHz	1960 MHz	1987.5 MHz

Toot Made	Bandwidth	TX / RX		RF Channel	
Test Mode	Danawiatri	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 19957	Channel 20175	Channel 20393
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		KA	2112.5 MHz	2132.5MHz	2152.5 MHz
		TX	Channel 19965	Channel 20175	Channel 20385
LTE Cat-M1			1711.5 MHz	1732.5 MHz	1753.5 MHz
Band 4	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		KA	2115 MHz	2132.5MHz	2150 MHz
			Channel 19975	Channel 20175	Channel 20375
		TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
	5MHz	DV	Channel 1975	Channel 2175	Channel 2375
		RX	2112.5 MHz	2132.5MHz	2152.5 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents as this trip of the trip of the second of the seco

South of No. 6 Plant, No. 1, Runsteing Rosal, Suzhou Industrial Park, Suzhou Area, Chime (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜商1号的6号厂房商部 鄉鄉: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Report No.: SEWM2207000119RG01

Rev.: Page: 20 of 38

Took Mode	Donahuidth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20407	Channel 20525	Channel 20643
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643
		KA.	869.7 MHz	881.5 MHz	893.3 MHz
			Channel 20415	Channel 20525	Channel 20635
LTE Cat-M1		TX	825.5 MHz	836.5 MHz	847.5 MHz
Band 5	3MHz	RX	Channel 2415	Channel 2525	Channel 2635
		KA.	870.5 MHz	881.5 MHz	892.5 MHz
	5MHz RX		Channel 20425	Channel 20525	Channel 20625
		TX	826.5 MHz	836.5 MHz	846.5 MHz
		DV	Channel 2425	Channel 2525	Channel 2625
		KΛ	871.5 MHz	881.5 MHz	891.5 MHz

Test Mode	Bandwidth	TX / RX		RF Channel	
Test Mode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 23017	Channel 23095	Channel 23173
		TX	699.7 MHz	707.5 MHz	715.3 MHz
	1.4MHz	RX	Channel 5017	Channel 5095	Channel 5173
		KΛ	729.7 MHz	737.5 MHz	745.3 MHz
			Channel 23025	Channel 23095	Channel 23165
LTE Cat-M1		TX	700.5 MHz	707.5 MHz	714.5 MHz
Band 12	3MHz	D.Y	Channel 5025	Channel 5095	Channel 5165
		RX	730.5 MHz	737.5 MHz	744.5 MHz
	5MHz		Channel 23035	Channel 23095	Channel 23155
		TX	701.5 MHz	707.5 MHz	713.5 MHz
		RX	Channel 5035	Channel 5095	Channel 5155
		KΛ	731.5 MHz	737.5 MHz	743.5 MHz

Test Mode Bandwidth		TX / RX		RF Channel	
rest Mode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 23025	Channel 23230	Channel 23255
LTE Cat-M1		TX	779.5 MHz	782 MHz	784.5 MHz
Band 13	5MHz	DV	Channel 5205	Channel 5230	Channel 5255
		RX	748.5 MHz	751 MHz	753.5 MHz

Test Mode Bandwidth		TX / RX	RF Channel		
i est iviode	Bandwidth	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 23305	Channel 23330	Channel 23355
LTE Cat-M1		TX	790.5 MHz	793 MHz	795.5 MHz
Band 14	5MHz	DV	Channel 5305	Channel 5330	Channel 5355
		RX	760.5 MHz	763 MHz	765.5 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law Lunless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州广区苏州工业园区湖胜路1号的6号广房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2207000119RG01

Rev.: Page: 21 of 38

			. ago:		
Toot Mode	Dondwidth	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 26047	Channel 26365	Channel 26683
		TX	1850.7 MHz	1882.5 MHz	1914.3 MHz
	1.4MHz	RX	Channel 8047	Channel 8365	Channel 8683
		KA.	1930.7 MHz	1962.5 MHz	1994.3 MHz
			Channel 26055	Channel 26365	Channel 26675
LTE Cat-M1		TX	1851.5 MHz	1882.5 MHz	1913.5 MHz
Band 25	3MHz	DV	Channel 8055	Channel 8365	Channel 8675
		RX	1931.5 MHz	1962.5 MHz	1993.5 MHz
	5MHz TX		Channel 26065	Channel 26365	Channel 26665
		TX	1852.5 MHz	1882.5 MHz	1912.5 MHz
		DV	Channel 8065	Channel 8365	Channel 8665
		KΛ	1932.5 MHz	1962.5 MHz	1992.5 MHz

Test Mode	Bandwidth	TX / RX		RF Channel	
i est iviode	Dariuwiutii	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 26697	Channel 26740	Channel 26783
		TX	814.7 MHz	819 MHz	823.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8740	Channel 8783
		KΛ	859.7 MHz	864MHz	868.3 MHz
1.75.0 . 144			Channel 26705	Channel 26740	Channel 26775
LTE Cat-M1		TX	815.5 MHz	819 MHz	822.5 MHz
Band 26	3MHz	RX	Channel 8705	Channel 8740	Channel 8775
(814-824)		KΛ	860.5 MHz	864MHz	867.5 MHz
			Channel 26715	Channel 26740	Channel 26765
		TX	816.5 MHz	819 MHz	821.5 MHz
	5MHz	DV	Channel 8715	Channel 8740	Channel 8755
		RX	861.5 MHz	864MHz	866.5 MHz

Test Mode	Bandwidth	TX / RX		RF Channel	
i est iviode	Danuwidin	IA/KA	Low (L)	Middle (M)	High (H)
			Channel 26797	Channel 26915	Channel 27033
		TX	824.7 MHz	836.5 MHz	848.3 MHz
	1.4MHz	RX	Channel 8697	Channel 8915	Channel 9033
		KA	859.7 MHz	881.5 MHz	893.3 MHz
			Channel 26805	Channel 26915	Channel 27025
LTE Cat-M1		TX	825.5 MHz	836.5 MHz	847.5 MHz
Band26	3MHz	RX	Channel 8805	Channel 8915	Channel 9025
(824-849)		KA	860.5 MHz	881.5 MHz	892.5 MHz
			Channel 26815	Channel 26915	Channel 27015
	5MHz	TX	826.5 MHz	836.5 MHz	846.5 MHz
		RX	Channel 8815	Channel 8915	Channel 9015
		KA.	871.5 MHz	881.5 MHz	891.5 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and

South of No. 6 Plant, No. 1, Runsteing Rosal, Suzhou Industrial Park, Suzhou Area, Chime (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜商1号的6号厂房商部 鄉鄉: 215000

t (86-512) 62992980

t (86–512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 22 of 38

			ı age		
Toot Mode	Dana alimitalda	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 131979	Channel 132322	Channel 132665
		TX	1710.7 MHz	1745 MHz	1779.3 MHz
	1.4MHz	RX	Channel 66443	Channel 66786	Channel 67329
		KA	2110.7 MHz	2145MHz	2199.3 MHz
			Channel 131987	Channel 132322	Channel 132657
LTE Cat-M1		TX	1711.5 MHz	1745 MHz	1778.5MHz
Band66	2MID=	Λ.	Channel 66451	Channel 66786	Channel 67321
		RX	2111.5 MHz	2145MHz	2198.5MHz
			Channel 131997	Channel 132322	Channel 132647
	51411	TX	1712.5 MHz	1745 MHz	1777.5 MHz
	5MHz	RX	Channel 66461	Channel 66786	Channel 67311
		Γ.Λ	2112.5 MHz	2145MHz	2197.5 MHz

Test Mode	Bandwidth	TV / DV		RF Channel	
rest Mode	Dariuwiuiri	TX/RX	Low (L)	Middle (M)	High (H)
			Channel 134027	Channel 134092	Channel 134157
LTE Cat-M1		TX	700.5 MHz	707 MHz	713.5 MHz
Band85	5MHz	DV	Channel 70391	Channel 70456	Channel 70521
		RX	730.5 MHz	737 MHz	743.5 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 23 of 38

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law longer of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be pro



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 24 of 38

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Condit

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州 | 上国区区园胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 25 of 38

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 26 of 38

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW > 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 27 of 38

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Ferms-and-Conditions.aspx and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions/Ferms-and-Condit



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 28 of 38

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 29 of 38

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB))

EIRP (dBm) = E (dB μ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB))

EIRP (dBm) = E (dBµV/m) + 20 log D - 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

Level = Reading Level + AF(dB/m) + Factor(dB)

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain (dB)

Margin = Limit(dBm) - Level(dBm)

 $dBm = dB\mu V - 95.26$

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agsp. and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as passed, so the representation of the properties of the second of the properties of the second of the

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgs t (86–512) 62992980 sgs.china



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 30 of 38

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3






Report No.: SEWM2207000119RG01


Rev.: 01 Page: 31 of 38

4.9 Test Setups

4.9.1 Test Setup 1

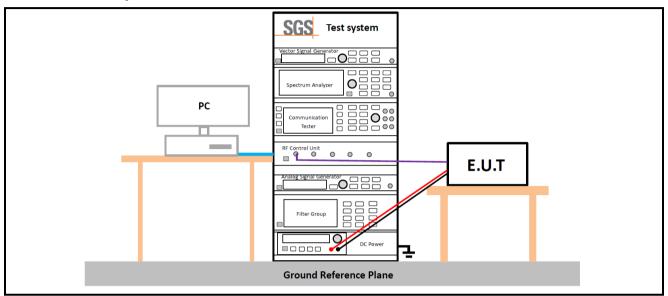

4.9.2 Test Setup 2

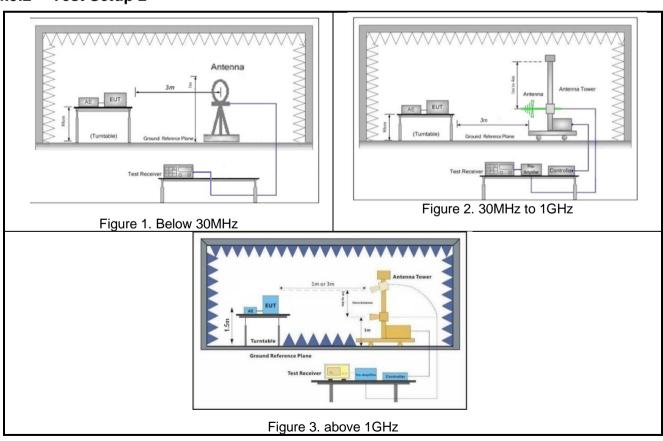



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agpx and, for electronic Documents at http://www.ags.com/en/Terms-en-Document.agpx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443,


or email: <u>CM.Doccheck@sgs.com</u> South of No. Fleat, No. 1, Runsheng Rosa, Subusu Indashia Park, Subou Area, China (Jángsu) Plot Free Trade Zone 215000 中国 - 苏州・中国 (江苏) 自由贸易试验区苏州 | 上型図区河胜路1号的6号 | 房南部 単線: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 32 of 38

4.9.3 Test Setup 3

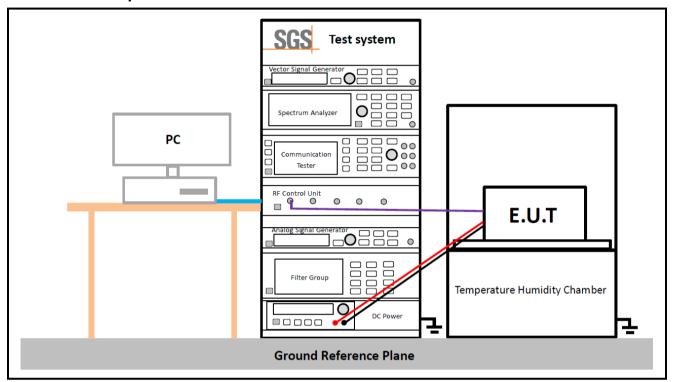



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law lunes stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention:Doceack the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**Doceack the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, **Attention:**Doceack the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ***Doceack the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, ***Contact us at telephone:**Certificate, please contact us at telephone:**Certificate, please contact us at telephone:**Certificate, please contact us at



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 33 of 38

4.10Test Conditions

4.10 lest Conditions			
Transmit Output Power Data - Average Power, Total			
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1; GSM/TM2;LTE/TM1;		
	Peak-to-Average Ratio		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1; GSM/TM2;LTE/TM1;		
Modulation Characteristics			
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	M (M= middle channel)		
Test Mode	GSM/TM1; GSM/TM2;LTE/TM1;		
	Bandwidth - Occupied Bandwidth		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1; GSM/TM2;LTE/TM1;		
	Bandwidth - Emission Bandwidth		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	GSM/TM1; GSM/TM2;LTE/TM1;		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, orgeny or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are tested for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or semile CAD Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 34 of 38

	Page: 34 of 38				
Band Edges Compliance					
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, H (L= low channel, H= high channel)				
Test Mode	GSM/TM1; LTE/TM1;				
	Spurious Emission at Antenna Terminals				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	GSM/TM1; LTE/TM1;				
Field Strength of Spurious Radiation					
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 2				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	GSM/TM1; LTE/TM1; Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.				
	Frequency Stability				
Test Case	Test Conditions				
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage				
Test Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.				
Test Setup	Test Setup 3				
RF Channels (TX)	M (M= middle channel)				
Test Mode	GSM/TM1; LTE/TM1;				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com.



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 35 of 38

5 Main Test Instruments

RF conducted test					
				Cal. date	Cal.Due date
Test Equipment	Manufacturer	Model No.	Inventory No.	(yyyy/mm/dd)	(yyyy/mm/dd)
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2022/02/16	2023/02/15
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2021/12/04	2022/12/03
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2022/02/14	2023/02/13
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2022/02/15	2023/02/14
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2022/02/15	2023/02/14
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com

South of No. 6 Pfant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 36 of 38

RSE Test System					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date (yyyy/mm/dd)	Cal Due Date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2021/05/08	2024/05/07
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2022/02/16	2023/02/15
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-05	2021/12/04	2022/12/03
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2022/02/19	2023/02/18
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-01	2021/05/16	2023/05/15
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2021/05/16	2023/05/15
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2022/02/14	2023/02/13
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2022/02/14	2023/02/13
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2022/02/19	2023/02/18
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2022/02/14	2023/02/13
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2021/12/04	2022/12/03
Measurement Software	Tonscend	JS32-RSE V4.0.0.0	SUWI-02-09-06	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01 Page: 37 of 38

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0%
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0%
		± 3.13dB (9k -30MHz)
7	Radiated Emission	± 4.8dB (30M -1GHz)
		± 4.8dB (1GHz to 18 GHz)
		± 4.8dB (Above 18GHz)

Remark:

The U_{lab} (lab Uncertainty) is less than U_{cispr/ETSI} (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.appx and, for electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law longer of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be pro

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2207000119RG01

Rev.: 01

Page: 38 of 38

7 Appendixes

Appendix A.1	WWAN Setup Photos
Appendix B.1	GSM 850 & 1900
Appendix B.2	LTE Cat-M1 Band 2
Appendix B.3	LTE Cat-M1 Band 4
Appendix B.4	LTE Cat-M1 Band 5
Appendix B.5	LTE Cat-M1 Band 12
Appendix B.6	LTE Cat-M1 Band 13
Appendix B.7	LTE Cat-M1 Band 14
Appendix B.8	LTE Cat-M1 Band 25
Appendix B.9	LTE Cat-M1 Band 26(814-824)
Appendix B.10	LTE Cat-M1 Band 26(824-849)
Appendix B.11	LTE Cat-M1 Band 66
Appendix B.12	LTE Cat-M1 Band 85

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com