Report No.: SZCR240200055102

Rev.: 01

1 of 55 Page:

## **TEST REPORT**

**Application No:** SZCR2402000551MO Applicant: Fibocom Wireless Inc

1101, Tower A, Building 6, Shenzhen International Innovation Valley, **Address of Applicant:** 

Dashi 1st Rd, Nanshan, Shenzhen, China

Manufacturer: Fibocom Wireless Inc

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Address of Manufacturer:

Dashi 1st Rd, Nanshan, Shenzhen, China

**EUT Description:** 5G RedCap Module

FG132-GL Model No.: **Trade Mark:** Fibocom

FCC ID: ZMOFG132GL 47 CFR Part 2 Standards: 47 CFR Part 22

47 CFR Part 24 47 CFR Part 27 47 CFR Part 90 47 CFR Part 96

**Date of Receipt:** 2024/02/21

**Date of Test:** 2024/03/01 to 2024/04/22

Date of Issue: 2024/04/28

PASS \* **Test Result:** 

Authorized Signature:

Keny Xu Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>, Attention is a drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document on exonet experts parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. if the law. Unless otherwise stated the results shown in the law. Unless otherwise stated and for 30 days only.
the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057

t (86-755) 26012053 sgs.china@sgs.com

t (86-755) 26012053

<sup>\*</sup> In the configuration tested, the EUT detailed in this report complied with the standards specified above.



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

2 of 55 Page:

### **Version**

Revision Record				
Version Chapter Date Modifier Remark				
01		2024/04/28		Original

Prepared By	Jack Huang) / Test Engineer
Checked By	Flora Wang  (Flora Wang) / Reviewer





SZCR240200055102 Report No.:

Rev.: 01

3 of 55 Page:

### Content

1	Ver	sion	2
2	Tes	st Summary	5
	2.1	NR Band n5/ NR Band n26(824-849)	5
	2.2	NR Band n7/ NR Band n38/ NR Band n41	
	2.3	NR Band n2/ NR Band n25	7
	2.4	NR Band n12	8
	2.5	NR Band n13	9
	2.6	NR Band n14	10
	2.7	NR Band n26(814~824 MHz)	12
	2.8	NR Band n30	13
	2.9	NR Band n48	15
	2.10	NR Band n66/ NR Band n70	17
	2.11	NR Band n71	18
	2.12	NR Band n77 / NR Band n78	19
3	Gei	neral Information	22
	3.1	Client Information	22
	3.2	Test Location	22
	3.3	Test Facility	22
	3.4	General Description of EUT	23
	3.5	Test Mode	24
	3.6	Test Environment	24
	3.7	Description of Support Units	24
	3.8	Technical Specification	25
	3.9	Test Frequencies	27
4	Des	scription of Tests	39
	4.1	Conducted Output Power	39
	4.2	Effective (Isotropic) Radiated Power of Transmitter	40
	4.3	EIRP Power Density	41
	4.4	Occupied Bandwidth	42



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 www.sgsgroup.com.cn

邮编: 518057

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

sgs.china@sgs.com

t (86-755) 26012053



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 4 of 55

4	4.5	Band Edge at Antenna Terminals	43
4	4.6	Spurious And Harmonic Emissions at Antenna Terminal	44
4	4.7	Peak-Average Ratio	45
4	4.8	Field Strength of Spurious Radiation	46
4	4.9	Frequency Stability / Temperature Variation	47
4	4.10	Test Setups	48
4	4.11	Test Conditions	50
5	Mai	n Test Instruments	52
6	Mea	asurement Uncertainty	54
7	App	pendixes	55



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

邮编: 518057



Report No.: SZCR240200055102

Rev.: 01

5 of 55 Page:

#### **Test Summary** 2

### 2.1 NR Band n5/ NR Band n26(824-849)/26(814~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	FCC: ERP ≤ 7 W	Section 5 of Appendix B.21&B.28	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.21&B.28	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.21&B.28	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 3 of Appendix B.21&B.28	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 4 of Appendix B.21&B.28	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.21&B.28	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	±2.5ppm.	Section 6 of Appendix B.21&B.28	Pass





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

6 of 55 Page:

### 2.2 NR Band n7/ NR Band n38/ NR Band n41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective	FCC Rule NO.	Requirements	1691 Kesuit	veruici
(Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 5 of Appendix B.22&B.30&B.31	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.22&B.30&B.31	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.22&B.30&B.31	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 3 of Appendix B.22&B.30&B.31	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge  -25 dBm/ 1 MHz 1 MHz 1 MHz 2 × MHz 10 <sup>th</sup> harmonics X=Max {6MHz, EBW}	Section 4 of Appendix B.22&B.30&B.31	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1	Section 7 of Appendix B.22&B.30&B.31	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 6 of Appendix B.22&B.30&B.31	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057

www.sgsgroup.com.cn t (86-755) 26012053 sgs.china@sgs.com



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

7 of 55 Page:

#### 2.3 NR Band n2/ NR Band n25

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 5 of Appendix B.20&B.26	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 2 of Appendix B.20&B.26	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.20&B.26	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 3 of Appendix B.20&B.26	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 4 of Appendix B.20&B.26	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.20&B.26	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.	Section 6 of Appendix B.20&B.26	Pass





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

8 of 55 Page:

#### 2.4 NR Band n12

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP≤3W.	Section 5 of Appendix B.23	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.23	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.23	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 3 of Appendix B.23	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 4 of Appendix B.23	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.23	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 6 of Appendix B.23	Pass





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

9 of 55 Page:

#### 2.5 NR Band n13

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(b)(10)	ERP ≤ 3 W.	Section 5 of Appendix B.24	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.24	Pass
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.24	Pass
Band Edges Compliance	§2.1051, §27.53(c)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 3 of Appendix B.24	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(c) §27.53(f)	≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.  On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations. For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 4 of Appendix B.24	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(c) §27.53(f)	FCC: ≤ -13 dBm/100 kHz.  For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B.24	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 6 of Appendix B.24	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

10 of 55 Page:

#### 2.6 NR Band n14

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective	FCC Rule No.	Requirements	Test Result	verdict
(Isotropic) Radiated Power Output Data	§2.1046 §90.542(a)	ERP ≤ 3 W.	Section 5 of Appendix B.25	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.25	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.25	Pass
Emission Mask	§2.1051 §90.210(b)	Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards (b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows: (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.(2) On any frequency removed from the assigned frequency by more than 100 percent of the authorized bandwidth: At least 35 dB(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.	Section 4 of Appendix B.25	Pass
Band Edges Compliance	§2.1051 §90.543(e)(2)(3)	(1) On all frequencies between 769- 775 MHz and 799-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations.(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and	Section 3 of Appendix B.25	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 11 of 55

		portable stations.(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least 43 + 10 log (P) dB.		
Spurious Emission at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 4 of Appendix B.25	Pass
Field Strength of Spurious Radiation	§2.1053, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B.25	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Section 6 of Appendix B.25	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.:

12 of 55 Page:

## 2.7 NR Band n26(814~824 MHz)/26(814~849 MHz)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Transmitter Conducted Power Output	§2.1046, §90.635(b)	< 100 W.	Section 5 of Appendix B.27	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.27	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.27	Pass
Emission Mask	§2.1051 § 90.691(a)	For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least 116 Log10(f/6.1) decibels or 50+10Log10(P) decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.	Section 3 of Appendix B.27	Pass
Spurious Emission at Antenna Terminals	§2.1051, §90.691	< 43 + 10Log10(P[Watts]) for all out- of-band emissions	Section 4 of Appendix B.27	Pass
Field Strength of Spurious Radiation	§2.1053, §90.691	< 43 + 10Log10(P[Watts]) for all out- of-band emissions	Section 7 of Appendix B.27	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §90.213	Within authorized bands of operation/frequency block.	Section 6 of Appendix B.27	Pass







## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

13 of 55 Page:

#### 2.8 NR Band n30

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(a)(3)	EIRP ≤ 50mW/1MHz EIRP ≤ 250mW/5MHz	Section 5 of Appendix B.29	Pass
Peak-Average Ratio		FCC: Limit≤13 dB	Section 2 of Appendix B.29	Pass
Bandwidth	§2.1049,	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.29	Pass
Band Edges Compliance	§2.1051, §27.53(a)(4)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 3 of Appendix B.29	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(a)(4)	For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:  (i) By a factor of not less than: 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than 55 + 10 log (P) dB on all frequencies between 2341 and 2345 MHz, not less than 61 + 10 log (P) dB on all frequencies between 2328 MHz and on all frequencies between 2328 MHz, and not less than 67 + 10 log (P) dB on all frequencies between 2328 and 2337 MHz;  (ii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 55 + 10 log (P) dB on all frequencies between 2300 and 2305 MHz, 61 + 10 log (P) dB on all frequencies between 2300 and 2300 MHz, 61 + 10 log (P) dB on all frequencies between 2296 and 2300 MHz, 67 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies between 2292 and 2296 MHz, 67 + 10 log (P) dB on all frequencies	Section 4 of Appendix B.29	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document oso not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@as.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 14 of 55

		between 2288 and 2292 MHz, and 70 + 10 log (P) dB below 2288 MHz;(iii) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2360 and 2365 MHz, and not less than 70 + 10 log (P) dB above 2365 MHz.		
Field Strength of Spurious Radiation	§2.1053, §27.53(a)(4)	≤ -40dBm/MHz.	Section 7 of Appendix B.29	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	within the range of the operating frequency blocks	Section 6 of Appendix B.29	Pass





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

15 of 55 Page:

#### 2.9 NR Band n48

#### 3550-3700MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §96.41	EIRP ≤ 23dBm/10MHz	Section 5 of Appendix B.32	Pass
Peak-Average Ratio	§96.41	FCC: Limit≤13 dB	Section 2 of Appendix B.32	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.32	Pass
Adjacent Channel Leakage Ratio	§96.41	the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.	Section 8 of Appendix B.32	Pass
Band Edges Compliance	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge.	Section 3 of Appendix B.32	Pass
Spurious Emission at Antenna Terminals	§2.1051, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed –13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed	Section 4 of Appendix B.32	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

邮编: 518057

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

t (86-755) 26012053



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 16 of 55

		-25 dBm/MHz.  (2) Additional protection levels.  Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.		
Field Strength of Spurious Radiation	§2.1053, §96.41	for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed –13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed –25 dBm/MHz.  (2) Additional protection levels.  Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed –25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed –40dBm/MHz.	Section 7 of Appendix B.32	Pass
Frequency Stability	§2.1055, §96.41	Within authorized bands of operation/ frequency block.	Section 6 of Appendix B.32	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

17 of 55 Page:

#### 2.10NR Band n66/NR Band n70

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	Section 5 of Appendix B.33&B.34	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.33&B.34	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.33&B.34	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 3 of Appendix B.33&B.34	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 4 of Appendix B.33&B.34	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.33&B.34	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 6 of Appendix B.33&B.34	Pass





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 18 of 55

#### 2.11NR Band n71

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046 §27.50(c)(10)	ERP≤3W	Section 5 of Appendix B.35	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B.35	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.35	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 3 of Appendix B.35	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 4 of Appendix B.35	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.35	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	within the authorized bands of operation.	Section 6 of Appendix B.35	Pass







## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Page: 19 of 55

#### 2.12NR Band n77 / NR Band n78

#### 3450-3550MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(k)(3)	EIRP ≤ 30dBm	Section 5 of Appendix B.36&B.38	Pass
Peak-Average Ratio	§27.50(k)(4)	FCC: Limit≤13 dB	Section 2 of Appendix B.36&B.38	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.36&B.38	Pass
Band Edges Compliance	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 3 of Appendix B.36&B.38	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 4 of Appendix B.36&B.38	Pass
Field Strength of Spurious Radiation	§2.1053, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 7 of Appendix B.36&B.38	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/ frequency block.	Section 6 of Appendix B.36&B.38	Pass





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

20 of 55 Page:

#### 3700-3980MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)(3)	EIRP ≤ 1W	Section 5 of Appendix B.37&B.39	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.37&B.39	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 1 of Appendix B.37&B.39	Pass
Band Edges Compliance	§2.1051, §27.53(I)(2)	(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (I)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.	Section 3 of Appendix B.37&B.39	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(I)(2)	not exceed -13 dBm/MHz.	Section 4 of Appendix B.37&B.39	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(I)(2)	not exceed -13 dBm/MHz	Section 7 of Appendix B.37&B.39	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 6 of Appendix B.37&B.39	Pass





Report No.: SZCR240200055102

Rev.: 01

21 of 55 Page:

Remark:

According to the declaration letter from client.

Packaging method:	LGA	MINIPCIE	M.2

LGA conducted all tests, while MINIPIE and M.2 conducted RSE tests, and the report only reflected the worst mode data.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document oso not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@as.com"

t (86-755) 26012053

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053

sgs.china@sgs.com

Report No.: SZCR240200055102

Rev.: Λ1

Page: 22 of 55

#### **General Information** 3

#### 3.1 Client Information

Applicant:	Fibocom Wireless Inc
Address of Applicant:	1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China
Manufacturer: Fibocom Wireless Inc	
Address of Manufacturer:	1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China

#### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China
Post code:	518057
Test engineer:	Ruby Huang, Xing Guo

### 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

#### FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch has been recognized as an

accredited testing laboratory. Designation Number: CN1336.

Test Firm Registration Number: 787754



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction fore-vercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document landwill and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053

sgs.china@sgs.com



Report No.: SZCR240200055102

Rev.: 01

23 of 55 Page:

## 3.4 General Description of EUT

						ı	
EUT Description:	5G RedCap Module	5G RedCap Module					
Model No.:	FG132-GL						
Trade Mark:	Fibocom						
Hardware Version:	V1.0						
Software Version:	19003.1000.00.02.0	01.12					
Power Supply:	DC3.8V						
INACL	RF Conducted	8635	81070002709				
IMEI:	RSE	8635	81070005827				
Antenna Type:	⊠External, □Inte	grated					
	NR Band n2:	2.850	dBi (Ant0)	NR Band ı	า5:	1.32dBi (Ant0)	
	NR Band n7:	2.21dBi (Ant0)		NR Band n12:		1.61dBi (Ant0)	
	NR Band n13:	1.83dBi (Ant0)		NR Band n14:		2.19dBi (Ant0)	
	NR Band n25:	2.850	dBi (Ant0)	NR Band n26:		1.32dBi (Ant0)	
	NR Band n30:	0.220	dBi (Ant0)	NR Band ı	า38:	1.71dBi (Ant0)	
Antenna Gain:	NR Band n41:	2.210	dBi (Ant0)	NR Band ı	า48:	-0.13dBi (Ant0)	
	NR Band n66:	2.98dBi (Ant0)		NR Band ı	า70:	2.86dBi (Ant0)	
	NR Band n71:	1.610	dBi (Ant0)	NR Band ı	า77:	2.95dBi (Ant0)	
	NR Band n78:	-0.13	dBi (Ant0)				
	Note:						
	The antenna gain a manufacturer.	The antenna gain are derived from the gain information report provided by the manufacturer.					
	9kHz ~ 30MHz	Z	30MHz ~ 1000MHz		1000MHz ~ 2000MHz		
	(0.3dB)		(0.6dB)		(0.8dB)		
RF Cable:	2000MHz ~ 4000l	MHz	4000MHz ~ 6000MHz		6000MHz ~ 12750MHz		
	(1.1dB)		(1.80	dB)		(2.6dB)	
	Above 12750MHz (	Above 12750MHz (3.5dB)					
Pomark:							

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057

t (86-755) 26012053

Report No.: SZCR240200055102

Rev.: 01

24 of 55 Page:

#### 3.5 Test Mode

Test Mode	Test Modes Description				
NR/TM1	NR system, DFT-s-Pi/2-BPSK modulation				
NR/TM2	NR system, DFT-s-QPSK modulation				
NR/TM3 NR system, DFT-s-16QAM modulation					
NR/TM4	NR system, DFT-s-64QAM modulation				
NR/TM5	NR system, CP-QPSK modulation				
NR/TM6	NR system, CP-16QAM modulation				
NR/TM7	NR/TM7 NR system, CP-64QAM modulation				
Remark: The test mode(s)	are selected according to relevant radio technology specifications.				

### 3.6 Test Environment

Environment Parameter	101.0 kPa Selected Values During Tests				
Relative Humidity	44-60 % RH Ambient				
Value	Temperature(℃) Voltage(V)				
NTNV	22~25	3.8			
LTLV	-30	3.3			
LTHV	-30	4.3			
HTLV	50	3.3			
HTHV	50	4.3			

Remark:

NV: Normal Voltage LV: Low Extreme Test Voltage HV: High Extreme Test Voltage NT: Normal Temperature LT: Low Extreme Test Temperature HT: High Extreme Test Temperature

## 3.7 Description of Support Units

Description	Manufacturer	Model No.					
Mother board	Fibocom	ADP-FG132-GL-00-00_V1.0					
USB cable	Ugreen	6A					
Adapter Apple A1443							
Remark: all above the information of table are provided by client.							



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction fore-vercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document landwill and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 www.sgsgroup.com.cn

中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 sgs.china@sgs.com

t (86-755) 26012053

Report No.: SZCR240200055102

Rev.: 01

25 of 55 Page:

## 3.8 Technical Specification

Characteristics	Description						
Radio System Type	⊠ SA □ NSA						
	Band	TX		RX			
	NR Band n2	1850 to 1910	1850 to 1910 MHz		MHz		
	NR Band n5	824 to 849 N	824 to 849 MHz		Hz		
	NR Band n7	2500 to 2570	MHz	2620 to 2690	MHz		
	NR Band n12	699 to 716 M	Hz	729 to 746 M	Hz		
	NR Band n13	777 to 787 M	Hz	746 to 756 M	Hz		
	NR Band n14	788 to 798 M	Hz	758 to 768 M	Hz		
	NR Band n25	1850 to 1915	MHz	1930 to 1995	MHz		
Supported Frequency Range	NR Band n26 (814 to 824 MHz)	814 to 824Mh	Hz	859 to 869 M	Hz		
	NR Band n26 (824 to 849 MHz)	824 to 849 M	824 to 849 MHz		869 to 894 MHz		
	NR Band n30	2305 to 2315 MHz		2350 to 2360 MHz			
	NR Band n38	2570 to 2620	2570 to 2620 MHz		MHz		
	NR Band n41	2496 to 2690 MHz		2496 to 2690	MHz		
	NR Band n48	3550 to 3700	3550 to 3700 MHz		MHz		
	NR Band n66	1710 to 1780	MHz	2110 to 2200 MHz			
	NR Band n70	1695 to 1710	MHz	1995 to 2020 MHz			
	NR Band n71	663 to 698 M	Hz	617 to 652 MHz			
	NR Band n77	3700 to 3980	MHz	3700 to 3980	MHz		
	INK BAHU H//	3450 to 3550 MHz		3450 to 3550 MHz			
	NR Band n78	3700 to 3800	MHz	3700 to 3800	MHz		
	INK Ballu II/6	3450 to 3550	MHz	3450 to 3550	MHz		
	ND Bond no	SCS 15kHz:					
	NR Band n2	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz		
Supported Channel	NR Band n5	SCS 15kHz:					
Bandwidth	INIT DAILU IID	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz		
	NR Band n7	SCS 15kHz:					
	TVI C Dalla III	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053 sgs.china@sgs.com



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZCR240200055102 Report No.:

Rev.: 01

26 of 55 Page:

		SCS 15kHz:			
	NR Band n12	SC3 13K112.	⊠10 MHz	⊠15 MHz	
		SCS 15kHz:	Z TO WIT IZ	Z 10 WI 12	
	NR Band n13	⊠5 MHz	⊠10 MHz		
			□ IU IVI⊓Z		
	NR Band n14	SCS 15kHz:	M40 MII-		
		⊠5 MHz	⊠10 MHz		
	NR Band n25	SCS 15kHz:	DIAO MILI-	MAE MILE	∇/00 MUI-
		⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
	NR Band n26	SCS 15kHz:			
	(814 to 824 MHz)	⊠5 MHz	⊠10 MHz		
	NR Band n26	SCS 15kHz:			
	(814 to 824 MHz)	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
	NR Band n30	SCS 15kHz:			
		⊠5 MHz	⊠10 MHz		
	NR Band n38	SCS 30kHz:			
		⊠10 MHz	⊠15 MHz	⊠20 MHz	
	NR Band n41	SCS 30kHz:			
	NK Danu 1141	⊠10 MHz	⊠15 MHz	⊠20 MHz	
	ND David v 40	SCS 30kHz:			
	NR Band n48	⊠10 MHz	⊠15 MHz	⊠20 MHz	
		SCS 15kHz:			
	NR Band n66	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
		SCS 15kHz:			
	NR Band n70	⊠5 MHz	⊠10 MHz	⊠15 MHz	
		SCS 15kHz:			
	NR Band n71	⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz
		SCS 30kHz			
	NR Band n77	⊠10 MHz	⊠15 MHz	⊠20 MHz	
		SCS 30kHz			
	NR Band n78	⊠10 MHz	⊠15 MHz	⊠20 MHz	
		⊠ IU WI⊓Z	M 19 MUZ	⊠ZU IVI⊓Z	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053

sgs.china@sgs.com



Report No.: SZCR240200055102

Rev.: 01

27 of 55 Page:

## 3.9 Test Frequencies

### Reference test frequencies for NR operating band n2

3.9.1.1 Test frequencies for NR operating band n2 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	1932.5	386500	
	Downlink	Mid	1960	392000	15
5		High	1987.5	397500	
)		Low	1852.5	370500	
	Uplink	Mid	1880	376000	_
		High	1907.5	381500	
		Low	1935	387000	
	Downlink	Mid	1960	392000	15
10		High	1985	397000	
10		Low	1855	371000	
	Uplink	Mid	1880	376000	-
		High	1905	381000	
		Low	1937.5	387500	15
	Downlink	Mid	1960	392000	
15		High	1982.5	396500	
13		Low	1857.5	371500	
	Uplink	Mid	1880	376000	_
		High	1902.5	380500	
		Low	1940	388000	
	Downlink	Mid	1960	392000	15
20		High	1980	396000	
20		Low	1860	372000	
	Uplink	Mid	1880	376000	-
		High	1900	380000	







## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 28 of 55

## Reference test frequencies for NR operating band n5

3.9.2.1 Test frequencies for NR operating band n5 and SCS 15 kHz

CBW	Range		Carrier centre	Carrier centre	SS block SCS
[MHz]			[MHz]	[ARFCN]	[kHz]
		Low	871.5	174300	
	Downlink	Mid	881.5	176300	15
5		High	891.5	178300	
3		Low	826.5	165300	
	Uplink	Mid	836.5	167300	-
		High	846.5	169300	
		Low	874	174800	
	Downlink	Mid	881.5	176300	15
10		High	889	177800	
10		Low	829	165800	
	Uplink	Mid	836.5	167300	-
		High	844	168800	
		Low	876.5	175300	
	Downlink	Mid	881.5	176300	15
15		High	886.5	177300	
15		Low	831.5	166300	
	Uplink	Mid	836.5	167300	-
		High	841.5	168300	
		Low	879	175800	
20	Downlink	Mid	881.5	176300	15
		High	884	176800	
		Low	834	166800	
	Uplink	Mid	836.5	167300	1 -
	·	High	839	167800	





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 29 of 55

## Reference test frequencies for NR operating band n7

3.9.3.1 Test frequencies for NR operating band n7 and SCS 15 kHz

Bandwidth [MHz]	Rang		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
[1411.12]		Low	2622.5	524500	[10.12]
	Downlink	Mid	2655	531000	15
_	2011111111	High	2687.5	537500	-
5		Low	2502.5	500500	
	Uplink	Mid	2535	507000	<b></b>
	•	High	2567.5	513500	
		Low	2625	525000	
	Downlink	Mid	2655	531000	15
10		High	2685	537000	
10		Low	2505	501000	
	Uplink	Mid	2535	507000	<b></b>
		High	2565	513000	
	Downlink	Low	2627.5	525500	
		Mid	2655	531000	15
45		High	2682.5	536500	
15		Low	2507.5	501500	
	Uplink	Mid	2535	507000	
	•	High	2562.5	512500	
		Low	2630	526000	
00	Downlink	Mid	2655	531000	15
		High	2680	536000	
20		Low	2510	502000	
	Uplink	Mid	2535	507000	<b>1</b>
	•	High	2560	512000	1





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 30 of 55

### Reference test frequencies for NR operating band n12

3.9.4.1 Test frequencies for NR operating band n12 and SCS 15 kHz

Bandwidth [MHz]	Rang	e	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	731.5	146300	
	Downlink	Mid	737.5	147500	15
5		High	743.5	148700	
3		Low	701.5	140300	
	Uplink	Mid	707.5	141500	
		High	713.5	142700	
		Low	734	146800	
	Downlink	Mid	737.5	147500	15
10		High	741	148200	
10		Low	704	140800	
	Uplink	Mid	707.5	141500	
	•	High	711	142200	
		Low	736.5	147300	
15	Downlink	Mid	737.5	147500	15
		High	738.5	147700	
		Low	706.5	141300	
	Uplink	Mid	707.5	141500	
		High	708.5	141700	

### Reference test frequencies for NR operating band n13

3 9 5 1 Test frequencies for NR operating hand n13 and SCS 15 kHz

Bandwidth [MHz]	Rang	е	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	•	Low	748.5	149700	
	Downlink	Mid	751	150200	15
5		High	753.5	150700	
5		Low	779.5	155900	
	Uplink	Mid	782	156400	
		High	784.5	156900	
	•	Low	1	ĺ	
	Downlink	Mid	751	150200	15
		High	1	1	
10		Low	1	1	
	Uplink	Mid	779.5	156400	
		High	1	1	







## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 31 of 55

## Reference test frequencies for NR operating band n14

3.9.6.1 Test frequencies for NR operating band n14 and SCS 15 kHz

Bandwidth [MHz]	Rang	е	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	760.5	151200	
	Downlink	Mid	763	152600	15
5		High	765.5	153100	
5		Low	790.5	158100	
	Uplink	Mid	793	158600	
		High	795.5	159100	
		Low	1	/	
	Downlink	Mid	763	152600	15
10		High	1	1	
	· · · · · · · · · · · · · · · · · · ·	Low	1	1	
	Uplink	Mid	763	152600	
		High	1	1	

### Reference test frequencies for NR operating band n25

Test frequencies for NR operating band n25 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	1932.5	386500	
	Downlink	Mid	1962.5	392500	15
5		High	1992.5	398500	
5		Low	1852.5 370500		
	Uplink	Mid	1882.5	376500	-
		High	1912.5	382500	
		Low	1935	387000	
	Downlink	Mid	1962.5	392500	15
10		High	1990	398000	
10	10	Low	1855	371000	
	Uplink	Mid	1882.5	376500	-
		High	1910	382000	
		Low	1937.5	387500	
	Downlink	Mid	1962.5	392500	15
15		High	1987.5	397500	
15		Low	1857.5	371500	
	Uplink	Mid	1882.5	376500	-
	•	High	1907.5	381500	
		Low	1940	388000	
	Downlink	Mid	1962.5	392500	15
20		High	1985	397000	
		Low	1860	372000	
	Uplink	Mid	1882.5	376500	] -
	•	High	1905	381000	1





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 32 of 55

### Reference test frequencies for NR operating band n26 3.9.8.1 Test frequencies for NR operating band n26 and SCS 15 kHz

#### 814-824:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	861.5	172300	
	Downlink	Mid	864	172800	15
5		High	866.5	173300	
3		Low	816.5	163300	
	Uplink	Mid	819	163800	-
		High	821.5	164300	
	Downlink	Low	1	1	15
		Mid	864	172800	
10		High	1	1	
		Low	1	1	
	Uplink	Mid	819	163800	-
		High	1	1	

824-849:					
CBW [MHz]	Range	)	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	871.5	174300	15
	Downlink	Mid	881.5	176300	
5		High	891.5	178300	
3		Low	826.5	165300	
	Uplink	Mid	836.5	167300	-
		High	846.5	169300	
		Low	874	174800	
	Downlink	Mid	881.5	176300	15
40		High	889	177800	
10		Low	829	165800	
	Uplink	Mid	836.5	167300	-
		High	844	168800	
		Low	876.5	175300	
	Downlink	Mid	881.5	176300	15
15		High	886.5	177300	
15		Low	831.5	166300	
	Uplink	Mid	836.5	167300	] -
	·	High	841.5	168300	1
		Low	879	175800	
20	Downlink	Mid	881.5	176300	15
		High	884	176800	]
20		Low	834	166800	
	Uplink	Mid	836.5	167300	-
		High	839	167800	]





## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.:

Page: 33 of 55

### Reference test frequencies for NR operating band n30

3.9.9.1 Test frequencies for NR operating band n30 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	2352.5	470500	
	Downlink	Mid	2355	471000	15
5		High	2357.5	471500	1
5		Low	2307.5	461500	
	Uplink	Mid	2310	462000	-
		High	2312.5	462500	
	Downlink	Low	2355	471000	15
		Mid	2355	471000	
10		High	2355	471000	
10		Low	2310	462000	
	Uplink	Mid	2310	462000	] -
	•	High	2310	462000	

3.9.10 Reference test frequencies for NR operating band n38

3.9.10.1 Test frequencies for NR operating band n38 and SCS 30 kHz

Bandwidth [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	2575	515000	
10	&	Mid	2595	519000	30
	Uplink	High	2615	523000	
	Downlink	Low	2577.5	515500	
15	&	Mid	2595	519000	30
	Uplink	High	2612.5	522500	
	Downlink	Low	2580	516000	
20	&	Mid	2595	519000	30
	Uplink	High	2610	522000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document oso not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@as.com"

t (86-755) 26012053



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.:

Page: 34 of 55

### 3.9.11 Reference test frequencies for NR operating band n41

### 3.9.11.1 Test frequencies for NR operating band n41 and SCS 30 kHz

CBW [MHz]	3		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	2501.01	500202	
10	&	Mid	2592.99	518598	30
	Uplink	High	2685	537000	
	Downlink	Low	2503.5	500700	
15	&	Mid	2592.99	518598	30
	Uplink	High	2682.48	536496	
	Downlink	Low	2506.02	501204	
20	&	Mid	2592.99	518598	30
	Uplink	High	2670	534000	

### 3.9.12 Reference test frequencies for NR operating band n48

### 3.9.12.1 Test frequencies for NR operating band n48 and SCS 30 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3555	637000	
10	&	Mid	3624.99	641666	30
	Uplink	High	3694.98	646332	
	Downlink	Low	3557.52	637168	
15	&	Mid	3624.99	641666	30
	Uplink	High	3692.49	646166	
	Downlink	Low	3560.01	637334	
20	&	Mid	3624.99	641666	30
	Uplink	High	3690	646000	







## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

35 of 55 Page:

## 3.9.13 Reference test frequencies for NR operating band n66

3.9.13.1 Test frequencies for NR operating band n66 and SCS 15 kHz

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	2112.5	422500	15
	Downlink	Mid	2155	431000	
5		High	2197.5	439500	
3		Low	1712.5	342500	
	Uplink	Mid	1745	349000	_
		High	1777.5	355500	
		Low	2115	423000	
	Downlink	Mid	2155	431000	15
10		High	2195	439000	
10		Low	1715	343000	-
	Uplink	Mid	1745	349000	
		High	1775	355000	
		Low	2117.5	423500	15
	Downlink	Mid	2155	431000	
15		High	2192.5	438500	
15		Low	1717.5	343500	
	Uplink	Mid	1745	349000	-
		High	1772.5	354500	
		Low	2120	424000	
20	Downlink	Mid	2155	431000	15
		High	2190	438000	
20		Low	1720	344000	
	Uplink	Mid	1745	349000	-
	•	High	1770	354000	







# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 36 of 55

## 3.9.14 Reference test frequencies for NR operating band n70

3.9.14.1 Test frequencies for NR operating band n70 and SCS 15 kHz

Bandwidth [MHz]	Rang	e	Carrier centre Carrier centre [MHz] [ARFCN]		SS block SCS [kHz]
		Low	1997.5	399500	
	Downlink	Mid	2002.5	400500	15
5		High	2007.5	401500	
3		Low	1697.5	339500	
	Uplink	Mid	1702.5	340500	
		High	1707.7	341500	
		Low	2000	400000	
	Downlink	Mid	2002.5	400500	15
10		High	2005	401000	
10		Low	1700	340000	
	Uplink	Mid	1702.5	340500	
		High	1705	341000	
		Low	/	1	
	Downlink	Mid	2002.5	400500	15
15		High	1	1	
15		Low	1	1	
	Uplink	Mid	1702.5	340500	
		High	/	1	

### 3.9.15 Reference test frequencies for NR operating band n71

3.9.15.1 Test frequencies for NR operating hand n71 and SCS 15 kHz

CBW [MHz]	Range		and n71 and SCS  Carrier centre  [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
		Low	619.5	123900	15
	Downlink	Mid	634.5	126900	
5		High	649.5	129900	
5		Low	665.5	133100	
	Uplink	Mid	680.5	136100	-
	-	High	695.5	139100	
		Low	622	124400	
	Downlink	Mid	634.5	126900	15
10		High	647	129400	
10		Low	668	133600	
	Uplink	Mid	680.5	136100	-
		High	693	138600	
	Downlink	Low	624.5	124900	15
		Mid	634.5	126900	
15		High	644.5	128900	
15		Low	670.5	134100	
	Uplink	Mid	680.5	136100	-
	-	High	690.5	138100	
		Low	627	125400	
	Downlink	Mid	634.5	126900	15
20		High	642	128400	1
20		Low	673	134600	
	Uplink	Mid	680.5	136100	_
	-	High	688	137600	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86–755) 26012053 中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057

t (86-755) 26012053 sgs.china@sgs.com



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 37 of 55

## 3.9.16 Reference test frequencies for NR operating band n77 3.9.16.1 Test frequencies for NR operating band n77 and SCS 30 kHz

#### 3700-3980:

0700 00001					
CBW [MHz]	Range	•	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3705	647000	
10	&	Mid	3840	656000	30
	Uplink	High	3975	665000	
	Downlink	Low	3707.52	647168	
15	&	Mid	3840	656000	30
	Uplink	High	3972.48	664832	
	Downlink	Low	3710.01	647334	
20	&	Mid	3840	656000	30
	Uplink	High	3969.99	664666	1

#### 3450-3550

3450-3550:					
CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3455.01	630334	
10	&	Mid	3500.01	633334	30
	Uplink	High	3545.01	636334	
	Downlink	Low	3457.5	630500	
15	&	Mid	3500.01	633334	30
	Uplink	High	3542.49	636166	
	Downlink	Low	3460.02	630668	
20	&	Mid	3500.01	633334	30
	Uplink	High	3540	636000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 38 of 55

## 3.9.17 Reference test frequencies for NR operating band n78 3.9.17.1 Test frequencies for NR operating band n78 and SCS 30 kHz

#### 3700-3800:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3705	647000	
10	&	Mid	3750	650000	30
	Uplink	High	3795	653000	
	Downlink	Low	3707.52	647168	
15	&	Mid	3750	650000	30
	Uplink	High	3792.48	652832	
•	Downlink	Low	3710.01	647334	
20	&	Mid	3750	650000	30
	Uplink	High	3789.99	652666	

#### 3450-3550

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3455.01	630334	
10	&	Mid	3500.01	633334	30
	Uplink	High	3545.01	636334	
	Downlink	Low	3457.5	630500	
15	&	Mid	3500.01	633334	30
	Uplink	High	3542.49	636166	
	Downlink	Low	3460.02	630668	
20	&	Mid	3500.01	633334	30
	Uplink	High	3540	636000	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

Report No.: SZCR240200055102

Rev.: 01

Page: 39 of 55

## **Description of Tests**

## 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction fore-vercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document landwill and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

Report No.: SZCR240200055102

Rev.: 01

Page: 40 of 55

## 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

邮编: 518057

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

t (86-755) 26012053 t (86-755) 26012053

sgs.china@sgs.com

Report No.: SZCR240200055102

Rev.: 01

41 of 55 Page:

## 4.3 EIRP Power Density

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.3

#### **Test Settings**

- 1. Set instrument center frequency to OBW center frequency.
- 2. Set span to at least 1.5 times the OBW.
- 3. Set the RBW to the specified reference bandwidth (often 1 MHz).
- 4. Set VBW ≥ 3 × RBW.
- 5. Detector = RMS (power averaging).
- 6. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
- 7. Sweep time = auto couple.
- 8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- 9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

邮编: 518057

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

sgs.china@sgs.com

t (86-755) 26012053

SZCR240200055102 Report No.:

Rev.: Λ1

42 of 55 Page:

## 4.4 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- 4. Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

邮编: 518057

Report No.: SZCR240200055102

Rev.: 01

Page: 43 of 55

## 4.5 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize



Report No.: SZCR240200055102

Rev.: 01

Page: 44 of 55

## 4.6 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

#### **Test Settings**

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document obscoment of a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unafful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com"

SZCR240200055102 Report No.:

Rev.: Λ1

45 of 55 Page:

## 4.7 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

#### Remark: Reference test setup 1

#### Test Settings

- The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- The signal analyzer was set to collect one million samples to generate the CCDF curve
- The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Report No.: SZCR240200055102

Rev.: 01

46 of 55 Page:

## 4.8 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D - 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

#### Remark: Reference test setup 2

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit – Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document one to exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document launwful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ss.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057

t (86-755) 26012053

t (86-755) 26012053

SZCR240200055102 Report No.:

Rev.: 01

Page: 47 of 55

## 4.9 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01 Section 9

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

#### **Time Period and Procedure:**

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3





# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZCR240200055102

Rev.: 01


Page: 48 of 55

## 4.10 Test Setups

### 4.10.1 Test Setup 1

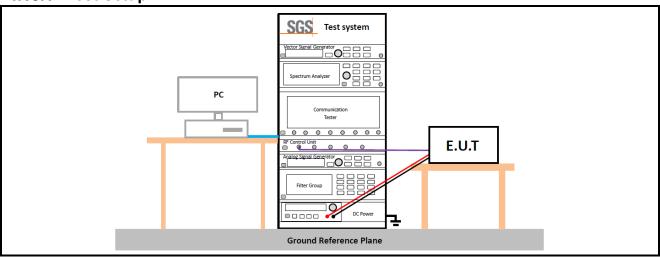

4.10.2 Test Setup 2

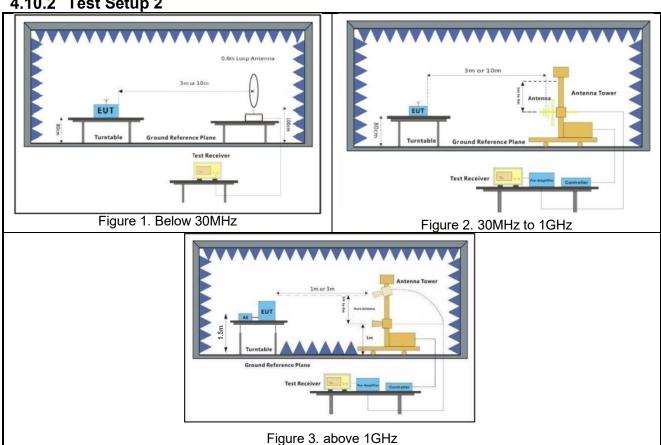



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document obscoment of a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unafful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@gs.com"

t (86-755) 26012053

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 中国・广东・深圳市南山区科技园中区M-10栋1号厂房

邮编: 518057 t (86-755) 26012053

www.sgsgroup.com.cn sgs.china@sgs.com




# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

Page: 49 of 55

### 4.10.3 Test Setup 3

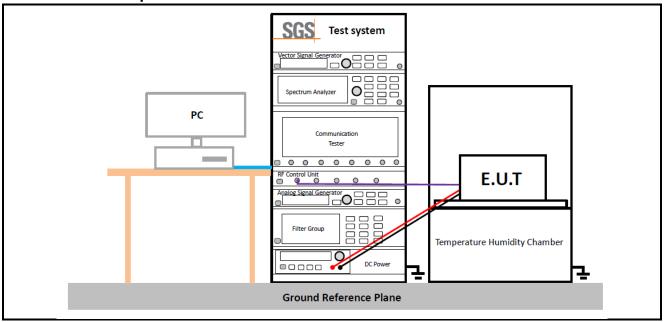



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.Doccheck@ags.com"

Report No.: SZCR240200055102

Rev.: 01

Page: 50 of 55

### **4.11Test Conditions**

4.111cst conditions					
	Transmit Output Power Data - Average Power, Spectral Density				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7;				
	Peak-to-Average Ratio				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	NR/TM1; NR/TM5				
	Bandwidth - Occupied Bandwidth				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	NR/TM1; NR/TM5				
	Bandwidth - Emission Bandwidth				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	NR/TM1; NR/TM5				
	Band Edges Compliance				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, H (L= low channel, H= high channel)				
Test Mode	NR/TM1; NR/TM5				
Spurious Emission at Antenna Terminals					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Sherzhen, Guangdong, China 518057 t (86-755) 26012053 www.sgsgroup.com.cn

中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

51 of 55 Page:

Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 1		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	NR/TM1; NR/TM5		
	Field Strength of Spurious Radiation		
Test Case	Test Conditions		
Test Environment	Ambient Climate & Rated Voltage		
Test Setup	Test Setup 2		
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Test Mode	NR/TM1 Remark: All bandwidth and modulation of NR have been pre tested, and only the worst results are reflected in the report.		
	Frequency Stability		
Test Case	Test Conditions		
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage		
rest Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.		
Test Setup	Test Setup 3		
RF Channels (TX)	M (M= middle channel)		
Tost Modo	NR/TM1; NR/TM5		
Test Mode	The report only show the bandwidth with the worst case.		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

邮编: 518057



Report No.: SZCR240200055102

Rev.: 01

52 of 55 Page:

### **Main Test Instruments**

RF Test System					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Radio Communication Tester	Keysight	UXM	SZ-WRG-M-021	2023/05/25	2024/05/24
MXA Signal	IZ a vašadak	NOOOOD	CEM004 04	2023/03/15	2024/03/14
Analyzer (10Hz-50GHz)	Keysight	N9020B	SEM004-24	2024/03/14	2025/03/13
Programmable Temperature & Humidity Chamber	Votsch Industrietechnik GmbH	VT 4002	SZ-WRG-M-075	2023/05/25	2024/05/24
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	SZ-WRG-M-077	2023/05/25	2024/05/24



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZCR240200055102

Rev.: 01

53 of 55 Page:

RSE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	SEM003-33	2021/09/25	2024/09/24
MXE EMI receiver	Agilent	N9038A	SEM004-05	2023/07/11	2024/07/10
Pre-amplifier	HP	8447D	SEM005-02	2023/07/11	2024/07/10
Spectrum Analyzer	Rohde & Schwarz	101288	SEM004-08	2023/07/11	2024/07/10
Low Noise Amplifier	CLAVIIO	BDLNA-0118- 352810	SEM005-05	2023/07/11	2024/07/10
Substitution Antenna	Schwarzbeck	VULB9168	SEM003-18	2022/08/07	2025/08/06
Signal Generator(9kHz- 40GHz)	N5173B	MY53270267	Agilent	2023/07/11	2024/07/10
Pre-amplifier	HP	8447D	SEM005-02	2023/07/11	2024/07/10
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2021/07/11	2024/07/10
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	SEM003-32	2021/09/26	2024/09/25
Double-ridged waveguide horn	ETS-LINDGREN	3117	SEM003-34	2021/09/25	2024/09/24
Spectrum Analyzer	Rohde & Schwarz	101288	SEM004-08	2023/07/11	2024/07/10
Low Noise Amplifier	CLAVIIO	BDLNA-0118- 352810	SEM005-05	2023/07/11	2024/07/10
Pre-amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2023/07/11	2024/07/10
Pre-amplifier	Rohde & Schwarz	CH14-H052	SEM005-17	2023/07/11	2024/07/10
Substitution Antenna	ETS-Lindgren	3142C	SEM003-01	2023/06/25	2026/06/24
Universal Radio Communication Tester	Rohde & Schwarz	CMW 500	SEM010-03	2023/03/28 2024/03/14	2024/03/27 2025/03/13

	General used equipment						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)		
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2023/07/28	2024/07/27		
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2023/07/28	2024/07/27		
	Changchun			2023/03/23	2024/03/22		
Barometer	Meteorological Industry Factory	DYM3	SEM002-01	2024/03/18	2025/03/17		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ass.com"

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

邮编: 518057

中国・广东・深圳市南山区科技园中区M-10栋1号厂房

t (86-755) 26012053 t (86-755) 26012053

sgs.china@sgs.com

Report No.: SZCR240200055102

Rev.: 01

Page: 54 of 55

## 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Radio Frequency	± 5.4 x 10 <sup>-8</sup>
2	Duty cycle	± 0.3%
3	Occupied Bandwidth	± 3%
4	RF conducted power	± 0.8dB
5	RF power density	± 0.4dB
6	Conducted Spurious emissions	± 2.7dB
7	Padiated Spurious emission test	± 3.1dB (Below 1GHz)
	Radiated Spurious emission test	± 4.4dB (Above 1GHz)

#### Remark:

The U<sub>lab</sub> (lab Uncertainty) is less than U<sub>cispr/ETSI</sub> (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.





Report No.: SZCR240200055102

Rev.: 01

55 of 55 Page:

## **Appendixes**

Appendix A.1	WWAN Setup Photos
Appendix B.20	NR Band n2
Appendix B.21	NR Band n5
Appendix B.22	NR Band n7
Appendix B.23	NR Band n12
Appendix B.24	NR Band n13
Appendix B.25	NR Band n14
Appendix B.26	NR Band n25
Appendix B.27	NR Band n26(814-824)
Appendix B.28	NR Band n26(824-849)
Appendix B.29	NR Band n30
Appendix B.30	NR Band n38
Appendix B.31	NR Band n41
Appendix B.32	NR Band n48
Appendix B.33	NR Band n66
Appendix B.34	NR Band n70
Appendix B.35	NR Band n71
Appendix B.36	NR Band n77(3450-3550)
Appendix B.37	NR Band n77(3700-3980)
Appendix B.38	NR Band n78(3450-3550)
Appendix B.39	NR Band n78(3700-3800)
Appendix B.43	NR_band_26(814~849)

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions">https://www.sgs.com/en/Terms-and-Conditions</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@ss.com"