

Report No.: SEWM2210000205RG02

Rev.:

Page: 1 of 42

## **TEST REPORT**

SEWM2210000205RG **Application No.:** Applicant: Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi **Address of Applicant:** 

1st Rd, Nanshan, Shenzhen, China

Manufacturer: Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi Address of Manufacturer:

1st Rd, Nanshan, Shenzhen, China

**EUT Description:** 5G module Model No.: FG360-NA Trade Mark: Fibocom

FCC ID: ZMOFG360NA08

Standards: 47 CFR Part 2

> 47 CFR Part 22 47 CFR Part 24 47 CFR Part 27

**Date of Receipt:** 2022/09/25

Date of Test: 2022/09/25 to 2022/12/04

Date of Issue: 2022/12/05

Test Result: PASS \*

Authorized Signature:

Panta Sun Wireless Laboratory Manager



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国。苏州。中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980

<sup>\*</sup> In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: SEWM2210000205RG02

Rev.: Page: 2 of 42

#### Version

|         | Revision Record                      |            |  |          |  |  |
|---------|--------------------------------------|------------|--|----------|--|--|
| Version | Version Chapter Date Modifier Remark |            |  |          |  |  |
| 01      |                                      | 2022/12/05 |  | Original |  |  |

| Prepared By | (Tizzy Song) / Test Engineer |
|-------------|------------------------------|
| Checked By  | (Well Wei) / Reviewer        |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions-en/Conditions/Terms-en/Conditions-en/Condit

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 3 of 42

#### Content

| 1 | Vers | sion   | 2  |
|---|------|--|----|
| 2 | Tes  | t Summary  | 5  |
|   | 2.1  | NR Band n41/CA_n41C (ENDC DC_2A_n41A/ DC_66A_n41A)     | 5  |
|   | 2.2  | NR Band n25(ENDC DC_12A-n25A/ DC_66A-n25A)             | 7  |
|   | 2.3  | NR Band n66(ENDC DC_2A-n66A/ DC_12A-n66A)              | 8  |
|   | 2.4  | NR Band n71(ENDC DC_2A-n71A/DC_66A-n71A)               | 9  |
|   | 2.5  | NR Band n77  | 10 |
| 3 | Ger  | neral Information                                      | 12 |
|   | 3.1  | Client Information                                     | 12 |
|   | 3.2  | Test Location  | 12 |
|   | 3.3  | Test Facility  | 12 |
|   | 3.4  | General Description of EUT                             | 13 |
|   | 3.5  | Test Mode  | 14 |
|   | 3.6  | Test Environment                                       |    |
|   | 3.7  | Description of Support Units                           | 14 |
|   | 3.8  | Technical Specification                                |    |
|   | 3.9  | Test Frequencies                                       |    |
|   | 3.9. | 1 0  |    |
|   | 3.9. | 1 3  |    |
|   | 3.9. | 1 0  |    |
|   | 3.9. | 1 3  |    |
|   | 3.9. |  |    |
|   | 3.9. | 6 Reference test frequencies for NR Intra-Band CA_n41C | 25 |
| 4 | Des  | cription of Tests                                      | 27 |
|   | 4.1  | Conducted Output Power                                 | 27 |
|   | 4.2  | Effective (Isotropic) Radiated Power of Transmitter    | 28 |
|   | 4.3  | Occupied Bandwidth                                     | 29 |
|   | 4.4  | Band Edge at Antenna Terminals                         | 30 |
|   | 4.5  | Spurious And Harmonic Emissions at Antenna Terminal    | 31 |
|   | 4.6  | Peak-Average Ratio                                     | 32 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Ferms-and-Conditions.aspx.and">http://www.sgs.com/en/Ferms-and-Conditions/Ferms-en/Conditions/Ferms

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号的6号厂房南部 邮编: 215000



7

# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

|   |      |   | Report No.:<br>Rev.:<br>Page: |    |
|---|------|---|-------------------------------|----|
|   | 4.7  | Field Strength of Spurious Radiation          |                               | 33 |
|   | 4.8  | Frequency Stability / Temperature Variation . |                               | 34 |
|   | 4.9  | Test Setups                                   |                               | 35 |
|   | 4.9  | .1 Test Setup 1                               |                               | 35 |
|   | 4.9  | .2 Test Setup 2                               |                               | 35 |
|   | 4.9  | .3 Test Setup 3                               |                               | 36 |
|   | 4.10 | Test Conditions                               |                               | 37 |
| 5 | Mai  | in Test Instruments                           |                               | 39 |
| 6 | Me   | asurement Uncertainty                         |                               | 41 |
|   |      |   |                               |    |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2210000205RG02

Rev.: 01 Page: 5 of 42

### 2 Test Summary

### 2.1 NR Band n41/CA\_n41C (ENDC DC\_2A\_n41A/ DC\_66A\_n41A)

| Test Item   | FCC Rule No.             | Requirements  | Test Result                           | Verdict |
|---|--------------------------|---|---------------------------------------|---------|
| Effective<br>(Isotropic)<br>Radiated Power<br>Output Data | §2.1046,<br>§27.50(h)(2) | EIRP ≤ 2W   | Section 1 of<br>Appendix<br>B.10&B.15 | Pass    |
| Peak-Average<br>Ratio                                     |                          | ≤13 dB  | Section 2 of<br>Appendix<br>B.10&B.15 | Pass    |
| Modulation<br>Characteristics                             | §2.1047                  | Digital modulation  | Section 3 of<br>Appendix<br>B.10&B.15 | Pass    |
| Bandwidth   | §2.1049                  | OBW: No limit.<br>EBW: No limit.  | Section 4 of<br>Appendix<br>B.10&B.15 | Pass    |
| Band Edges<br>Compliance                                  | §2.1051,<br>§27.53(m4)   | For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. | Section 5 of<br>Appendix<br>B.10&B.15 | Pass    |
| Spurious<br>Emission at<br>Antenna<br>Terminals           | §2.1051,<br>§27.53(m)    | Channel Edge  | Section 6 of<br>Appendix<br>B.10&B.15 | Pass    |
| Field Strength<br>of Spurious<br>Radiation                | §2.1053,<br>§27.53(m)    | Channel Edge  -25 dBm/ 1 MHz 1 MHz -// 9 kHz 95 MHz x MHz 10 <sup>th</sup> harmonics X=Max {6MHz, EBW}  | Section 7 of<br>Appendix<br>B.10&B.15 | Pass    |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Term

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Fiee Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路(号的6号厂房南部 邮编: 215000



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 6 of 42

| Test Item              | FCC Rule No.                                | Requirements  | Test Result                           | Verdict |
|------------------------|---|---|---------------------------------------|---------|
| Frequency<br>Stability | §2.1055(a)(1)(b)<br>§2.1055(d)(1)<br>§27.54 | Within authorized bands of operation/frequency block. | Section 8 of<br>Appendix<br>B.10&B.15 | Pass    |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Parts, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜商1号的6号厂房南部 邮编: 215000



Report No.: SEWM2210000205RG02

Rev.: 01 Page: 7 of 42

### 2.2 NR Band n25(ENDC DC\_12A-n25A/ DC\_66A-n25A)

| Test Item   | FCC Rule No.                                 | Requirements   | Test Result                  | Verdict |
|---|--|--|------------------------------|---------|
| Effective<br>(Isotropic)<br>Radiated Power<br>Output Data | §2.1046,<br>§24.232(c)                       | EIRP ≤ 2 W   | Section 1 of<br>Appendix B.9 | Pass    |
| Peak-Average<br>Ratio                                     | §24.232(d)                                   | Limit≤13 dB  | Section 2 of<br>Appendix B.9 | Pass    |
| Modulation<br>Characteristics                             | §2.1047                                      | Digital modulation   | Section 3 of<br>Appendix B.9 | Pass    |
| Bandwidth   | §2.1049                                      | OBW: No limit.<br>EBW: No limit.   | Section 4 of<br>Appendix B.9 | Pass    |
| Band Edges<br>Compliance                                  | §2.1051,<br>§24.238(a)                       | ≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.                    | Section 5 of<br>Appendix B.9 | Pass    |
| Spurious<br>Emission at<br>Antenna<br>Terminals           | §2.1051,<br>§24.238(a)                       | ≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges. | Section 6 of<br>Appendix B.9 | Pass    |
| Field Strength of<br>Spurious<br>Radiation                | §2.1053,<br>§24.238(a)                       | ≤ -13 dBm/1 MHz.   | Section 7 of<br>Appendix B.9 | Pass    |
| Frequency<br>Stability                                    | §2.1055(a)(1)(b)<br>§2.1055(d)(1)<br>§24.235 | Within authorized bands of operation/frequency block.  | Section 8 of<br>Appendix B.9 | Pass    |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Term

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Fiee Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路(号的6号厂房南部 邮编: 215000 t (86–512) 62992980 ww t (86–512) 62992980 sgs



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 8 of 42

### 2.3 NR Band n66(ENDC DC\_2A-n66A/ DC\_12A-n66A)

| Test Item   | FCC Rule No.                                | Requirements   | Test Result                   | Verdict |
|---|---|--|-------------------------------|---------|
| Effective<br>(Isotropic)<br>Radiated Power<br>Output Data | §2.1046,<br>§27.50(d)(4)                    | EIRP ≤ 1 W   | Section 1 of<br>Appendix B.11 | Pass    |
| Peak-Average<br>Ratio                                     | §27.50(d)(5)                                | Limit≤13 dB  | Section 2 of<br>Appendix B.11 | Pass    |
| Modulation<br>Characteristics                             | §2.1047                                     | Digital modulation   | Section 3 of<br>Appendix B.11 | Pass    |
| Bandwidth   | §2.1049                                     | OBW: No limit.<br>EBW: No limit.   | Section 4 of<br>Appendix B.11 | Pass    |
| Band Edges<br>Compliance                                  | §2.1051,<br>§27.53(h)                       | ≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.                    | Section 5 of<br>Appendix B.11 | Pass    |
| Spurious<br>Emission at<br>Antenna<br>Terminals           | §2.1051,<br>§27.53(h)                       | ≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges. | Section 6 of<br>Appendix B.11 | Pass    |
| Field Strength of<br>Spurious<br>Radiation                | §2.1053,<br>§27.53(h)                       | ≤ -13 dBm/1 MHz.   | Section 7 of<br>Appendix B.11 | Pass    |
| Frequency<br>Stability                                    | §2.1055(a)(1)(b)<br>§2.1055(d)(1)<br>§27.54 | Within authorized bands of operation/frequency block.  | Section 8 of<br>Appendix B.11 | Pass    |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-And-Conditions-and-Conditions-And-Con

South of No. 6 Plant, No. 1, Runshang Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区洄胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.s t (86–512) 62992980 sgs.ch



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 9 of 42

### 2.4 NR Band n71(ENDC DC\_2A-n71A/DC\_66A-n71A)

| Test Item   | FCC Rule No.                                | Requirements   | Test Result                   | Verdict |
|---|---|--|-------------------------------|---------|
| Effective<br>(Isotropic)<br>Radiated Power<br>Output Data | §2.1046<br>§27.50(c)(10)                    | ERP≤3W   | Section 1 of<br>Appendix B.12 | Pass    |
| Peak-Average<br>Ratio                                     |   | Limit≤13 dB  | Section 2 of<br>Appendix B.12 | Pass    |
| Modulation<br>Characteristics                             | §2.1047                                     | Digital modulation   | Section 3 of<br>Appendix B.12 | Pass    |
| Bandwidth   | §2.1049                                     | OBW: No limit.<br>EBW: No limit.   | Section 4 of<br>Appendix B.12 | Pass    |
| Band Edges<br>Compliance                                  | §2.1051,<br>§27.53(g)                       | ≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.                    | Section 5 of<br>Appendix B.12 | Pass    |
| Spurious<br>Emission at<br>Antenna<br>Terminals           | §2.1051,<br>§27.53(g)                       | ≤ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges. | Section 6 of<br>Appendix B.12 | Pass    |
| Field Strength of<br>Spurious<br>Radiation                | §2.1053,<br>§27.53(g)                       | ≤ -13 dBm/1 MHz.   | Section 7 of<br>Appendix B.12 | Pass    |
| Frequency<br>Stability                                    | §2.1055(a)(1)(b)<br>§2.1055(d)(1)<br>§27.54 | within the authorized bands of operation.  | Section 8 of<br>Appendix B.12 | Pass    |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Document-Terms-en-Term

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Fiee Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路(号的6号厂房南部 邮编: 215000 t (86–512) 62992980 w t (86–512) 62992980 s



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 10 of 42

#### 2.5 NR Band n77

#### 3700-3980MHz:

| Test Item   | FCC Rule No.                                | Requirements   | Test Result                      |
|---|---|--|----------------------------------|
| Effective<br>(Isotropic)<br>Radiated Power<br>Output Data | §2.1046,<br>§27.50(j)(3)                    | EIRP ≤ 1W  | Section 1 of<br>Appendix<br>B.14 |
| Peak-Average<br>Ratio                                     |   | ≤13 dB   | Section 2 of<br>Appendix<br>B.14 |
| Modulation<br>Characteristics                             | §2.1047                                     | Digital modulation   | Section 3 of<br>Appendix<br>B.14 |
| Bandwidth   | §2.1049                                     | OBW: No limit.<br>EBW: No limit.   | Section 4 of<br>Appendix<br>B.14 |
| Band Edges<br>Compliance                                  | §2.1051,<br>§27.53(I)(2)                    | (2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (I)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. | Section 5 of<br>Appendix<br>B.14 |
| Spurious<br>Emission at<br>Antenna<br>Terminals           | §2.1051,<br>§27.53(I)(2)                    | not exceed -13 dBm/MHz.  | Section 6 of<br>Appendix<br>B.14 |
| Field Strength of<br>Spurious<br>Radiation                | §2.1053,<br>§27.53(I)(2)                    | not exceed -13 dBm/MHz   | Section 7 of<br>Appendix<br>B.14 |
| Frequency<br>Stability                                    | §2.1055(a)(1)(b)<br>§2.1055(d)(1)<br>§27.54 | Within authorized bands of operation/frequency block.  | Section 8 of<br>Appendix<br>B.14 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runshang Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区洄胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 w t (86–512) 62992980 s



Report No.: SEWM2210000205RG02

Rev.:

11 of 42 Page:

#### 3450-3550MHz:

| Test Item   | FCC Rule No.                                | Requirements   | Test Result                      |
|---|---|--|----------------------------------|
| Effective<br>(Isotropic)<br>Radiated Power<br>Output Data | §2.1046,<br>§27.50(k)(3)                    | EIRP ≤ 30dBm   | Section 1 of<br>Appendix<br>B.13 |
| Peak-Average<br>Ratio                                     | §27.50(k)(4)                                | FCC: Limit≤13 dB   | Section 2 of<br>Appendix<br>B.13 |
| Bandwidth   | §2.1049                                     | OBW: No limit.<br>EBW: No limit.   | Section 4 of<br>Appendix<br>B.13 |
| Band Edges<br>Compliance                                  | §2.1051,<br>§27.50(n)(2)                    | For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. | Section 5 of<br>Appendix<br>B.13 |
| Spurious<br>Emission at<br>Antenna<br>Terminals           | §2.1051,<br>§27.50(n)(2)                    | For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. | Section 6 of<br>Appendix<br>B.13 |
| Field Strength of<br>Spurious<br>Radiation                | §2.1053,<br>§27.50(n)(2)                    | For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. | Section 7 of<br>Appendix<br>B.13 |
| Frequency<br>Stability                                    | §2.1055(a)(1)(b)<br>§2.1055(d)(1)<br>§27.54 | Within authorized bands of operation/ frequency block.   | Section 8 of<br>Appendix<br>B.13 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 12 of 42

#### 3 General Information

#### 3.1 Client Information

| Applicant:               | Fibocom Wireless Inc.   |
|--------------------------|---|
| Address of Applicant:    | 1101,Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan,Shenzhen, China |
| Manufacturer:            | Fibocom Wireless Inc.   |
| Address of Manufacturer: | 1101,Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan,Shenzhen, China |

#### 3.2 Test Location

| Company:       | SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.   |
|----------------|--|
| Address:       | South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone |
| Post code:     | 215000   |
| Test engineer: | Weller Liu, Tizzy Song   |

### 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

#### FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx">http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law longer of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extend of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be prosecuted to the fullest extender of the lawfull and offenders may be pro



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 13 of 42

### 3.4 General Description of EUT

| EUT Description:  | 5G module                                   | 5G module                        |                             |                          |  |  |
|-------------------|---|----------------------------------|-----------------------------|--------------------------|--|--|
| Model No.:        | FG360-NA                                    | FG360-NA                         |                             |                          |  |  |
| Trade Mark:       | Fibocom                                     |                                  |                             |                          |  |  |
| Hardware Version: | V1.0  |                                  |                             |                          |  |  |
| Software Version: | 81112.7000.30.01                            | .01.09                           |                             |                          |  |  |
| INACI.            | RF Conducted                                | 86242                            | 24050044030                 |                          |  |  |
| IMEI:             | RSE 868245060000843                         |                                  |                             |                          |  |  |
| Feature:          | UL 2*2 MIMO: n4*                            | 1; n77                           |                             |                          |  |  |
| HPUE Power Class: | Class 2: n41; n77                           | Class 2: n41; n77                |                             |                          |  |  |
| Antenna Type:     | ⊠External, □Int                             | egrated                          |                             |                          |  |  |
|                   | NR Band n25:                                | 2.63dBi (Ant3)                   |                             |                          |  |  |
|                   | NR Band n41: 1.52dBi (Ant3); 1.52dBi (Ant8) |                                  |                             |                          |  |  |
|                   | NR Band n66:                                | NR Band n66: 2.86dBi (Ant3)      |                             |                          |  |  |
|                   | NR Band n71:                                | 1.39dB                           | i (Ant8)                    |                          |  |  |
| Antenna Gain:     | NR Band n77:                                | -1.13dBi (Ant3); -1.13dBi (Ant8) |                             |                          |  |  |
|                   | NR CA_n41C:                                 | 1.52dB                           | i (Ant3)                    |                          |  |  |
|                   | Note: The antenna gain manufacturer.        | are derive                       | d from the gain information | n report provided by the |  |  |
| DE O.L.           | 0.8dB (Below 1Gh                            | Hz)                              | 1.0dB (1.0~2.4GHz)          | 1.2dB (2.4~3.4GHz)       |  |  |
| RF Cable:         | 1.5dB (Above 3.40                           | 1.5dB (Above 3.4GHz)             |                             |                          |  |  |

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Condit

South of No. 6 Plant, No. 1, Runshang Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州 | 上国区河阻路 | 1号的6号厂房南部 邮编: 215000



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 14 of 42

#### 3.5 Test Mode

| Test Mode                | Test Modes Description  |
|--------------------------|---|
| NR/TM1                   | NR system, DFT-s-QPSK modulation                                    |
| NR/TM2                   | NR system, DFT-s-16QAM modulation                                   |
| NR/TM3                   | NR system, DFT-s-64QAM modulation                                   |
| NR/TM4                   | NR system, DFT-s-256QAM modulation                                  |
| NR/TM5                   | NR system, CP-QPSK modulation                                       |
| NR/TM6                   | NR system, CP-16QAM modulation                                      |
| NR/TM7                   | NR system, CP-64QAM modulation                                      |
| NR/TM8                   | NR system, CP-256QAM modulation                                     |
| Remark: The test mode(s) | are selected according to relevant radio technology specifications. |

#### 3.6 Test Environment

NT: Normal Temperature

| Environment Parameter     | 101.0 kPa Selected Values During Tests |                               |  |  |
|---------------------------|--|-------------------------------|--|--|
| Relative Humidity         | 44-46 % RH Ambient                     |                               |  |  |
| Value                     | Temperature(°C)                        | Voltage(V)                    |  |  |
| NTNV                      | 22~23                                  | 3.8                           |  |  |
| LTLV                      | -30                                    | 3.3                           |  |  |
| LTHV                      | -30                                    | 4.4                           |  |  |
| HTLV                      | 50                                     | 3.3                           |  |  |
| HTHV                      | 50                                     | 4.4                           |  |  |
| Remark:                   |  |                               |  |  |
| NV: Normal Voltage LV: Lo | w Extreme Test Voltage F               | IV: High Extreme Test Voltage |  |  |

### 3.7 Description of Support Units

| Description  | Manufacturer | Model No. |  |  |  |  |
|--|--------------|-----------|--|--|--|--|
| Mother board   | Fibocom      | N/A       |  |  |  |  |
| Remark: all above the information of table are provided by client. |              |           |  |  |  |  |

LT: Low Extreme Test Temperature



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions.apx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.apx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law lunes stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*Doceack the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Attention:\*\*Doceack the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Termination:\*\*Cannot and the such as the produced and such sample(s) tested and such sample(s) tested further than the contact us at telephone: (86-755) 8307 1443, \*\*Termination:\*\*Cannot and the sample of the sample of

 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com

HT: High Extreme Test Temperature



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 15 of 42

### 3.8 Technical Specification

| Characteristics             | Description   |                 |              |                  |             |  |  |
|-----------------------------|---|-----------------|--------------|------------------|-------------|--|--|
| Radio System Type           | ⊠ SA ⊠ NSA  |                 |              |                  |             |  |  |
|                             | Band  | TX              |              | RX               |             |  |  |
|                             | NR Band n25   | 1850 to 1915MHz |              | 1930 to 1995 MHz |             |  |  |
|                             | NR Band n41   | 2496 to 2690    | MHz          | 2496 to 2690     | MHz         |  |  |
|                             | NR Band n66   | 1710 to 1780    | MHz          | 2110 to 2180     | MHz         |  |  |
|                             | NR Band n71   | 663 to 698 M    | Hz           | 617 to 652 M     | Hz          |  |  |
|                             | NR Band n77   | 3700 to 3980    | MHz          | 3700 to 3980     | MHz         |  |  |
|                             | INK Ballu III I   | 3450 to 3550    | MHz          | 3450 to 3550     | MHz         |  |  |
| Supported Frequency         | NR CA_n41C  | 2496 to 2690    | MHz          | 2496 to 2690     | MHz         |  |  |
| Range                       | ENDC:   |                 |              |                  |             |  |  |
|                             | DC_12A_n25A; DC   | _66A_n25A; D    | C_2A_n41A; D | C_66A_n41A;      | DC_2A_n66A; |  |  |
|                             | DC_12A_n66A; DC   | _2A_n71A;DC     | _66A_n71A;   |                  |             |  |  |
|                             | NR UL CA:   |                 |              |                  |             |  |  |
|                             | NR CA_n41C; n25A-n41A; n25A-n66A; n25A-n71A; n25A-n77A; |                 |              |                  |             |  |  |
|                             | n41A-n66A; n41A-n71A; n41A-n77A;                        |                 |              |                  |             |  |  |
|                             | n66A-n71A; n66A-n77A; n71A-n77A;                        |                 |              |                  |             |  |  |
|                             | ENDC& NRCA Only test RSE, report only show worst mode.  |                 |              |                  |             |  |  |
|                             | SCS 15kHz:  |                 |              |                  |             |  |  |
|                             | NR Band n25   | ⊠5 MHz          | ⊠10 MHz      | ⊠15 MHz          | ⊠20 MHz     |  |  |
|                             |   | ⊠25 MHz         | ⊠30 MHz      | ⊠40 MHz          |             |  |  |
|                             |   | SCS 30kHz:      |              |                  |             |  |  |
|                             | ND David v 44   | ⊠10 MHz         | ⊠15 MHz      | ⊠20 MHz          | ⊠30 MHz     |  |  |
|                             | NR Band n41   | ⊠40 MHz         | ⊠50 MHz      | ⊠60 MHz          | ⊠70 MHz     |  |  |
|                             |   | ⊠80 MHz         | ⊠90 MHz      | ⊠100 MHz         |             |  |  |
| Supported Channel Bandwidth |   | SCS 15kHz:      |              |                  |             |  |  |
| Bariawiati                  | NR Band n66   | ⊠5 MHz          | ⊠10 MHz      | ⊠15 MHz          | ⊠20 MHz     |  |  |
|                             |   | ⊠25 MHz         | ⊠30 MHz      | ⊠40 MHz          |             |  |  |
|                             |   | SCS 15kHz:      |              |                  |             |  |  |
|                             | NR Band n71   | ⊠5 MHz          | ⊠10 MHz      | ⊠15 MHz          | ⊠20 MHz     |  |  |
|                             |   | SCS 30kHz       |              |                  |             |  |  |
|                             | NR Band n77   | ⊠10 MHz         | ⊠15 MHz      | ⊠20 MHz          | ⊠30 MHz     |  |  |
|                             | INIX Dana III I   |                 |              |                  |             |  |  |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic Documents at <a href="http://www.sgs.com/en/Terms-en/Conditions/Terms-en/Comments.and">http://www.sgs.com/en/Terms-en/Conditions/Terms-e

South of No. F Plant, No. J, Runsheng Read, Suchou Industrial Park, Suchou Area, China (liangsu) Plat Free Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号约6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2210000205RG02

Rev.: Page: 16 of 42

| •   |                |                | Page:    | 16 of 42      |
|---|----------------|----------------|----------|---------------|
|   |                | ⊠80 MHz        | ⊠90 MHz  | ⊠100 MHz      |
|   |                | SCS 30kHz:     |          |               |
|   |                | ⊠60MHz+50      | MHz      | ⊠60MHz+60MHz  |
|   |                | ⊠80MHz+40      | MHz      | ⊠80MHz+50MHz  |
|   | NR CA_n41C     | ⊠80MHz+60      | MHz      | ⊠80MHz+80MHz  |
|   |                | ⊠80MHz+10      | 0MHz     | ⊠100MHz+40MHz |
|   |                | ⊠100MHz+5      | i0MHz    | ⊠100MHz+60MHz |
|   |                | ⊠100MHz+8      | 80MHz    |               |
|   |                | DFT-s-<br>QPSK | CP-16QAM |               |
|   |                | SCS 15kHz:     |          |               |
|   |                | 4M47G7D        | 4M47W7D  |               |
|   |                | 8M92G7D        | 9M31W7D  |               |
|   | NR Band n25    | 13M5G7D        | 14M2W7D  |               |
|   |                | 17M9G7D        | 19M0W7D  |               |
|   |                | 22M9G7D        | 23M8W7D  |               |
|   |                | 28M6G7D        | 28M6W7D  |               |
|   |                | 38M6G7D        | 38M6W7D  |               |
| Designation of                            |                | SCS 30kHz:     |          |               |
| Emissions (Remark: the necessary          |                | 8M58G7D        | 8M58W7D  |               |
| bandwidth of which is                     |                | 12M9G7D        | 13M6W7D  |               |
| the worst value from                      |                | 17M9G7D        | 18M3W7D  |               |
| the measured occupied bandwidths for each |                | 26M8G7D        | 27M9W7D  |               |
| type of channel                           | NR Band n41    | 35M7G7D        | 38M0W7D  |               |
| bandwidth                                 | INK Dallu 1141 | 45M8G7D        | 47M6W7D  |               |
| configuration.)                           |                | 57M9G7D        | 57M9W7D  |               |
|   |                | 64M3G7D        | 67M5W7D  |               |
|   |                | 77M1G7D        | 77M5W7D  |               |
|   |                | 85M7G7D        | 87M6W7D  |               |
|   |                | 96M4G7D        | 97M6W7D  |               |
|   |                | SCS 15kHz:     |          |               |
|   |                | 4M46G7D        | 4M49W7D  |               |
|   | NR Band n66    | 8M94G7D        | 9M33W7D  |               |
|   |                | 13M5G7D        | 14M1W7D  |               |
|   |                | 17M9G7D        | 19M0W7D  |               |
|   | 1              | L              |          |               |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic Documents a thittp://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980

sgs.china@sgs.com



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 17 of 42

|                 | 1              | Page.           | 17 01 42 |
|-----------------|----------------|-----------------|----------|
|                 | 22M9G7D        | 23M8W7D         |          |
|                 | 28M6G7D        | 28M6W7D         |          |
|                 | 38M7G7D        | 38M7W7D         |          |
|                 | SCS 15kHz:     |                 |          |
|                 | 4M49G7D        | 4M47W7D         |          |
| NR Band n71     | 8M92G7D        | 9M31W7D         |          |
|                 | 13M4G7D        | 14M1W7D         |          |
|                 | 17M9G7D        | 19M0W7D         |          |
|                 | SCS 30kHz:     |                 |          |
|                 | 8M61G7D        | 8M59W7D         |          |
|                 | 12M9G7D        | 13M6W7D         |          |
|                 | 17M9G7D        | 18M2W7D         |          |
|                 | 26M8G7D        | 27M9W7D         |          |
| NR Band n77     | 35M8G7D        | 37M9W7D         |          |
| (3450-3550 MHz) | 45M7G7D        | 47M5W7D         |          |
|                 | 57M8G7D        | 57M8W7D         |          |
|                 | 64M2G7D        | 67M4W7D         |          |
|                 | 77M0G7D        | 77M5W7D         |          |
|                 | 85M6G7D        | 87M4W7D         |          |
|                 | 96M3G7D        | 97M5W7D         |          |
|                 | SCS 30kHz:     |                 |          |
|                 | 8M62G7D        | 8M59W7D         |          |
|                 | 12M8G7D        | 13M6W7D         |          |
|                 | 17M9G7D        | 18M2W7D         |          |
|                 | 26M9G7D        | 27M9W7D         |          |
| NR Band n77     | 35M9G7D        | 37M9W7D         |          |
| (3700-3980 MHz) | 45M7G7D        | 47M6W7D         |          |
|                 | 57M9G7D        | 57M9W7D         |          |
|                 | 64M3G7D        | 67M5W7D         |          |
|                 | 77M2G7D        | 77M5W7D         |          |
|                 | 85M8G7D        | 87M4W7D         |          |
|                 | 96M3G7D        | 97M4W7D         |          |
|                 | SCS 30kHz:     |                 |          |
| NR CA_n41C      | DFT-s-<br>QPSK | DFT-s-<br>16QAM |          |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND occheck@ss.com

South of No. 1 Plant, No. 1, Runsheng Road, Sudrou Industrial Park, Sudrou Area, Chira (Jiangsu) Pilot Fiee Trade Zone 215000 t (86—512 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜器(号的6号厂房南部 邮编: 215000 t (86—512



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 18 of 42

|          | . ago.   | 10 01 12 |
|----------|----------|----------|
| 105M4G7D | 105M4W7D |          |
| 117M1G7D | 117M2W7D |          |
| 114M8G7D | 115M0W7D |          |
| 124M7G7D | 125M2W7D |          |
| 136M7G7D | 136M9W7D |          |
| 155M9G7D | 156M4W7D |          |
| 134M5G7D | 134M5W7D |          |
| 144M7G7D | 144M9W7D |          |
| 156M4G7D | 156M5W7D |          |
| 175M5G7D | 175M9W7D |          |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

| South of No. 6 Plant, No. 1, Runsterng Read, Suthou Industrial Plant, Suchou Area, Otine (Liangsu) Plot Free Trade Zone 215000 t (86 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜商1号的6号厂房南部 邮编: 215000 t (86



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 19 of 42

### 3.9 Test Frequencies

#### 3.9.1 Reference test frequencies for NR operating band n25

3.9.1.1 Test frequencies for NR operating band n25 and SCS 15 kHz

| CBW<br>[MHz] | Range    | •                 | Carrier centre<br>[MHz] | Carrier centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|-------------------|-------------------------|---------------------------|-----------------------|
| []           |          | Low               | 1932.5                  | 386500                    |                       |
|              | Downlink | Mid               | 1962.5                  | 392500                    | 15                    |
| _            |          | High              | 1992.5                  | 398500                    |                       |
| 5            |          | Low               | 1852.5                  | 370500                    |                       |
|              | Uplink   | Mid               | 1882.5                  | 376500                    | -                     |
|              |          | High              | 1912.5                  | 382500                    |                       |
|              |          | Low               | 1935                    | 387000                    |                       |
|              | Downlink | Mid               | 1962.5                  | 392500                    | 15                    |
| 10           |          | High              | 1990                    | 398000                    |                       |
| 10           |          | Low               | 1855                    | 371000                    |                       |
|              | Uplink   | Mid               | 1882.5                  | 376500                    | -                     |
|              |          | High              | 1910                    | 382000                    |                       |
|              |          | Low               | 1937.5                  | 387500                    |                       |
|              | Downlink | Mid               | 1962.5                  | 392500                    | 15                    |
| 15           |          | High              | 1987.5                  | 397500                    |                       |
| 15           |          | Low               | 1857.5                  | 371500                    | -                     |
|              | Uplink   | Mid               | 1882.5                  | 376500                    |                       |
|              |          | High              | 1907.5                  | 381500                    |                       |
|              |          | Low               | 1940                    | 388000                    | 15                    |
|              | Downlink | Mid               | 1962.5                  | 392500                    |                       |
| 20           |          | High              | 1985                    | 397000                    |                       |
| 20           |          | Low               | 1860                    | 372000                    |                       |
|              | Uplink   | Mid               | 1882.5                  | 376500                    | -                     |
|              | •        | High              | 1905                    | 381000                    |                       |
|              |          | Low               | 1942.5                  | 388500                    |                       |
|              | Downlink | Mid               | 1962.5                  | 392500                    | 15                    |
| 25           |          | High              | 1982.5                  | 396500                    |                       |
| 25           |          | Low               | 1862.5                  | 372500                    |                       |
|              | Uplink   | Mid               | 1882.5                  | 376500                    | -                     |
|              | •        | High              | 1902.5                  | 380500                    |                       |
|              |          | Low               | 1945                    | 389000                    |                       |
|              | Downlink | Mid               | 1962.5                  | 392500                    | 15                    |
| 20           |          | High              | 1980                    | 396000                    | 7                     |
| 30           |          | Low               | 1865                    | 373000                    |                       |
|              | Uplink   | Mid               | 1882.5                  | 376500                    | 7 -                   |
|              | •        | High              | 1900                    | 380000                    | 1                     |
|              |          | Low               | 1950                    | 390000                    |                       |
|              | Downlink | Mid               | 1962.5                  | 392500                    | 15                    |
|              |          | High              | 1975                    | 395000                    | 1                     |
| 40           |          | Low               | 1870                    | 374000                    |                       |
|              | Uplink   | Mid 1882.5 376500 | ┪ _                     |                           |                       |
|              | Opilitik |                   |                         |                           | ┪ -                   |
|              |          | High              | 1895                    | 379000                    |                       |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Ferms-and-Conditions.aspx">http://www.sgs.com/en/Ferms-and-Conditions.aspx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Ferms-and-Conditions/Ferms-en/Comments.aspx">http://www.sgs.com/en/Ferms-en/Conditions/Ferms-en/Comments/Ferms-e

South of No. 6 PPart, No. 1, Runsharg Read, Suzhou Industrial Part, Suzhou Area, China (liangsu) Plot Free Trate Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2210000205RG02

Rev.:

Page: 20 of 42

### Reference test frequencies for NR operating band n41

3.9.2.1 Test frequencies for NR operating band n41 and SCS 30 kHz

| CBW<br>[MHz] | Range    |      | Carrier centre<br>[MHz] | Carrier centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|------|-------------------------|---------------------------|-----------------------|
|              | Downlink | Low  | 2501.01                 | 500202                    |                       |
| 10           | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2685                    | 537000                    |                       |
|              | Downlink | Low  | 2503.5                  | 500700                    |                       |
| 15           | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2682.48                 | 536496                    |                       |
|              | Downlink | Low  | 2506.02                 | 501204                    |                       |
| 20           | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2670                    | 534000                    |                       |
|              | Downlink | Low  | 2511                    | 502200                    |                       |
| 30           | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2675                    | 535000                    |                       |
|              | Downlink | Low  | 2516.01                 | 503202                    |                       |
| 40           | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2670                    | 534000                    |                       |
|              | Downlink | Low  | 2521.02                 | 504204                    |                       |
| 50           | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2664.99                 | 532998                    |                       |
|              | Downlink | Low  | 2526                    | 505200                    |                       |
| 60           | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2659.98                 | 531996                    |                       |
|              | Downlink | Low  | 2536.02                 | 507204                    |                       |
| 70           | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2649.99                 | 529998                    |                       |
|              | Downlink | Low  | 2536.02                 | 507204                    |                       |
| 80           | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2649.99                 | 529998                    |                       |
|              | Downlink | Low  | 2541                    | 508200                    |                       |
| 90           | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2644.98                 | 528996                    |                       |
|              | Downlink | Low  | 2546.01                 | 509202                    |                       |
| 100          | &        | Mid  | 2592.99                 | 518598                    | 30                    |
|              | Uplink   | High | 2640                    | 528000                    |                       |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980

sgs.china@sgs.com



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 21 of 42

### 3.9.3 Reference test frequencies for NR operating band n66

3.9.3.1 Test frequencies for NR operating band n66 and SCS 15 kHz

| CBW<br>[MHz] | Range    |      | Carrier centre [MHz] | Carrier centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|------|----------------------|---------------------------|-----------------------|
|              |          | Low  | 2112.5               | 422500                    |                       |
|              | Downlink | Mid  | 2145                 | 429000                    | 15                    |
| _            |          | High | 2177.5               | 435500                    |                       |
| 5            |          | Low  | 1712.5               | 342500                    |                       |
|              | Uplink   | Mid  | 1745                 | 349000                    | -                     |
|              | •        | High | 1777.5               | 355500                    |                       |
|              |          | Low  | 2115                 | 423000                    |                       |
|              | Downlink | Mid  | 2145                 | 429000                    | 15                    |
| 40           |          | High | 2175                 | 435000                    |                       |
| 10           |          | Low  | 1715                 | 343000                    |                       |
|              | Uplink   | Mid  | 1745                 | 349000                    | -                     |
|              | •        | High | 1775                 | 355000                    |                       |
|              |          | Low  | 2117.5               | 423500                    | 1                     |
|              | Downlink | Mid  | 2145                 | 429000                    | 15                    |
| 45           |          | High | 2172.5               | 434500                    |                       |
| 15           |          | Low  | 1717.5               | 343500                    | -                     |
|              | Uplink   | Mid  | 1745                 | 349000                    |                       |
|              | '        | High | 1772.5               | 354500                    |                       |
|              |          | Low  | 2120                 | 424000                    | 15                    |
|              | Downlink | Mid  | 2145                 | 429000                    |                       |
| 00           |          | High | 2170                 | 434000                    |                       |
| 20           |          | Low  | 1720                 | 344000                    |                       |
|              | Uplink   | Mid  | 1745                 | 349000                    | -                     |
|              | - 1      | High | 1770                 | 354000                    | 1                     |
|              |          | Low  | 2122.5               | 424500                    |                       |
|              | Downlink | Mid  | 2145                 | 429000                    | 15                    |
| 0.5          |          | High | 2167.5               | 433500                    | 1                     |
| 25           |          | Low  | 1722.5               | 344500                    |                       |
|              | Uplink   | Mid  | 1745                 | 349000                    | 1 -                   |
|              | '        | High | 1767.5               | 353500                    | 1                     |
|              |          | Low  | 2125                 | 425000                    |                       |
|              | Downlink | Mid  | 2145                 | 429000                    | 15                    |
| 00           |          | High | 2165                 | 433000                    | 1                     |
| 30           |          | Low  | 1725                 | 345000                    |                       |
|              | Uplink   | Mid  | 1745                 | 349000                    | -                     |
|              | ı        | High | 1765                 | 353000                    | 7                     |
|              |          | Low  | 2130                 | 426000                    |                       |
|              | Downlink | Mid  | 2145                 | 429000                    | 15                    |
|              |          | High | 2160                 | 432000                    | 1                     |
| 40           |          | Low  | 1730                 | 346000                    |                       |
|              | Holiok   | Mid  | 1745                 | 349000                    | -                     |
|              | Uplink   |      |                      |                           |                       |
|              |          | High | 1760                 | 352000                    |                       |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runshang Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Plot Firee Trade Zone 215000 t (86—512) 62 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区洞胜裔(号统)6号厂房商部 邮编: 215000 t (86—512) 62



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 22 of 42

### 3.9.4 Reference test frequencies for NR operating band n71

3.9.4.1 Test frequencies for NR operating band n71 and SCS 15 kHz

| CBW<br>[MHz] | Range    |      | Carrier centre<br>[MHz] | Carrier centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|------|-------------------------|---------------------------|-----------------------|
|              |          | Low  | 619.5                   | 123900                    |                       |
|              | Downlink | Mid  | 634.5                   | 126900                    | 15                    |
| 5            |          | High | 649.5                   | 129900                    |                       |
| 5            |          | Low  | 665.5                   | 133100                    |                       |
|              | Uplink   | Mid  | 680.5                   | 136100                    | -                     |
|              |          | High | 695.5                   | 139100                    |                       |
|              |          | Low  | 622                     | 124400                    |                       |
|              | Downlink | Mid  | 634.5                   | 126900                    | 15                    |
| 40           |          | High | 647                     | 129400                    |                       |
| 10           |          | Low  | 668                     | 133600                    |                       |
|              | Uplink   | Mid  | 680.5                   | 136100                    | -                     |
|              | ·        | High | 693                     | 138600                    |                       |
|              |          | Low  | 624.5                   | 124900                    |                       |
|              | Downlink | Mid  | 634.5                   | 126900                    | 15                    |
| 4.5          |          | High | 644.5                   | 128900                    |                       |
| 15           |          | Low  | 670.5                   | 134100                    |                       |
|              | Uplink   | Mid  | 680.5                   | 136100                    | -                     |
|              | ·        | High | 690.5                   | 138100                    |                       |
|              |          | Low  | 627                     | 125400                    |                       |
| 20           | Downlink | Mid  | 634.5                   | 126900                    | 15                    |
|              |          | High | 642                     | 128400                    |                       |
| 20           |          | Low  | 673                     | 134600                    |                       |
|              | Uplink   | Mid  | 680.5                   | 136100                    | -                     |
|              |          | High | 688                     | 137600                    | 1                     |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are tested for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@ass.com

South of No. 6 Plant, No. 1, Runsherg Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区洞胜路1号的6号厂房南部 鄉鄉。 215000

215000 t (86–512) 62992980 215000 t (86–512) 62992980



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 23 of 42

## 3.9.5 Reference test frequencies for NR operating band n77 3.9.5.1 Test frequencies for NR operating band n77 and SCS 30 kHz

#### 3700-3980:

| CBW<br>[MHz] | Range    |      | Carrier centre<br>[MHz] | Carrier centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|------|-------------------------|---------------------------|-----------------------|
|              | Downlink | Low  | 3705                    | 647000                    |                       |
| 10           | &        | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3975                    | 665000                    |                       |
|              | Downlink | Low  | 3707.52                 | 647168                    |                       |
| 15           | &        | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3972.48                 | 664832                    |                       |
|              | Downlink | Low  | 3710.01                 | 647334                    |                       |
| 20           | &        | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3969.99                 | 664666                    |                       |
|              | Downlink | Low  | 3714.99                 | 647666                    |                       |
| 30           | &        | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3965.01                 | 664334                    |                       |
|              | Downlink | Low  | 3720                    | 648000                    |                       |
| 40           | &        | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3960                    | 664000                    |                       |
|              | Downlink | Low  | 3725.01                 | 648334                    |                       |
| 50           | &        | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3954.99                 | 663666                    |                       |
|              | Downlink | Low  | 3730.02                 | 648668                    |                       |
| 60           | &        | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3949.98                 | 663332                    |                       |
|              | Downlink | Low  | 3735                    | 649000                    |                       |
| 70           | &        | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3945                    | 663000                    |                       |
|              | Downlink | Low  | 3740.01                 | 649334                    |                       |
| 80           | &        | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3939.99                 | 662666                    |                       |
|              | Downlink | Low  | 3745.02                 | 649668                    |                       |
| 90           | &        | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3934.98                 | 662332                    |                       |
|              | Downlink | Low  | 3750                    | 650000                    |                       |
| 100          | & &      | Mid  | 3840                    | 656000                    | 30                    |
|              | Uplink   | High | 3930                    | 662000                    | 1 "                   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@ass.com

South of No. F Part, No. 1, Runsherig Road, Suzhou Industrial Park, Suzhou Area, China (Jangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 鄉編: 215000



Report No.: SEWM2210000205RG02

Rev.:

Page: 24 of 42

#### 3450-3550:

| CBW<br>[MHz] | Range    |      | Carrier centre<br>[MHz] | Carrier centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|------|-------------------------|---------------------------|-----------------------|
|              | Downlink | Low  | 3455.01                 | 630334                    |                       |
| 10           | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | 3545.01                 | 636334                    |                       |
|              | Downlink | Low  | 3457.5                  | 630500                    |                       |
| 15           | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | 3542.49                 | 636166                    |                       |
|              | Downlink | Low  | 3460.02                 | 630668                    |                       |
| 20           | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | 3540                    | 636000                    |                       |
|              | Downlink | Low  | 3465                    | 631000                    |                       |
| 30           | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | 3534.99                 | 635666                    |                       |
|              | Downlink | Low  | 3470.01                 | 631334                    |                       |
| 40           | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | 3530.01                 | 635334                    |                       |
|              | Downlink | Low  | 3475.02                 | 631668                    |                       |
| 50           | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | 3525                    | 635000                    |                       |
|              | Downlink | Low  | 3480                    | 632000                    |                       |
| 60           | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | 3519.99                 | 634666                    |                       |
|              | Downlink | Low  | 3485.01                 | 632334                    |                       |
| 70           | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | 3515.01                 | 634334                    |                       |
|              | Downlink | Low  | 3490.02                 | 632668                    |                       |
| 80           | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | 3510                    | 634000                    |                       |
|              | Downlink | Low  | 3495                    | 633000                    |                       |
| 90           | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | 3504.99                 | 633666                    |                       |
|              | Downlink | Low  | \                       | \                         |                       |
| 100          | &        | Mid  | 3500.01                 | 633334                    | 30                    |
|              | Uplink   | High | \                       | \                         | 1                     |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2210000205RG02

Rev.: 01 Page: 25 of 42

3.9.6 Reference test frequencies for NR Intra-Band CA\_n41C 3.9.6.1 Test frequencies for NR Intra-Band CA\_n41C and SCS 30 kHz

| CBW         | CBW   | Range    | е        | Carrier | Carrier | SS block |
|-------------|-------|----------|----------|---------|---------|----------|
| combination | [MHz] |          |          | centre  | centre  | SCS      |
|             |       |          | <u> </u> | [MHz]   | [ARFCN] | [kHz]    |
|             | 60    | Downlink | Low      | 2526    | 505200  | _        |
|             |       | &        | Mid      | 2568    | 513600  | _        |
| 60+50       |       | Uplink   | High     | 2610.03 | 522006  | 30       |
| 00.00       | 50    | Downlink | Low      | 2580.96 | 516192  |          |
|             |       | &        | Mid      | 2622.96 | 524592  |          |
|             |       | Uplink   | High     | 2664.99 | 532998  |          |
|             | 60    | Downlink | Low      | 2526    | 505200  |          |
|             |       | &        | Mid      | 2562.99 | 512598  |          |
| 60+60       |       | Uplink   | High     | 2599.98 | 519996  | 30       |
| 33.33       | 60    | Downlink | Low      | 2586    | 517200  |          |
|             |       | &        | Mid      | 2622.99 | 524598  |          |
|             |       | Uplink   | High     | 2659.98 | 531996  |          |
|             | 80    | Downlink | Low      | 2536.02 | 507204  |          |
|             |       | &        | Mid      | 2573.01 | 514602  |          |
| 80+40       |       | Uplink   | High     | 2610.18 | 522036  | 30       |
| 00140       | 40    | Downlink | Low      | 2595.84 | 519168  | 30       |
|             |       | &        | Mid      | 2632.83 | 526566  |          |
|             |       | Uplink   | High     | 2670    | 534000  |          |
| 80+50       | 80    | Downlink | Low      | 2536.02 | 507204  |          |
|             |       | &        | Mid      | 2568    | 513600  |          |
|             |       | Uplink   | High     | 2600.13 | 520026  | 30       |
|             | 50    | Downlink | Low      | 2600.88 | 520176  | 30       |
|             |       | &        | Mid      | 2632.86 | 526572  |          |
|             |       | Uplink   | High     | 2664.99 | 532998  |          |
|             | 80    | Downlink | Low      | 2536.02 | 507204  |          |
|             |       | &        | Mid      | 2562.99 | 512598  |          |
| 80+60       |       | Uplink   | High     | 2590.08 | 518016  | 30       |
| 00+00       | 60    | Downlink | Low      | 2605.92 | 521184  | 30       |
|             |       | &        | Mid      | 2632.89 | 526578  |          |
|             |       | Uplink   | High     | 2659.98 | 531996  |          |
|             | 80    | Downlink | Low      | 2536.02 | 507204  |          |
|             |       | &        | Mid      | 2553    | 510600  |          |
| 90.90       |       | Uplink   | High     | 2570.01 | 514002  | 20       |
| 80+80       | 80    | Downlink | Low      | 2616    | 523200  | 30       |
|             |       | &        | Mid      | 2632.98 | 526596  |          |
|             |       | Uplink   | High     | 2649.99 | 529998  |          |
|             | 80    | Downlink | Low      | 2536.02 | 507204  |          |
|             |       | &        | Mid      | 2562.99 | 512598  |          |
| 80+100      |       | Uplink   | High     | 2590.08 | 518016  | 20       |
|             | 100   | Downlink | Low      | 2625.9  | 525180  | 30       |
|             |       | &        | Mid      | 2632.89 | 526578  |          |
|             |       | Uplink   | High     | 2640    | 528000  |          |
|             | 100   | Downlink | Low      | 2546.01 | 509202  |          |
|             |       | &        | Mid      | 2573.01 | 514602  |          |
| 400.40      |       | Uplink   | High     | 2600.28 | 520056  | 1        |
| 100+40      | 40    | Downlink | Low      | 2615.73 | 523146  | 30       |
|             | -     | &        | Mid      | 2642.73 | 528546  |          |
|             |       | Uplink   | High     | 2670    | 534000  | 1        |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Friee Trade Zone
中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000



Report No.: SEWM2210000205RG02

Rev.:

Page: 26 of 42

|        | 100 | Downlink | Low  | 2546.01 | 509202 |    |
|--------|-----|----------|------|---------|--------|----|
|        |     | &        | Mid  | 2568    | 513600 |    |
| 100+50 |     | Uplink   | High | 2590.23 | 518046 | 20 |
| 100+50 | 50  | Downlink | Low  | 2620.77 | 524154 | 30 |
|        |     | &        | Mid  | 2642.76 | 528552 |    |
|        |     | Uplink   | High | 2664.99 | 532998 |    |
|        | 100 | Downlink | Low  | 2546.01 | 509202 |    |
|        |     | &        | Mid  | 2562.99 | 512598 |    |
| 100+60 |     | Uplink   | High | 2580.18 | 516036 | 30 |
| 100+60 | 60  | Downlink | Low  | 2625.81 | 525162 | 30 |
|        |     | &        | Mid  | 2642.79 | 528558 |    |
|        |     | Uplink   | High | 2659.98 | 531996 |    |
|        | 100 | Downlink | Low  | 2546.01 | 509202 |    |
|        |     | &        | Mid  | 2553    | 510600 |    |
| 100+80 |     | Uplink   | High | 2560.11 | 512022 | 30 |
| 100+60 | 80  | Downlink | Low  | 2635.89 | 527178 | 30 |
|        |     | &        | Mid  | 2642.88 | 528576 |    |
|        |     | Uplink   | High | 2649.99 | 529998 |    |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 27 of 42

### 4 Description of Tests

### **4.1 Conducted Output Power**

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.app.and">http://www.sps.com/en/Terms-and-Conditions.app.and</a>, or electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions/Terms-and-Condi

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区河胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 28 of 42

### 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents as subject to Terms and Conditions for Electronic Document say that this first the strength of the stre

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 29 of 42

### 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Remark: Reference test setup 1

#### Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx and,">http://www.sgs.com/en/Terms-and-Conditions.appx and,</a> for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-Conditions/Terms-and-Conditions-an

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 30 of 42

### 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 9. The trace was allowed to stabilize



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents subject to Terms and Conditions [Terms-and-Conditions]</a> For Decoument and the Intervention of Intervention of Intervention of Intervention of Intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to itsnascation from exercising all their rights and obligations under the transaction document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing impaction report & certificate, please contact us at telephone: (86-75) 8307 144.

\*\*Attention: To check the authenticity of testing impaction report & certificate, please contact us at telephone: (86-75) 8307 144.



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 31 of 42

### 4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### Remark: Reference test setup 1

#### **Test Settings**

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.app.and">http://www.sps.com/en/Terms-and-Conditions.app.and</a>, or electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sps.com/en/Terms-and-Conditions/Terms-and-Condi

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区海胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 32 of 42

### 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.sgx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing (impsection report & certificate, please contact us at telephone; (86-755) 8307 1443



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 33 of 42

### 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB $\mu$ V/m) = Measured amplitude level ( $\mu$ V/m) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB $\mu$ V/m) = Measured amplitude level (dB $\mu$ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

#### Remark: Reference test setup 2

#### Remark

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx">http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

 t (86–512) 62992980 w t (86–512) 62992980 se



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 34 of 42

### 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01 Section 9

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.

#### **Time Period and Procedure:**

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Ferms-and-Conditions.aspx and for electronic Documents at http://www.sgs.com/en/Ferms-and-Conditions/Ferms-and-Condit




Report No.: SEWM2210000205RG02

Rev.: 01


Page: 35 of 42

### 4.9 Test Setups

#### 4.9.1 Test Setup 1

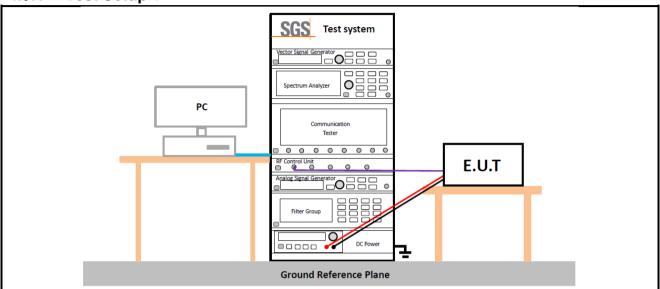

4.9.2 Test Setup 2

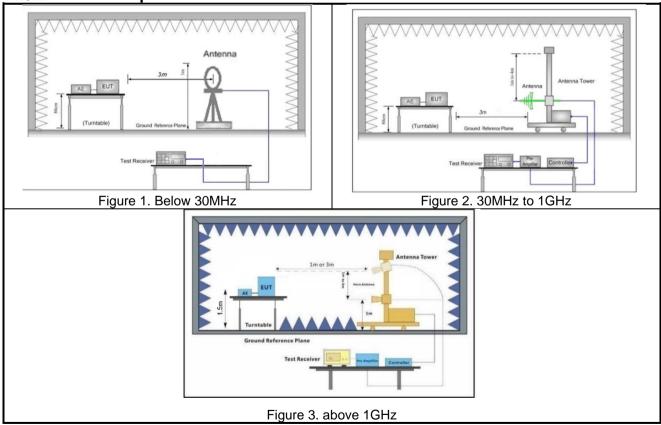



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Document.aspx">http://www.sgs.com/en/Terms-en/Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\* Or check the authenticity of testing inspection records exertificate please contact us at telephone; (86-755) \$30.71443.

or email: CN\_Doccheck@egg.com Jodn dhk.6 First, th. Flansheng Road, Subtou Indasthei Park, Subrou Area, China (Jangsu) Pkd Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易は強区苏州上区苏州工业国区到胜路号的6号厂房南部 邮集: 215000




Report No.: SEWM2210000205RG02

Rev.: 01

Page: 36 of 42

#### 4.9.3 Test Setup 3

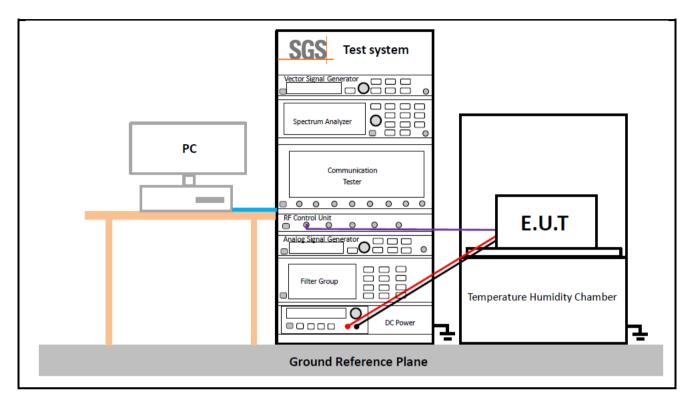



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.ags.com/en/Terms-and-Conditions.ags">http://www.ags.com/en/Terms-and-Conditions.ags</a>, and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-en/Document.ags.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction forcement cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) \$3071443,



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 37 of 42

#### 4.10 Test Conditions

|                  | Transmit Output Power Data - Average Power, Total              |
|------------------|--|
| Test Case        | Test Conditions  |
| Test Environment | Ambient Climate & Rated Voltage                                |
| Test Setup       | Test Setup 1   |
| RF Channels (TX) | L, M, H (L= low channel, M= middle channel, H= high channel)   |
| Test Mode        | NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8 |
|                  | Peak-to-Average Ratio  |
| Test Case        | Test Conditions  |
| Test Environment | Ambient Climate & Rated Voltage                                |
| Test Setup       | Test Setup 1   |
| RF Channels (TX) | L, M, H (L= low channel, M= middle channel, H= high channel)   |
| Test Mode        | NR/TM4; NR/TM8   |
|                  | Modulation Characteristics                                     |
| Test Case        | Test Conditions  |
| Test Environment | Ambient Climate & Rated Voltage                                |
| Test Setup       | Test Setup 1   |
| RF Channels (TX) | M (M= middle channel)  |
| Test Mode        | NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8 |
|                  | Bandwidth - Occupied Bandwidth                                 |
| Test Case        | Test Conditions  |
| Test Environment | Ambient Climate & Rated Voltage                                |
| Test Setup       | Test Setup 1   |
| RF Channels (TX) | L, M, H (L= low channel, M= middle channel, H= high channel)   |
| Test Mode        | NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8 |
|                  | Bandwidth - Emission Bandwidth                                 |
| Test Case        | Test Conditions  |
| Test Environment | Ambient Climate & Rated Voltage                                |
| Test Setup       | Test Setup 1   |
| RF Channels (TX) | L, M, H (L= low channel, M= middle channel, H= high channel)   |
| Test Mode        | NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8 |
|                  | Band Edges Compliance  |
| Test Case        | Test Conditions  |
| Test Environment | Ambient Climate & Rated Voltage                                |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions</a> for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com</a>

South of No. 6 Plant, No. 1, Runsteng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 38 of 42

|                  | rage. 30 01 42  |
|------------------|---|
| Test Setup       | Test Setup 1  |
| RF Channels (TX) | L, H (L= low channel, H= high channel)  |
| Test Mode        | NR/TM1; NR/TM5  |
|                  | Spurious Emission at Antenna Terminals  |
| Test Case        | Test Conditions   |
| Test Environment | Ambient Climate & Rated Voltage   |
| Test Setup       | Test Setup 1  |
| RF Channels (TX) | L, M, H (L= low channel, M= middle channel, H= high channel)  |
| Test Mode        | NR/TM1  |
|                  | Field Strength of Spurious Radiation  |
| Test Case        | Test Conditions   |
| Test Environment | Ambient Climate & Rated Voltage   |
| Test Setup       | Test Setup 2  |
| RF Channels (TX) | L, M, H (L= low channel, M= middle channel, H= high channel)  |
| Test Mode        | NR/TM1 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected. |
|                  | Frequency Stability   |
| Test Case        | Test Conditions   |
| Test Environment | (1) -30 °C to +50 °C with step 10 °C at Rated Voltage   |
| rest Environment | (2) VL, VN and VH of Rated Voltage at Ambient Climate.  |
| Test Setup       | Test Setup 3  |
| RF Channels (TX) | M (M= middle channel)   |
| Test Mode        | NR/TM1; NR/TM5  |
|                  |   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions</a> for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND Doccheck@ass.com</a>



Report No.: SEWM2210000205RG02

Rev.:

Page: 39 of 42

### **Main Test Instruments**

|   | RF conducted test |  |               |                           |                              |  |
|---|-------------------|--|---------------|---------------------------|------------------------------|--|
| Test Equipment                                  | Manufacturer      | Model No.                                | Inventory No. | Cal. date<br>(yyyy/mm/dd) | Cal.Due date<br>(yyyy/mm/dd) |  |
| Shielding Room                                  | Brilliant-emc     | N/A                                      | SUWI-04-01-06 | 2021/05/08                | 2024/05/07                   |  |
| Temperature and humidity meter                  | MingGao           | TH101B                                   | SUWI-01-01-07 | 2022/02/16                | 2023/02/15                   |  |
| Signal Analyzer                                 | ROHDE&SCHW<br>ARZ | FSV3030                                  | SUWI-01-02-02 | 2022/05/17                | 2023/05/16                   |  |
| Measurement Software                            | Tonscend          | JS1120-3 Test<br>System<br>V 2.6.88.0336 | SUWI-02-09-09 | NCR                       | NCR                          |  |
| Radio Communication<br>Analyzer                 | Anritsu           | MT8821C                                  | SUWI-01-26-03 | 2021/12/04                | 2022/12/03                   |  |
| Wideband Radio<br>Communication Tester          | ROHDE&SCHW<br>ARZ | CMW500                                   | SUWI-01-16-05 | 2022/02/14                | 2023/02/13                   |  |
| DC Power Supply                                 | HYELEC            | HY3005B                                  | SUWI-01-18-01 | 2022/02/15                | 2023/02/14                   |  |
| Temperature Chamber                             | ESPEC             | SU-242                                   | SUWI-01-13-01 | 2022/02/15                | 2023/02/14                   |  |
| Wideband Radio<br>Communication Test<br>Ststion | Anritsu           | MT8000A                                  | SUWI-01-34-02 | 2022/09/16                | 2023/09/15                   |  |
| Signal Analyzer                                 | ROHDE&SCHW<br>ARZ | FSW43                                    | SUWI-01-02-04 | 2022/05/28                | 2023/05/27                   |  |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions-en/Conditions/Terms-en/Conditions-en/Condit

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2210000205RG02

Rev.:

Page: 40 of 42

|  | RSE Test System                   |                    |               |                           |                              |
|--|-----------------------------------|--------------------|---------------|---------------------------|------------------------------|
| Test<br>Equipment                            | Manufacturer                      | Model No.          | Inventory No. | Cal. date<br>(yyyy/mm/dd) | Cal.Due date<br>(yyyy/mm/dd) |
| Semi-Anechoic<br>Chamber                     | Brilliant-emc                     | N/A                | SUWI-04-02-01 | 2021/05/08                | 2024/05/07                   |
| Temperature<br>and humidity<br>meter         | MingGao                           | TH101B             | SUWI-01-01-05 | 2022/02/16                | 2023/02/15                   |
| Signal Analyzer                              | ROHDE&SCHWARZ                     | FSW43              | SUWI-01-02-04 | 2022/05/28                | 2023/05/27                   |
| Signal Analyzer                              | KEYSIGHT                          | N9020A             | SUWI-01-02-05 | 2021/12/04                | 2022/12/03                   |
| Test receiver                                | ROHDE&SCHWARZ                     | ESR7               | SUWI-01-10-01 | 2022/02/19                | 2023/02/18                   |
| Receiving antenna                            | SCHWRZBECK<br>MESS-<br>ELEKTRONIK | VULB 9163          | SUWI-01-11-01 | 2021/05/16                | 2023/05/15                   |
| Receiving antenna                            | SCHWRZBECK<br>MESS-<br>ELEKTRONIK | BBHA 9120D         | SUWI-01-11-02 | 2021/05/16                | 2023/05/15                   |
| Receiving antenna                            | SCHWRZBECK<br>MESS-<br>ELEKTRONIK | BBHA 9170          | SUWI-01-11-03 | 2021/05/14                | 2023/05/13                   |
| Amplifier                                    | Tonscend                          | TAP9K3G40          | SUWI-01-14-01 | 2022/02/14                | 2023/02/13                   |
| Amplifier                                    | Tonscend                          | TAP01018050        | SUWI-01-14-02 | 2022/02/14                | 2023/02/13                   |
| Amplifier                                    | Tonscend                          | TAP18040048        | SUWI-01-14-03 | 2022/02/19                | 2023/02/18                   |
| Active Loop<br>Antenna                       | SCHWRZBECK<br>MESS-<br>ELEKTRONIK | FMZB 1519B         | SUWI-01-21-01 | 2021/06/10                | 2023/06/09                   |
| Wideband<br>Radio<br>Communication<br>Tester | Anritsu                           | MT8820C            | SUWI-01-16-08 | 2022/02/14                | 2023/02/13                   |
| Wideband<br>Radio<br>Communication<br>Tester | Anritsu                           | MT8821C            | SUWI-01-26-03 | 2021/12/04                | 2022/12/03                   |
| UXM 5G<br>Wireless Test<br>Platform          | KEYSIGHT                          | E7515B             | SUWI-01-04-01 | 2022/02/20                | 2023/02/19                   |
| Measurement<br>Software                      | Tonscend                          | JS32-RE<br>4.0.0.0 | SUWI-02-09-04 | NCR                       | NCR                          |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 41 of 42

### 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

| No.      | Item                          | Measurement Uncertainty  |
|----------|-------------------------------|--------------------------|
| 1        | Total RF power, conducted     | ±0.54dB                  |
| 2        | RF power density, conducted   | ±1.03dB                  |
| 3        | Spurious emissions, conducted | ±0.54dB                  |
| 4        | Radio Frequency               | ±1.0 %                   |
| 5        | Duty Cycle                    | ±0.37%                   |
| 6        | Occupied Bandwidth            | ±1.0 %                   |
|          |                               | ± 3.13dB (9k -30MHz)     |
| 7        | Radiated Emission             | ± 4.8dB (30M -1GHz)      |
| <b>'</b> | Radiated Effilssion           | ± 4.8dB (1GHz to 18 GHz) |
|          |                               | ± 4.8dB (Above 18GHz)    |

#### Remark

The U<sub>lab</sub> (lab Uncertainty) is less than U<sub>cispr/ETSI</sub> (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at <a href="http://www.sps.com/en/Terms-and-Conditions.appx.and">http://www.sps.com/en/Terms-and-Conditions.appx.and</a>, for electronic Documents stubility. The terms and Conditions for Electronic Documents and this first studies of the imitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction document coment cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2210000205RG02

Rev.: 01

Page: 42 of 42

### 7 Appendixes

| Appendix A.2  | WWAN Setup Photos      |
|---------------|------------------------|
| Appendix B.9  | NR Band n25            |
| Appendix B.10 | NR Band n41            |
| Appendix B.11 | NR Band n66            |
| Appendix B.12 | NR Band n71            |
| Appendix B.13 | NR Band n77(3450-3550) |
| Appendix B.14 | NR Band n77(3700-3980) |
| Appendix B.15 | NR CA_n41C             |
|               |                        |

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Conditions/Terms