



MRT Technology (Suzhou) Co., Ltd  
Phone: +86-512-66308358  
Web: www.mrt-cert.com

Report No.: 2110RSU053-U1  
Report Version: V02  
Issue Date: 12-23-2021

# MEASUREMENT REPORT

## FCC PART 96

---

**FCC ID:** ZMOFM101NA

**Applicant:** Fibocom Wireless Inc.

**Application Type:** Certification

**Product:** LTE Module

**Model No.:** FM101-NA

**Brand Name:** Fibocom

**FCC Rule Part(s):** Part 96

**Test Procedure(s):** ANSI C63.26: 2015

**Test Date:** November 04 ~ December 23, 2021

Reviewed By: \_\_\_\_\_

Approved By: \_\_\_\_\_



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

## Revision History

Report No.	Version	Description	Issue Date	Note
2110RSU053-U1	Rev. 01	Initial Report	12-17-2021	Invalid
2110RSU053-U1	Rev. 02	Added the full EIRP and corrected the calibration date of equipment	12-22-2021	Valid

## CONTENTS

Description	Page
<b>1. GENERAL INFORMATION.....</b>	<b>5</b>
1.1. Applicant .....	5
1.2. Manufacturer.....	5
1.3. Testing Facility .....	5
<b>2. PRODUCT INFORMATION .....</b>	<b>6</b>
2.1. Product Information .....	6
2.2. Radio Specification under Test .....	6
2.3. Description of Available Antennas.....	7
2.4. Test Methodology.....	7
2.5. EMI Suppression Device(s)/Modifications .....	7
2.6. Configuration of Tested System .....	8
2.7. Test Environment Condition.....	8
<b>3. TEST EQUIPMENT CALIBRATION DATE.....</b>	<b>9</b>
<b>4. MEASUREMENT UNCERTAINTY.....</b>	<b>10</b>
<b>5. TEST RESULT.....</b>	<b>11</b>
5.1. Summary .....	11
5.2. Occupied Bandwidth Measurement.....	12
5.2.1. Test Limit.....	12
5.2.2. Test Procedure.....	12
5.2.3. Test Setting .....	12
5.2.4. Test Setup .....	12
5.2.4.1. Test Result .....	13
5.3. Frequency Stability Measurement .....	19
5.3.1. Test Limit.....	19
5.3.2. Test Procedure.....	19
5.3.3. Test Setting .....	19
5.3.4. Test Setup .....	20
5.3.5. Test Result .....	21
5.4. Equivalent Isotropically Radiated Power Measurement .....	24
5.4.1. Test Limit.....	24
5.4.2. Test Procedure.....	24
5.4.3. Test Setting .....	24
5.4.4. Test Setup .....	25
5.4.5. Test Result .....	26

---

5.5.	Band Edge Measurement .....	32
5.5.1.	Test Limit.....	32
5.5.2.	Test Procedure.....	32
5.5.3.	Test Setting .....	32
5.5.4.	Test Setup .....	33
5.5.5.	Test Result .....	34
5.6.	Conducted Spurious Emission Measurement.....	68
5.6.1.	Test Limit.....	68
5.6.2.	Test Procedure.....	68
5.6.3.	Test Setting .....	68
5.6.4.	Test Setup .....	69
5.6.5.	Test Result .....	70
5.7.	Radiated Spurious Emission Measurement.....	79
5.7.1.	Test Limit.....	79
5.7.2.	Test Procedure.....	79
5.7.3.	Test Setting .....	79
5.7.4.	Test Setup .....	79
5.7.5.	Test Result .....	81
5.8.	End User Device Additional Requirement (CBSD Protocol) .....	84
5.8.1.	Test Limit.....	84
5.8.2.	Test Procedure.....	84
5.8.3.	Test Setting .....	84
5.8.4.	Test Result .....	85
<b>6.</b>	<b>CONCLUSION .....</b>	<b>87</b>
<b>Appendix A - Test Setup Photograph .....</b>		<b>88</b>
<b>Appendix B - EUT Photograph .....</b>		<b>89</b>

## 1. GENERAL INFORMATION

### 1.1. Applicant

Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1<sup>st</sup> Rd, Nanshan, Shenzhen, China

### 1.2. Manufacturer

Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1<sup>st</sup> Rd, Nanshan, Shenzhen, China

### 1.3. Testing Facility

<input checked="" type="checkbox"/>	<b>Test Site – MRT Suzhou Laboratory</b>
	<b>Laboratory Location (Suzhou - Wuzhong)</b>
	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	<b>Laboratory Location (Suzhou - SIP)</b>
	4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	<b>Laboratory Accreditations</b>
	A2LA: 3628.01 CNAS: L10551
	FCC: CN1166 ISED: CN0001
	VCCI: <input type="checkbox"/> R-20025 <input type="checkbox"/> G-20034 <input type="checkbox"/> C-20020 <input type="checkbox"/> T-20020
	<input type="checkbox"/> R-20141 <input type="checkbox"/> G-20134 <input type="checkbox"/> C-20103 <input type="checkbox"/> T-20104
<input type="checkbox"/>	<b>Test Site – MRT Shenzhen Laboratory</b>
	<b>Laboratory Location (Shenzhen)</b>
	1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	<b>Laboratory Accreditations</b>
	A2LA: 3628.02 CNAS: L10551
	FCC: CN1284 ISED: CN0105
<input type="checkbox"/>	<b>Test Site – MRT Taiwan Laboratory</b>
	<b>Laboratory Location (Taiwan)</b>
	No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	<b>Laboratory Accreditations</b>
	TAF: L3261-190725
	FCC: 291082, TW3261 ISED: TW3261

## 2. PRODUCT INFORMATION

### 2.1. Product Information

Product Name	LTE Module
Model No.	FM101-NA
Brand Name	Fibocom
IMEI	Conducted Measurement: 867141050004112 Radiated Measurement: 867141050004062
Operating Temperature	-30 ~ 75 °C
Power Type	3.135 ~ 4.4Vdc, typical 3.8Vdc
Antenna Information	Refer to Section 2.3
UMTS Specification	
Single Band	Band 2, 4, 5
Modulation	Uplink up to 16QAM, Downlink up to 64QAM
E-UTRA Specification	
Single Band	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 41, 42, 43, 48, 66, 71
HPUE Band	Band 41
Modulation	Uplink up to 16QAM, Downlink up to 64QAM

Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.

### 2.2. Radio Specification under Test

TDD Tx & Rx Frequency Range	Band 42: 3550 ~ 3600 MHz; Band 43: 3600 ~ 3700 MHz Band 48: 3550 ~ 3700 MHz
Device Type	End User Device

Note: For other features of this EUT, test reports will be issued separately.

### 2.3. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
LTE Band 2	1850 ~ 1910	PIFA	2.63
LTE Band 4	1710 ~ 1755		2.86
LTE Band 5	824 ~ 849		1.61
LTE Band 7	2500 ~ 2570		1.07
LTE Band 12	699 ~ 716		1.61
LTE Band 13	777 ~ 787		2.19
LTE Band 14	788 ~ 798		2.22
LTE Band 17	704 ~ 716		1.61
LTE Band 25	1850 ~ 1915		2.63
LTE Band 26	814 ~ 849		1.93
LTE Band 30	2305 ~ 2315		0.67
LTE Band 41	2496 ~ 2690		2.49
LTE Band 42	3450 ~ 3550		-1.18
LTE Band 42	3550 ~ 3600		-1.18
LTE Band 43	3600 ~ 3700		-0.13
LTE Band 43	3700 ~ 3800		-0.71
LTE Band 48	3550 ~ 3700		-0.13
LTE Band 66	1710 ~ 1780		3.76
LTE Band 71	663 ~ 698		1.39

### 2.4. Test Methodology


According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 96
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP
- FCC KDB 940660 D01 Part 96 CBRS v03
- WINNF-TS-0122 V1.0.2: Test and Certification for Citizens Broadband Radio Service (CBRS); Conformance and Performance Test Technical Specification; CBSD/DP as Unit Under Test (UUT)

### 2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.6. Configuration of Tested System

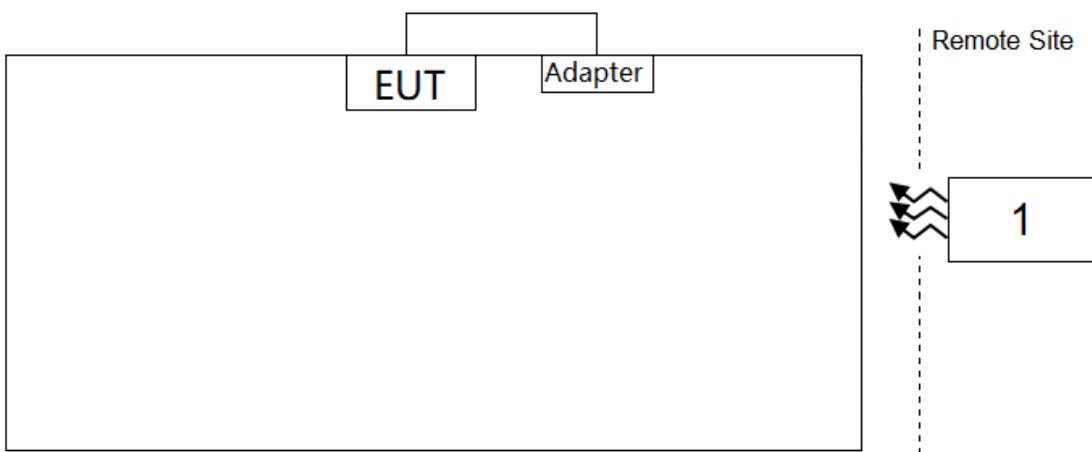

Product	Manufacturer	Model No.
1   Wideband Radio Communication Tester	R&S	CMW 500

## 2.7. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

### 3. TEST EQUIPMENT CALIBRATION DATE

Instrument Name	Manufacturer	Model No.	Asset No.	Cali. Interval	Cal. Due Date	Test Site
Communication Tester	R&S	CMU 200	MRTSUE06009	1 year	2022/9/7	SIP-SR1
Communication Tester	R&S	CMW500	MRTSUE06243	1 year	2022/10/10	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06453	1 year	2022/6/24	SIP-SR1
Thermohygrometer	testo	622	MRTSUE06629	1 year	2022/11/2	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06904	1 year	2021/12/8	SIP-SR1
Signal Generator	Keysight	E8257D	MRTSUE06904	1 year	2022/11/23	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06905	/	/	SIP-SR1
DC POWER MODULE	Keysight	N6743B	MRTSUE06906	/	/	SIP-SR1
Low-Profile Modular Power System Mainframe	Keysight	N6700C	MRTSUE06907	/	/	SIP-SR1
Signal Analyzer	Keysight	N9021B	MRTSUE06915	1 year	2022/1/18	SIP-SR1
Temperature Chamber	BAOYT	BYG-80CL	MRTSUE06932	1 year	2022/3/16	SIP-SR1
Shielding Room	MIX-BEP	SIP-SR1	MRTSUE06948	/	/	SIP-SR1
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022/1/12	SIP-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2022/6/24	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2022/10/20	SIP-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2022/10/11	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06623	1 year	2021/12/3	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06623	1 year	2022/11/28	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06624	1 year	2021/12/3	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06624	1 year	2022/11/28	SIP-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021/11/26	SIP-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2022/11/8	SIP-AC2
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06647	1 year	2022/8/5	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2021/11/26	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2022/11/9	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2021/12/24	SIP-AC2

Software	Version	Function
EMI Software	V3	EMI Test Software

## 4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

Radiated Spurious Emissions
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
Conducted Spurious Emissions
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 1.13dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 0.28%
Frequency Stability
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 76.2Hz

## 5. TEST RESULT

### 5.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	Conducted	Pass	Section5.2
2.1055	Frequency Stability	Refer to section 5.3		Pass	Section5.3
96.41(b)	Equivalent Isotropic Radiated Power	Refer to section 5.4		Pass	Section5.4
2.1051 96.41(e)	Spurious Emission; Band Edge Emission	Refer to section 5.5, 5.6		Pass	Section 5.5, 5.6
2.1053, 96.41(e)	Spurious Emission	Refer to section 5.7	Radiated	Pass	Section5.7
96.47	End User Device Additional Requirements (CBSD Protocol)	Refer to section 5.8		Pass	Section5.8

**Notes:**

- 1) The analyzer plots shown in this report were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations the worst-case was found.
- 3) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Band Edge, Radiated & Conducted Spurious Emission were presented worst case in the test report.

## 5.2. Occupied Bandwidth Measurement

### 5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


### 5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

### 5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.


### 5.2.4. Test Setup

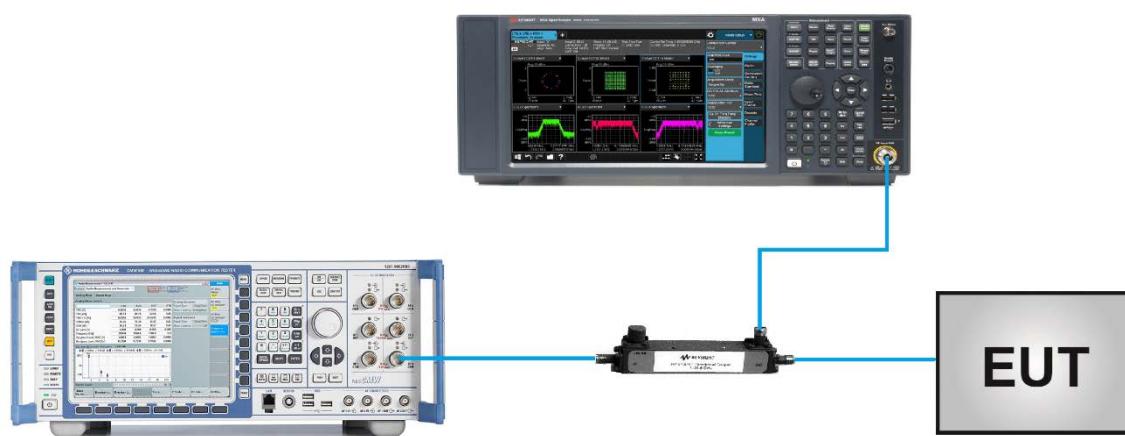

#### 5.2.4.1. Test Result


Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/11/09
Test Band	LTE Band 42		

Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	3575.0	5	4.48
		10	8.95
		15	13.40
		20	17.87
16QAM	3575.0	5	4.47
		10	8.95
		15	13.41
		20	17.84

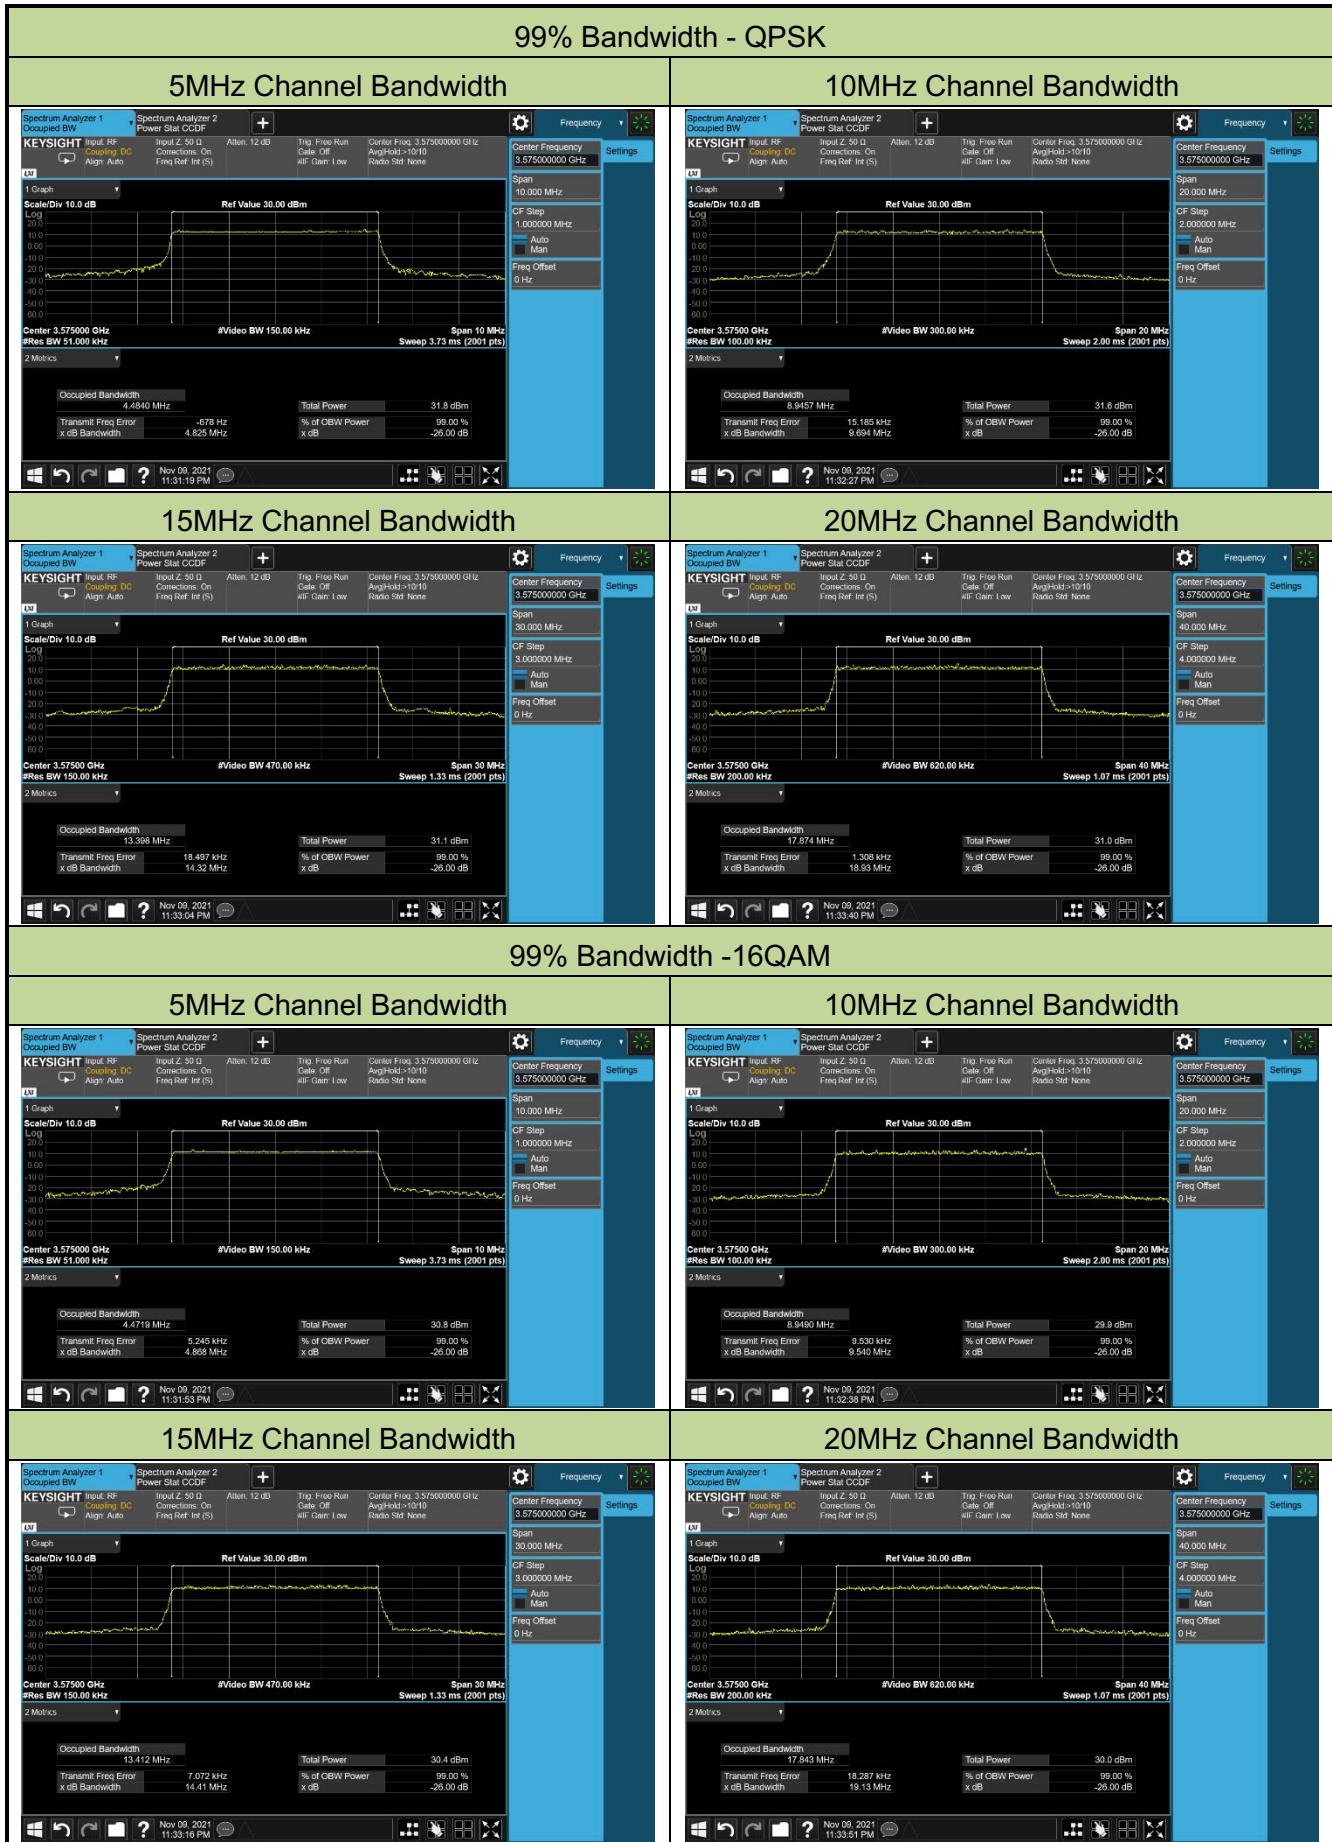


Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/11/09
Test Band	LTE Band 43		

Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	3650.0	5	4.46
		10	8.93
		15	13.40
		20	17.84
16QAM	3650.0	5	4.46
		10	8.95
		15	13.40
		20	17.85

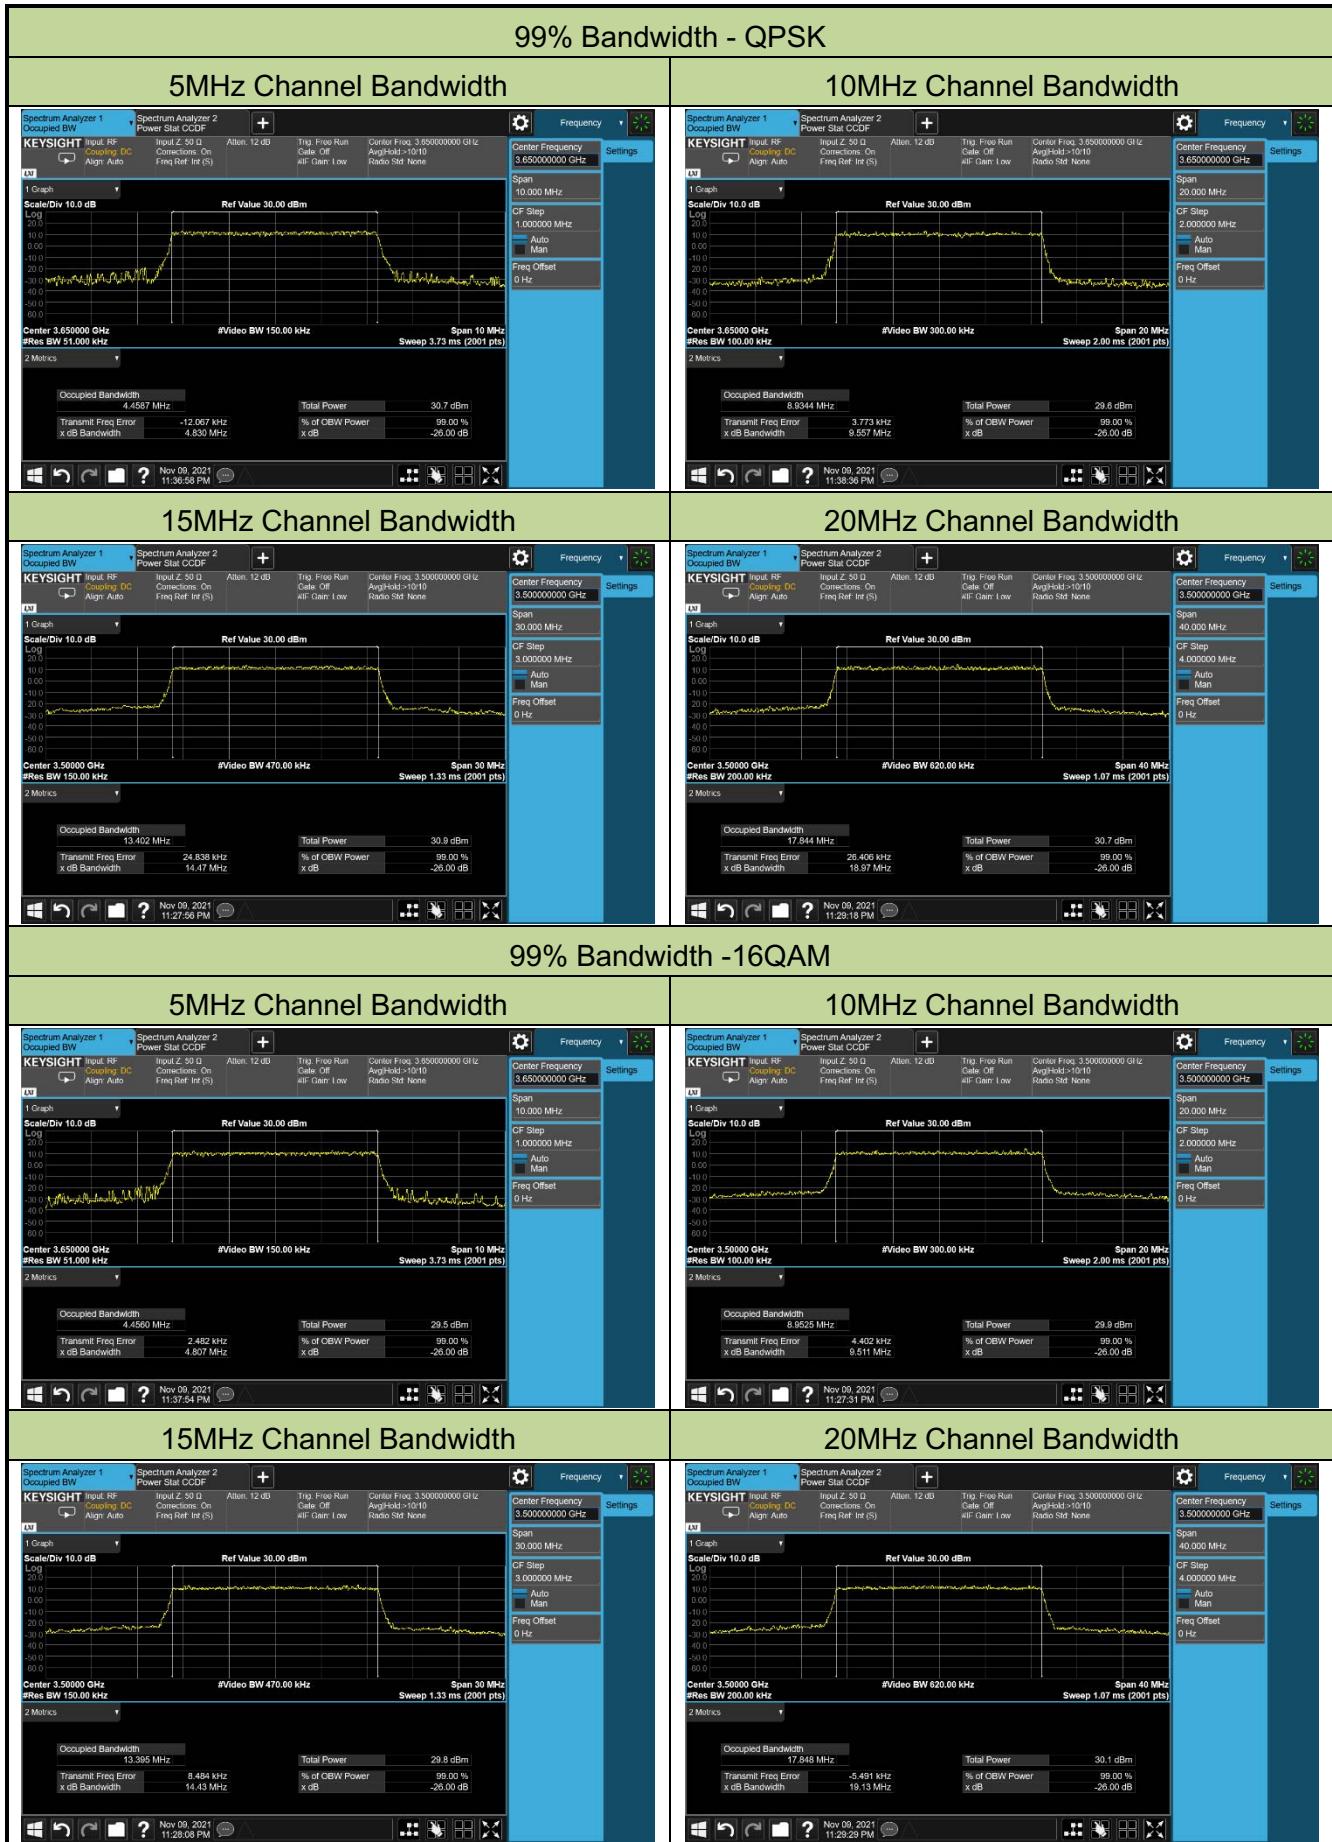

Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/11/05
Test Band	LTE Band 48		

Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	3625.0	5	4.47
		10	8.94
		15	13.40
		20	17.83
16QAM	3625.0	5	4.46
		10	8.93
		15	13.39
		20	17.84

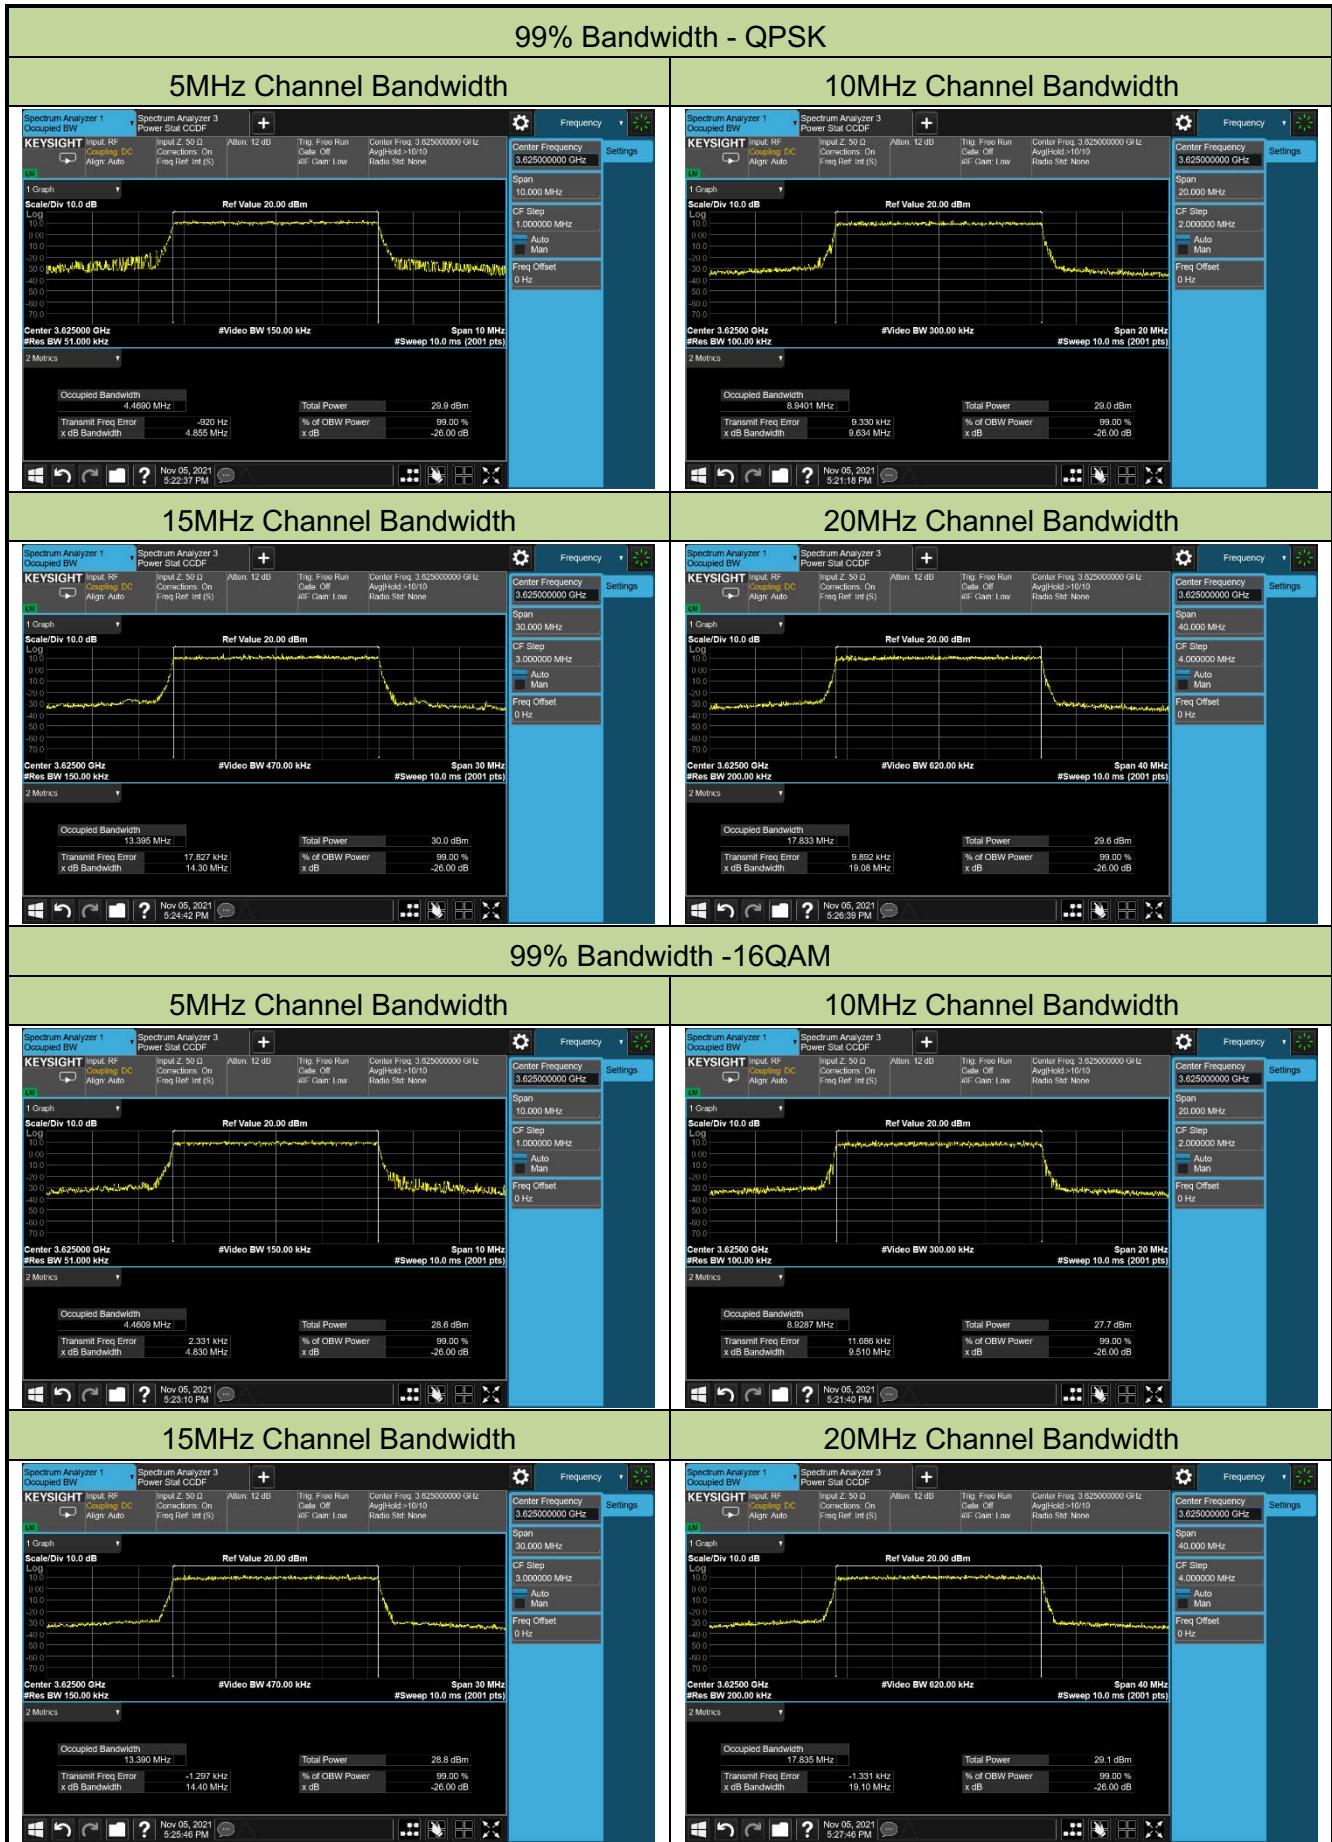

### **5.3. Frequency Stability Measurement**

#### **5.3.1. Test Limit**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### **5.3.2. Test Procedure**

ANSI C63.26-2015 - Section 5.6

#### **5.3.3. Test Setting**

##### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

##### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### 5.3.4. Test Setup

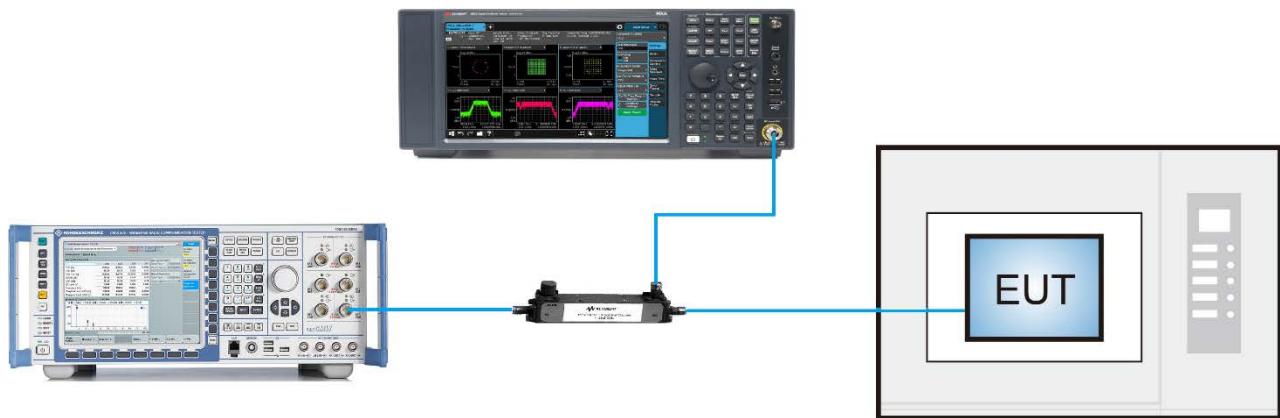

### 5.3.5. Test Result

Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/11/11
Test Band	LTE Band 42		

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	-0.0038
	- 20	0.0028
	- 10	0.0034
	0	-0.0031
	+ 10	0.0026
	+ 20	-0.0018
	+ 30	0.0017
	+ 40	0.0020
	+ 50	0.0014
4.4	+ 20	-0.0024
3.135	+ 20	-0.0027

Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/11/11
Test Band	LTE Band 43		

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	-0.0026
	- 20	0.0029
	- 10	0.0021
	0	-0.0024
	+ 10	0.0019
	+ 20	0.0025
	+ 30	-0.0022
	+ 40	-0.0029
	+ 50	0.0035
4.4	+ 20	0.0027
3.135	+ 20	-0.0022

Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/11/11
Test Band	LTE Band 48		

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.8	- 30	-0.0059
	- 20	0.0044
	- 10	-0.0038
	0	-0.0031
	+ 10	-0.0064
	+ 20	-0.0035
	+ 30	-0.0061
	+ 40	-0.0043
	+ 50	-0.0023
4.4	+ 20	0.0044
3.135	+ 20	-0.0037

## 5.4. Equivalent Isotropically Radiated Power Measurement

### 5.4.1. Test Limit

The maximum effective isotropic radiated power (EIRP) End User Device is 23dBm/10MHz

### 5.4.2. Test Procedure

ANSI C63.26-2015 - Section 5.2.4.4.2 & 5.2.5.5

### 5.4.3. Test Setting

When the fundamental condition for average power measurements cannot be realized (i.e., the EUT can not be configured to transmit at full-power on a continuous basis (i.e., duty cycle < 98%) and the instrumentation cannot be configured to measure only during active full-power transmissions), then the following procedure can be used if the EUT duty cycle is constant (i.e., duty cycle variations are less than or equal to  $\pm 2\%$ ).

- a) Set span to  $2 \times$  to  $3 \times$  the OBW.
- b) Set RBW = 1% to 5% of the OBW.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
- e) Sweep time:
  - 1) Set = auto-couple, or
  - 2) Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$  for single sweep (automation-compatible) measurement.
- f) Detector = power averaging (rms).
- g) Set sweep trigger to "free run."
- h) Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.

To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

- i) Using the marker function to identify the maximum PSD.
- j) Add  $10 \log (1/\text{duty cycle})$  to the measured power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25%.

The relevant equation for determining the maximum ERP or EIRP from the measured RF output

power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T \quad (1)$$

where


ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively  
(expressed in the same units as  $P_{\text{Meas}}$ , e.g., dBm or dBW)

$P_{\text{Meas}}$  measured transmitter output power or PSD, in dBm or dBW

$G_T$  gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

For devices utilizing multiple antennas, see 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

#### 5.4.4. Test Setup

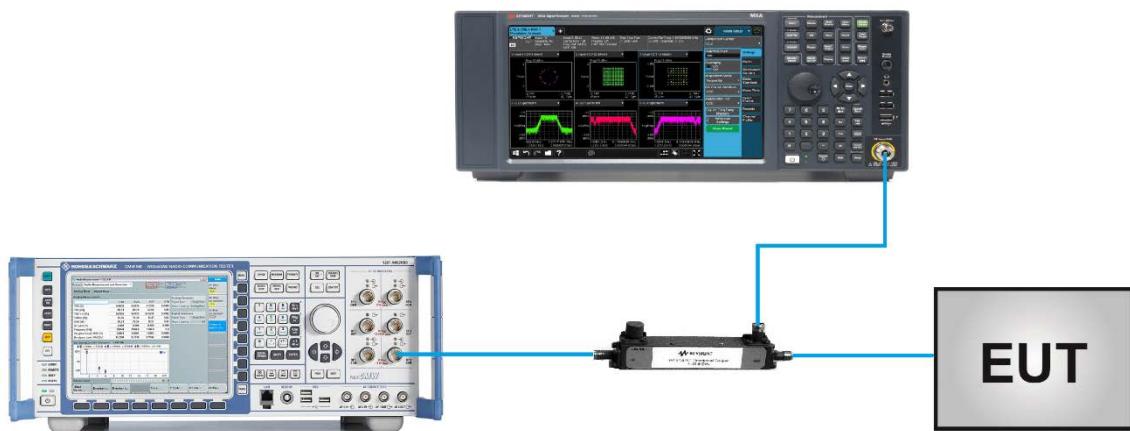

#### 5.4.5. Test Result

Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/11/09
Test Band	LTE Band 42		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
<b>QPSK</b>							
43115	3552.50	5	25	0	22.39	21.21	< 23.00
43340	3575.00				22.54	21.36	< 23.00
43565	3597.50				22.76	21.58	< 23.00
43140	3555.00	10	50	0	22.25	21.07	< 23.00
43340	3575.00				22.67	21.49	< 23.00
43540	3595.00				22.33	21.15	< 23.00
43165	3557.50	15	75	0	21.52	20.34	< 23.00
43340	3575.00				21.31	20.13	< 23.00
43515	3592.50				21.31	20.13	< 23.00
43190	3560.00	20	100	0	20.15	18.97	< 23.00
43340	3575.00				20.28	19.10	< 23.00
43490	3590.00				20.03	18.85	< 23.00
<b>16QAM</b>							
43115	3552.50	5	25	0	21.42	20.24	< 23.00
43340	3575.00				21.88	20.70	< 23.00
43565	3597.50				21.57	20.39	< 23.00
43140	3555.00	10	50	0	21.34	20.16	< 23.00
43340	3575.00				21.65	20.47	< 23.00
43540	3595.00				21.61	20.43	< 23.00
43165	3557.50	15	75	0	19.87	18.69	< 23.00
43340	3575.00				20.22	19.04	< 23.00
43515	3592.50				20.42	19.24	< 23.00
43190	3560.00	20	100	0	19.10	17.92	< 23.00
43340	3575.00				19.38	18.20	< 23.00
43490	3590.00				19.07	17.89	< 23.00
Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)							

Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/12/23
Test Band	LTE Band 42		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)			
<b>QPSK</b>										
43165	3557.50	15	75	0	21.49	20.31	N/A			
43340	3575.00				22.07	20.89	N/A			
43515	3592.50				22.38	21.20	N/A			
43190	3560.00	20	100	0	21.72	20.54	N/A			
43340	3575.00				22.10	20.92	N/A			
43490	3590.00				22.25	21.07	N/A			
<b>16QAM</b>										
43165	3557.50	15	75	0	20.60	19.42	N/A			
43340	3575.00				21.08	19.90	N/A			
43515	3592.50				21.30	20.12	N/A			
43190	3560.00	20	100	0	20.75	19.57	N/A			
43340	3575.00				21.19	20.01	N/A			
43490	3590.00				21.32	20.14	N/A			
Note 1: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi);										
Note 2: The EIRP is reported for the grant output power.										

Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/11/09
Test Band	LTE Band 43		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
<b>QPSK</b>							
43615	3602.50	5	25	0	22.56	22.43	< 23.00
44090	3650.00				22.61	22.48	< 23.00
44565	3697.50				22.85	22.72	< 23.00
43640	3605.00	10	50	0	22.64	22.51	< 23.00
44090	3650.00				22.65	22.52	< 23.00
44540	3695.00				22.90	22.77	< 23.00
43665	3607.50	15	75	0	21.34	21.21	< 23.00
44090	3650.00				21.32	21.19	< 23.00
44515	3692.50				21.56	21.43	< 23.00
43690	3610.00	20	100	0	20.21	20.08	< 23.00
44090	3650.00				20.15	20.02	< 23.00
44490	3690.00				20.20	20.07	< 23.00
<b>16QAM</b>							
43615	3602.50	5	25	0	21.33	21.20	< 23.00
44090	3650.00				21.47	21.34	< 23.00
44565	3697.50				21.56	21.43	< 23.00
43640	3605.00	10	50	0	21.70	21.57	< 23.00
44090	3650.00				21.73	21.60	< 23.00
44540	3695.00				21.89	21.76	< 23.00
43665	3607.50	15	75	0	20.34	20.21	< 23.00
44090	3650.00				20.22	20.09	< 23.00
44515	3692.50				20.52	20.39	< 23.00
43690	3610.00	20	100	0	19.16	19.03	< 23.00
44090	3650.00				19.12	18.99	< 23.00
44490	3690.00				19.47	19.34	< 23.00
Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)							

Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/12/23
Test Band	LTE Band 43		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)
<b>QPSK</b>							
43665	3607.50	15	75	0	22.34	22.21	N/A
44090	3650.00				22.40	22.27	N/A
44515	3692.50				22.53	22.40	N/A
43690	3610.00	20	100	0	22.34	22.21	N/A
44090	3650.00				22.36	22.23	N/A
44490	3690.00				22.41	22.28	N/A
<b>16QAM</b>							
43665	3607.50	15	75	0	21.32	21.19	N/A
44090	3650.00				21.41	21.28	N/A
44515	3692.50				21.40	21.27	N/A
43690	3610.00	20	100	0	21.24	21.11	N/A
44090	3650.00				21.34	21.21	N/A
44490	3690.00				21.52	21.39	N/A

Note 1: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi);

Note 2: The EIRP is reported for the grant output power.

Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/11/09
Test Band	LTE Band 48		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm/10MHz)	EIRP (dBm/10MHz)	Limit (dBm/10MHz)
<b>QPSK</b>							
55265	3552.50	5	25	0	22.82	22.69	< 23.00
55900	3625.00				22.20	22.07	< 23.00
56715	3697.50				22.47	22.34	< 23.00
55290	3555.00	10	50	0	22.67	22.54	< 23.00
55900	3625.00				22.17	22.04	< 23.00
56690	3695.00				22.59	22.46	< 23.00
55315	3557.50	15	75	0	21.30	21.17	< 23.00
55990	3625.00				21.01	20.88	< 23.00
56665	3692.50				21.24	21.11	< 23.00
55340	3560.00	20	100	0	20.12	19.99	< 23.00
55990	3625.00				19.30	19.17	< 23.00
56640	3690.00				19.95	19.82	< 23.00
<b>16QAM</b>							
55265	3552.50	5	25	0	21.15	21.02	< 23.00
55900	3625.00				21.04	20.91	< 23.00
56715	3697.50				21.91	21.78	< 23.00
55290	3555.00	10	50	0	21.42	21.29	< 23.00
55900	3625.00				21.01	20.88	< 23.00
56690	3695.00				21.58	21.45	< 23.00
55315	3557.50	15	75	0	20.19	20.06	< 23.00
55990	3625.00				19.65	19.52	< 23.00
56665	3692.50				20.22	20.09	< 23.00
55340	3560.00	20	100	0	18.89	18.76	< 23.00
55990	3625.00				18.85	18.72	< 23.00
56640	3690.00				19.09	18.96	< 23.00
Note: The EIRP (dBm/10MHz) = Output Power (dBm/10MHz) + Antenna Gain (dBi)							

Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/12/23
Test Band	LTE Band 48		

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	EIRP (dBm)	Limit (dBm)			
<b>QPSK</b>										
55315	3557.50	15	75	0	21.70	21.57	N/A			
55990	3625.00				22.08	21.95	N/A			
56665	3692.50				22.31	22.18	N/A			
55340	3560.00	20	100	0	21.73	21.60	N/A			
55990	3625.00				22.11	21.98	N/A			
56640	3690.00				22.20	22.07	N/A			
<b>16QAM</b>										
55315	3557.50	15	75	0	20.65	20.52	N/A			
55990	3625.00				21.11	20.98	N/A			
56665	3692.50				21.35	21.22	N/A			
55340	3560.00	20	100	0	20.63	20.50	N/A			
55990	3625.00				21.02	20.89	N/A			
56640	3690.00				21.29	21.16	N/A			
Note 1: The EIRP (dBm) = Output Power (dBm) + Antenna Gain (dBi);										
Note 2: The EIRP is reported for the grant output power.										

## 5.5. Band Edge Measurement

### 5.5.1. Test Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

### 5.5.2. Test Procedure

ANSI C63.26-2015 - Section 5.7

### 5.5.3. Test Setting

1. Set the analyzer frequency to low, middle, high channel.
2. RBW  $\geq$  The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3. VBW  $\geq 3 \times$  RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full

power


8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.  
To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.
9. Used power integration when using a measurement bandwidth smaller than the specified bandwidth.


#### 5.5.4. Test Setup





### 5.5.5. Test Result


Product	LTE Module	Test Site	SIP-SR1
Test Engineer	Candy Luo	Test Date	2021/11/23
Test Band	LTE Band 42_QPSK	Test Result	Pass

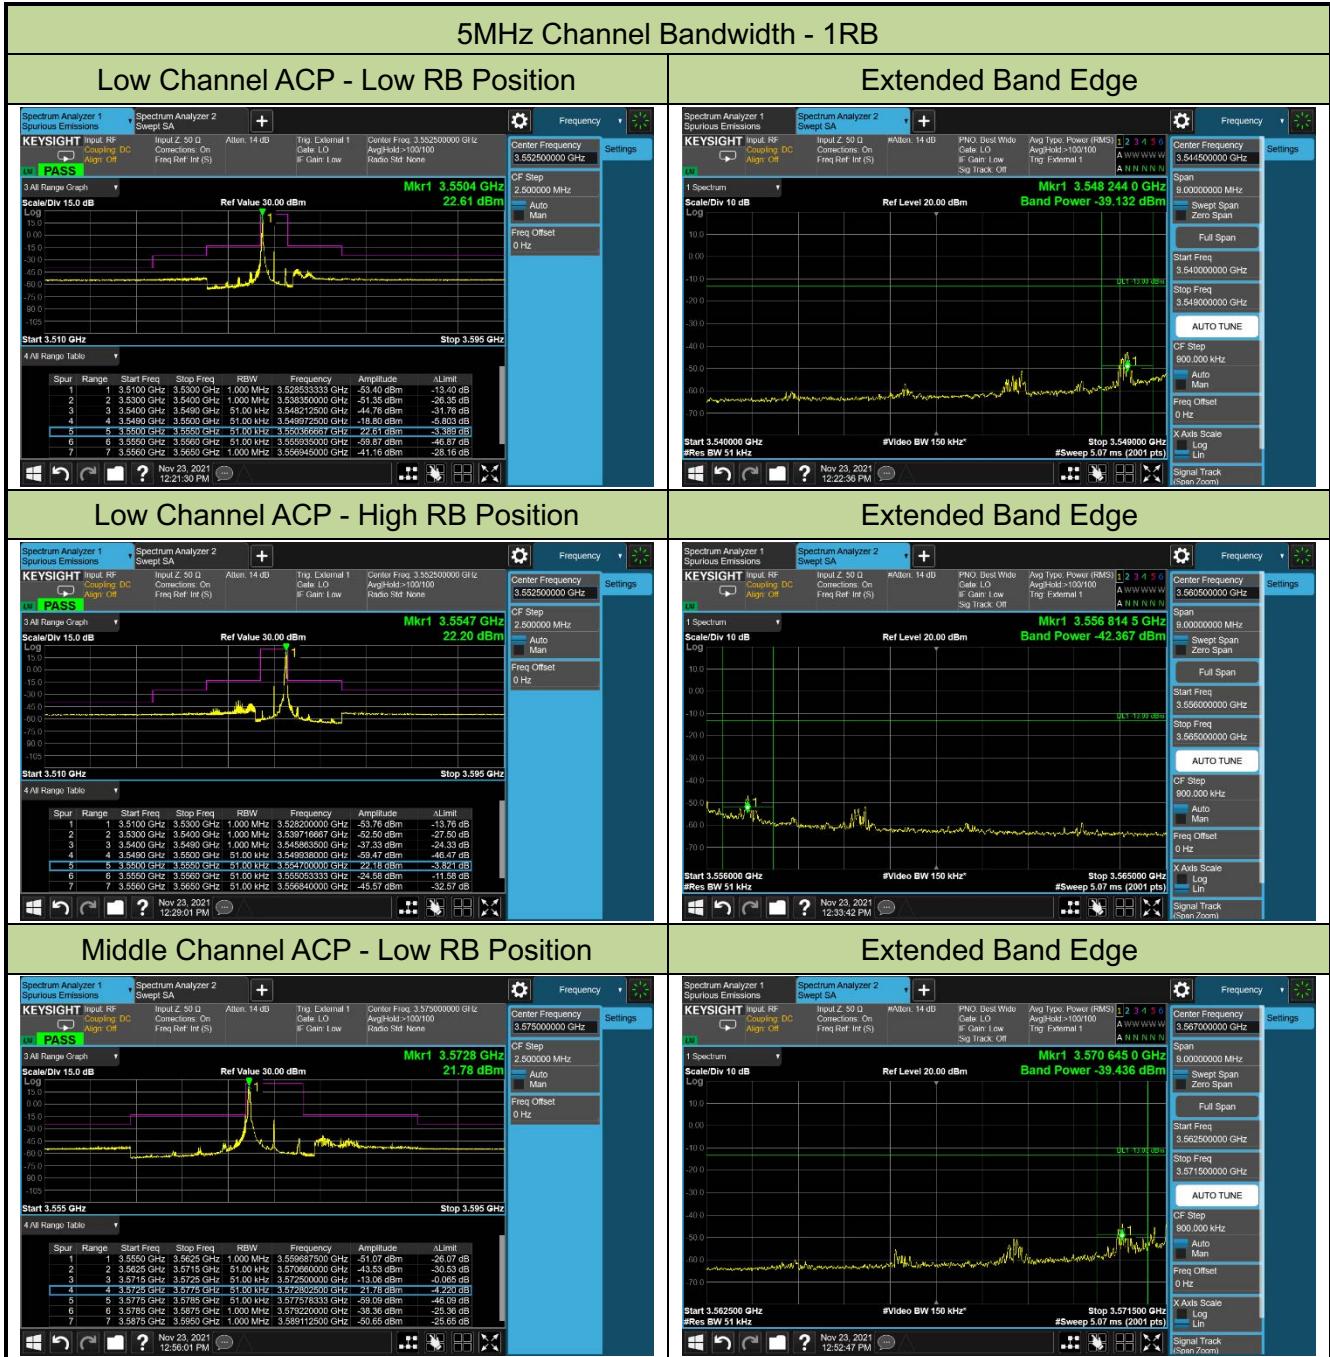


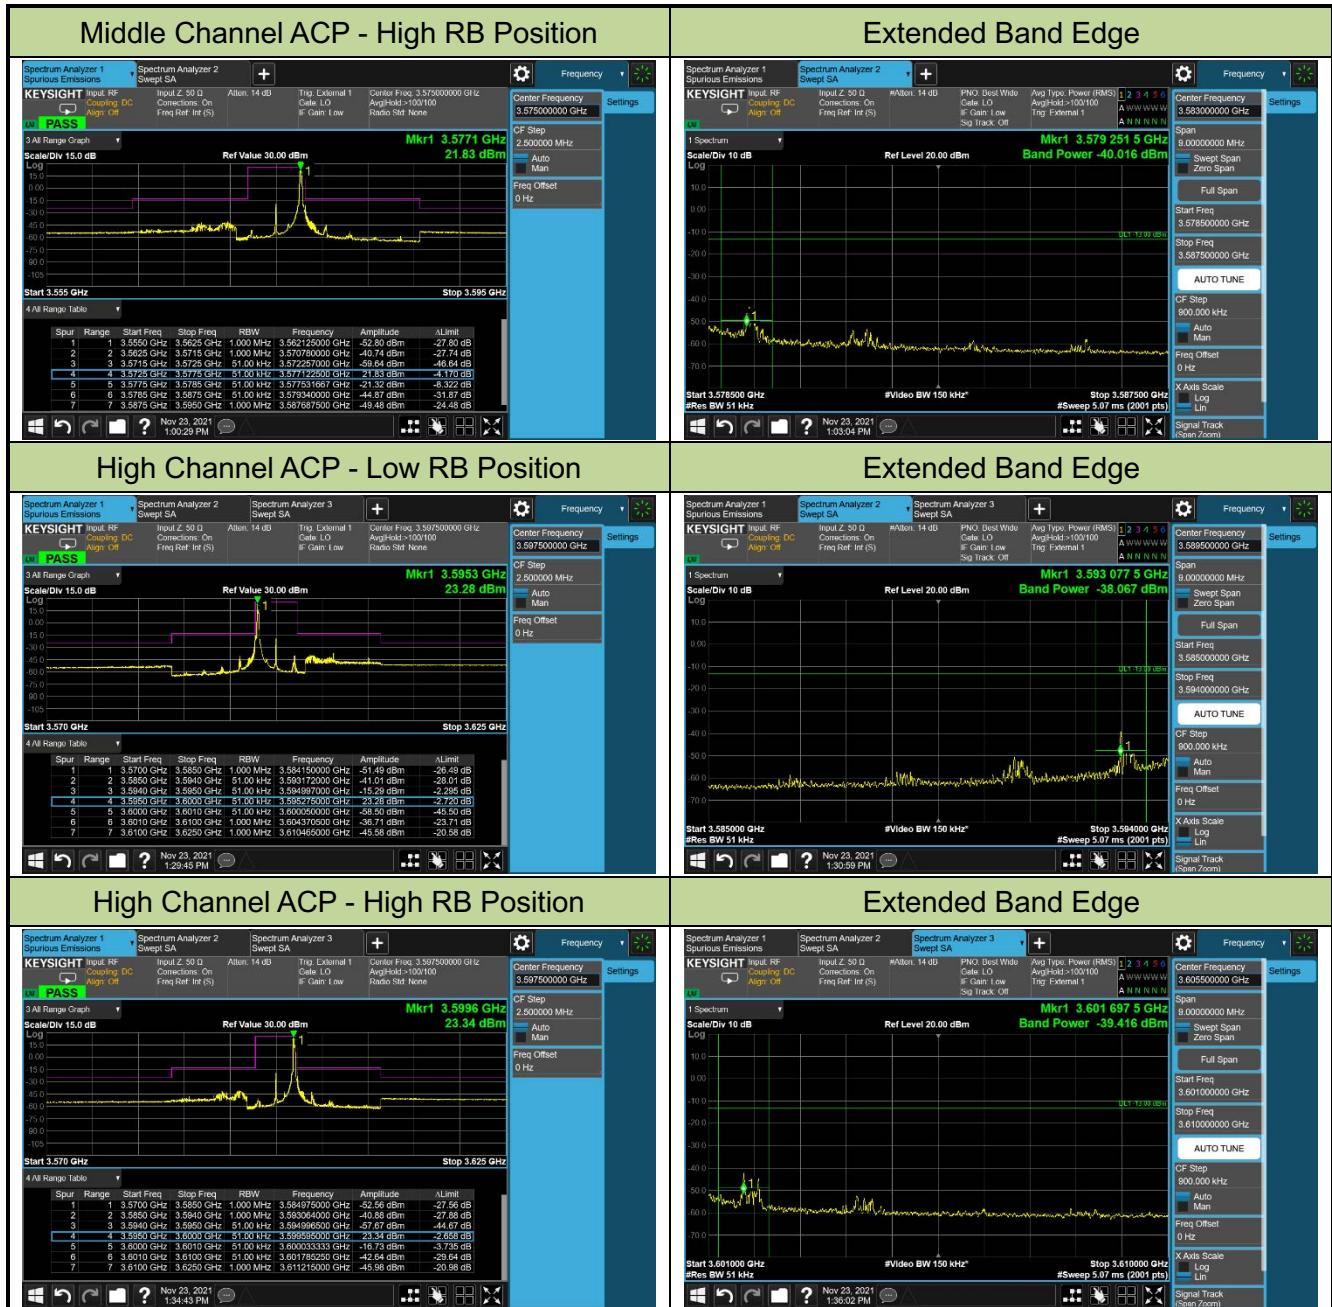


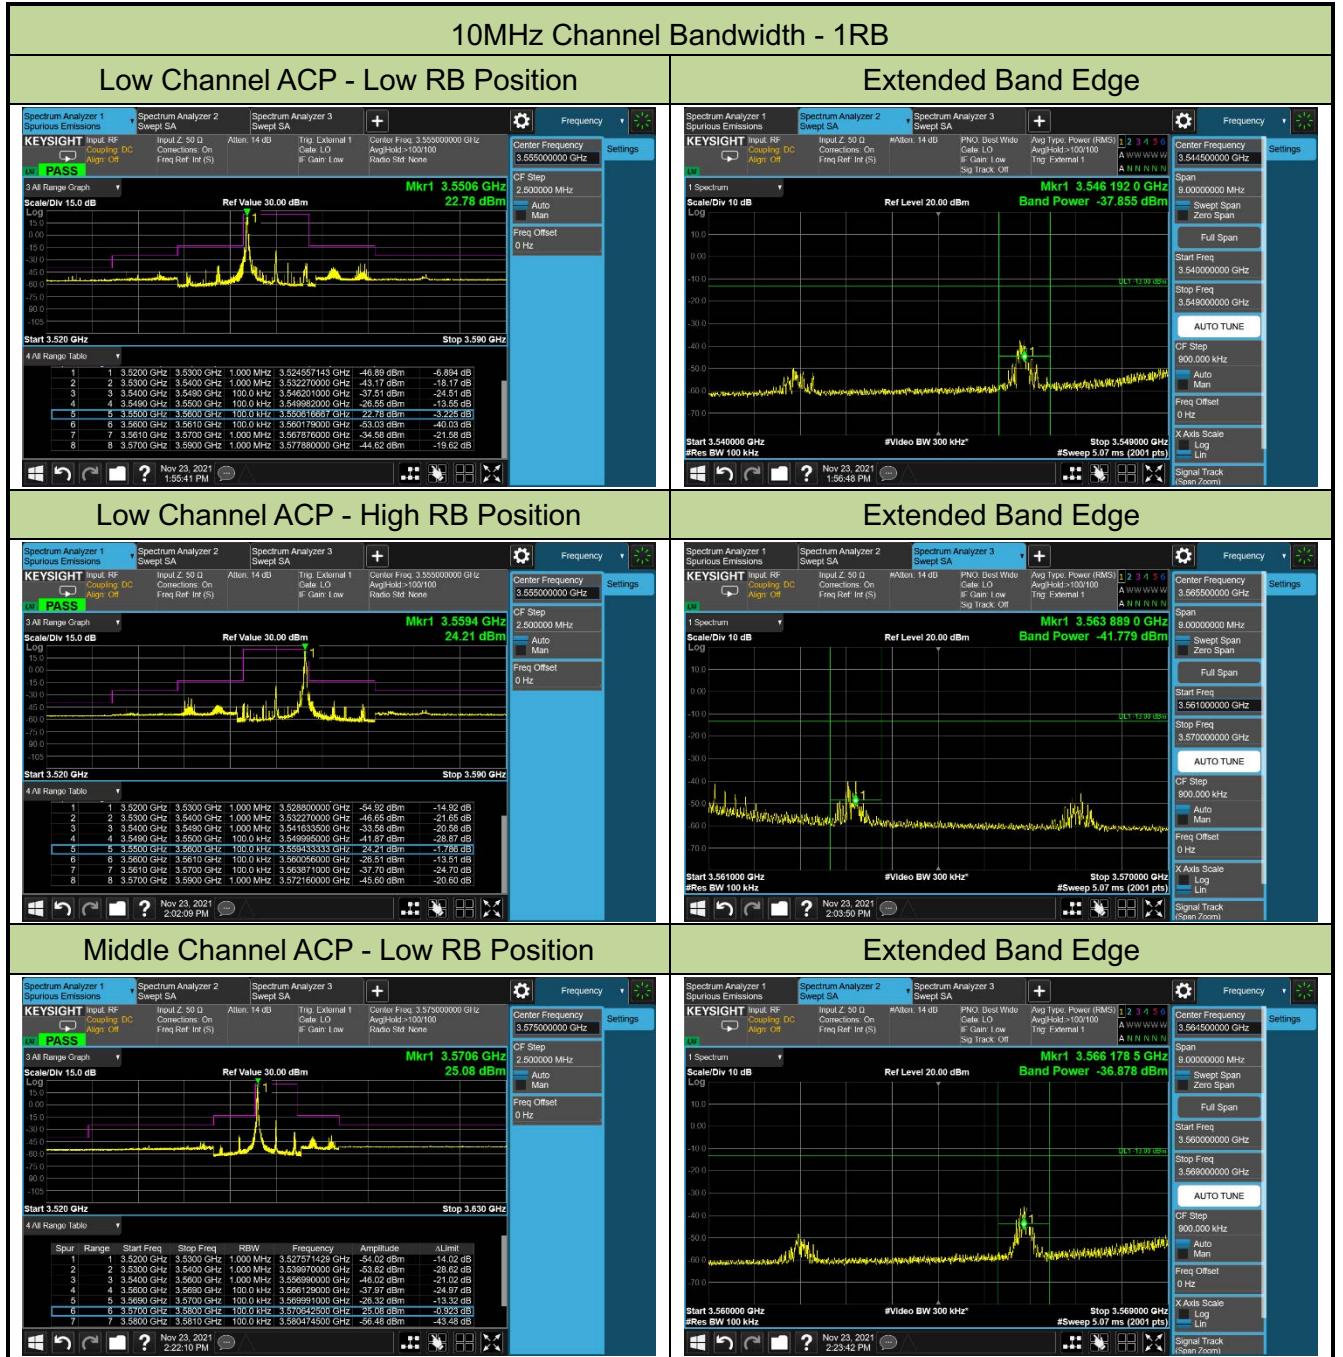

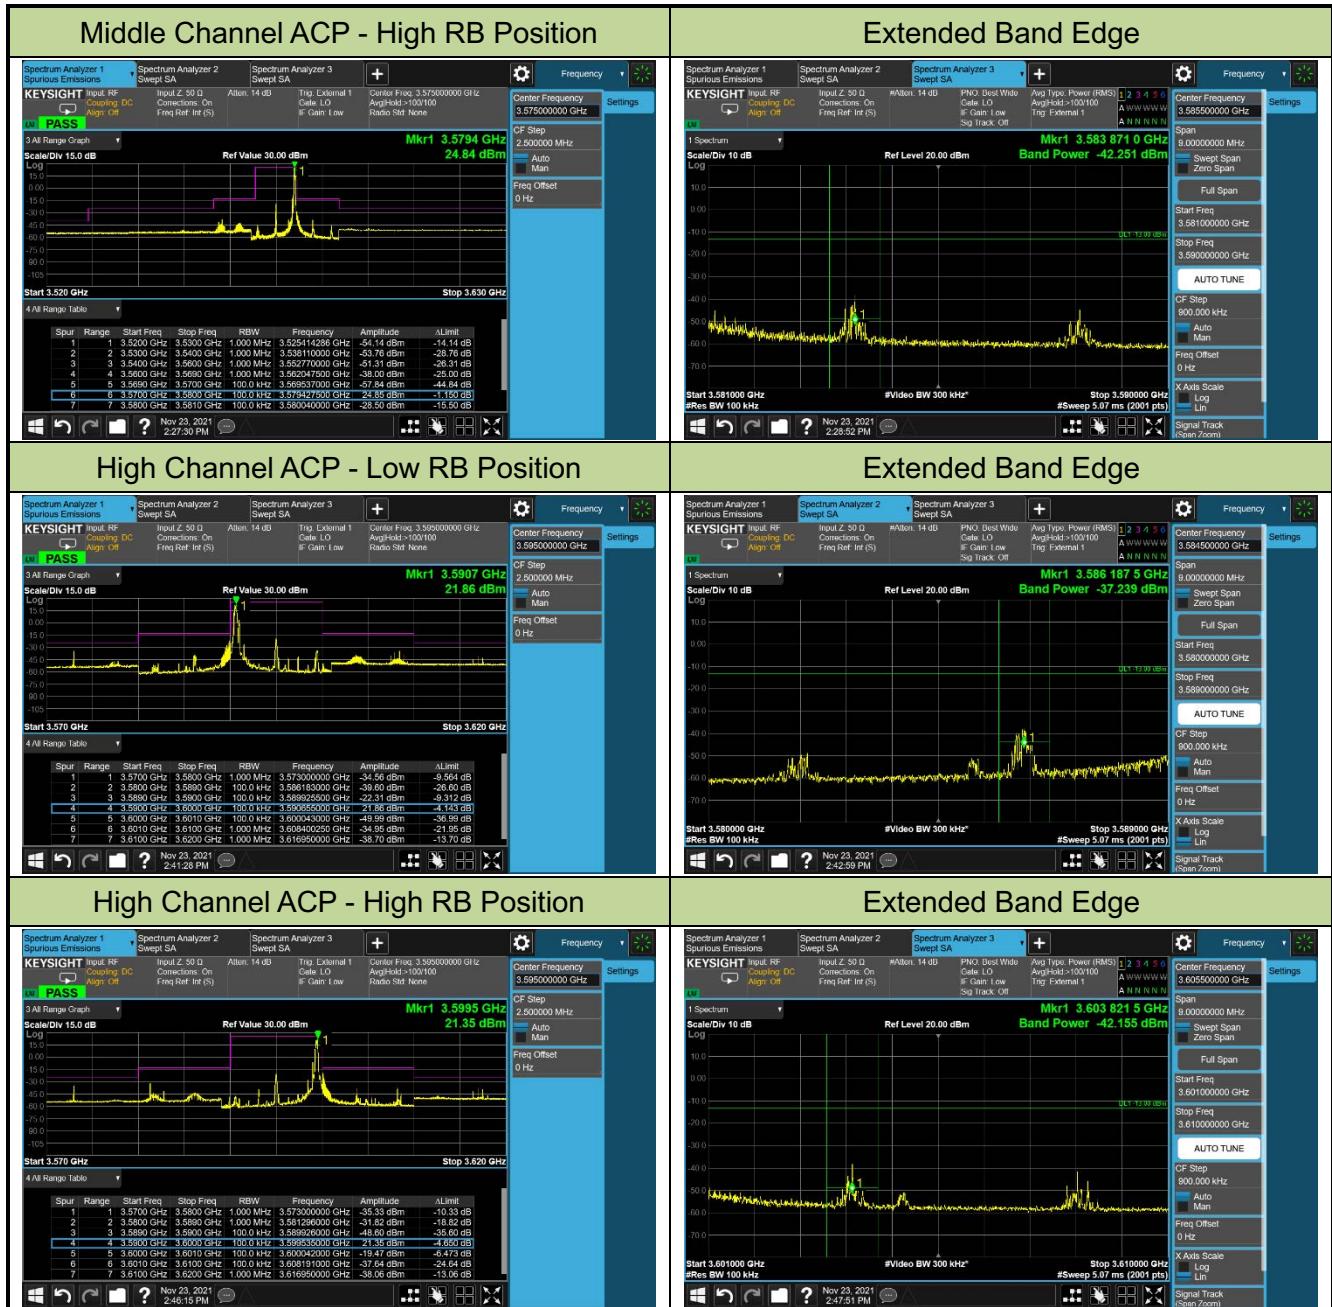

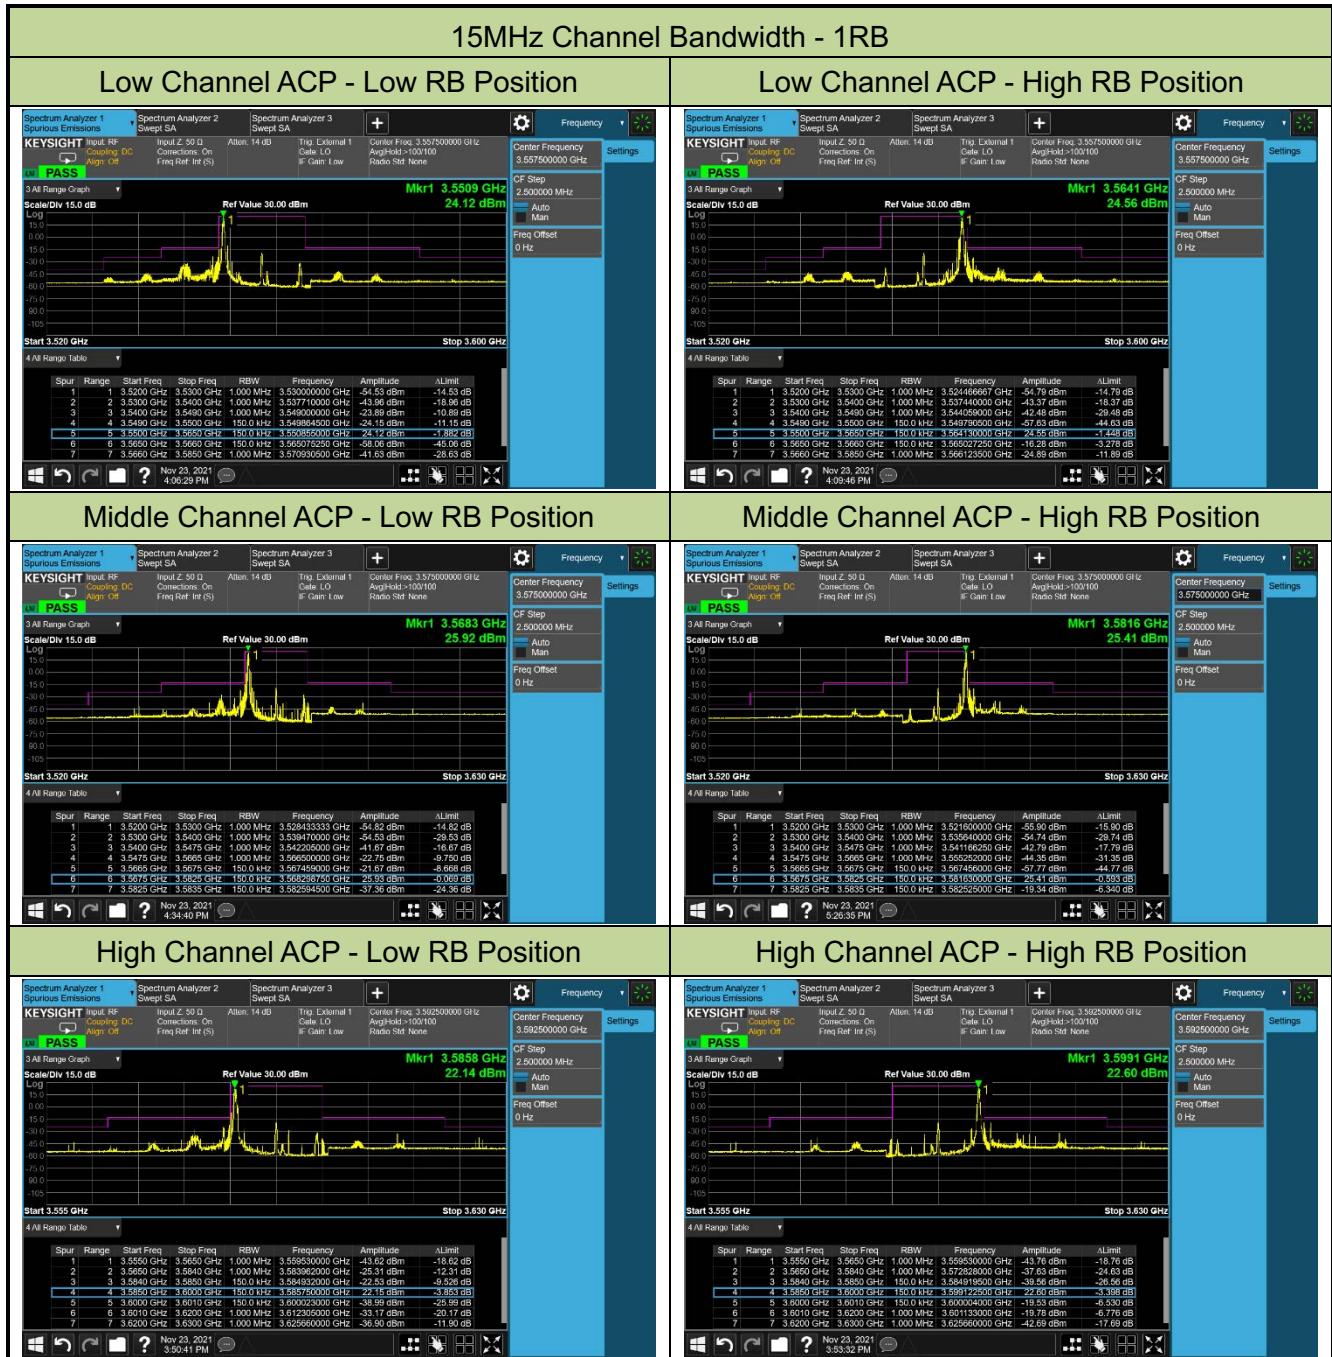

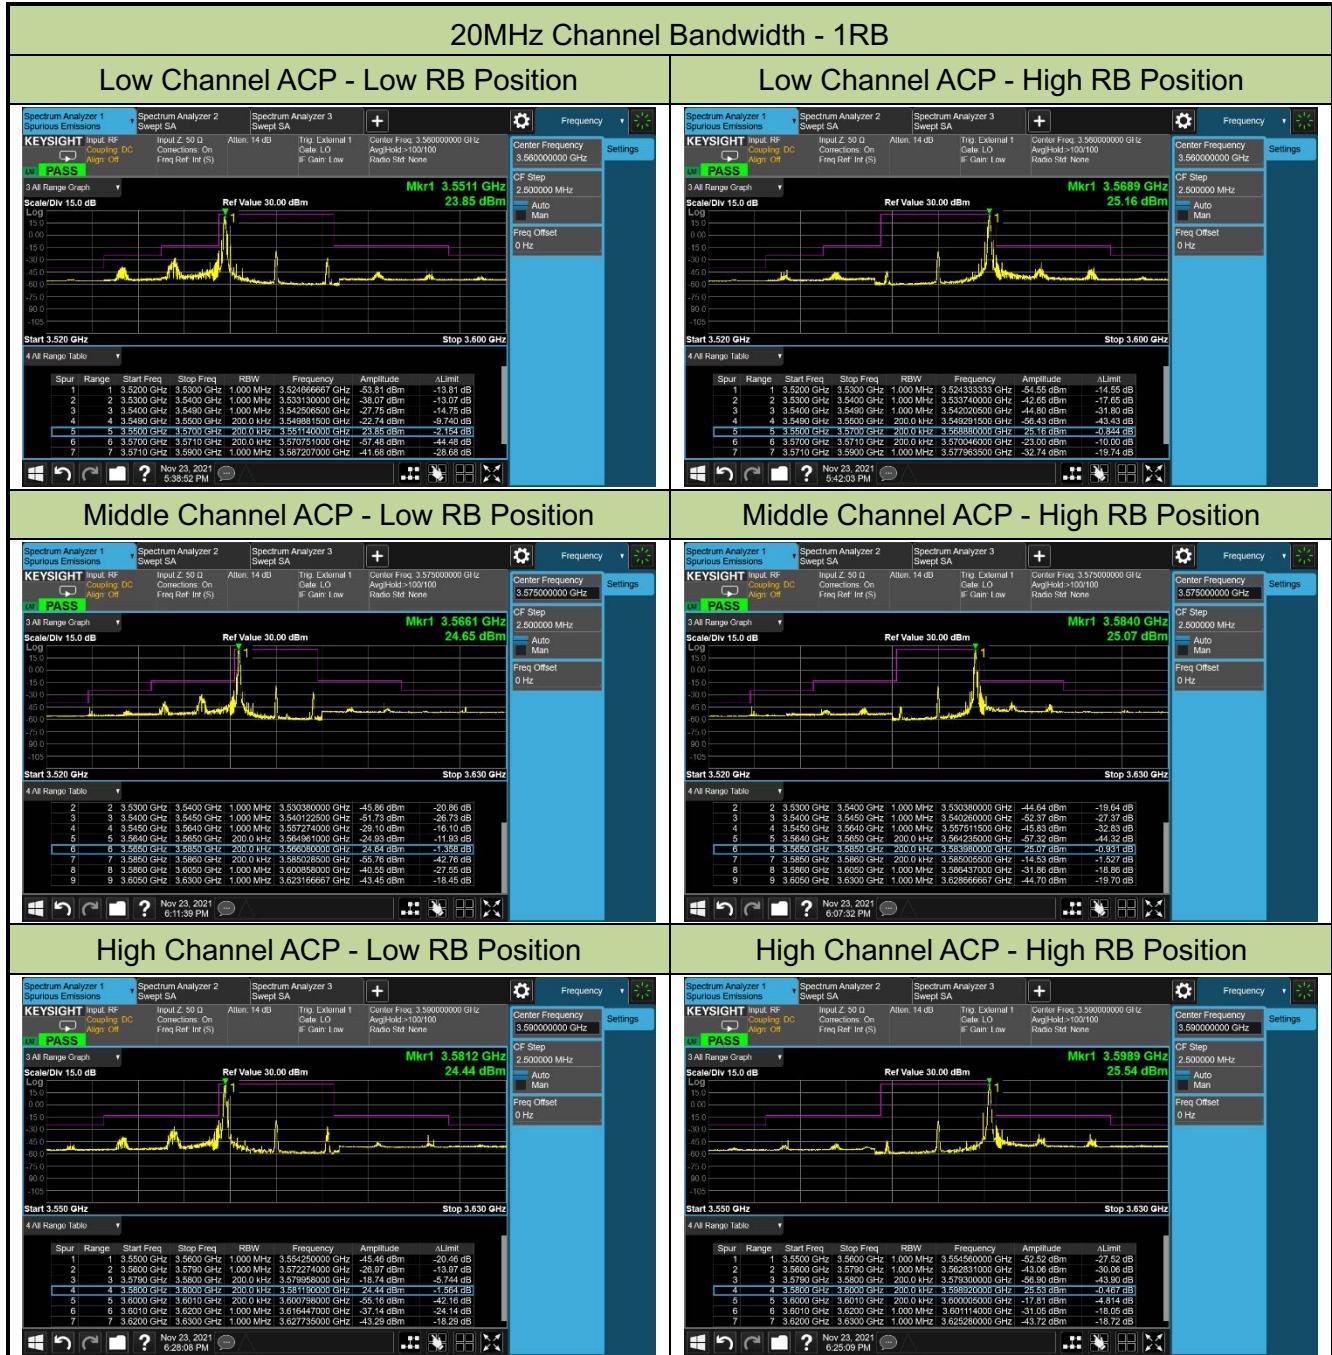

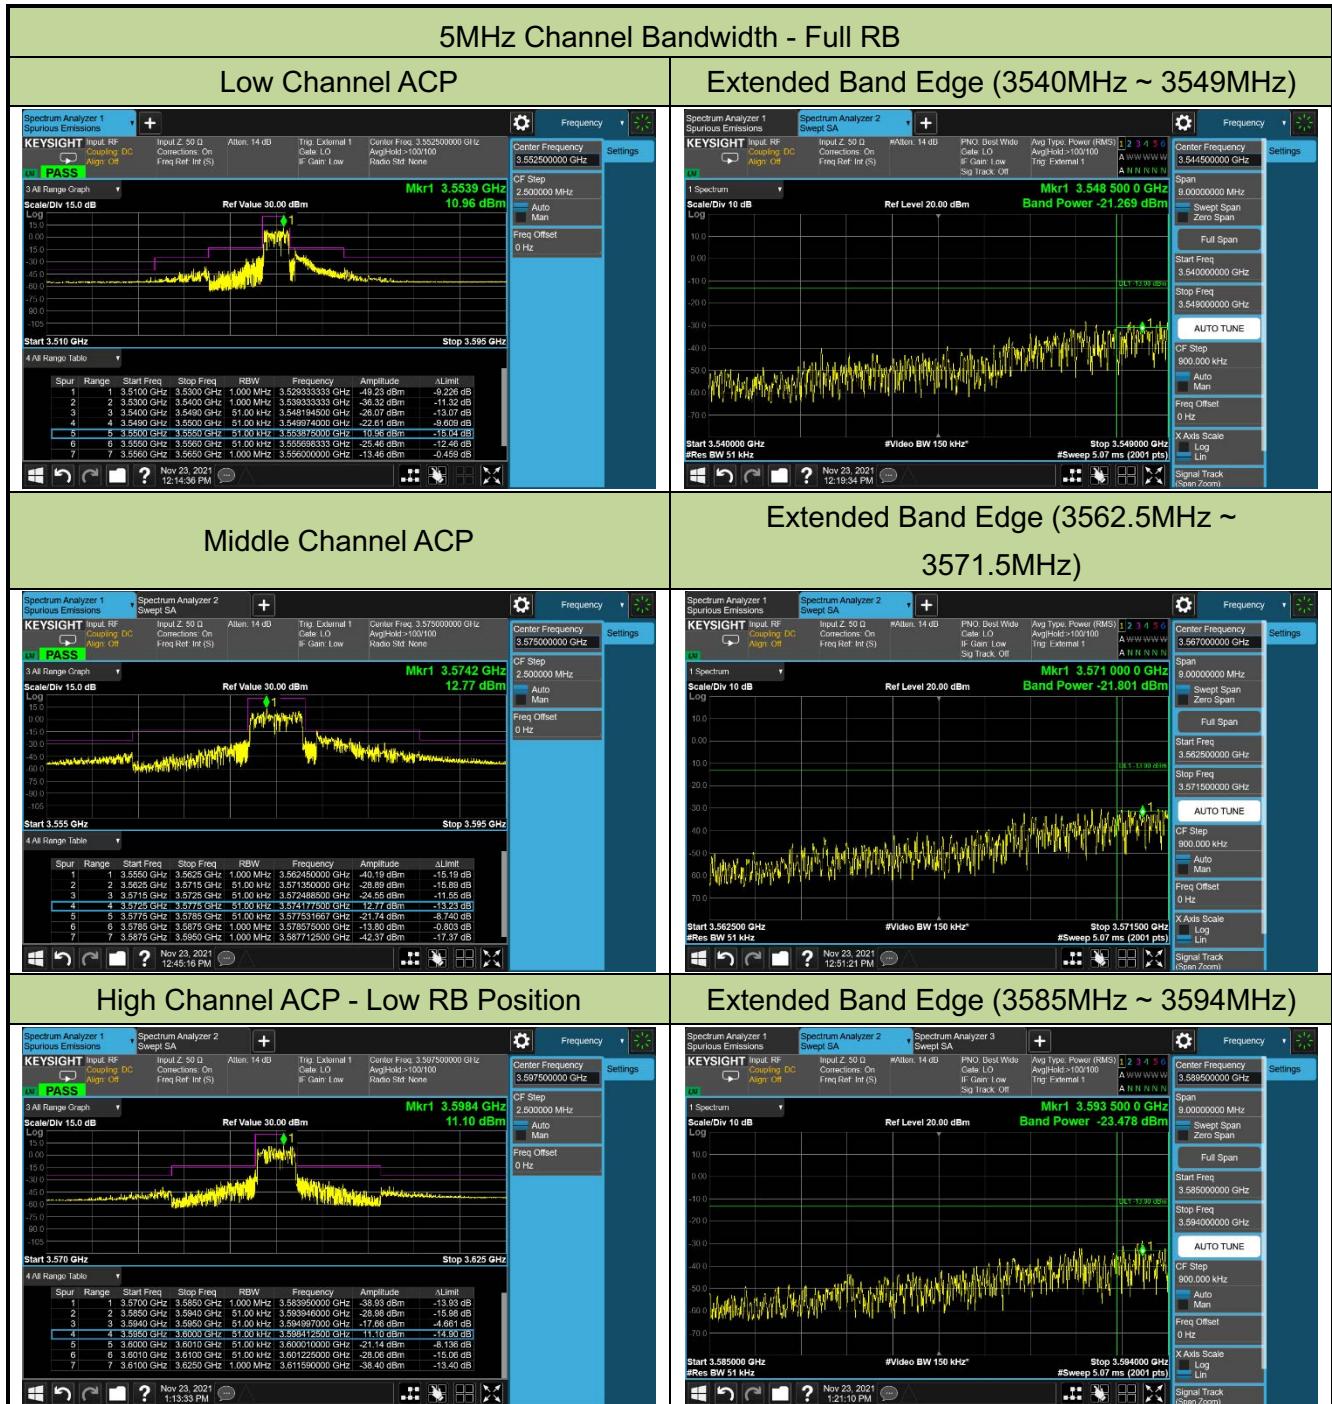

### Extended Band Edge (3601MHz ~ 3610MHz)

