

# TEST REPORT

**Applicant:** Fibocom Wireless Inc.  
**Address:** 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China  
**Equipment Type:** WiFi Smart Module  
**Model Name:** SC126-W  
**Brand Name:** Fibocom  
**FCC ID:** ZMOSC126W  
47 CFR Part 15 Subpart B  
**Test Standard:** ICES-003 (Issue 7, October 15, 2020)  
ANSI C63.4-2014  
**Sample Arrival Date:** Aug. 21, 2023  
**Test Date:** Aug. 31, 2023  
**Date of Issue:** Oct. 13, 2023


**ISSUED BY:**

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Xin Liao



**Checked by:** Xia Long



**Approved by:** Liao Jianming  
(Technical Director)



<b>Revision History</b>		
Version	Issue Date	Revisions Content
Rev. 01	Oct. 13, 2023	Initial Issue

## TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test Laboratory .....	3
1.2	Test Location.....	3
2	PRODUCT INFORMATION .....	4
2.1	Applicant Information.....	4
2.2	Manufacturer Information .....	4
2.3	General Description for Equipment under Test (EUT) .....	4
2.4	Ancillary Equipment.....	4
2.5	Technical Information .....	4
3	SUMMARY OF TEST RESULTS .....	5
3.1	Test Standards .....	5
3.2	Verdict.....	5
3.3	Test Uncertainty .....	5
4	GENERAL TEST CONFIGURATIONS .....	6
4.1	Test Enclosure List.....	6
4.2	Test Configurations .....	6
4.3	Test Setups .....	7
5	TEST ITEMS .....	9
5.1	Emission Tests .....	9
ANNEX A	TEST RESULTS.....	14
A.1	Radiated Emission .....	14
A.2	Conducted Emission, AC Ports .....	22
ANNEX B	TEST SETUP PHOTOS .....	25
ANNEX C	EUT EXTERNAL PHOTOS.....	25
ANNEX D	EUT INTERNAL PHOTOS.....	25

# 1 GENERAL INFORMATION

## 1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Fibocom Wireless Inc.
Address	1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China

### 2.2 Manufacturer Information

Manufacturer	N/A
Address	N/A

### 2.3 General Description for Equipment under Test (EUT)

EUT Name	WiFi Smart Module
Model Name Under Test	SC126-W
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

### 2.4 Ancillary Equipment

Note: Not applicable.

### 2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) U-NII-1/2A/2C/3, GLONASS
Classification of equipment	Class B
The highest internal frequency of EUT	5.8GHz

### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ICES-003 (Issue 7, October 15, 2020)	Information Technology Equipment (Including Digital Apparatus)
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

#### 3.2 Verdict

No.	Description	FCC Rule	ISED Rule	Test Verdict	Remark
1	Radiated Emission	15.109	ICES-003, 3.2.2	Pass	--
2	Conducted Emission, AC Ports	15.107	ICES-003, 3.2.1	Pass	--

Note: Compared with the EUT of test report BL-SZ2350434-401, the changes of the EUT of this report as below:

1. Remove GNSS circuit components.

Therefore, the conducted radiation test data are derived from the original project BL-SZ2350434-401, and the worst mode of radiation emission in the original report has been retested.

#### 3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.2 dB
Radiated emissions (30 MHz-1 GHz)-3m	4.8 dB
Radiated emissions (1 GHz-18 GHz)-3m	4.9 dB

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
DC Power Supply	ITECH	IT6863A	600014010 687210000	N/A	N/A	<input checked="" type="checkbox"/>
Antenna 1	N/A	N/A	N/A	0.5M	N/A	<input checked="" type="checkbox"/>
Antenna 2	N/A	N/A	N/A	0.5M	N/A	<input checked="" type="checkbox"/>

### 4.2 Test Configurations


All test modes of EUT are listed in the table below.

Test Mode Configuration	Description
Mode 1	<u>The Normal Work Test Mode</u> EUT +DC Power Supply + Antenna 1+Antenna 2


Test Case	Test Mode Configuration	Worst Mode
Radiated Emission	Mode 1	1
Conducted Emission, AC Ports	Mode 1	1

### 4.3 Test Setups

#### Test Setup 1

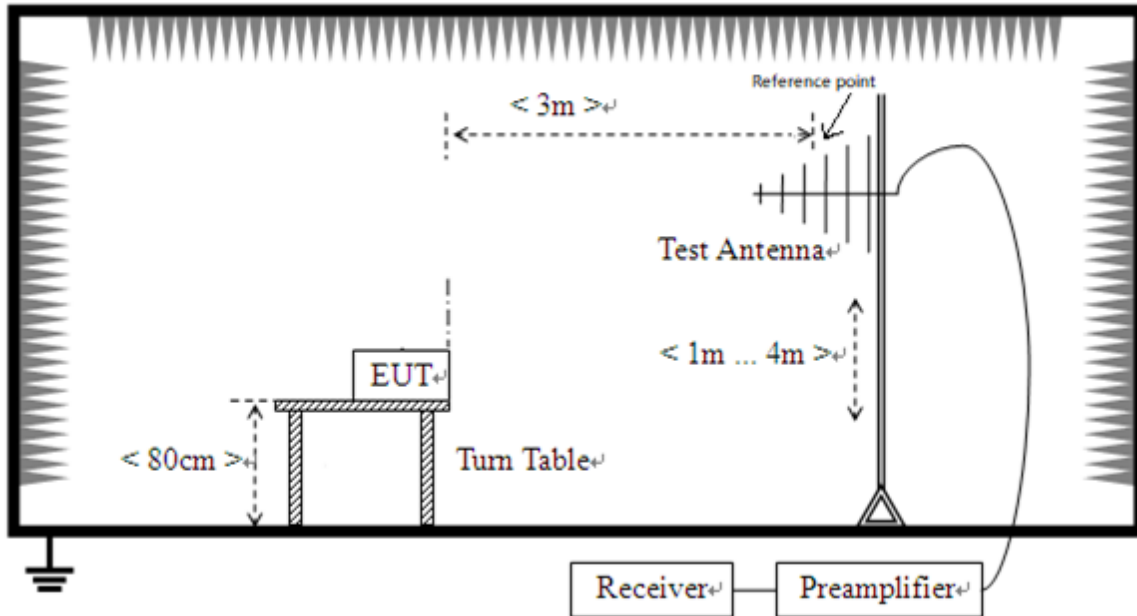


Radiated Emission (30 MHz-1 GHz)

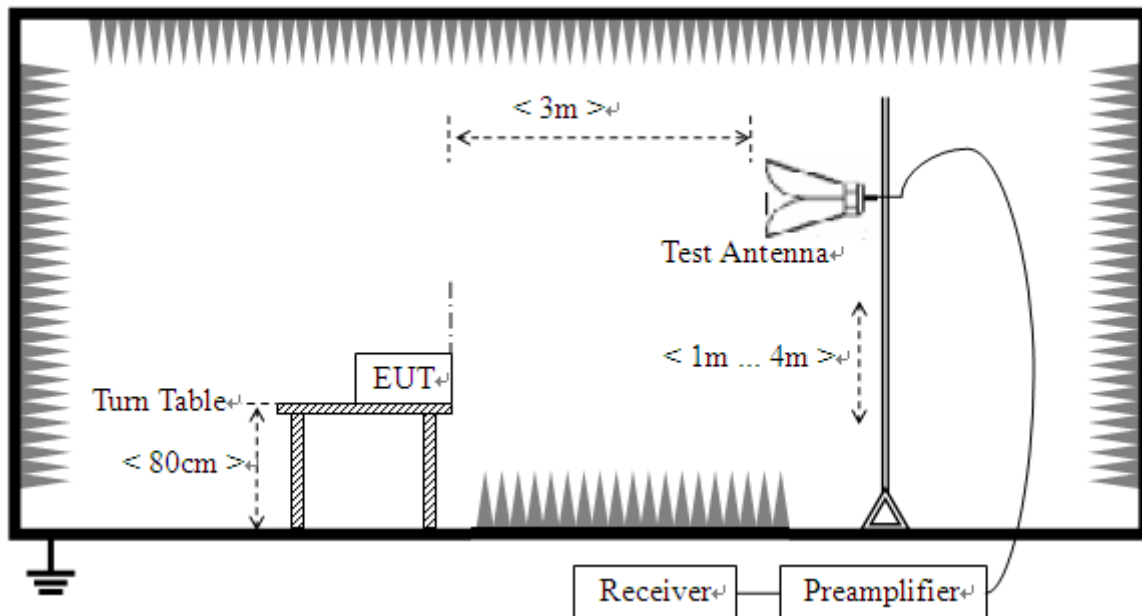

Radiated Emission (above 1 GHz)

Test Setup 2

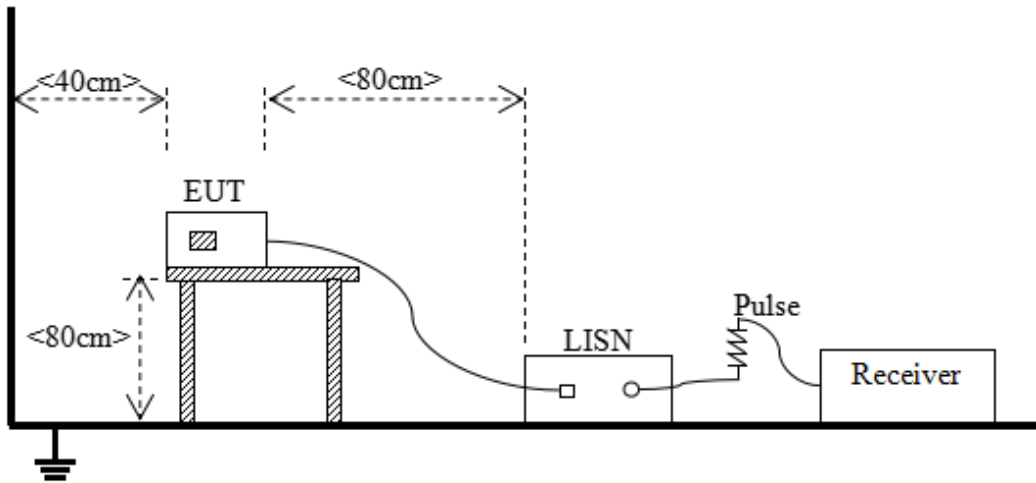

Conducted Emissions, AC Ports



## 5 TEST ITEMS

### 5.1 Emission Tests

#### 5.1.1 Radiated Emission

##### 5.1.1.1 Limit

FCC:

Frequency range (MHz)	Class B (at 3 m)		Class A (at 3 m)
	Field Strength ( $\mu\text{V/m}$ )	Field Strength (dB $\mu\text{V/m}$ )	Field Strength (dB $\mu\text{V/m}$ )
30 - 88	100	40	49.5
88 - 216	150	43.5	54
216 - 960	200	46	56.9
Above 960	500	54	60

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$ ) =  $20 \cdot \log$  [Field Strength ( $\mu\text{V/m}$ )].
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) The limits using ANSI C63.4.
- 4) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ( $\mu\text{V/m}$ )	Field Strength Average (dB $\mu\text{V/m}$ )	Field Strength Peak (dB $\mu\text{V/m}$ )	Field Strength Average (dB $\mu\text{V/m}$ )	Field Strength Peak (dB $\mu\text{V/m}$ )
1 - $F_M$	500	54	74	60	80

Note 1: The highest measurement frequency,  $F_M$ , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m  $L_{3m}$  is determined by the following conversion formula:

$$L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$$

Where:

$L_{3m}$  is Average Class A limit at 3m;

$L_{10m}$  is Average Class A limit at 10m;

$d_{10m}$  is Measurement distance in 10m;

$d_{3m}$  is Measurement distance in 3m.

For this case:  $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$  (dB $\mu\text{V/m}$ ).

Highest internal frequency ( $F_X$ )	Highest measurement frequency ( $F_M$ )
$F_X \leq 108$ MHz	1 GHz
$108$ MHz $\leq F_X \leq 500$ MHz	2 GHz

Highest internal frequency ( $F_X$ )	Highest measurement frequency ( $F_M$ )
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.

Note:  $F_X$  is Highest frequency generated or used in the device or on which the device operates or tunes.

IC:

Frequency range (MHz)	Class A (3 m) Quasi-peak (dB $\mu$ V/m)	Class A (10 m) Quasi-peak (dB $\mu$ V/m)	Class B (3 m) Quasi-peak (dB $\mu$ V/m)	Class B (10m) Quasi-peak (dB $\mu$ V/m)
30 - 88	50.0	40.0	40.0	30.0
88 - 216	54.0	43.5	43.5	33.1
216 - 230	56.9	46.4	46.0	35.6
230 - 960	57.0	47.0	47.0	37.0
960 - 1000	60.0	49.5	54.0	43.5

Note: The more stringent limit applies at transition frequencies.

Frequency range (GHz)	Class A (3 m) Average (dB $\mu$ V/m)	Class A (3 m) Peak (dB $\mu$ V/m)	Class B (3 m) Average (dB $\mu$ V/m)	Class B (3 m) Peak (dB $\mu$ V/m)
1 - $F_M$	60	80	54	74

Note:

- The highest measurement frequency,  $F_M$ , in GHz, shall be determined as next Table.
- The measurement bandwidth shall be 1 MHz or greater.
- These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test.
- The test site shall have been validated at the distance used for radiated emission measurements on the ITE or digital apparatus under test

Highest internal frequency ( $F_X$ )	Highest measurement frequency ( $F_M$ )
$F_X \leq 108 \text{ MHz}$	1GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ up to a maximum of 40 GHz

Note:  $F_X$  is the highest fundamental frequency generated and/or used in the ITE or digital apparatus

Highest internal frequency (F <sub>X</sub> )	Highest measurement frequency (F <sub>M</sub> )
under test.	

### 5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

### 5.1.1.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak for  $f < 1$  GHz, peak & RMS Average for  $f \geq 1$  GHz

Trace = max hold

### 5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB $\mu$ V/m) = Reading (dB $\mu$ V/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit – Results

## 5.1.2 Conducted Emission, AC Ports

### 5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

**NOTE:**

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

### 5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

### 5.1.2.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);

The EUT is connected to the power mains through a LISN which provides 50  $\Omega$ /50  $\mu$ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW  $\geq$  RBW

Sweep = 10ms

Detector function =peak & Average

Trace = max hold

#### 5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

#### NOTE:

1. Results (dB $\mu$ V) = Reading (dB $\mu$ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

# ANNEX A TEST RESULTS


## A.1 Radiated Emission

Note 1: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Sample No.	S06	Temperature	20.6°C
Humidity	31%RH	Pressure	101kPa
Test Engineer	He Shichang	Test Date	2023.08.31


### The Normal Work Test Mode

#### 1) Test Antenna Vertical, 30 MHz – 1 GHz (FCC)

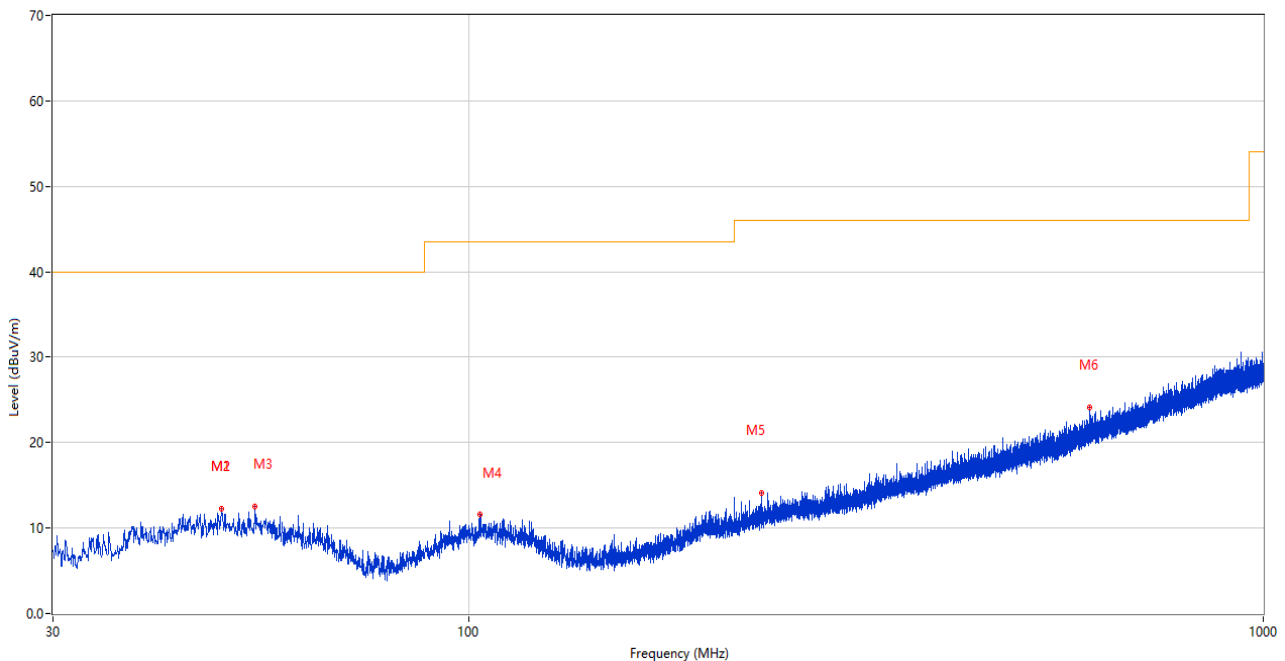


No.	Frequency (MHz)	Results (dBUV/m)	Factor (dB)	Limit (dBUV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.915	12.22	-25.38	40.0	27.78	Peak	287.00	100	Vertical	Pass
2	48.915	12.22	-25.38	40.0	27.78	Peak	287.00	100	Vertical	Pass
3	53.910	12.52	-25.55	40.0	27.48	Peak	286.00	200	Vertical	Pass
4	103.478	11.57	-26.52	43.5	31.93	Peak	203.00	100	Vertical	Pass
5	233.603	14.07	-25.41	46.0	31.93	Peak	248.00	100	Vertical	Pass
6	605.065	24.19	-15.75	46.0	21.81	Peak	324.00	200	Vertical	Pass

2) Test Antenna Horizontal, 30 MHz – 1 GHz (FCC)

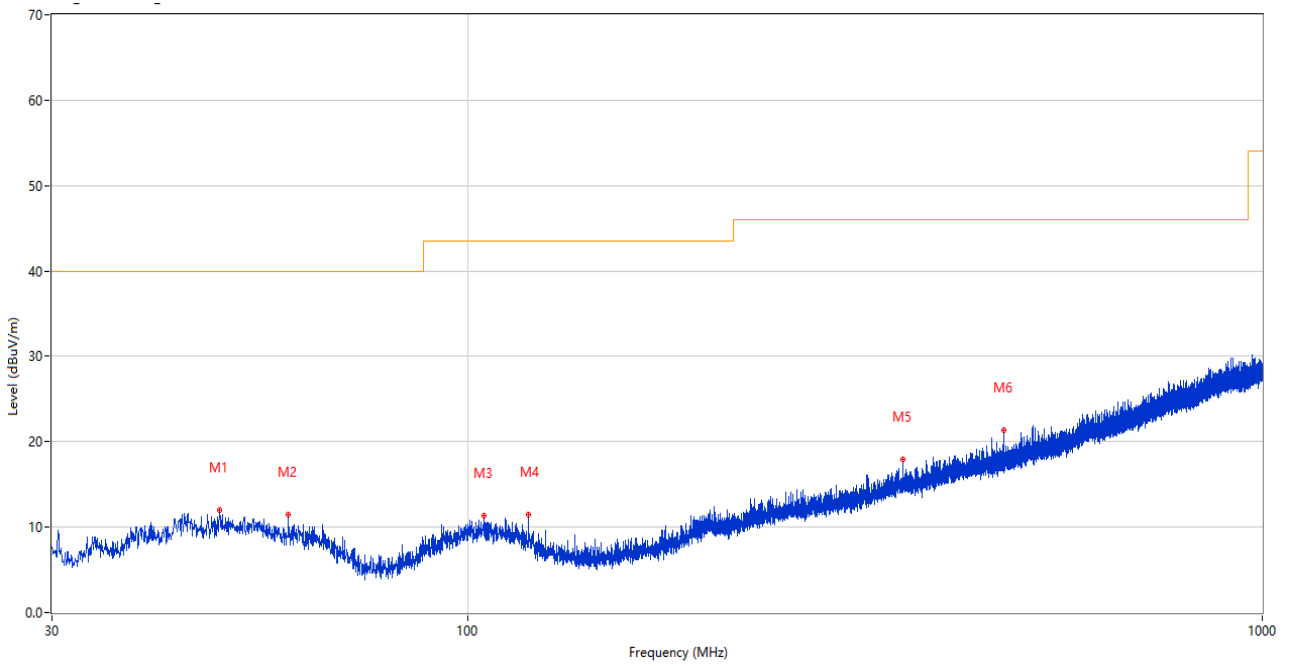

No.	Frequency (MHz)	Results (dBUV/m)	Factor (dB)	Limit (dBUV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.770	12.01	-25.36	40.0	27.99	Peak	167.00	100	Horizontal	Pass
2	59.440	11.43	-26.77	40.0	28.57	Peak	191.00	200	Horizontal	Pass
3	104.884	11.38	-26.51	43.5	32.12	Peak	52.00	100	Horizontal	Pass
4	119.288	11.48	-28.24	43.5	32.02	Peak	132.00	200	Horizontal	Pass
5	352.865	17.92	-21.84	46.0	28.08	Peak	350.00	200	Horizontal	Pass
6	472.320	21.36	-19.39	46.0	24.64	Peak	13.00	200	Horizontal	Pass


3) Test Antenna Vertical, 30 MHz – 1 GHz (IC)

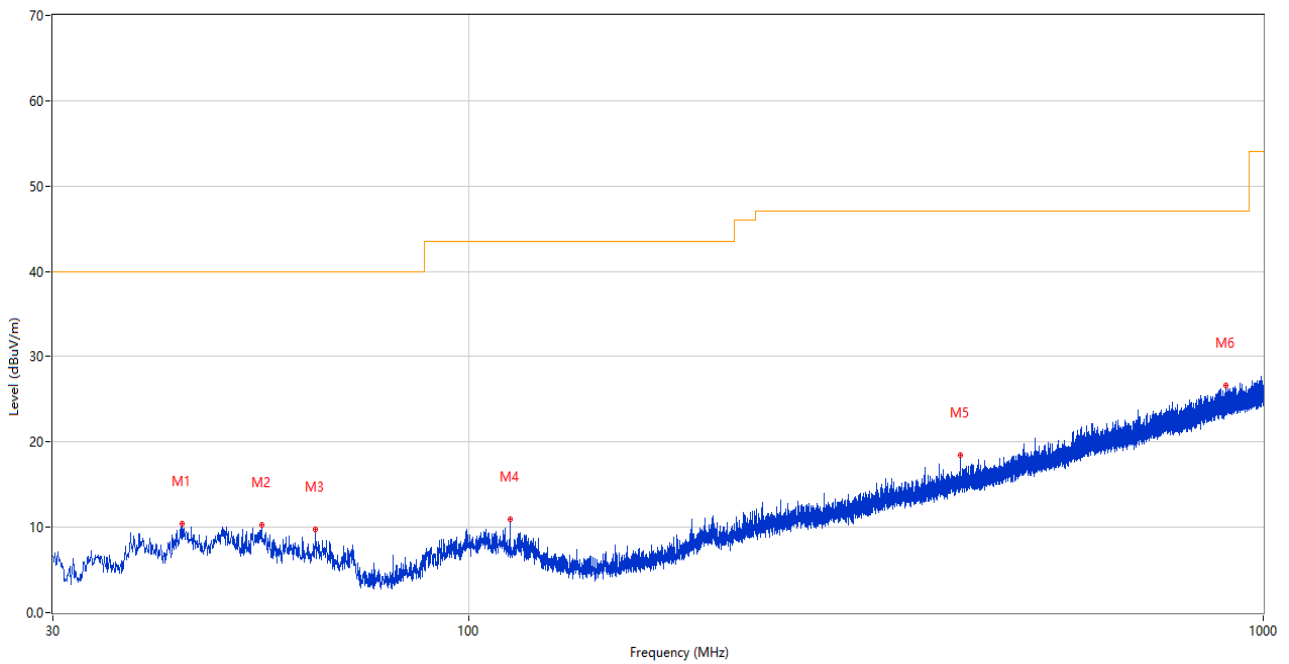

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	43.677	10.40	-25.74	40.0	29.60	Peak	207.00	100	Vertical	Pass
2	54.929	10.33	-25.77	40.0	29.67	Peak	247.00	200	Vertical	Pass
3	64.192	9.77	-27.28	40.0	30.23	Peak	329.00	100	Vertical	Pass
4	112.741	10.93	-27.17	43.5	32.57	Peak	182.00	100	Vertical	Pass
5	415.914	18.47	-20.46	47.0	28.53	Peak	0.00	200	Vertical	Pass
6	897.034	26.65	-9.88	47.0	20.35	Peak	264.00	100	Vertical	Pass




4) Test Antenna Horizontal, 30 MHz – 1 GHz (IC)

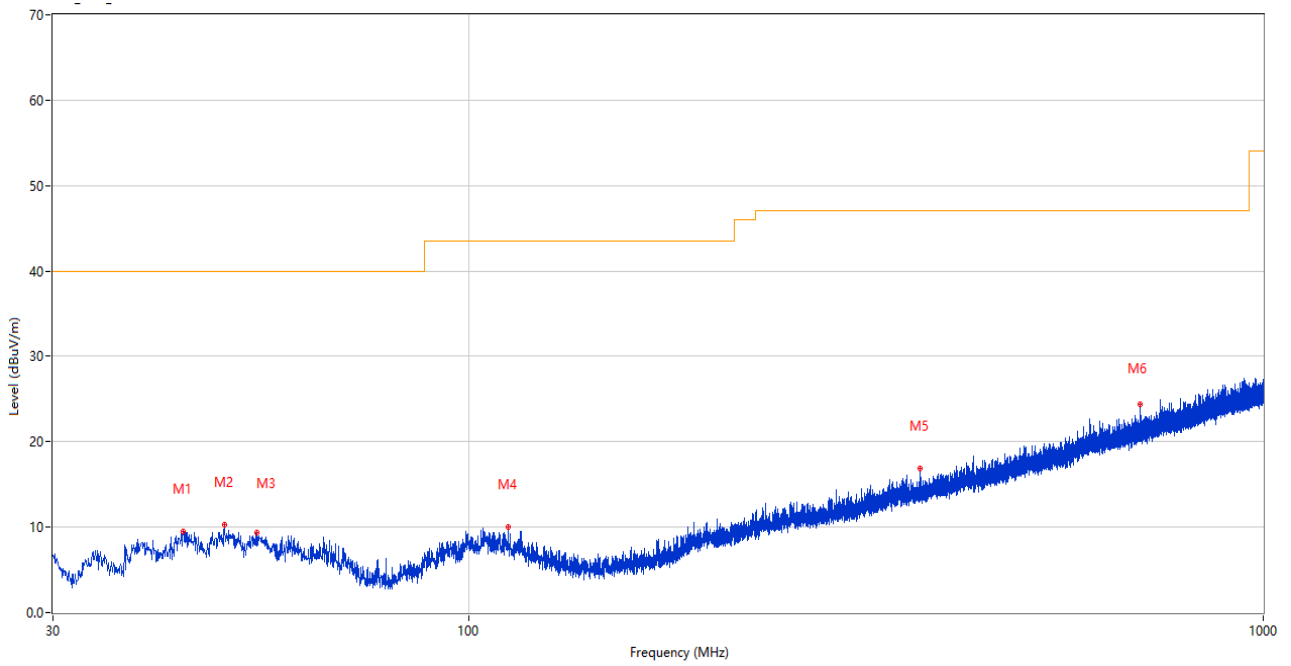

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	43.774	9.46	-25.74	40.0	30.54	Peak	108.00	100	Horizontal	Pass
2	49.255	10.26	-25.47	40.0	29.74	Peak	204.00	200	Horizontal	Pass
3	54.105	9.34	-25.56	40.0	30.66	Peak	284.00	100	Horizontal	Pass
4	112.110	10.04	-27.03	43.5	33.46	Peak	223.00	100	Horizontal	Pass
5	369.791	16.86	-21.87	47.0	30.14	Peak	204.00	100	Horizontal	Pass
6	699.785	24.36	-14.07	47.0	22.64	Peak	253.00	200	Horizontal	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2022.09.09	2023.09.08	<input checked="" type="checkbox"/>
Amplifier (30-1GHz)	COM-MV	ZT30-1000M	B2017119081	2022.12.07	2023.12.06	<input checked="" type="checkbox"/>
Test Antenna- Bi-Log	SCHWARZB ECK	VULB 9168	9168-00867	2022.04.12	2025.04.11	<input checked="" type="checkbox"/>
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2021.08.19	2024.08.18	<input checked="" type="checkbox"/>
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		<input checked="" type="checkbox"/>


5) Test Antenna Vertical, 1 GHz – 6 GHz

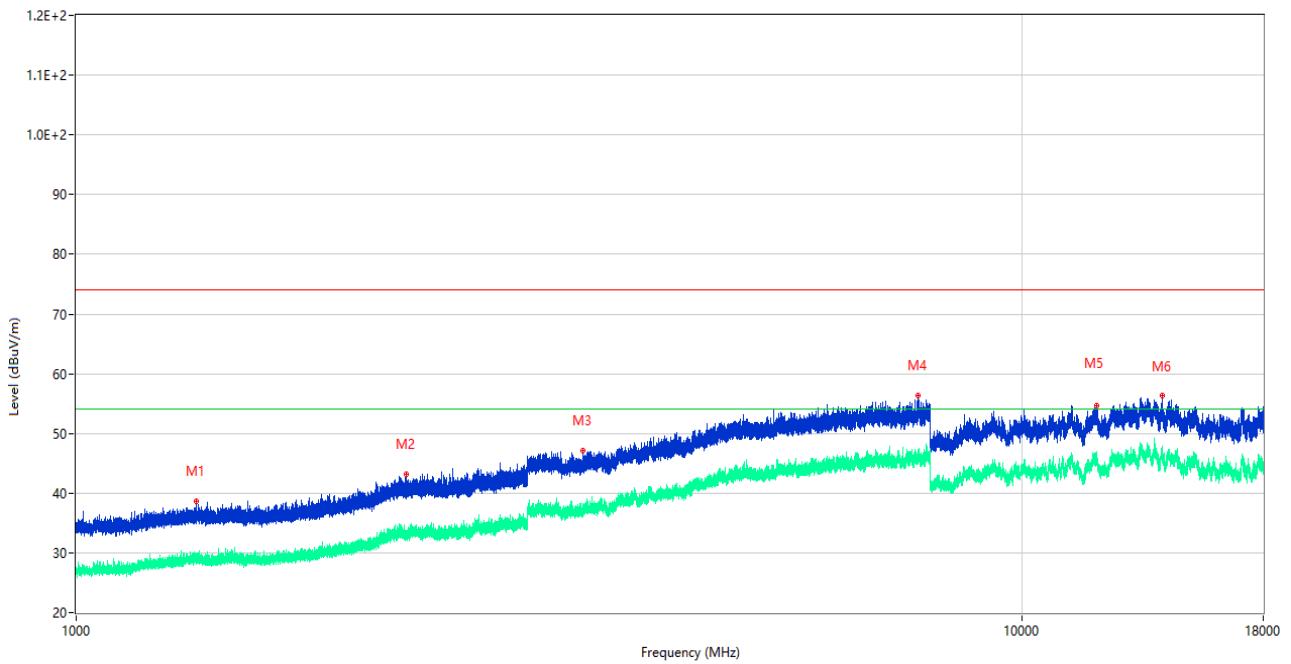

No.	Frequency (MHz)	Results (dBUV/m)	Factor (dB)	Limit (dBUV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1338.200	38.64	-16.57	74.0	35.36	Peak	267.00	100	Vertical	Pass
1**	1338.200	29.07	-16.57	54.0	24.93	AV	267.00	100	Vertical	Pass
2	2233.300	43.19	-12.19	74.0	30.81	Peak	335.00	100	Vertical	Pass
2**	2233.300	32.61	-12.19	54.0	21.39	AV	335.00	100	Vertical	Pass
3	3430.750	47.12	-5.59	74.0	26.88	Peak	64.00	100	Vertical	Pass
3**	3430.750	36.91	-5.59	54.0	17.09	AV	64.00	100	Vertical	Pass
4	7775.750	56.41	3.04	74.0	17.59	Peak	342.00	100	Vertical	Pass
4**	7775.750	46.24	3.04	54.0	7.76	AV	342.00	100	Vertical	Pass
5	11998.000	54.72	2.63	74.0	19.28	Peak	154.00	100	Vertical	Pass
5**	11998.000	45.95	2.63	54.0	8.05	AV	154.00	100	Vertical	Pass
6	14062.500	56.31	5.07	74.0	17.69	Peak	168.00	100	Vertical	Pass
6**	14062.500	46.35	5.07	54.0	7.65	AV	168.00	100	Vertical	Pass

Note: The RE-H test method for ICES-003 references FCC PART 15B, so test data is shared.

6) Test Antenna Horizontal, 1 GHz – 6 GHz

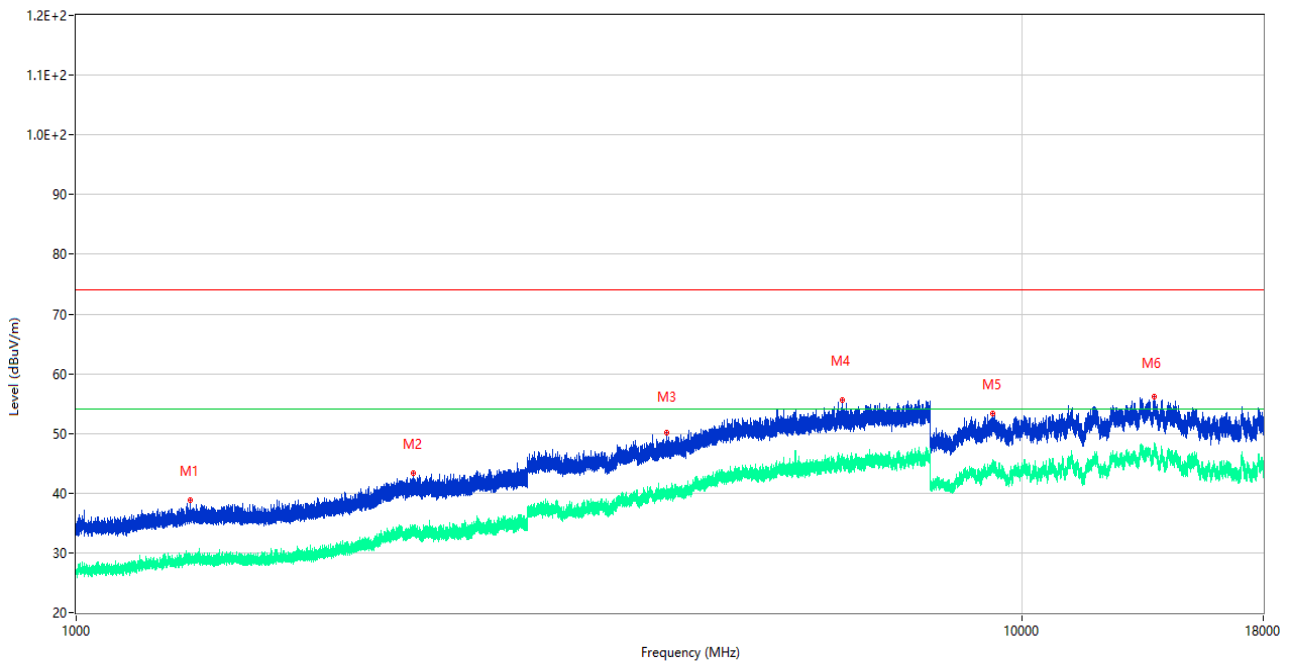

No.	Frequency (MHz)	Results (dBUV/m)	Factor (dB)	Limit (dBUV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1319.500	38.77	-16.54	74.0	35.23	Peak	7.00	100	Horizontal	Pass
1**	1319.500	29.39	-16.54	54.0	24.61	AV	7.00	100	Horizontal	Pass
2	2274.300	43.29	-11.86	74.0	30.71	Peak	111.00	100	Horizontal	Pass
2**	2274.300	33.79	-11.86	54.0	20.21	AV	111.00	100	Horizontal	Pass
3	4212.250	50.06	-1.93	74.0	23.94	Peak	43.00	100	Horizontal	Pass
3**	4212.250	39.59	-1.93	54.0	14.41	AV	43.00	100	Horizontal	Pass
4	6454.000	55.52	2.53	74.0	18.48	Peak	204.00	100	Horizontal	Pass
4**	6454.000	44.82	2.53	54.0	9.18	AV	204.00	100	Horizontal	Pass
5	9323.500	53.31	2.17	74.0	20.69	Peak	263.00	100	Horizontal	Pass
5**	9323.500	44.26	2.17	54.0	9.74	AV	263.00	100	Horizontal	Pass
6	13810.000	56.07	5.68	74.0	17.93	Peak	179.00	100	Horizontal	Pass
6**	13810.000	47.21	5.68	54.0	6.79	AV	179.00	100	Horizontal	Pass

Note: The RE-H test method for ICES-003 references FCC PART 15B, so test data is shared.

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY55330120	2022.09.09	2023.09.08	<input checked="" type="checkbox"/>
Amplifier (1-12GHz)	Advanced Microwave	WLA652A	1740103	2022.12.07	2023.12.06	<input checked="" type="checkbox"/>
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	225321316	2022.12.07	2023.12.06	<input checked="" type="checkbox"/>
Test Antenna- Horn	SCHWARZB ECK	BBHA 9120D	01917	2022.06.09	2025.06.08	<input checked="" type="checkbox"/>
Anechoic Chamber (#2)	YiHeng	9m*6m*6m	142	2021.08.19	2024.08.18	<input checked="" type="checkbox"/>
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		<input checked="" type="checkbox"/>


## A.2 Conducted Emission, AC Ports

Note: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz ) shown here.

Sample No.	S01	Temperature	24.3°C
Humidity	52%RH	Pressure	101kPa
Test Engineer	Ye Guangqi	Test Date	2022.05.16


### The Charge Test Mode

#### 1) AC Ports - L Phase

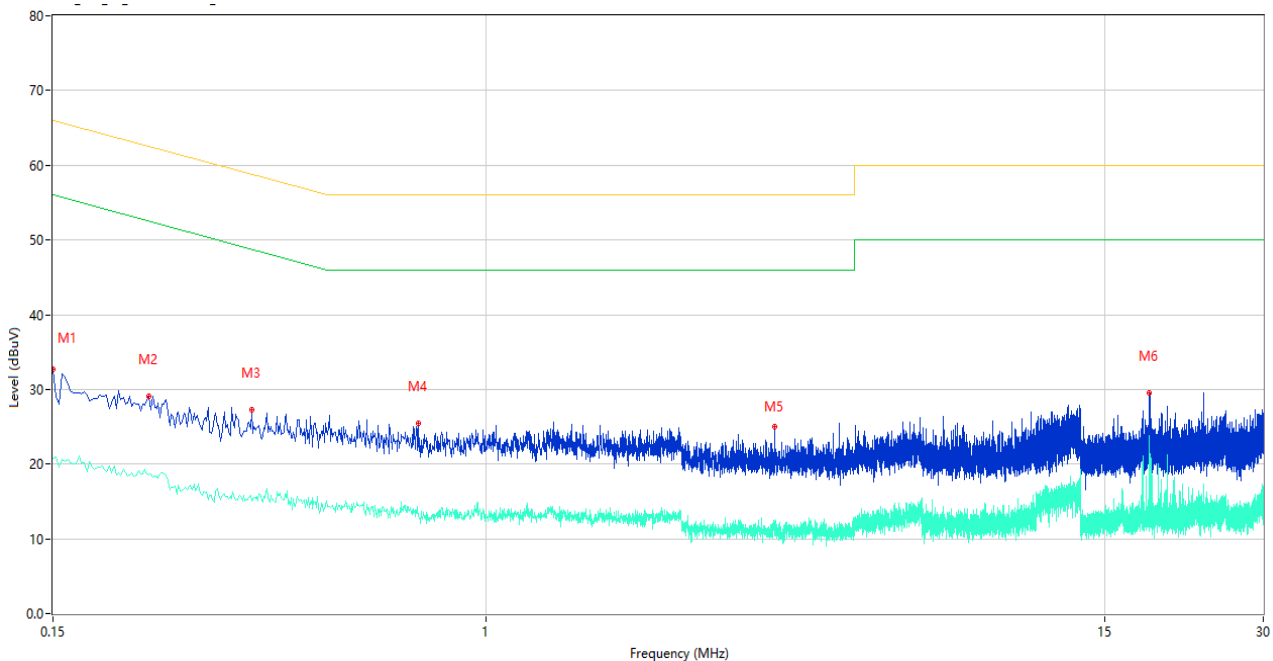

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.150	32.71	9.84	66.00	33.29	Peak	L	Pass
1**	0.150	20.80	9.84	56.00	35.20	AV	L	Pass
2	0.228	29.10	9.79	62.52	33.42	Peak	L	Pass
2**	0.228	18.55	9.79	52.52	33.97	AV	L	Pass
3	0.358	27.28	9.81	58.77	31.49	Peak	L	Pass
3**	0.358	15.01	9.81	48.77	33.76	AV	L	Pass
4	0.744	25.48	9.84	56.00	30.52	Peak	L	Pass
4**	0.744	13.06	9.84	46.00	32.94	AV	L	Pass
5	3.530	24.95	10.40	56.00	31.05	Peak	L	Pass
5**	3.530	11.03	10.40	46.00	34.97	AV	L	Pass
6	18.242	29.54	10.46	60.00	30.46	Peak	L	Pass
6**	18.242	23.88	10.46	50.00	26.12	AV	L	Pass

1) AC Ports - N Phase

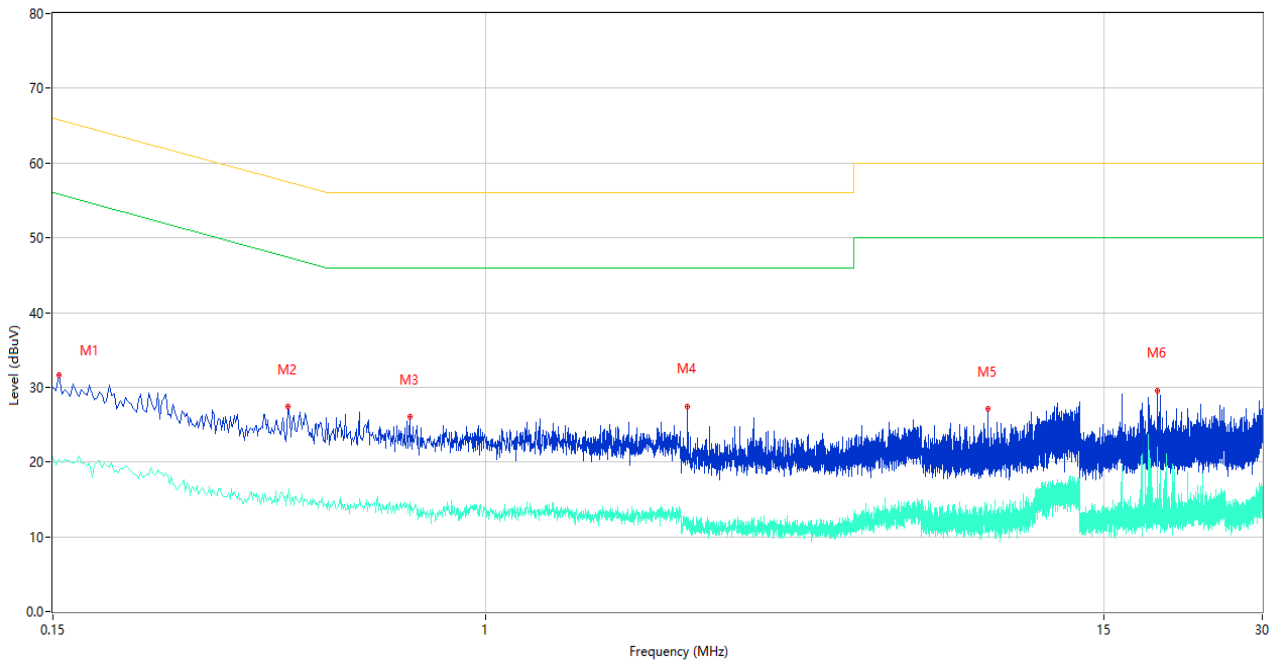

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	31.66	9.84	65.78	34.12	Peak	N	Pass
1**	0.154	20.36	9.84	55.78	35.42	AV	N	Pass
2	0.420	27.37	10.35	57.45	30.08	Peak	N	Pass
2**	0.420	15.21	10.35	47.45	32.24	AV	N	Pass
3	0.716	26.09	10.24	56.00	29.91	Peak	N	Pass
3**	0.716	14.63	10.24	46.00	31.37	AV	N	Pass
4	2.422	27.49	10.17	56.00	28.51	Peak	N	Pass
4**	2.422	11.71	10.17	46.00	34.29	AV	N	Pass
5	9.000	27.08	10.40	60.00	32.92	Peak	N	Pass
5**	9.000	12.54	10.40	50.00	37.46	AV	N	Pass
6	18.912	29.60	10.75	60.00	30.40	Peak	N	Pass
6**	18.912	18.56	10.75	50.00	31.44	AV	N	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2022.09.09	2023.09.08	<input checked="" type="checkbox"/>
LISN	SCHWARZB ECK	NSLK 8127	8127-687	2023.05.16	2024.05.15	<input checked="" type="checkbox"/>
ISN	TESEQ	ISN T800	34449	2022.11.11	2023.11.10	<input type="checkbox"/>
ISN	TESEQ	ISN T8-Cat6	53561	2023.04.23	2024.04.22	<input type="checkbox"/>
Shielded Room	YiHeng Electronic Co., Ltd	3.5m*3.1m*2. 8m	112	2022.02.19	2025.02.18	<input checked="" type="checkbox"/>
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		<input checked="" type="checkbox"/>



## **ANNEX B TEST SETUP PHOTOS**

Please refer the document “BL-SZ2380885-AE.PDF”.

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document “BL-SZ2380885-AW.PDF”.

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document “BL-SZ2380885-AI.PDF”.

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--