


APPENDIX A – TEST DATA OF CONDUCTED EMISSION

End user device additional requirements


< n48: Tx: 3550~3700 MHz >

[Step 1] Setup with frequency 3560-3670MHz and power level 20dBm/MHz


[Step 3] Check EUD Tx Frequency and power

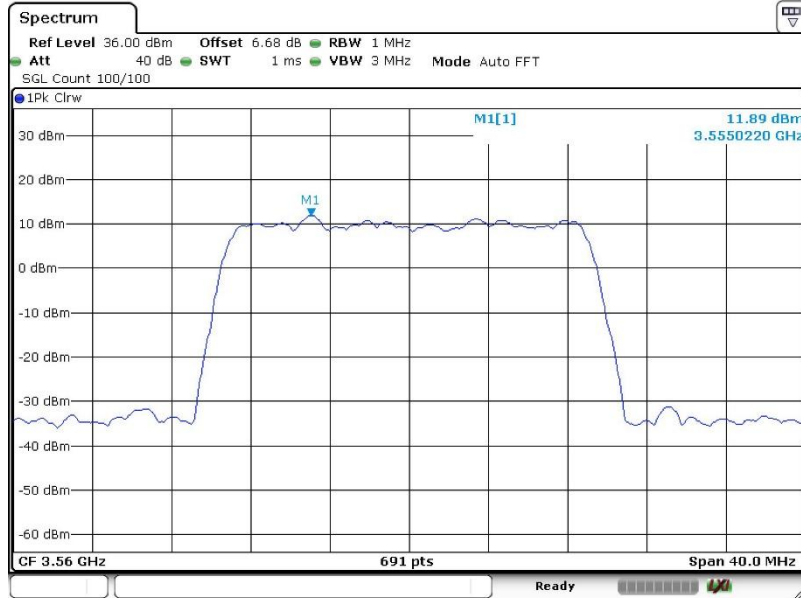


[Step 5] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD

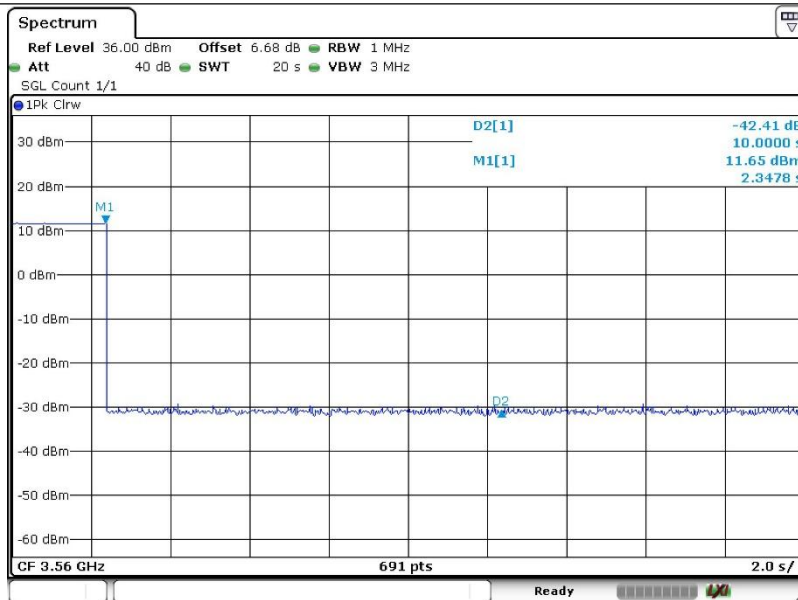

[Step 6] Setup with frequency 3590-3610MHz and power level 8dBm/MHz
[Step 8] Check EUD Tx Frequency and power

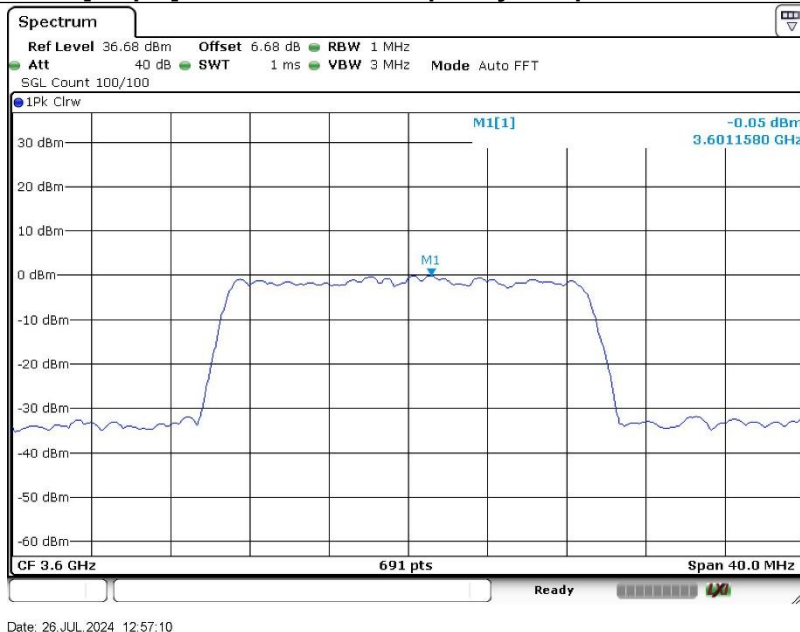

[Step 10] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD

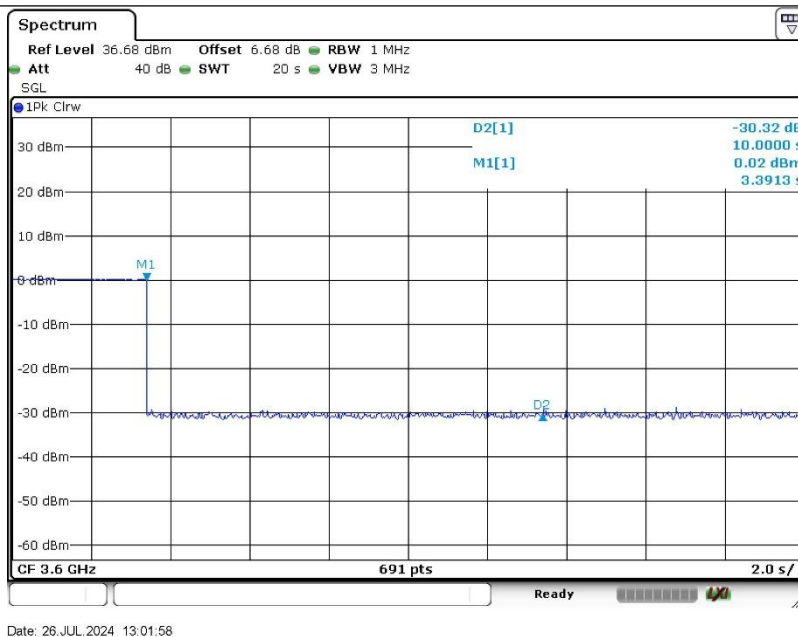


< n78: Tx: 3550-3700 MHz >

[Step 1] Setup with frequency 3560-3670MHz and power level 20dBm/MHz

[Step 3] Check EUD Tx Frequency and power



[Step 5] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD

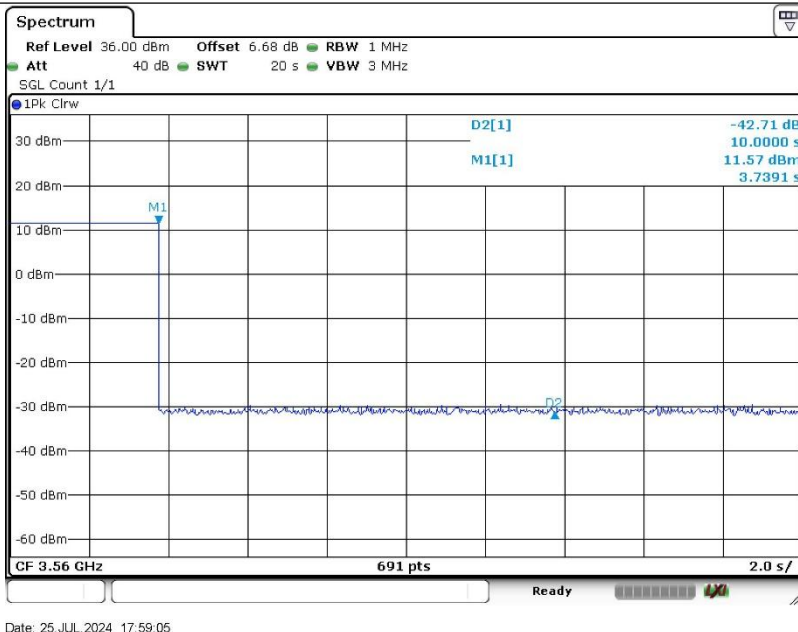

[Step 6] Setup with frequency 3590-3610MHz and power level 8dBm/MHz
[Step 8] Check EUD Tx Frequency and power



[Step 10] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD

