




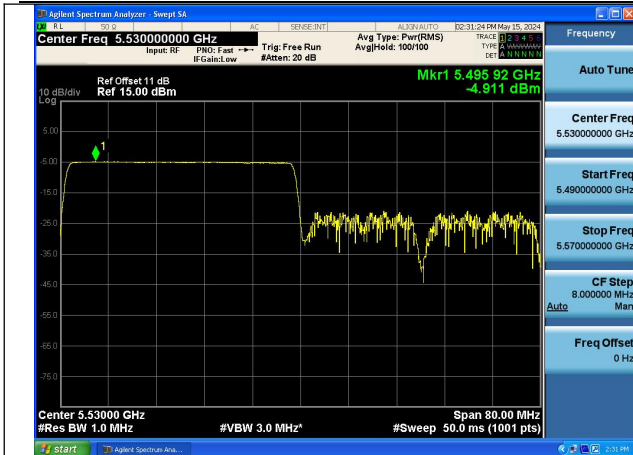


Mode:802.11ax HE80 Tone:484T Frequency:5530MHz
Ant:Chain1

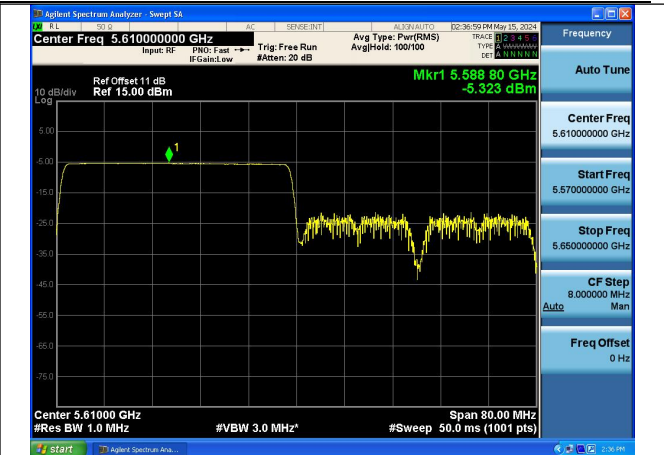


Mode:802.11ax HE80 Tone:484T Frequency:5610MHz
Ant:Chain1

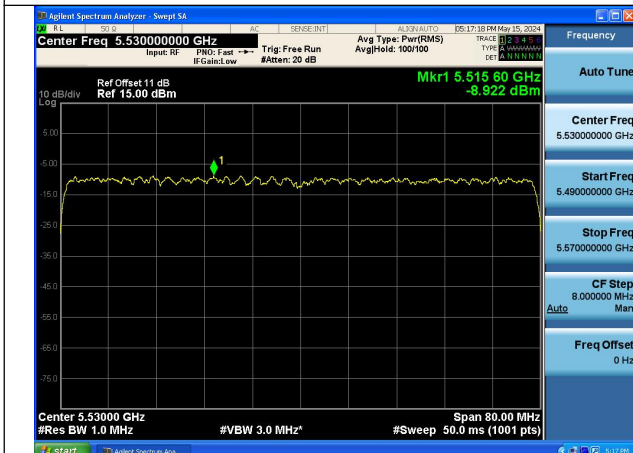


Mode:802.11ax HE80 Tone:996T Frequency:5530MHz
Ant:Chain0

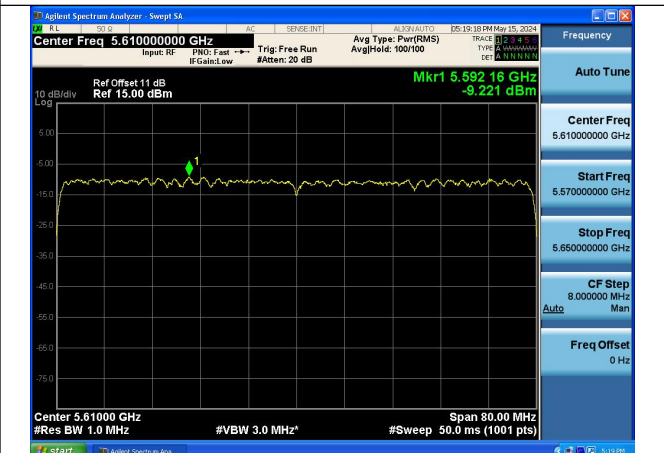

Mode:802.11ax HE80 Tone:996T Frequency:5610MHz
Ant:Chain0

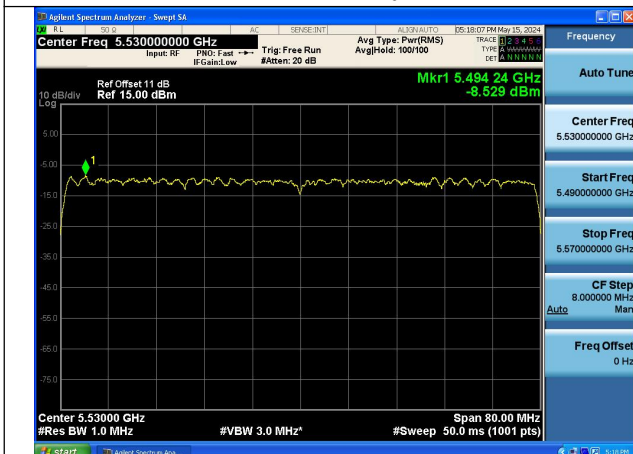

Mode:802.11ax HE80 Tone:996T Frequency:5530MHz
Ant:Chain1

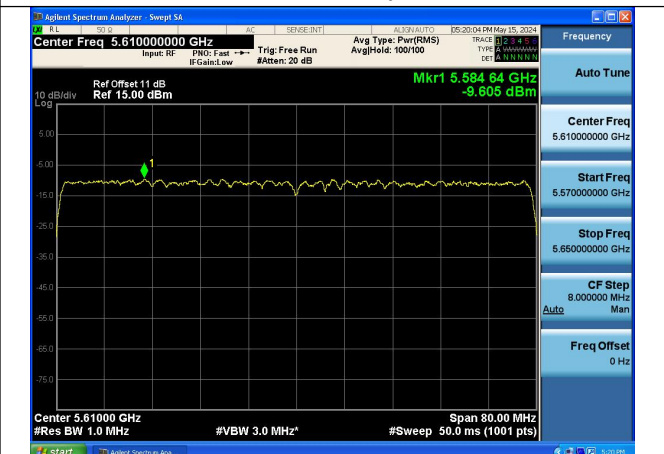


Mode:802.11ax HE80 Tone:996T Frequency:5610MHz
Ant:Chain1

Test Mode: 802.11ac VHT160





Test Mode: 802.11ax HE160

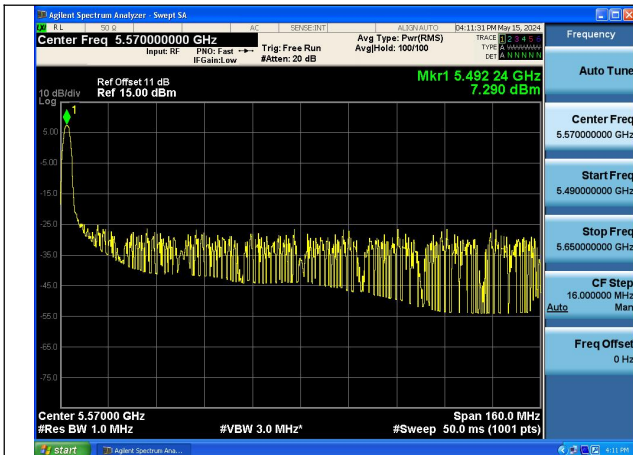



Mode:802.11ax HE160 Tone:26T Frequency:5570MHz
Ant:Chain0

Mode:802.11ax HE160 Tone:26T Frequency:5570MHz
Ant:Chain1

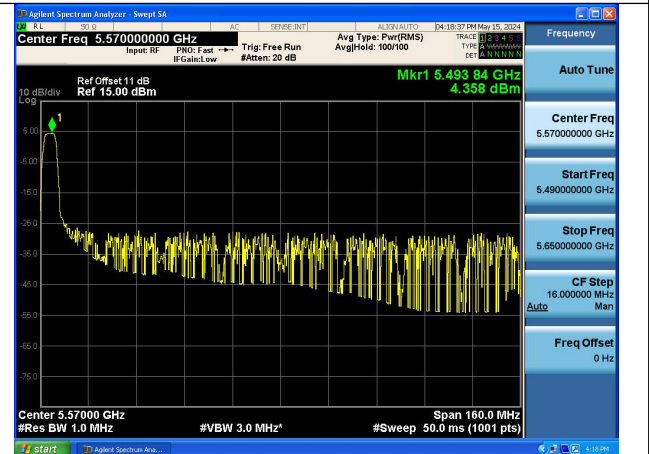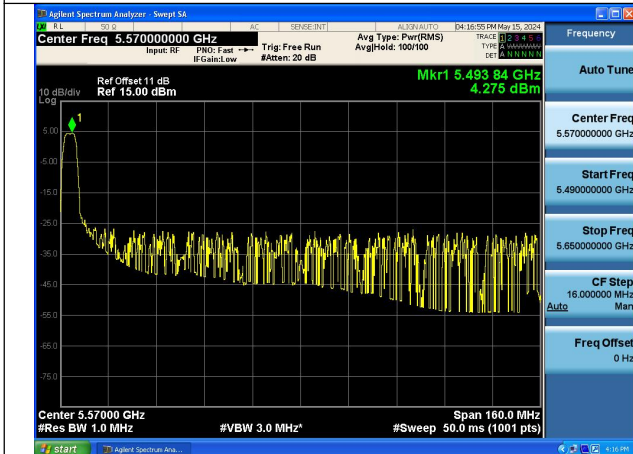


Mode:802.11ax HE160 Tone:52T Frequency:5570MHz
Ant:Chain0

Mode:802.11ax HE160 Tone:52T Frequency:5570MHz
Ant:Chain1

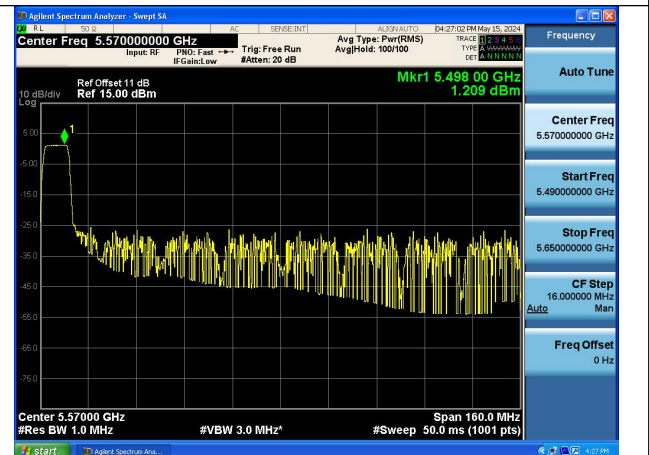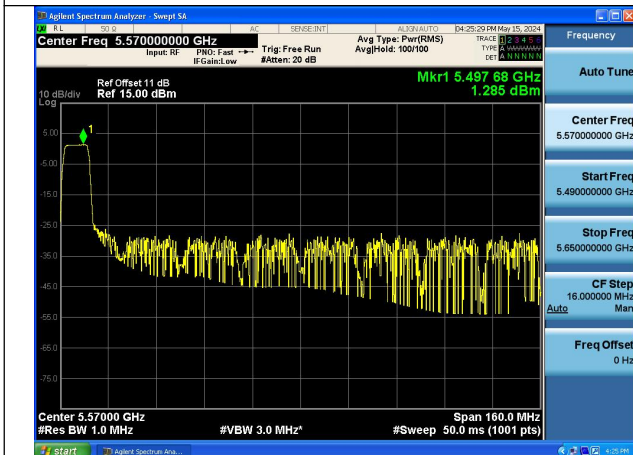


Mode:802.11ax HE160 Tone:106T
Frequency:5570MHz Ant:Chain0


Mode:802.11ax HE160 Tone:106T
Frequency:5570MHz Ant:Chain1

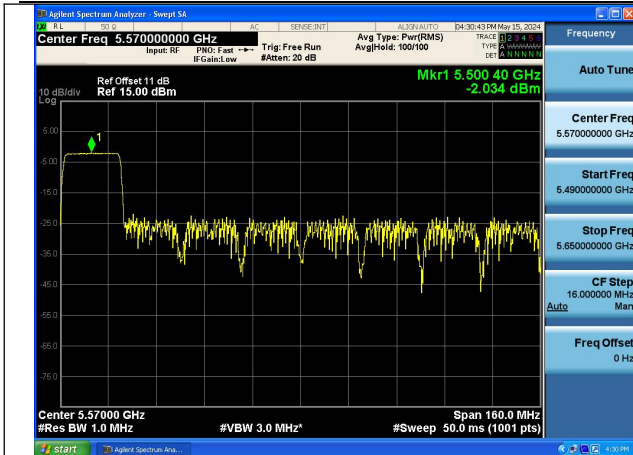


Mode:802.11ax HE160 Tone:242T
Frequency:5570MHz Ant:Chain0

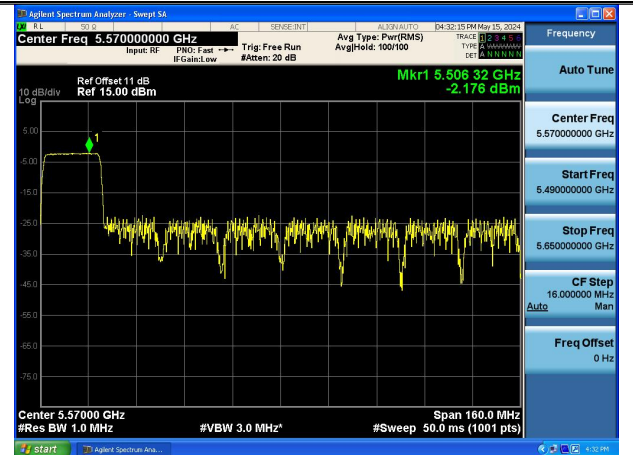


Mode:802.11ax HE160 Tone:242T
Frequency:5570MHz Ant:Chain1

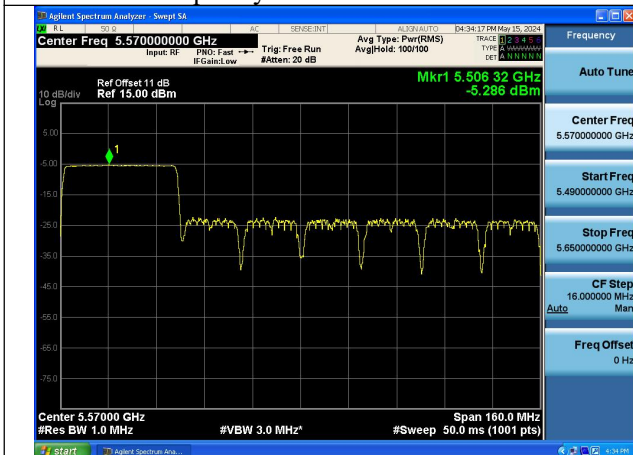


Mode:802.11ax HE160 Tone:484T
Frequency:5570MHz Ant:Chain0

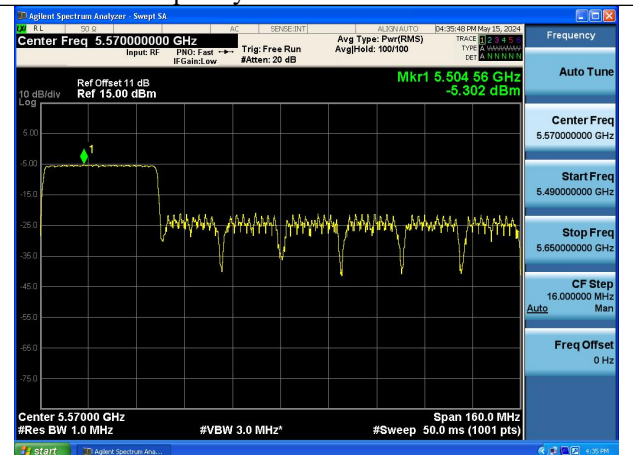


Mode:802.11ax HE160 Tone:484T
Frequency:5570MHz Ant:Chain1

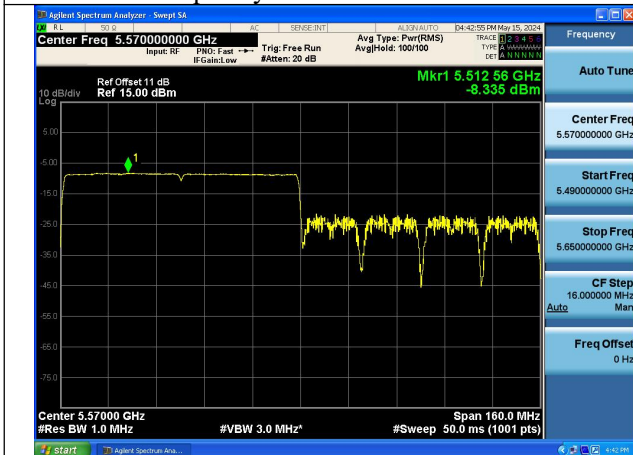

Mode:802.11ax HE160 Tone:996T
Frequency:5570MHz Ant:Chain0

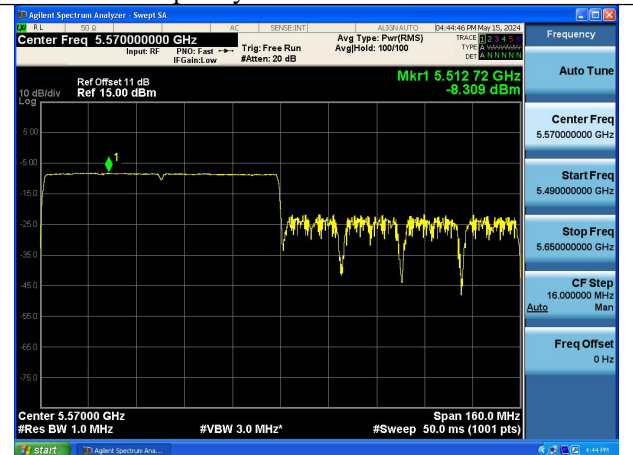

Mode:802.11ax HE160 Tone:996T
Frequency:5570MHz Ant:Chain1

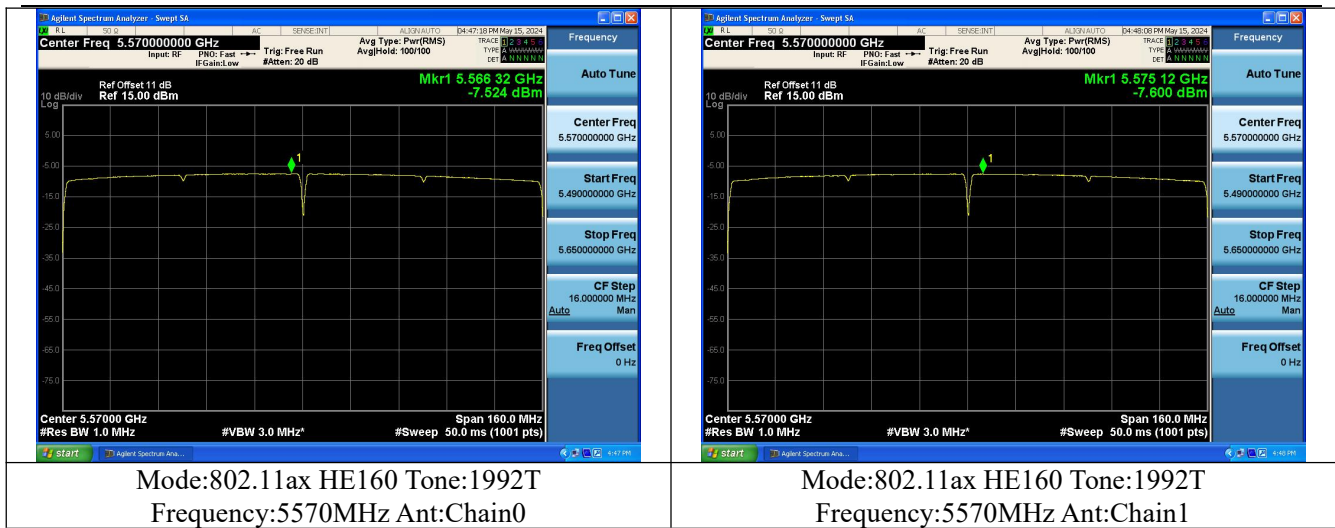

Dynamic Frequency Selection


DESCRIPTION OF Master Device

The Master Device is a SKSpruce Technologies Co., Ltd., Indoor Access Point, FCC ID: 2AHKT-WIA3300-20, Antenna gain: 3 dBi. The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64dBm

Radar Waveform Calibration Result

<20MHz / 5320 MHz> Radar Type 0


Radar / DFS detection threshold level and the burst of pulses on the Channel frequency

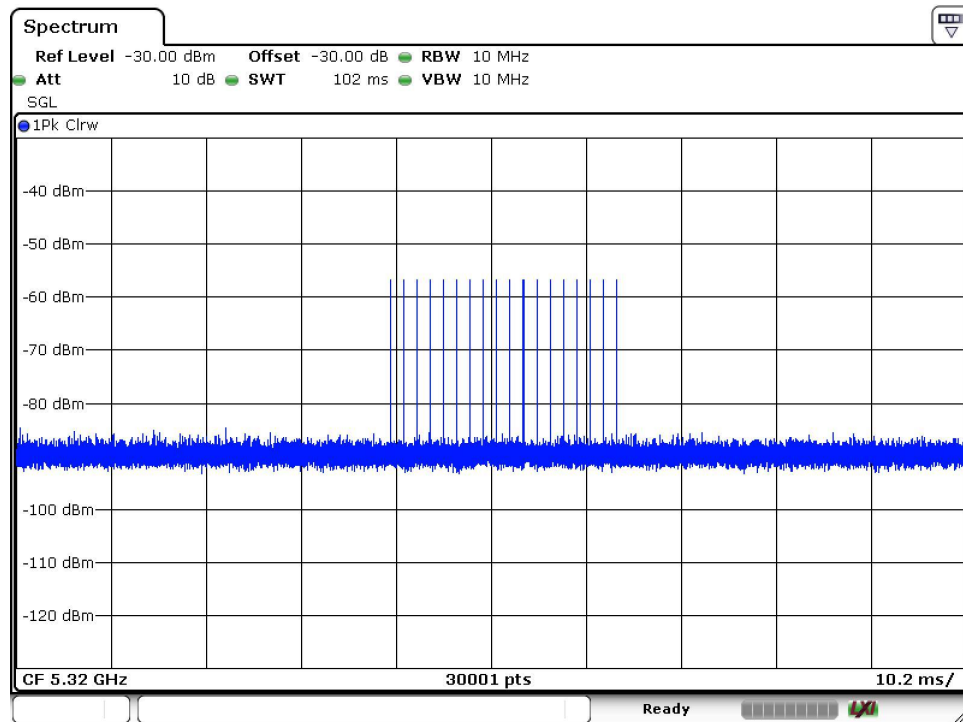

Date: 6.APR.2024 18:43:32

<80MHz / 5530 MHz> Radar Type 0


Radar / DFS detection threshold level and the burst of pulses on the Channel frequency

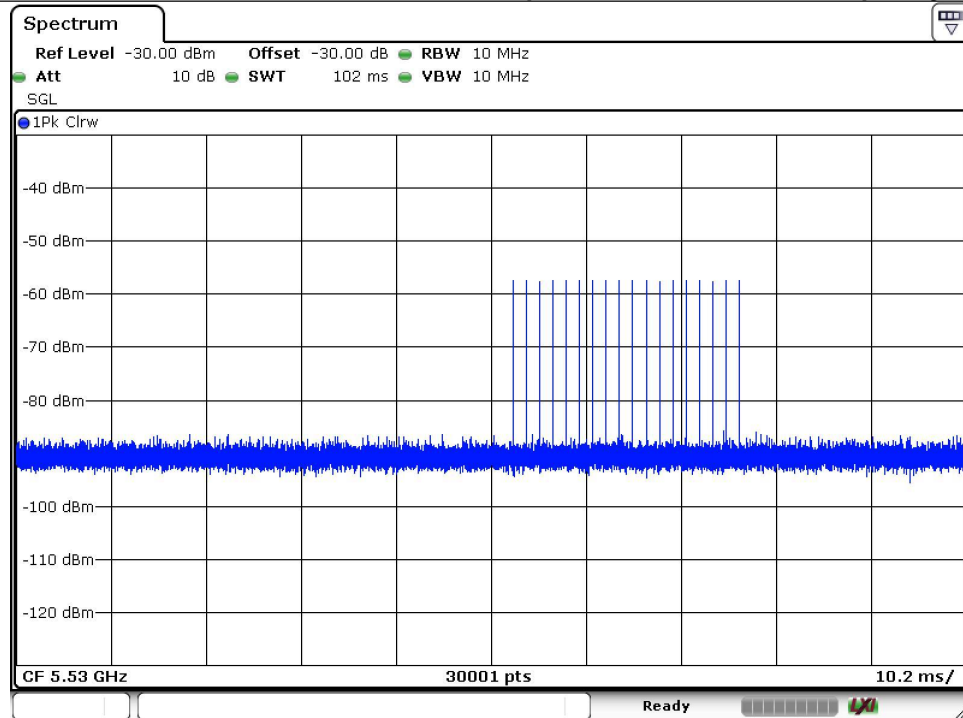

Date: 6.APR.2024 19:03:58


Data Traffic and Noise Floor Plots

<20MHz / 5320 MHz>
EUT data traffic (Client)
Traffic loading :90.23%

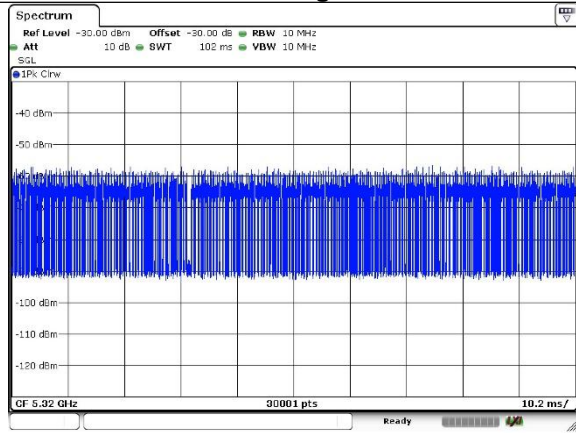


Date: 6 APR 2024 18:41:18

<20MHz / 5320 MHz>
Noise Floor (No transmission)

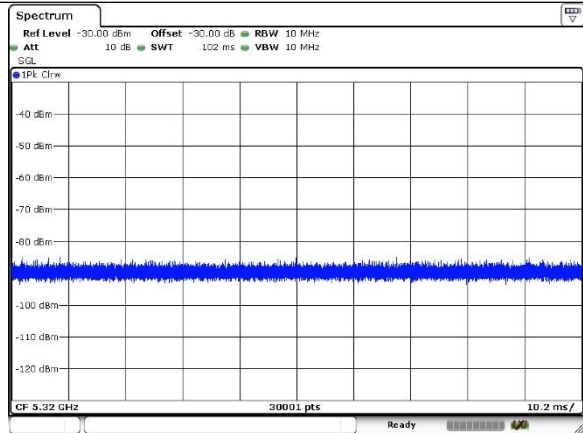


Date: 6 APR 2024 18:42:59

<80MHz / 5530 MHz>
EUT data traffic (Client)
Traffic loading :91.66%

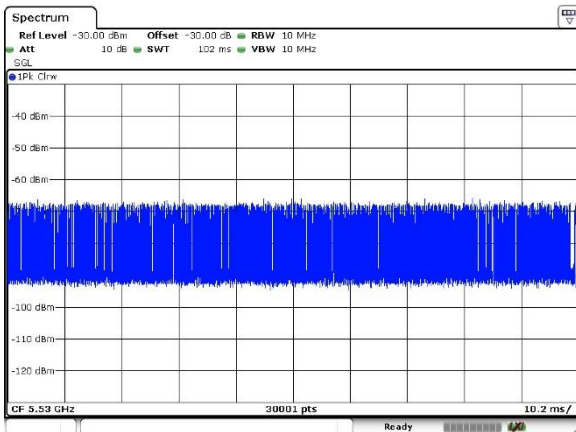

Date: 7 APR 2024 18:23:22

<80MHz / 5530 MHz>
Noise Floor (No transmission)

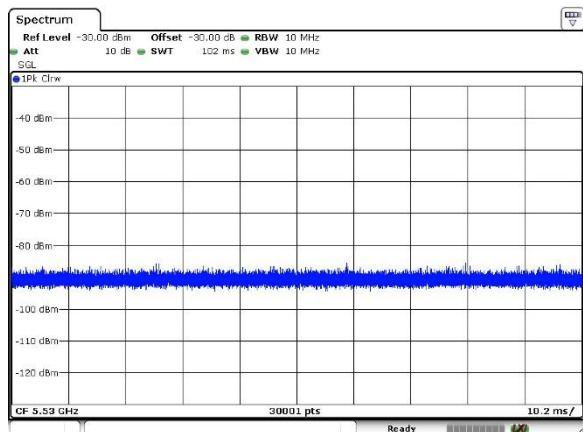

Date: 6 APR 2024 19:03:15

Channel Move Time, Channel Closing Transmission Time


Frequency	Test Item	Test Result	Limit	Pass/Fail
5320MHz	Channel Move Time	< 10s*	< 10s	Pass
	Channel Closing Transmission Time	102.0ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass
5530MHz	Channel Move Time	< 10s*	< 10s	Pass
	Channel Closing Transmission Time	102.0ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass

Note*: We notice clearly that “Channel Move Time” is less than 10s from the figure.
The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Channel Move Time, Channel Closing Transmission Time

<20MHz / 5320 MHz>


Channel Move Time & Channel Closing Transmission Time

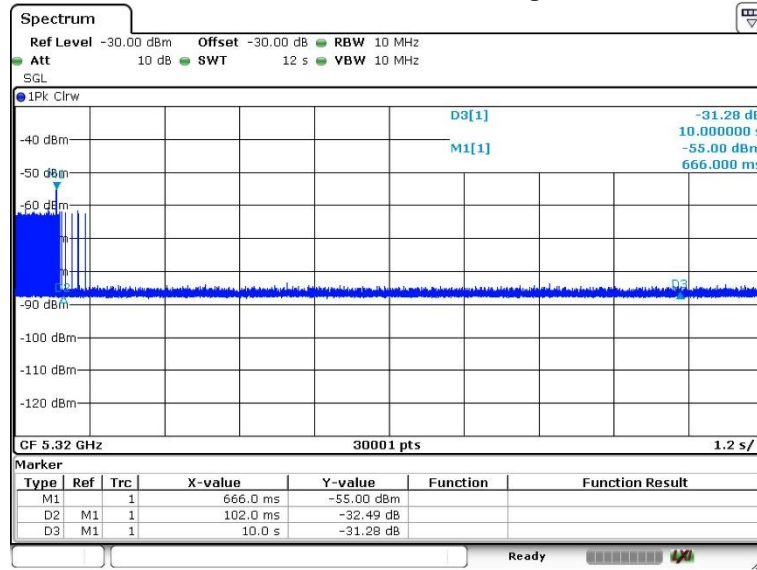

Date: 6.APR.2024 19:02:25


<80MHz / 5530 MHz>

Channel Move Time & Channel Closing Transmission Time

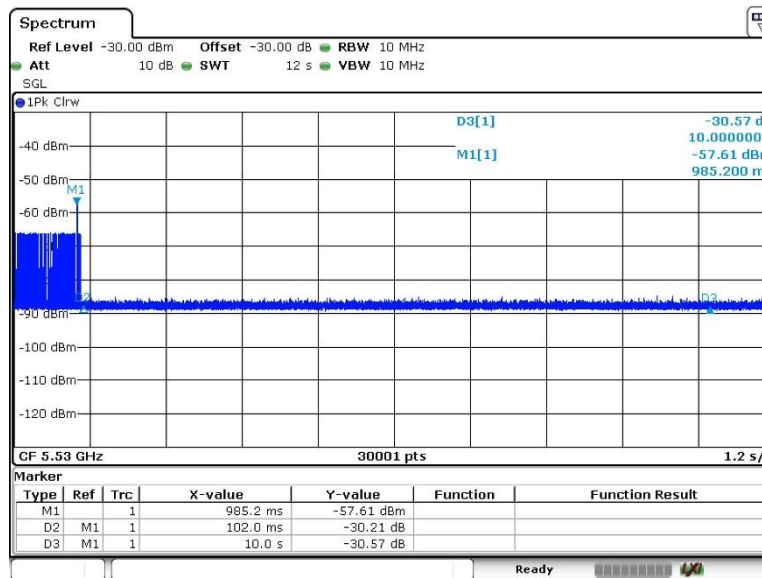


Date: 9.APR.2024 17:39:40

<20MHz / 5320 MHz>
Non-Occupancy Period

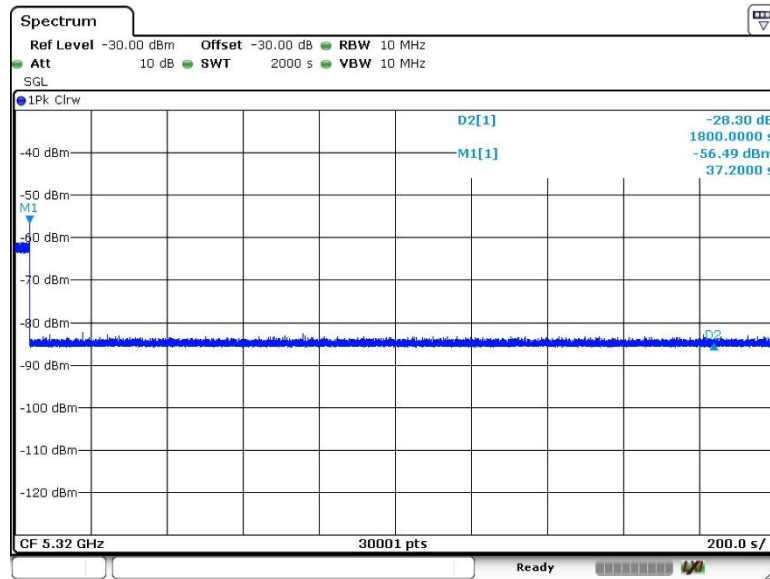

Date: 7.APR.2024 16:53:50

<80MHz / 5530 MHz>
Non-Occupancy Period

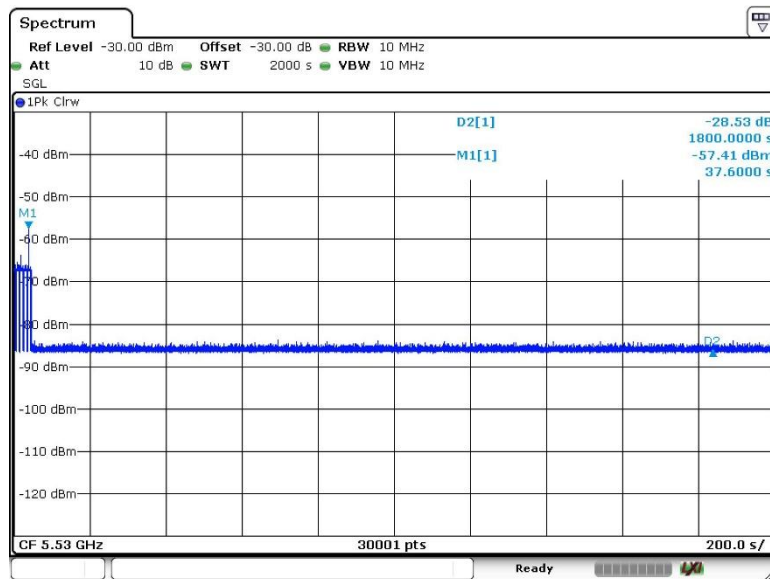

Date: 7.APR.2024 21:02:48