



## Product specification

客 户: Shenzhen Fibocom Wireless Co., Ltd.


客户编码: \_\_\_\_\_

产品描述: 5G external rubber sleeve antenna

制造商编码: GHT-019A (RA version)

产品制造商: Shenzhen Bogesi Communication Technology Co., Ltd.

承认日期: 2021/8/9

Supplier signature	Customer signature
	

Note: 1. After the electronic file or paper file that has been stamped by Bogesi is provided to the demander, the demander shall sign the paper or electronic file back to Bogesi before placing the formal order to Boggs. If there is no formal change or change notification, Bogesi defaults to the requester's approval and acceptance of the product described in the specification.

2. The related intellectual property rights of this product belong to Shenzhen Bogus Communication Technology Co., Ltd. Without our permission, please do not apply for patent rights for this product in other names, and please do not disclose this product and related information to others Or provide third-party reading and use.



# 深圳市博格斯通信技术有限公司

## shenzhen bogesi communication technology co.,ltd

### Use range:

Applicable to Shenzhen Fibocom Wireless Co., Ltd. 5G antenna solution.

### Electrical Specifications:

Electrical Specifications	700-1000MHz;1400-6000MHz	Material	ABS
input resistance	50 Ω	Plastic material	Rubber cap:ABS
Standing wave ratio	≤3.0		Adapter 1: ABS
Polarization mode	Linear polarization		Adapter 2:ABS
Operating temperature	- 40 °C ~ + 65 °C	RF cable specifications	RG-178
Storage temperature	- 40 °C ~ + 80 °C	Connector specifications	SMA Male J
Connector torque test	200 ~ 1000 g.cm	Joint tension test	SMA≥3 Kg

### Test conditions and methods:

Test conditions and instruments	Test Methods	Test Results
---------------------------------	--------------	--------------



# 深圳市博格斯通信技术有限公司

## shenzhen bogesi communication technology co.,ltd

### Test data:

	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
BGS-036(700-1000)_30du	700	5.73	-4.12	38.75	0.5
	710	5.67	-4.09	39.04	0.5
	720	5.17	-3.87	41.02	0.5
	730	4.91	-3.71	42.52	1.2
	740	4.49	-3.75	42.14	0.74
	750	4.81	-3.91	40.62	0.9
	760	5.13	-3.93	40.44	1.2

	770	5.84	-3.9	40.76	1.94
	780	5.48	-3.65	43.11	0.5
	790	5.53	-3.34	46.32	2.19
	800	3.84	-3.12	48.71	0.72
	810	3.38	-2.97	50.49	0.5
	820	3.52	-2.82	52.19	0.5
	830	3.67	-2.65	54.28	0.5
	840	3.67	-2.35	58.15	0.5
	850	2.71	-1.91	64.47	0.5
	860	1.72	-1.46	71.43	0.26
	870	1.85	-1.13	77.15	0.72
	880	2.19	-1.02	79.03	1.17
	890	2.29	-1.21	75.66	1.08
	900	2.24	-1.58	69.49	0.66
	910	2.08	-1.83	65.6	0.25
	920	1.94	-2.1	61.7	-0.16
	930	2.01	-2.33	58.51	-0.32
	940	2.29	-2.63	54.6	-0.34
	950	2.63	-3.17	48.21	-0.54
	960	2.83	-4.02	39.59	-1.19
	970	2.86	-5.11	30.86	-2.25
	980	2.83	-6.14	24.34	-3.31
	990	2.96	-7.09	19.55	-4.13
	1000	3.29	-7.55	17.57	-4.26
BGS- 036(1400- 1690)_30du	<b>Frequency (MHz)</b>	<b>Directivity (dBi)</b>	<b>Avg Gain(dBi)</b>	<b>Efficiency (%)</b>	<b>Peak Gain(dBi)</b>
	1400	3.67	-0.82	82.77	2.85
	1410	3.49	-0.88	81.6	2.61
	1420	3.34	-0.92	80.85	2.42
	1430	3.35	-0.76	83.95	2.59
	1440	3.51	-0.57	87.7	2.94
	1450	3.47	-0.49	89.24	2.98
	1460	3.19	-0.51	88.83	2.68
	1470	3.48	-0.74	84.33	2.74
	1480	3.81	-0.89	81.41	2.92
	1490	3.68	-0.98	79.86	2.7
	1500	3.63	-0.85	82.17	2.78

	1510	3.7	-0.76	84.04	2.94
	1520	3.36	-0.73	84.47	2.63
	1530	3.61	-0.71	84.83	2.9
	1540	3.91	-1.01	79.19	2.9
	1550	3.87	-1.21	75.68	2.66
	1560	3.81	-1.33	73.68	2.48
	1570	3.8	-1.28	74.45	2.52
	1580	3.87	-1.1	77.67	2.77
	1590	3.93	-0.96	80.24	2.97
	1600	3.85	-0.99	79.62	2.86
	1610	4.13	-1.14	76.92	2.99
	1620	4.13	-1.32	73.76	2.81
	1630	4.12	-1.53	70.25	2.59
	1640	4.16	-1.56	69.82	2.6
	1650	4.31	-1.43	71.93	2.88
	1660	4.15	-1.27	74.63	2.88
	1670	4.08	-1.1	77.58	2.98
	1680	3.83	-1.09	77.74	2.74
	1690	4.12	-1.16	76.54	2.96
BGS-036(1700-2090)_30du	<b>Frequency (MHz)</b>	<b>Directivity (dBi)</b>	<b>Avg Gain(dBi)</b>	<b>Efficiency (%)</b>	<b>Peak Gain(dBi)</b>
	1700	3.85	-0.99	79.71	2.86
	1710	3.99	-1.13	77.05	1.00
	1720	3.99	-1.03	78.81	1.00
	1730	3.6	-1	79.47	1.00
	1740	3.9	-0.92	80.92	1.00
	1750	3.8	-0.98	79.75	1.00
	1760	4.1	-1.12	77.25	1.00
	1770	4.22	-1.35	73.33	1.00
	1780	4.34	-1.48	71.12	1.00
	1790	4.46	-1.48	71.06	2.98
	1800	4.49	-1.51	70.55	2.98
	1810	4.5	-1.5	70.86	3
	1820	4.6	-1.61	68.98	2.99
	1830	4.59	-1.78	66.43	2.81
	1840	4.56	-1.92	64.24	2.64
1850	4	-2.07	62.06	1.0	

	1860	4.39	-2.09	61.82	1.0
	1870	4.66	-2.03	62.66	1.0
	1880	4.66	-1.89	64.75	1.0
	1890	4.64	-1.79	66.19	1.0
	1900	4.58	-1.84	65.45	1.0
	1910	4.5	-1.92	64.22	1.0
	1920	4.4	-2.13	61.2	2.27
	1930	4.3	-2.25	59.5	2.05
	1940	4.23	-2.36	58.01	1.87
	1950	4.18	-2.23	59.88	1.95
	1960	4.1	-2.27	59.32	1.83
	1970	3.97	-2.35	58.17	1.62
	1980	3.89	-2.49	56.35	1.4
	1990	3.85	-2.7	53.71	1.15
	2000	3.89	-2.82	52.24	1.07
	2010	3.96	-2.82	52.22	1.14
	2020	4.09	-2.69	53.82	1.4
	2030	4.18	-2.53	55.84	1.65
	2040	4.2	-2.45	56.95	1.75
	2050	4.17	-2.46	56.74	1.71
	2060	4.14	-2.49	56.37	1.65
	2070	4.16	-2.6	54.96	1.56
2080	4.21	-2.67	54.13	1.54	
2090	4.29	-2.74	53.26	1.55	
BGS-036(2100-2690)_30du	<b>Frequency (MHz)</b>	<b>Directivity (dBi)</b>	<b>Avg Gain(dBi)</b>	<b>Efficiency (%)</b>	<b>Peak Gain(dBi)</b>
	2100	4.35	-2.68	53.9	1.67
	2110	4.36	-2.83	52.08	1.53
	2120	4.3	-3	50.09	1.3
	2130	4.23	-3.16	48.29	1.07
	2140	4.2	-3.32	46.54	0.88
	2150	4.25	-3.33	46.42	0.92
	2160	4.37	-3.3	46.8	1.07
	2170	4.47	-3.16	48.33	1.31
	2180	4.52	-2.98	50.4	1.54
	2190	4.5	-2.84	52	1.66
	2200	4.46	-2.7	53.68	1.76

2210	4.43	-2.66	54.21	1.77
2220	4.51	-2.51	56.17	2
2230	4.61	-2.22	60.04	2.39
2240	4.69	-1.81	65.86	2.88
2250	4.37	-1.39	72.6	2.98
2260	4.15	-1.17	76.43	2.98
2270	2.87	-1.06	78.36	1.81
2280	2.31	-1.18	76.19	1.13
2290	2.26	-1.23	75.29	1.03
2300	1.89	-1.38	72.78	0.51
2310	1.67	-1.45	71.54	0.22
2320	1.68	-1.47	71.23	0.21
2330	3.35	-1.55	69.94	1.8
2340	3.49	-1.59	69.41	1.9
2350	3.57	-1.76	66.7	1.81
2360	3.47	-1.87	65.07	1.6
2370	3.48	-1.89	64.71	1.59
2380	3.51	-1.89	64.65	1.62
2390	3.55	-1.84	65.49	1.71
2400	2.77	-1.87	65.04	2.0
2410	2.77	-1.87	65.08	2.0
2420	2.87	-1.96	63.67	2.0
2430	3.02	-2.1	61.64	2.0
2440	3	-2.08	61.89	2.0
2450	2.95	-2.03	62.62	2.0
2460	2.76	-1.86	65.23	2.0
2470	2.56	-1.66	68.19	2.0
2480	2.34	-1.43	71.97	2.0
2490	2.31	-1.18	76.19	2.0
2500	2.26	-1.23	75.29	2.0
2510	2.43	-1.38	72.78	2.0
2520	2.51	-1.45	71.54	2.0
2530	3.1	-1.47	71.23	2.0
2540	3.76	-1.55	69.94	2.0
2550	3.74	-1.59	69.41	2.0
2560	3.57	-1.76	66.7	2.0

	2570	3.47	-1.87	65.07	2.0
	2580	3.48	-1.89	64.71	1.59
	2590	3.51	-1.89	64.65	2.0
	2600	3.55	-1.84	65.49	2.0
	2610	2.77	-1.87	65.04	2.0
	2620	2.77	-1.87	65.08	2.0
	2630	2.87	-1.96	63.67	2.0
	2640	3.02	-2.1	61.64	2.0
	2650	3	-2.08	61.89	2.0
	2660	2.95	-2.03	62.62	2.0
	2670	2.76	-1.86	65.23	2.0
	2680	1.67	-1.45	71.54	2.0
	2690	1.68	-1.47	71.23	2.0
BGS-036(3580-3990)_30du	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)
	3580	0.99	-1.17	76.38	-0.18
	3590	1.08	-1.24	75.16	-0.16
	3600	1.15	-1.28	74.56	-0.13
	3610	1.16	-1.36	73.07	-0.2
	3620	1.14	-1.4	72.47	-0.26
	3630	0.87	-1.45	71.69	-0.58
	3640	1.38	-1.51	70.57	-0.13
	3650	1.47	-1.6	69.23	-0.13
	3660	1.51	-1.64	68.51	-0.13
	3670	1.48	-1.7	67.68	-0.22
	3680	1.53	-1.67	68.15	-0.14
	3690	1.5	-1.65	68.36	-0.15
	3700	1.52	-1.7	67.53	-0.18
	3710	1.63	-1.85	65.26	-0.22
	3720	1.68	-1.88	64.9	-0.2
	3730	1.79	-1.97	63.58	-0.18
3740	1.73	-1.95	63.8	-0.22	
3750	1.7	-1.9	64.59	-0.2	
3760	1.58	-1.8	66.04	-0.22	
3770	1.46	-1.66	68.18	-0.2	
3780	1.42	-1.6	69.21	-0.18	
3790	1.37	-1.59	69.31	-0.22	

	3800	1.41	-1.61	69.07	-0.2
	3810	1.52	-1.7	67.61	-0.18
	3820	1.47	-1.69	67.72	-0.22
	3830	1.5	-1.72	67.3	-0.22
	3840	1.81	-2.01	62.88	-0.2
	3850	1.52	-1.7	67.58	-0.18
	3860	1.18	-1.4	72.47	-0.22
	3870	1.25	-1.45	71.69	-0.2
	3880	1.29	-1.51	70.57	-0.22
	3890	1.4	-1.6	69.23	-0.2
	3900	1.46	-1.64	68.51	-0.18
	3910	1.48	-1.7	67.68	-0.22
	3920	1.6	-1.8	66.04	-0.2
	3930	1.48	-1.66	68.18	-0.18
	3940	1.38	-1.6	69.21	-0.22
	3950	1.14	-1.51	70.57	-0.37
	3960	1.47	-1.6	69.23	-0.13
	3970	1.46	-1.64	68.51	-0.18
	3980	1.56	-1.7	67.68	-0.14
	3990	1.22	-1.59	69.31	-0.37
BGS-036(4000-4490)_30du	<b>Frequency (MHz)</b>	<b>Directivity (dBi)</b>	<b>Avg Gain(dBi)</b>	<b>Efficiency (%)</b>	<b>Peak Gain(dBi)</b>
	4000	3.94	-1.17	76.38	2.77
	4010	3.83	-1.24	75.16	2.59
	4020	3.91	-1.28	74.56	2.63
	4030	4.04	-1.36	73.07	2.68
	4040	4.35	-1.4	72.47	2.95
	4050	3.76	-1.45	71.69	2.31
	4060	3.73	-1.51	70.57	2.22
	4070	4.14	-1.6	69.23	2.54
	4080	3.86	-1.64	68.51	2.22
	4090	4.49	-1.7	67.68	2.79
	4100	4.39	-1.67	68.15	2.72
	4110	4.33	-1.65	68.36	2.68
	4120	4.26	-1.49	70.98	2.77
	4130	3.97	-1.38	72.7	2.59
4140	3.91	-1.28	74.45	2.63	



	4150	3.86	-1.18	76.25	2.68
	4160	4.9	-1.95	63.8	2.95
	4170	4.58	-1.9	64.59	2.68
	4180	4.75	-1.8	66.04	2.95
	4190	4.38	-1.66	68.18	2.72
	4200	4.28	-1.6	69.21	2.68
	4210	4.36	-1.59	69.31	2.77
	4220	4.2	-1.61	69.07	2.59
	4230	4.49	-1.7	67.61	2.79
	4240	4.41	-1.69	67.72	2.72
	4250	4.4	-1.72	67.3	2.68
	4260	4.44	-2.01	62.88	2.43
	4270	4.27	-1.59	69.31	2.68
	4280	3.92	-1.49	70.98	2.43
	4290	4.06	-1.38	72.7	2.68
	4300	4.44	-2.01	62.88	2.43
	4310	4.4	-1.7	67.58	2.7
	4320	3.62	-1.4	72.47	2.22
	4330	3.99	-1.45	71.69	2.54
	4340	3.73	-1.51	70.57	2.22
	4350	4.37	-1.6	69.23	2.77
	4360	4.29	-1.64	68.51	2.65
	4370	3.89	-1.51	70.57	2.38
	4380	3.82	-1.6	69.23	2.22
	4390	3.86	-1.64	68.51	2.22
	4400	4.47	-1.7	67.68	2.77
	4410	4.24	-1.59	69.31	2.65
	4420	3.87	-1.49	70.98	2.38
	4430	4.47	-1.7	67.58	2.77
	4440	3.99	-1.4	72.47	2.59
	4450	4.08	-1.45	71.69	2.63
	4460	4.19	-1.51	70.57	2.68
	4470	4.55	-1.6	69.23	2.95
	4480	3.95	-1.64	68.51	2.31
	4490	2.98	-0.76	83.88	2.22
BGS-036(4500-	Frequency (MHz)	Directivity (dBi)	Avg Gain(dBi)	Efficiency (%)	Peak Gain(dBi)

4990)_30du	4500	3.39	-1.17	76.38	2.22
	4510	3.78	-1.24	75.16	2.54
	4520	3.91	-1.69	67.72	2.22
	4530	4.51	-1.72	67.3	2.79
	4540	3.89	-1.17	76.38	2.72
	4550	3.92	-1.24	75.16	2.68
	4560	3.5	-1.28	74.56	2.22
	4570	3.9	-1.36	73.07	2.54
	4580	3.62	-1.4	72.47	2.22
	4590	4.22	-1.45	71.69	2.77
	4600	4.16	-1.51	70.57	2.65
	4610	3.98	-1.6	69.23	2.38
	4620	3.92	-1.7	67.53	2.22
	4630	3.67	-1.45	71.69	2.22
	4640	4.28	-1.51	70.57	2.77
	4650	4.25	-1.6	69.23	2.65
	4660	4.02	-1.64	68.51	2.38
	4670	4.47	-1.7	67.68	2.77
	4680	3.77	-1.67	68.15	2.1
	4690	3.86	-1.65	68.36	2.21
	4700	4.01	-1.7	67.53	2.31
	4710	3.81	-1.59	69.31	2.22
	4720	4.15	-1.61	69.07	2.54
	4730	3.92	-1.7	67.61	2.22
	4740	4.46	-1.69	67.72	2.77
	4750	4.37	-1.72	67.3	2.65
	4760	4.39	-2.01	62.88	2.38
	4770	3.92	-1.7	67.58	2.22
	4780	3.62	-1.4	72.47	2.22
	4790	4.22	-1.45	71.69	2.77
4800	4.1	-1.45	71.69	2.65	
4810	3.89	-1.51	70.57	2.38	
4820	4.37	-1.6	69.23	2.77	
4830	3.74	-1.64	68.51	2.1	
4840	4.01	-1.8	66.04	2.21	
4850	3.97	-1.66	68.18	2.31	

	4860	3.82	-1.6	69.21	2.22
	4870	4.13	-1.59	69.31	2.54
	4880	3.83	-1.61	69.07	2.22
	4890	4.41	-1.64	68.51	2.77
	4900	4.35	-1.7	67.68	2.65
	4910	3.97	-1.59	69.31	2.38
	4920	3.71	-1.49	70.98	2.22
	4930	3.6	-1.38	72.7	2.22
	4940	4.05	-1.28	74.45	2.77
	4950	3.83	-1.18	76.25	2.65
	4960	3.45	-1.07	78.09	2.38
	4970	3.74	-0.97	79.98	2.77
	4980	3.46	-0.87	81.91	2.59
	4990	3.39	-0.76	83.88	2.63
BGS-036(5500-6000)_30du	<b>Frequency (MHz)</b>	<b>Directivity (dBi)</b>	<b>Avg Gain(dBi)</b>	<b>Efficiency (%)</b>	<b>Peak Gain(dBi)</b>
	5000	4.05	-3.19	67.58	2.0
	5010	3.83	-3.19	72.47	2.0
	5020	4.05	-3.2	69.07	2.0
	5030	4.35	-3.27	68.51	2.0
	5040	3.97	-3.21	67.68	2.0
	5050	3.71	-3.1	52.93	2.0
	5060	3.6	-2.98	53.67	2.0
	5070	4.11	-2.93	54.27	2.0
	5080	4.09	-2.89	53.52	2.0
	5090	4.12	-2.94	51.93	2.0
	5100	4.18	-2.97	69.31	2.0
	5110	4.05	-3.19	70.98	2.0
	5120	4.18	-3.19	72.7	2.0
	5130	4.22	-1.51	74.45	2.0
	5140	4.26	-1.6	76.25	2.0
	5150	4.17	-1.64	78.09	2.0
	5160	4.06	-2.83	71.69	2.0
5170	4.03	-2.76	70.57	2.0	
5180	-2.93	-2.7	69.23	2.0	
5190	5.26	-2.65	68.51	2.0	
5200	4.85	-2.71	67.68	2.0	

5210	4.64	-2.85	68.15	2.0
5220	4.54	-2.91	68.36	2.0
5230	4.48	-2.93	70.98	2.0
5240	4.33	-2.89	72.7	2.0
5250	4.54	-2.94	51.27	2.0
5260	4.48	-2.93	51.32	2.0
5270	4.33	-2.89	52.12	2.0
5280	4.25	-2.94	53.63	2.0
5290	3.97	-2.97	52.69	2.0
5300	3.91	-1.51	52.43	2.0
5310	3.9	-1.6	51.27	2.0
5320	4.11	-1.64	51.32	2.0
5330	4.1	-2.83	52.12	2.0
5340	4.01	-2.76	53.63	2.0
5350	4.01	-2.7	52.69	2.0
5360	4.06	-2.65	52.43	2.0
5370	4.11	-3.07	52.15	2.0
5380	4.09	-3.15	51.93	2.0
5390	4.12	-3.18	69.31	2.0
5400	4.18	-3.19	70.98	2.0
5410	4.05	-3.18	72.7	2.0
5420	4.18	-2.92	74.45	2.0
5430	4.22	-2.92	76.25	2.0
5440	4.09	-2.93	78.09	2.0
5450	4.12	-2.9	52.69	2.0
5460	4.18	-2.9	52.43	2.0
5470	4.05	-2.7	51.27	2.0
5480	6.07	-2.65	51.32	2.0
5490	5.97	-2.9	52.15	2.0
5500	6.3	-2.98	50.41	2.0
5510	6.24	-3.07	49.35	2.0
5520	6.17	-3.15	48.37	2.0
5530	6.07	-3.18	48.14	2.0
5540	5.97	-3.19	48	2.0
5550	5.83	-3.18	48.05	2.0
5560	5.74	-3.18	48.05	2.0

5570	5.61	-3.25	47.3	2.0
5580	-2.98	-3.26	47.21	2.0
5590	-2.93	-3.3	46.82	2.0
5600	5.26	-3.32	46.61	2.0
5620	4.85	-3.19	47.96	2.0
5630	4.64	-3.19	47.94	2.0
5640	4.54	-3.2	47.84	2.0
5650	4.48	-3.27	47.15	2.0
5660	4.33	-3.21	47.72	2.0
5670	4.25	-3.1	48.94	2.0
5680	3.97	-2.98	50.33	2.0
5690	3.91	-2.93	50.99	2.0
5700	3.9	-2.89	51.42	2.0
5710	4.11	-2.94	50.81	2.0
5720	4.1	-2.97	50.42	2.0
5730	4.01	-3	50.08	1.01
5740	4.03	-2.89	51.42	1.14
5750	4.03	-2.86	51.74	1.17
5760	4.14	-2.83	52.08	1.31
5770	4.03	-2.84	52.04	1.19
5780	4.01	-2.88	51.54	1.13
5790	4.06	-2.92	51.07	1.14
5800	4.11	-2.92	51.01	1.19
5810	4.09	-2.93	50.94	1.16
5820	4.12	-2.9	51.27	1.22
5830	4.18	-2.9	51.32	1.28
5840	4.05	-2.83	52.12	1.22
5850	4.18	-2.71	53.63	1.47
5860	4.22	-2.78	52.69	1.44
5870	4.26	-2.8	52.43	1.46
5880	4.17	-2.83	52.15	1.34
5890	4.06	-2.76	52.93	1.3
5900	4.03	-2.7	53.67	1.33
5910	3.96	-2.65	54.27	1.31
5920	3.92	-2.71	53.52	1.21
5930	3.93	-2.85	51.93	1.08


	5940	3.83	-2.91	51.14	0.92
	5950	3.71	-2.95	50.66	0.76
	5960	3.8	-2.9	51.24	0.9
	5970	3.83	-2.81	52.36	1.02
	5980	3.82	-2.78	52.76	1.04
	5990	3.77	-2.81	52.31	0.96
	6000	3.79	-2.83	52.07	0.96









# 深圳市博格斯通信技术有限公司







shenzhen bogesi communication technology co.,ltd

Direction map:



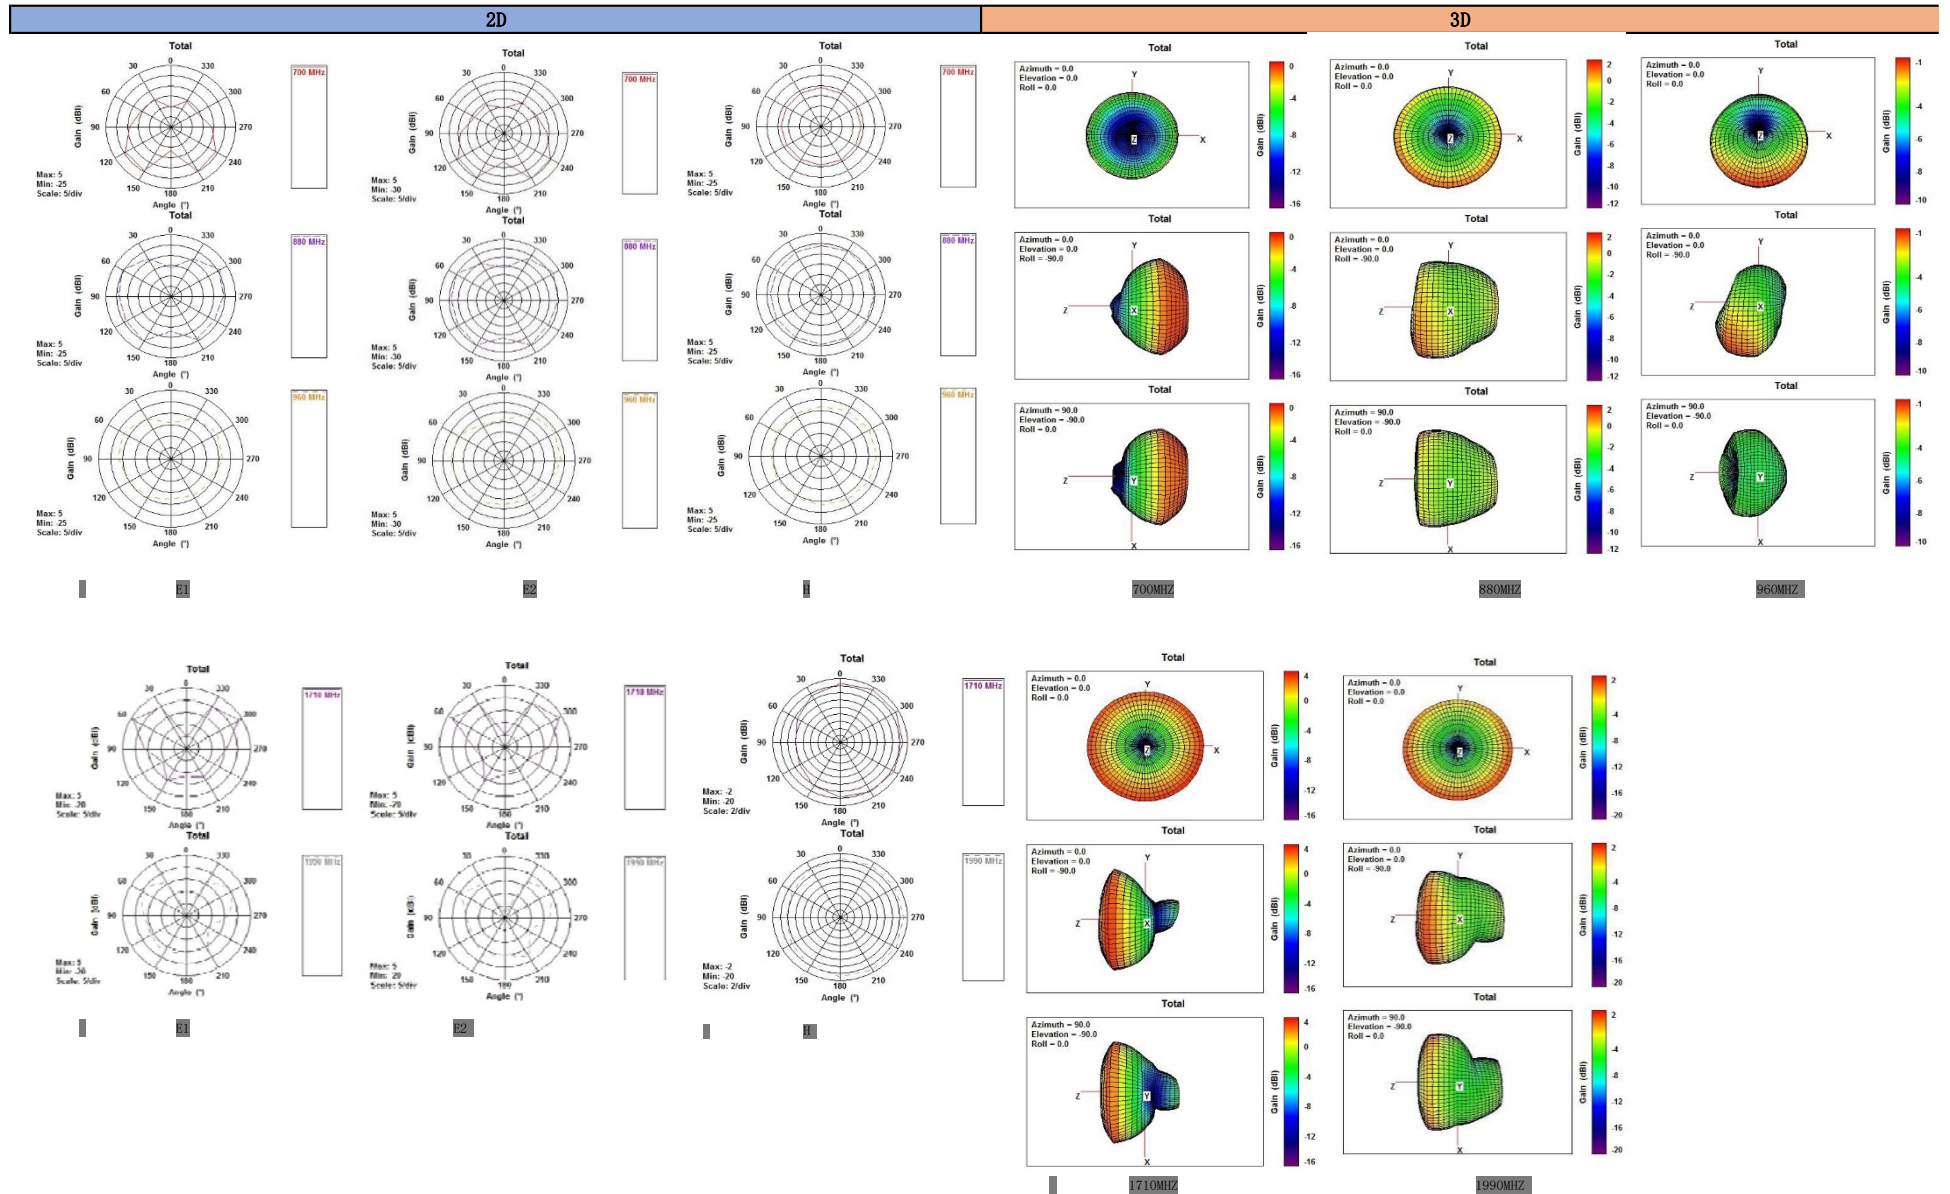










2170MHZ






2690MHZ



2690MHZ







3350MHZ







3350MHZ




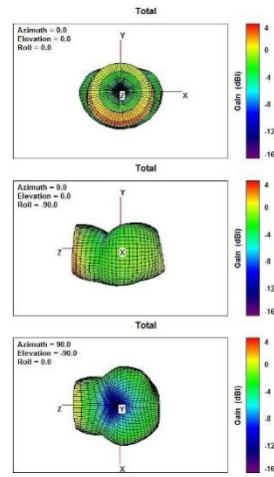


3600MHz

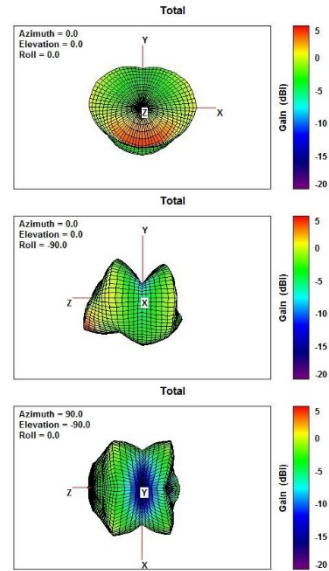

5370MHz




6000 MHz



||

||


6000 MHz



||

||

6000 MHz

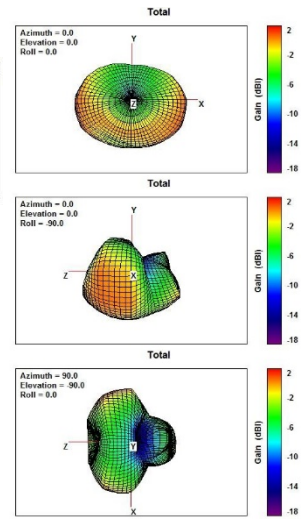




||

6000MHz






Direction map:




700

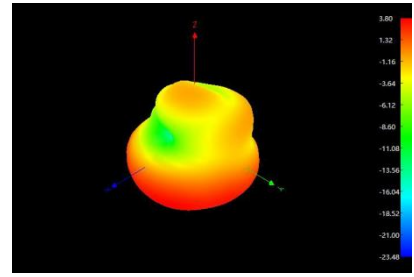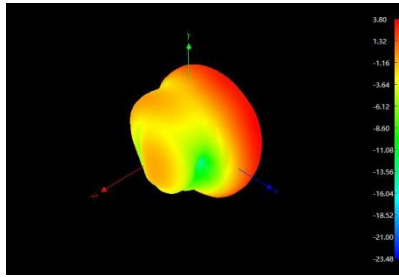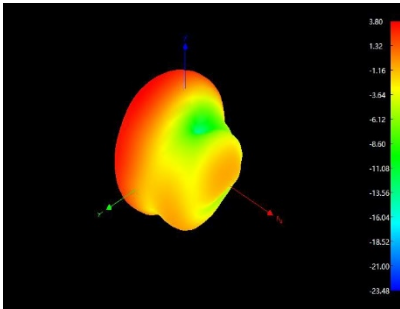




750

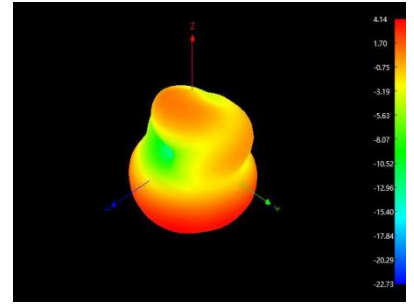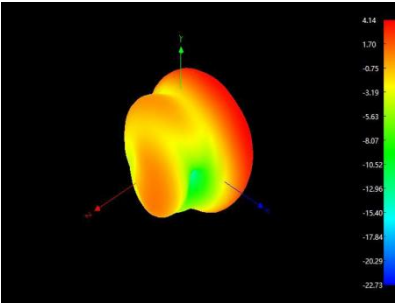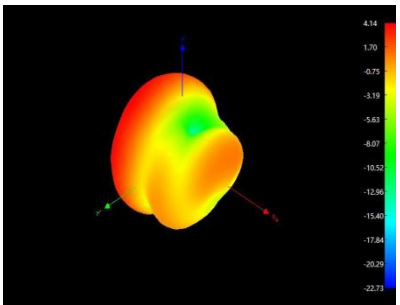




800

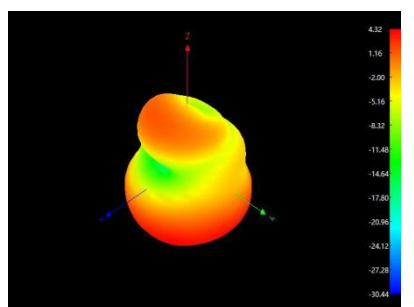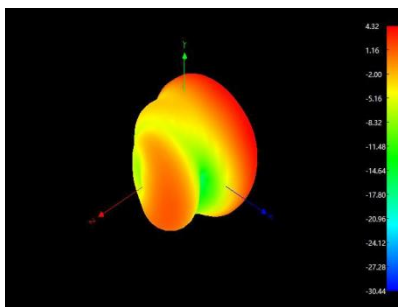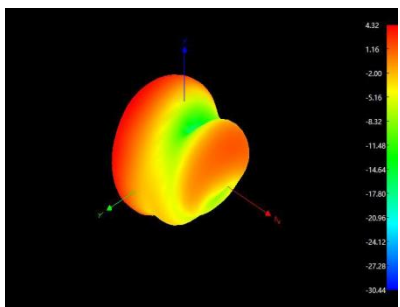

850

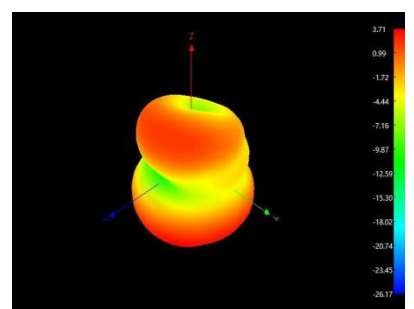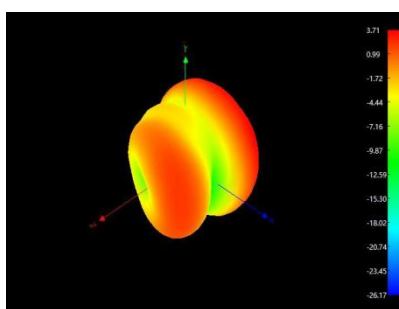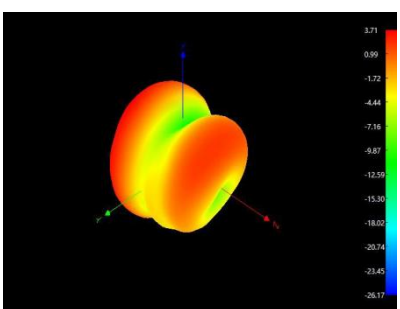

1570

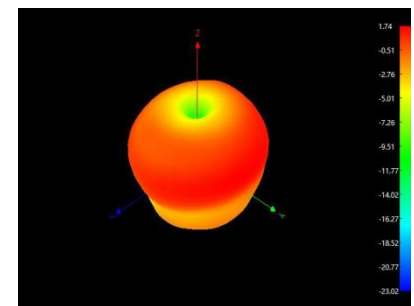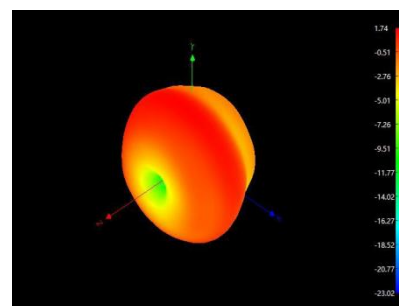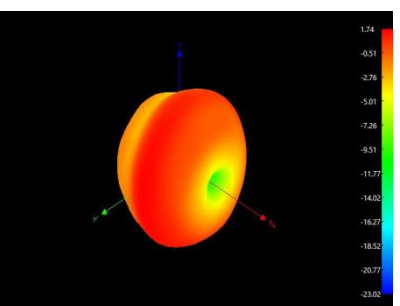








Antenna Dimension-mm

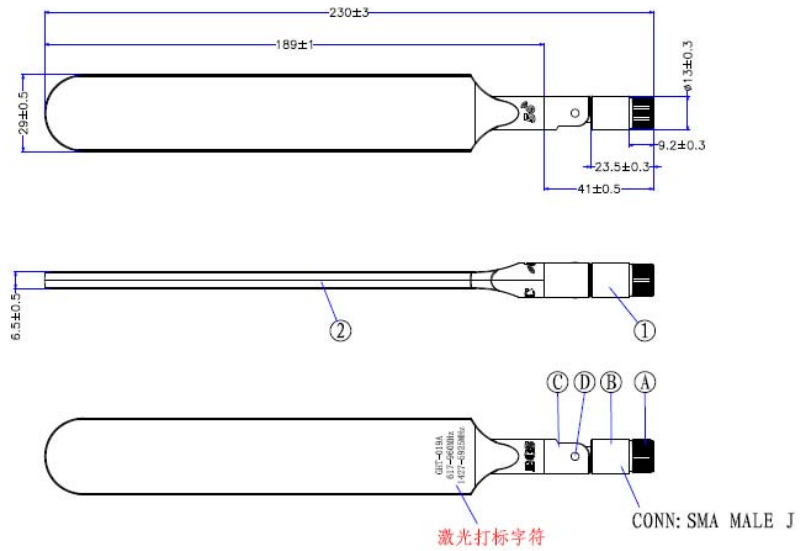



## Antenna packaging instructions

### 1. Outer packaging: carton packaging

Front view:



side view:



### 2. Inner packaging (1PCS/PE ziplock bag, 50PCS/bag, the size of the bag depends on the product size)

