



FCC Radio Test Report

FCC ID: ZMOSC228GL

This report concerns: Original Grant

Project No. : 2403G086
Equipment : LTE Module
Brand Name : Fibocom
Test Model : SC228-GL
Series Model : N/A
Applicant : Fibocom Wireless Inc.
Address : 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China
Manufacturer : Fibocom Wireless Inc.
Address : 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China
Factory : Fibocom Wireless Inc.
Address : 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China
Date of Receipt : Mar. 14, 2024
Date of Test : Mar. 14, 2024 ~ Apr. 11, 2024
Issued Date : Sep. 30, 2024
Report Version : R01
Test Sample : Engineering Sample No.: SSL20240314104 for radiated, SSL20240314102 for conducted.
Standard(s) : 47 CFR FCC Part 90 Subpart S
 47 CFR FCC Part 2

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by :

Abel Cao

Abel Cao

Approved by :

Steven Lu

Steven Lu

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong,
People's Republic of China

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATIONOFSYSTEMTESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS	11
4 . TEST RESULT	12
4.1 OUTPUT POWER MEASUREMENT	12
4.1.1 LIMIT	12
4.1.2 TEST PROCEDURE	12
4.1.3 TESTSETUP LAYOUT	12
4.1.4 TEST DEVIATION	12
4.1.5 TEST RESULTS	12
4.2 OCCUPIED BANDWIDTH MEASUREMENT	13
4.2.1 TEST PROCEDURE	13
4.2.2 TEST SETUP LAYOUT	13
4.2.3 TEST DEVIATION	13
4.2.4 TEST RESULTS	13
4.3 CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	14
4.3.1 LIMIT	14
4.3.2 TEST PROCEDURES	14
4.3.3 TESTSETUP LAYOUT	14
4.3.4 TESTDEVIATION	14
4.3.5 TEST RESULTS	14
4.4 RADIATED SPURIOUS EMISSIONS MEASUREMENT	15
4.4.1 LIMIT	15
4.4.2 TEST PROCEDURES	15
THE TESTING FOLLOWS FCC KDB 971168 V03R01 SECTION 6.2 OR ANSI	
C63.26-2015 SECTION 5.5.	15
4.4.3 TEST SETUP LAYOUT	16
4.4.4 TESTDEVIATION	17
4.4.5 TEST RESULTS (9KHZ TO 30MHZ)	17
4.4.6 TEST RESULTS (30MHZ TO 1000MHZ)	17

Table of Contents	Page
4.4.7 TEST RESULTS (ABOVE 1000MHZ)	17
4.5 MASK MEASUREMENTS	18
4.5.1 LIMIT	18
4.5.2 TEST PROCEDURES	18
4.5.3 TESTSETUP LAYOUT	18
4.5.4 TESTDEVIATION	18
4.5.5 TEST RESULTS	18
4.6 PEAK TO AVERAGE RATIO MEASUREMENT	19
4.6.1 LIMIT	19
4.6.2 TEST PROCEDURES	19
4.6.3 TEST SETUP LAYOUT	19
4.6.4 TEST DEVIATION	19
4.6.5 TEST RESULTS	19
4.7 FREQUENCY STABILITY MEASUREMENT	20
4.7.1 LIMIT	20
4.7.2 TEST PROCEDURES	20
4.7.3 TESTSETUP LAYOUT	20
4.7.4 TESTDEVIATION	20
4.7.5 TEST RESULTS	20
4. LIST OF MEASUREMENT EQUIPMENTS	21
5. EUT TEST PHOTO	23
APPENDIX A - OUTPUT POWER	26
APPENDIX B - OCCUPIED BANDWIDTH	31
APPENDIX C - CONDUCTED SPURIOUS EMISSIONS	36
APPENDIX D - RADIATED SPURIOUS EMISSIONS (9KHZ TO 30MHZ)	38
APPENDIX E - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1000MHZ)	40
APPENDIX F - RADIATED SPURIOUS EMISSIONS (ABOVE 1000MHZ)	43
APPENDIX G - MASK	46
APPENDIX H - PEAK TO AVERAGE RATIO	51
APPENDIX I - FREQUENCY STABILITY	56

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2403G086	R00	Original Report.	Sep. 23, 2024	Invalid
BTL-FCCP-4-2403G086	R01	Modified the comments.	Sep. 30, 2024	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.26-2015

The following reference test guidance is not within the scope of accreditation of A2LA:

FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 90 Subpart S & Part 2			
Standard(s) Section	Test Item	Judgment	Remark
2.1046 & 90.635 (b)	Effective Radiated Power	PASS	-----
2.1049 & 90.209	Occupied Bandwidth	PASS	-----
2.1053 & 90.669	Conducted Spurious Emissions	PASS	-----
2.1053 & 90.669	Radiated Spurious Emissions	PASS	-----
2.1053 & 90.691	Mask Measurements	PASS	-----
-	Peak To Average Ratio	PASS	Record Only
2.1055 & 90.213	Frequency Stability	PASS	-----

Note:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

For radiated emissions 9K to 30MHz:

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China.

For others:

The test facilities used to collect the test data in this report is at the location of Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
SSL-CB01 (3m)	CISPR	30MHz ~ 200MHz	V	4.70
		30MHz ~ 200MHz	H	3.56
		200MHz ~ 1,000MHz	V	4.92
		200MHz ~ 1,000MHz	H	4.54

Test Site	Method	Measurement Frequency Range	U,(dB)
SSL-CB01 (3m)	CISPR	1GHz ~ 6GHz	4.56
		6GHz ~ 18GHz	5.14

B. Other Measurement:

Parameter	Uncertainty
Spectrum Bandwidth	±1.74%
Maximum Output Power	±0.87dB
Frequency Stability	±53.10 Hz
Temperature	±0.48 °C
Humidity	±1.37 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
Output Power & ERP	24°C	41%	DC 3.8V	Gavin Ge	Mar. 14, 2024~ Apr. 01, 2024
Occupied Bandwidth	24°C	41%	DC 3.8V	Gavin Ge	Mar. 14, 2024~ Apr. 01, 2024
Conducted Spurious Emissions	24°C	41%	DC 3.8V	Gavin Ge	Mar. 14, 2024~ Apr. 01, 2024 Apr. 11, 2024
Radiated Spurious Emissions (9 kHz to 30 MHz)	24°C	54%	DC 3.8V	Hayden Chen	Apr. 03, 2024
Radiated Spurious Emissions (30 MHz to 1000 MHz)	23°C	50%	DC 3.8V	Max Wang	Mar. 22, 2024~ Mar. 31, 2024
Radiated Spurious Emissions (Above 1000 MHz)	23°C	50-55%	DC 3.8V	Max Wang	Mar. 19, 2024~ Mar. 31, 2024
Band Edge	24°C	41%	DC 3.8V	Gavin Ge	Mar. 14, 2024~ Apr. 01, 2024
Peak to Average Ratio	24°C	41%	DC 3.8V	Gavin Ge	Mar. 14, 2024~ Apr. 01, 2024
Frequency Stability	Normal & Extreme	41%	Normal & Extreme	Gavin Ge	Mar. 14, 2024~ Apr. 01, 2024

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	LTE Module			
Brand Name	Fibocom			
Test Model	SC228-GL			
Series Model	N/A			
Model Difference(s)	N/A			
Hardware Version	V1.1			
Software Version	SC228-GL-T16.12.034			
Power Source	DC voltage supplied from external power supply.			
Power Rating	DC 3.5V - 4.35V, Typical: 3.8V			
IMEI No.	Radiated	864712070000349		
	Conducted	864712070000927		
Modulation Type	LTE	UL: QPSK,16QAM DL: QPSK,16QAM,64QAM		
Max. ERP	LTE	Channel Bandwidth (MHz)	QPSK (dBm)	16QAM (dBm)
	Band 26	1.4	22.33	21.74
		3	22.31	21.91
		5	22.43	21.79
		10	22.36	21.38

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

LTE Band 26					
Test Frequency ID	Bandwidth (MHz)	N _{UL}	Frequency of Uplink (MHz)	N _{DL}	Frequency of Downlink (MHz)
Low Range	1.4	26697	814.7	8697	859.7
	3	26705	815.5	8705	860.5
	5	26715	816.5	8715	861.5
Mid Range	1.4/3/5/10	26740	819	8740	864
High Range	1.4	26783	823.3	8783	868.3
	3	26775	822.5	8775	867.5
	5	26765	821.5	8765	866.5

3. Table for Filed Antenna:

Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)	Note
Shenzhen Bogesi Communication Technology Co., Ltd	GHT-019A	Dipole	SMA Male J	0.7	LTE Band 26


Note: The antenna gain is provided by the manufacturer.

3.2 DESCRIPTION OF TEST MODES

Following mode(s) is (were) found to be the worst case(s) and selected for the final test.

LTE BAND 26 MODE					
Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Output Power & ERP	26697 to 26783	26697, 26740, 26783	1.4MHz	QPSK, 16QAM	1RB/3RB/6RB
	26705 to 26775	26705, 26740, 26775	3MHz	QPSK, 16QAM	1RB/8RB/15RB
	26715 to 26765	26715, 26740, 26765	5MHz	QPSK, 16QAM	1RB/12RB/25RB
	26740	26740	10MHz	QPSK, 16QAM	1RB/25RB/50RB
Occupied Bandwidth	26697 to 26783	26697, 26740, 26783	1.4MHz	QPSK, 16QAM	6RB
	26705 to 26775	26705, 26740, 26775	3MHz	QPSK, 16QAM	15RB
	26715 to 26765	26715, 26740, 26765	5MHz	QPSK, 16QAM	25RB
	26740	26740	10MHz	QPSK, 16QAM	50RB
Conducted Spurious Emissions	26697 to 26783	26740	1.4MHz	QPSK	1RB
	26705 to 26775	26740	5MHz	QPSK	1RB
	26715 to 26765	26740	10MHz	QPSK	1RB
Radiated Spurious Emissions	26697 to 26783	26740	1.4MHz	QPSK	1RB
	26705 to 26775	26740	5MHz	QPSK	1RB
	26715 to 26765	26740	10MHz	QPSK	1RB
Mask	26697 to 26783	26697, 26783	1.4MHz	QPSK	1RB
					6RB
	26705 to 26775	26705, 26775	3MHz	QPSK	1RB
					15RB
	26715 to 26765	26715, 26765	5MHz	QPSK	1RB
					25RB
Peak To Average Ratio	26697 to 26783	26697, 26740, 26783	1.4MHz	QPSK, 16QAM	1RB
	26705 to 26775	26705, 26740, 26775	3MHz	QPSK, 16QAM	1RB
	26715 to 26765	26715, 26740, 26765	5MHz	QPSK, 16QAM	1RB
	26740	26740	10MHz	QPSK, 16QAM	1RB
Frequency Stability	26715 to 26765	26740	10MHz	QPSK	50RB

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATIONOFSYSTEMTESTED

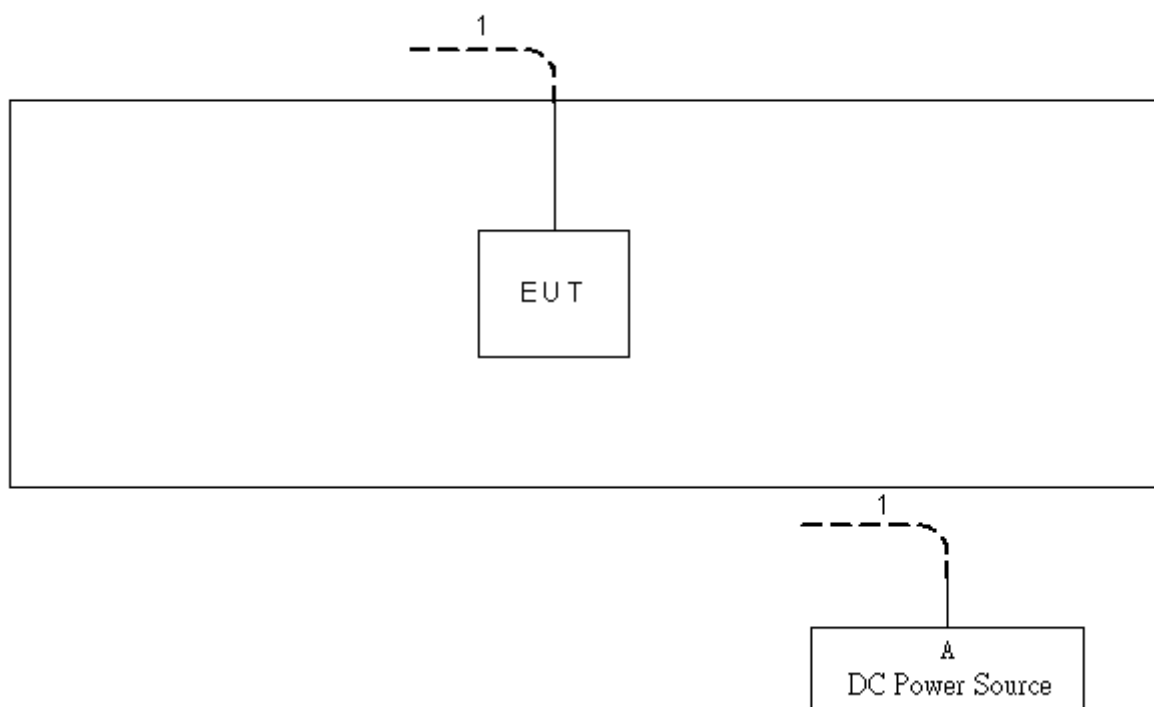

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.
A	DC Power Source	TRUE-POWER	GPC30300N	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	10m

4. TEST RESULT

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

Mobile / Portable stations are limited to 100 watts e.r.p.

4.1.2 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 5.0 or ANSI C63.26-2015 Section 5.2.

ERP:

$EIRP = \text{Output Power} + \text{Antenna gain}$


$ERP = EIRP - 2.15\text{dBi}$

Output Power:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TESTSETUP LAYOUT

Output Power Measurement

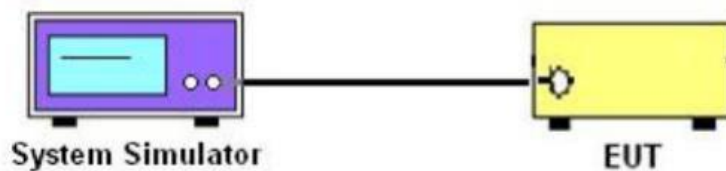

4.1.4 TEST DEVIATION

No deviation.

4.1.5 TEST RESULTS

Please refer to the APPENDIX A.


4.2 OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 4.0 or ANSI C63.26-2015 Section 5.4.

1. The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. $RBW = (1\% \sim 5\%) \cdot EBW$
 $VBW \geq 3 \cdot RBW$
4. Set spectrum analyzer with RMS detector.

4.2.2 TEST SETUP LAYOUT

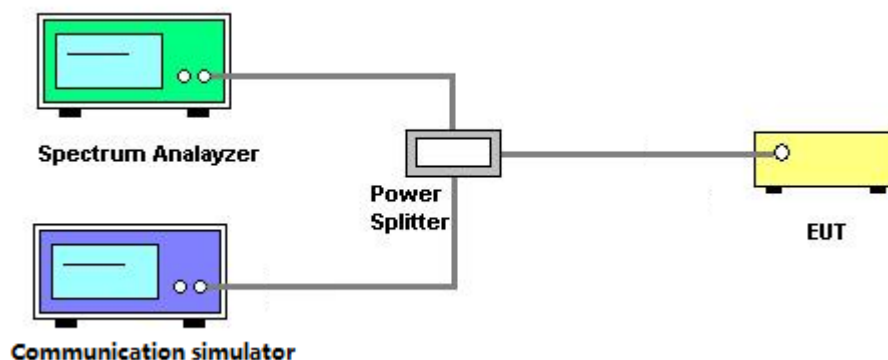

4.2.3 TEST DEVIATION

No deviation

4.2.4 TEST RESULTS

Please refer to the APPENDIX B.

4.3 CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

4.3.1 LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.3.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.0 or ANSI C63.26-2015 Section 5.7.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
3. Set spectrum analyzer with Peak or RMS detector.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

4.3.3 TESTSETUP LAYOUT

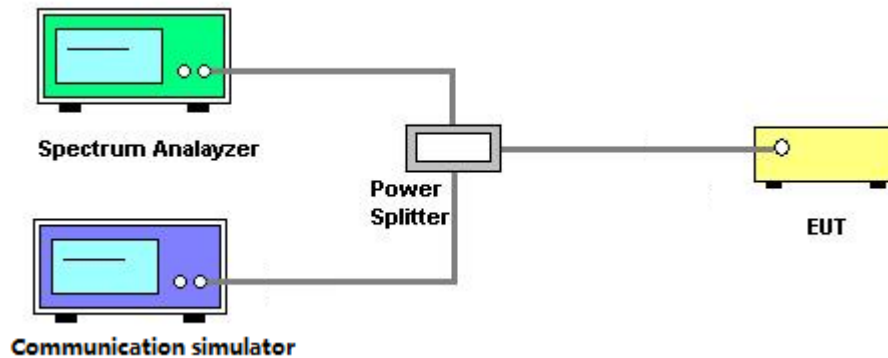

4.3.4 TESTDEVIATION

No deviation.

4.3.5 TEST RESULTS

Please refer to the APPENDIX C.

4.4 RADIATED SPURIOUS EMISSIONS MEASUREMENT

4.4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

$E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log D + 104.8$; where D is the measurement distance in meters. The emission limit equal to 82.26dB μ V/m.


4.4.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.2 or ANSI C63.26-2015 Section 5.5.


1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
4. Start the test, rotate the table 360° to find the worst Angle, maintain the worst Angle, raise the antenna to 1-4m to find the worst height, maintain the worst height, then rotate the table to determine the final worst Angle, grab the spectrum diagram.
5. EUT shall be placed in accordance with X,Y,Z as required by Figure 5 in ANSI C63.26. Repeat Step 5 above to find the worst placement. Test all bands according to the worst placement.
6. Then EIRP is then converted to field strength as follows in Equation
7. $E \text{ (dB}\mu\text{V/m)} = \text{EIRP (dBm)} - 20 \log(D) + 104.8$; where D is the measurement distance (in the far field region) in m. The emission limit equal to 82.26dB μ V/m or 70.26dB μ V/m or 55.26dB μ V/m.


4.4.3 TEST SETUP LAYOUT

Below 30MHz

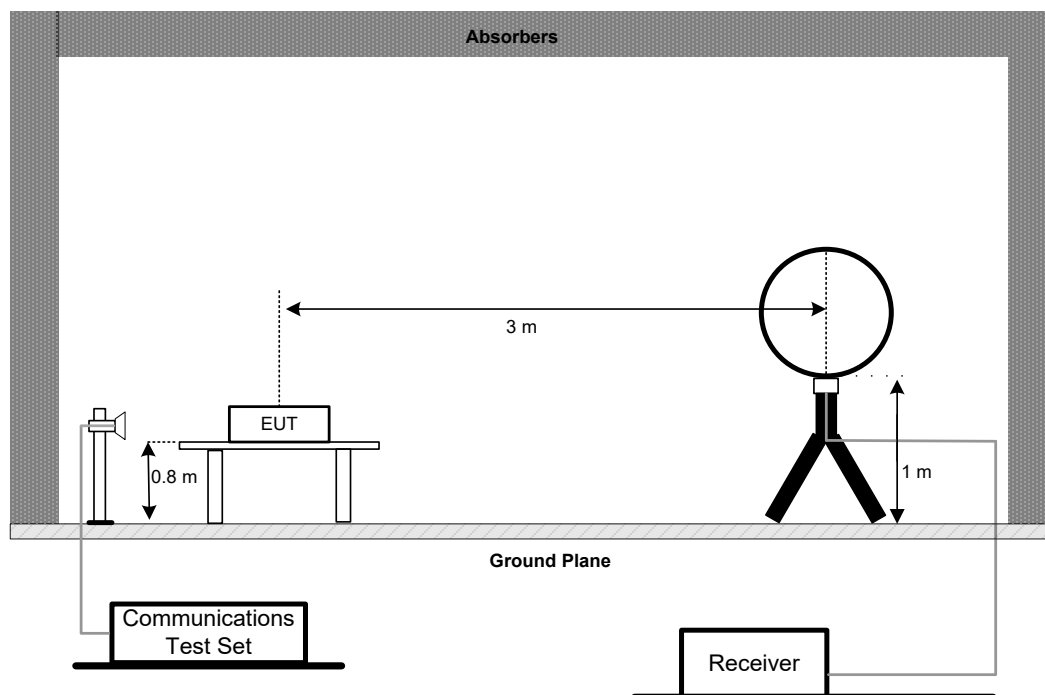

30MHz to 1000MHz

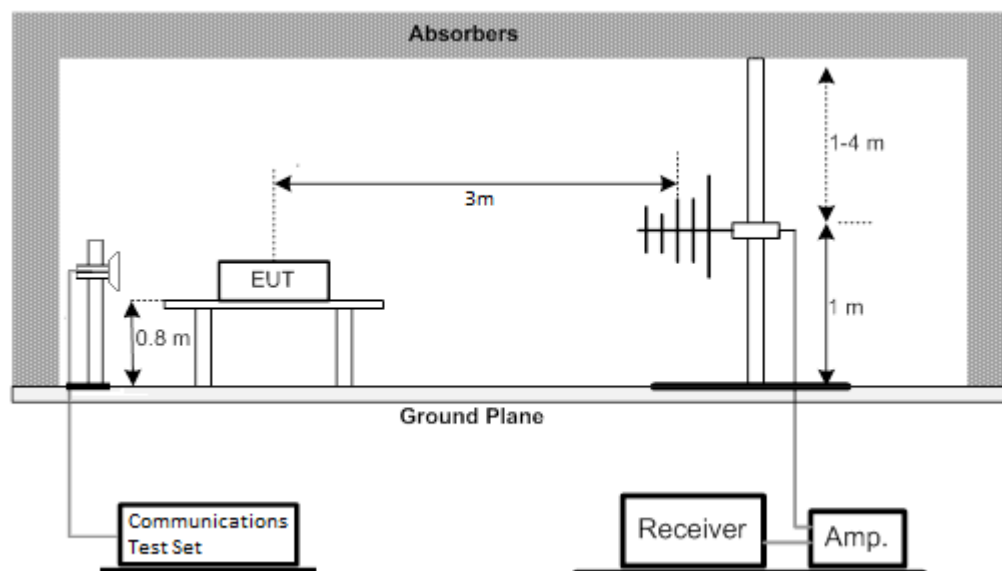

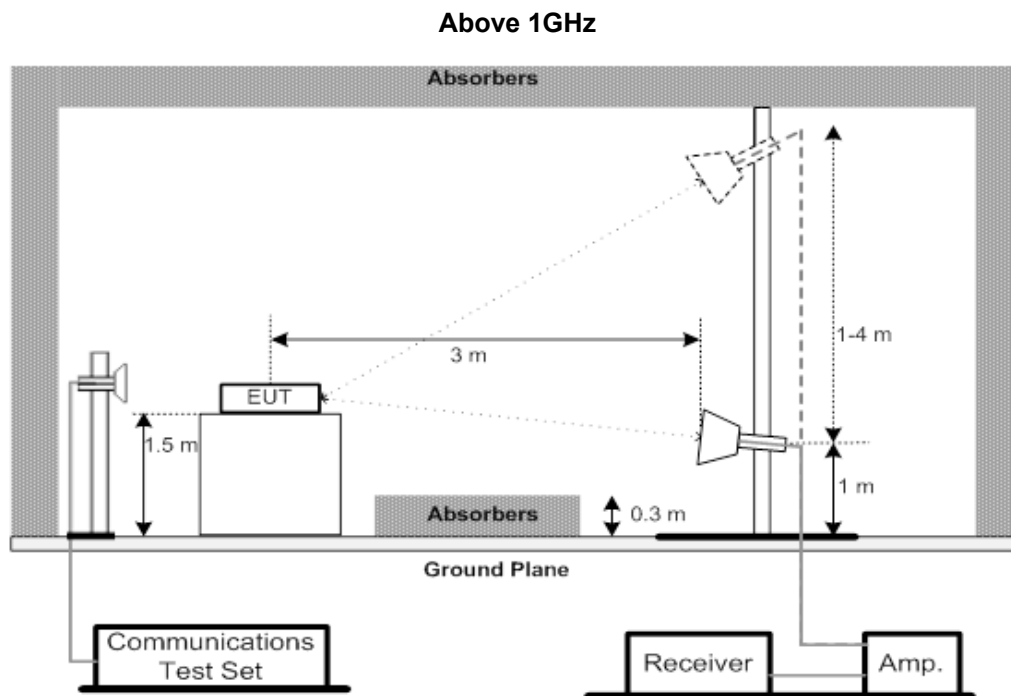

4.4.4 TESTDEVIATION

No deviation.

4.4.5 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the APPENDIX D.

4.4.6 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the APPENDIX E.

4.4.7 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the APPENDIX F.

4.5 MASK MEASUREMENTS

4.5.1 LIMIT


According to FCC part 90.691 shall be tested the emission mask. For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz. For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

4.5.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.0 or ANSI C63.26-2015 Section 5.7.

1. All measurements were done at low and high operational frequency range.
2. Set RBW=1% of 26dBc bandwidth, VBW=3 X RBW, detector=RMS, Sweep time = Auto.
For Section 90.691(a) compliance testing, use RBW = 300 Hz for offsets less than 37.5 kHz from a channel edge; RBW = 100 kHz for offsets greater than 37.5 kHz is allowed.
3. Record the max trace plot into the test report.

4.5.3 TESTSETUP LAYOUT

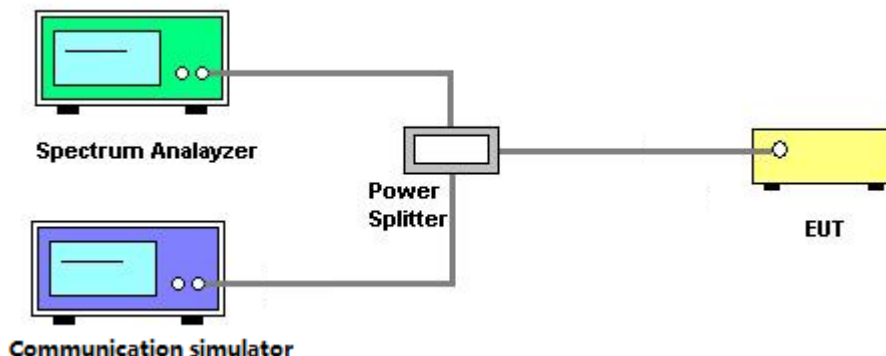

4.5.4 TESTDEVIATION

No deviation.

4.5.5 TEST RESULTS

Please refer to the APPENDIX G.

4.6 PEAK TO AVERAGE RATIO MEASUREMENT

4.6.1 LIMIT


In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 5.7 or ANSI C63.26-2015 Section 5.2.6.

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.6.3 TEST SETUP LAYOUT

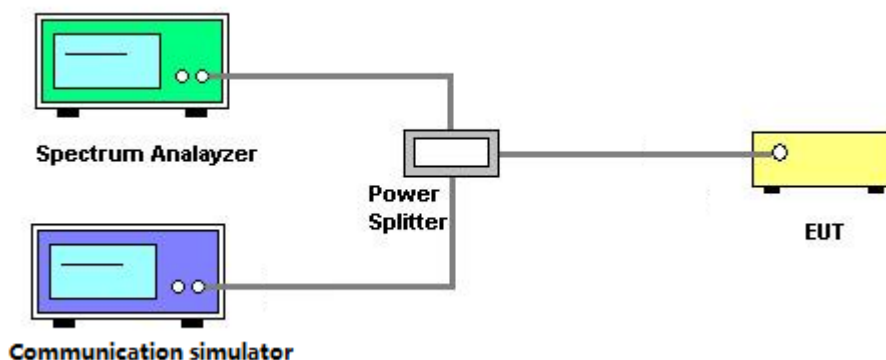

4.6.4 TEST DEVIATION

No deviation.

4.6.5 TEST RESULTS

Please refer to the APPENDIX H.

4.7 FREQUENCY STABILITY MEASUREMENT

4.7.1 LIMIT


± 1.5 ppm is for base and fixed station. ± 2.5 ppm is for mobile station.

4.7.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 9.0 or ANSI C63.26-2015 Section 5.6.

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

4.7.3 TESTSETUP LAYOUT

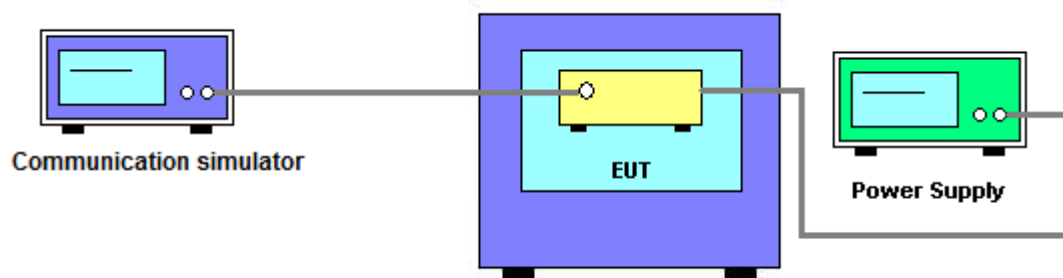

4.7.4 TESTDEVIATION

No deviation.

4.7.5 TEST RESULTS

Please refer to the APPENDIX I.

4. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	25	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 22, 2024
3	Cable	N/A	RW2350-3.8A-N MBM-1.5M	N/A	Jun. 10, 2024
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chamber room	ETS	9*6*6	N/A	Jul. 11, 2024

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB9168	01269	May 15, 2024
2	Attenuator	EMCI	EMCI-N-6-06	AN-N0697	May 15, 2024
3	MXE EMI Receiver	Keysight	N9038A	MY59050118	Sep. 26, 2024
4	Preamplifier	EMC INSTRUMENT	EMC001330	980825	Jan. 19, 2025
5	Cable	EMC INSTRUMENT	EMCCFD400-N M-NM-2500	N/A	Jun. 08, 2024
6	Cable	EMC INSTRUMENT	EMCCFD400-N M-NM-7000	N/A	Jun. 08, 2024
7	Cable	EMC INSTRUMENT	EMCCFD400-N M-NM-3000	N/A	Jun. 08, 2024
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
9	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	Jun. 07, 2024

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXE EMI Receiver	Keysight	N9038A	MY59050118	Sep. 26, 2024
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980739	Jan. 19, 2025
4	Cable	EMC INSTRUMENT	EMC104-SM-SM-1 0000	N/A	Jun. 08, 2024
5	Cable	EMC INSTRUMENT	EMC104-SM-SM-3 000	N/A	Jun. 08, 2024
6	Cable	EMC INSTRUMENT	EMC104-SM-SM-8 00	N/A	Jun. 08, 2024
7	Double Ridged Broadband Horn Antenna	RF SPIN	DRH18-E	210106A18E	Jul. 04, 2024
8	Preamplifier	EMC INSTRUMENT	EMC184045SE	980793	Jan. 19, 2025
9	Cable	EMC INSTRUMENT	EMC101G-KM-KM- 800	N/A	Aug. 13, 2024
10	Cable	EMC INSTRUMENT	EMC101G-KM-KM- 6000	N/A	Aug. 13, 2024
11	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	01046	Jul. 05, 2024
12	Band Reject Filter	COM-MW	ZHPF6-C3000-180 00-174	7213126	Jul. 07, 2024
13	Band Reject Filter	COM-MW	ZHPF6-M6500-180 00-547	7213124	Jul. 07, 2024
14	Attenuator	Talent Microwave	ATT-18G2W-10	N/A	N/A
15	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	Jun. 07, 2024



Conducted Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wideband Radio Communication Tester	R&S	CWM 500	131463	Jan. 19, 2025
2	Signal Analyzer	R&S	FSV 40	100948	Jul. 07, 2024
3	Temperature Chamber	ESPEC	SU-242	93018786	Jul. 07, 2024
4	MXA Signal Analyzer	Agilent Technologies	N9020A	MY49100060	Jul. 07, 2024
5	DC Source metter	Iteck	IT6154	00610412676820100 1	Jul. 08, 2024



Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.



5. EUT TEST PHOTO

Radiated Emissions Test Photos

9 kHz to 30 MHz

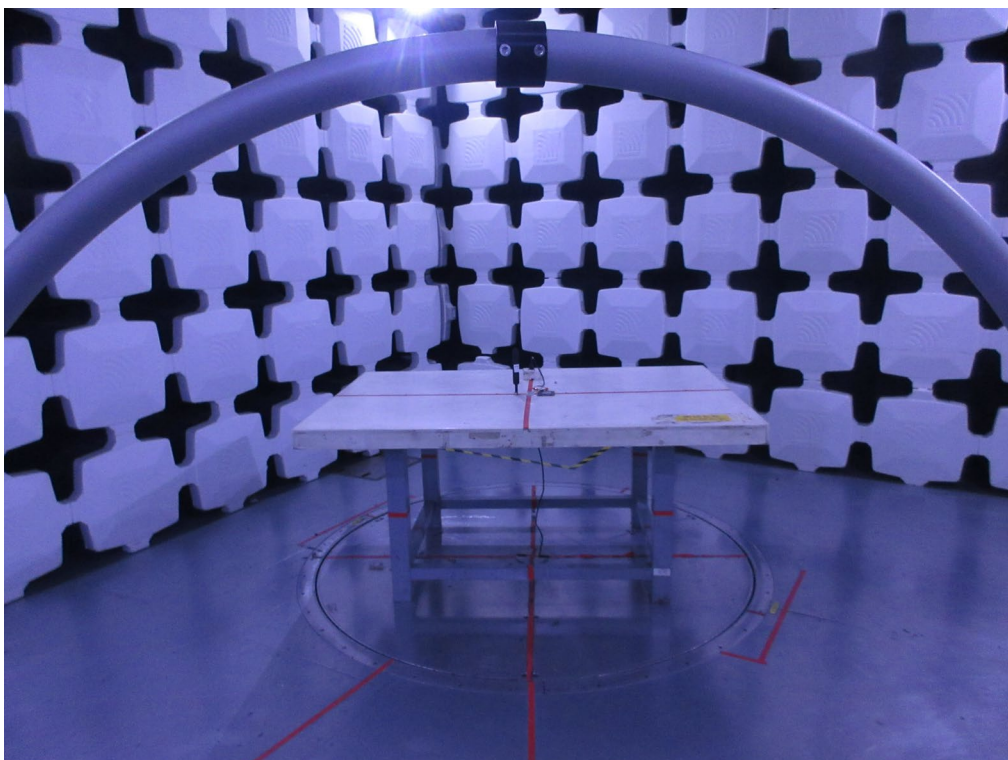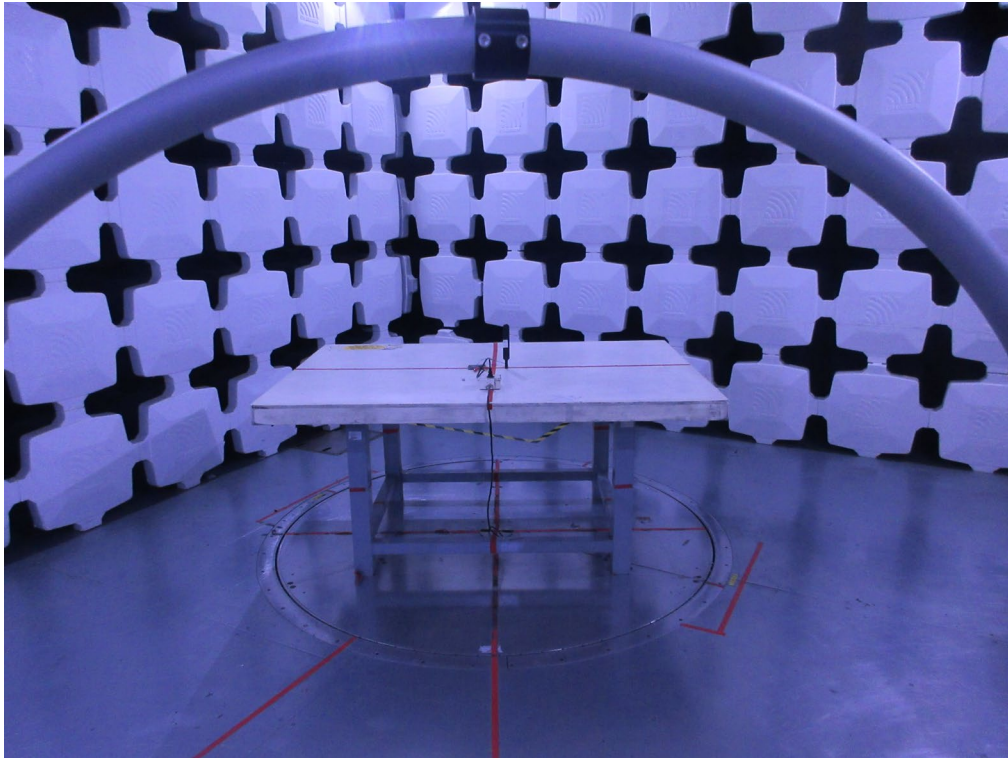

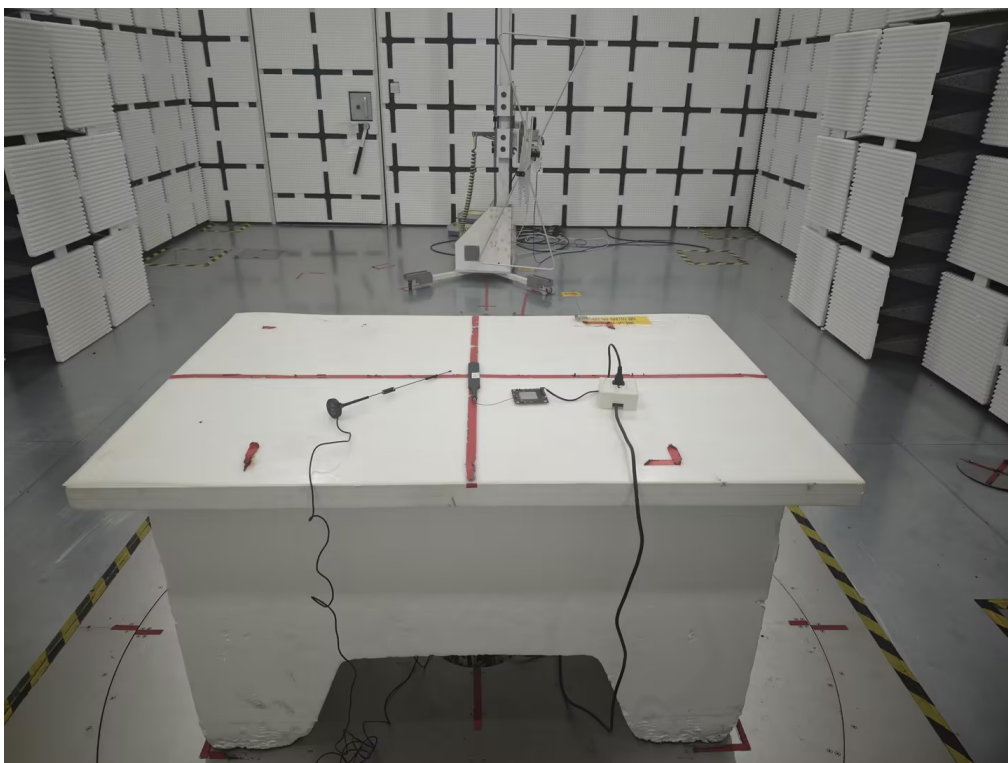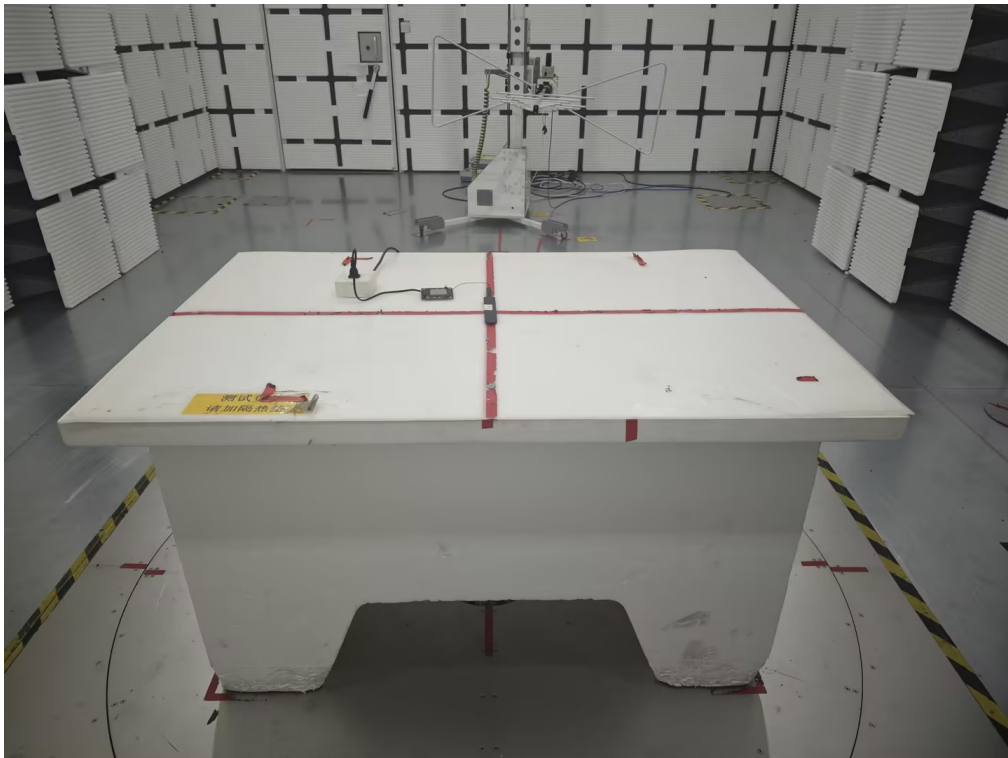Radiated Emissions Test Photos**30 MHz to 1 GHz**

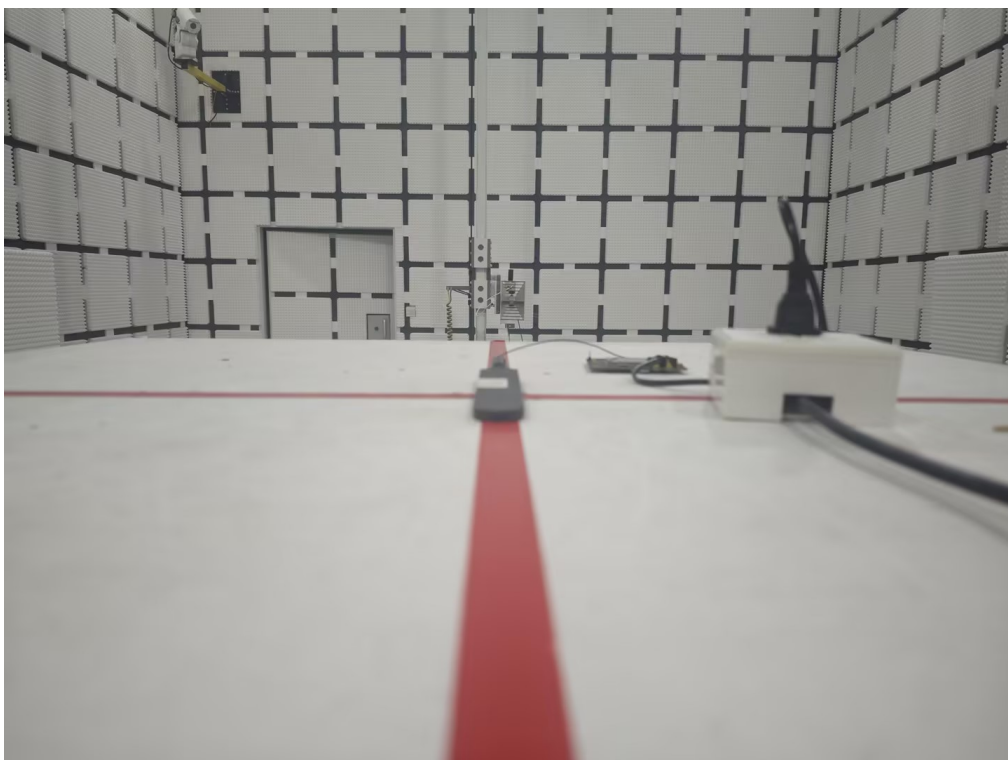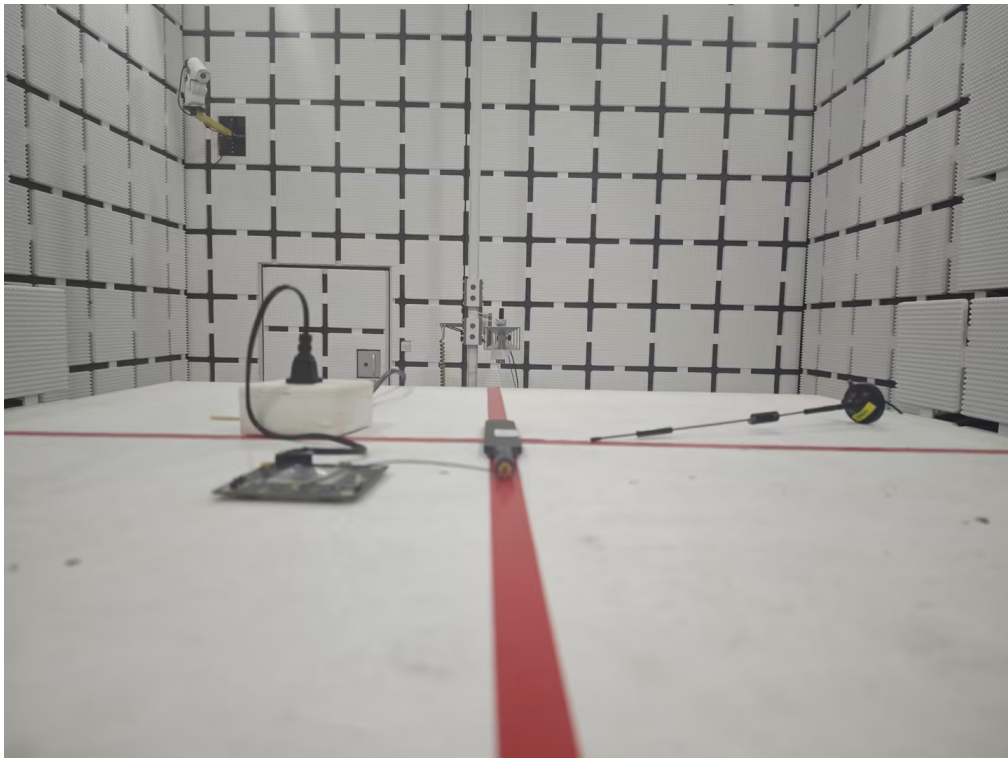Radiated Emissions Test Photos**Above 1 GHz**

APPENDIX A - OUTPUT POWER

Output Power (dBm)

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				26697CH	26740CH	26783CH
				814.7MHz	819MHz	823.3MHz
26 / 1.4MHz	QPSK	1	0	23.52	23.73	23.71
		1	2	23.58	23.78	23.77
		1	5	23.69	23.72	23.70
		3	0	23.48	23.68	23.56
		3	1	23.60	23.75	23.60
		3	2	23.60	23.77	23.54
		6	0	22.60	22.62	22.55
	16QAM	1	0	23.05	22.72	22.74
		1	2	23.19	22.76	22.73
		1	5	23.10	22.82	22.75
		3	0	22.71	22.85	22.72
		3	1	22.87	22.89	22.70
		3	2	22.76	22.91	22.66
		6	0	21.53	21.86	21.77

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				26705CH	26740CH	26775CH
				815.5MHz	819MHz	822.5MHz
26 / 3MHz	QPSK	1	0	23.49	23.67	23.73
		1	7	23.58	23.69	23.74
		1	14	23.62	23.76	23.68
		8	0	22.63	22.68	22.65
		8	4	22.60	22.64	22.63
		8	7	22.61	22.68	22.64
		15	0	22.60	22.65	22.69
	16QAM	1	0	22.57	23.22	22.72
		1	7	22.74	23.36	22.90
		1	14	22.63	23.25	22.81
		8	0	21.76	21.83	21.71
		8	4	21.74	21.76	21.68
		8	7	21.75	21.79	21.66
		15	0	21.63	21.74	21.68

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				26715CH	26740CH	26765CH
				816.5MHz	819MHz	821.5MHz
26 / 5MHz	QPSK	1	0	23.63	23.88	23.84
		1	13	23.74	23.76	23.79
		1	24	23.72	23.67	23.70
		12	0	22.63	22.69	22.76
		12	6	22.68	22.66	22.62
		12	11	22.67	22.67	22.64
		25	0	22.64	22.65	22.67
	16QAM	1	0	22.76	23.20	22.91
		1	13	22.82	23.24	22.86
		1	24	22.83	23.11	22.83
		12	0	21.72	21.85	21.84
		12	6	21.77	21.82	21.68
		12	11	21.77	21.82	21.72
		25	0	21.64	21.77	21.65

LTE Band / BW	Modulation	RB Size	RB Offset	Mid CH
				26740CH
				819MHz
26 / 10MHz	QPSK	1	0	23.81
		1	25	23.72
		1	49	23.78
		25	0	22.70
		25	13	22.78
		25	25	22.70
		50	0	22.69
	16QAM	1	0	22.83
		1	25	22.76
		1	49	22.78
		25	0	21.78
		25	13	21.88
		25	25	21.78
		50	0	21.72

ERP (dBm)						
LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				26697CH	26740CH	26783CH
				814.7MHz	819MHz	823.3MHz
26 / 1.4MHz	QPSK	1	0	22.07	22.28	22.26
		1	2	22.13	22.33	22.32
		1	5	22.24	22.27	22.25
		3	0	22.03	22.23	22.11
		3	1	22.15	22.30	22.15
		3	2	22.15	22.32	22.09
		6	0	21.15	21.17	21.10
	16QAM	1	0	21.60	21.27	21.29
		1	2	21.74	21.31	21.28
		1	5	21.65	21.37	21.30
		3	0	21.26	21.40	21.27
		3	1	21.42	21.44	21.25
		3	2	21.31	21.46	21.21
		6	0	20.08	20.41	20.32


LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				26705CH	26740CH	26775CH
				815.5MHz	819MHz	822.5MHz
26 / 3MHz	QPSK	1	0	22.04	22.22	22.28
		1	7	22.13	22.24	22.29
		1	14	22.17	22.31	22.23
		8	0	21.18	21.23	21.20
		8	4	21.15	21.19	21.18
		8	7	21.16	21.23	21.19
		15	0	21.15	21.20	21.24
	16QAM	1	0	21.12	21.77	21.27
		1	7	21.29	21.91	21.45
		1	14	21.18	21.80	21.36
		8	0	20.31	20.38	20.26
		8	4	20.29	20.31	20.23
		8	7	20.30	20.34	20.21
		15	0	20.18	20.29	20.23

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				26715CH	26740CH	26765CH
				816.5MHz	819MHz	821.5MHz
26 / 5MHz	QPSK	1	0	22.18	22.43	22.39
		1	13	22.29	22.31	22.34
		1	24	22.27	22.22	22.25
		12	0	21.18	21.24	21.31
		12	6	21.23	21.21	21.17
		12	11	21.22	21.22	21.19
		25	0	21.19	21.20	21.22
	16QAM	1	0	21.31	21.75	21.46
		1	13	21.37	21.79	21.41
		1	24	21.38	21.66	21.38
		12	0	20.27	20.40	20.39
		12	6	20.32	20.37	20.23
		12	11	20.32	20.37	20.27
		25	0	20.19	20.32	20.20


LTE Band / BW	Modulation	RB Size	RB Offset	Mid CH
				26740CH
				819MHz
26 / 10MHz	QPSK	1	0	22.36
		1	25	22.27
		1	49	22.33
		25	0	21.25
		25	13	21.33
		25	25	21.25
		50	0	21.24
	16QAM	1	0	21.38
		1	25	21.31
		1	49	21.33
		25	0	20.33
		25	13	20.43
		25	25	20.33
		50	0	20.27

APPENDIX B - OCCUPIED BANDWIDTH


LTE Band 26_1.4MHz					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		26dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26697	814.7	1.0944	1.0942	1.272	1.285
26740	819	1.1021	1.0930	1.312	1.294
26783	823.3	1.0880	1.0969	1.278	1.293

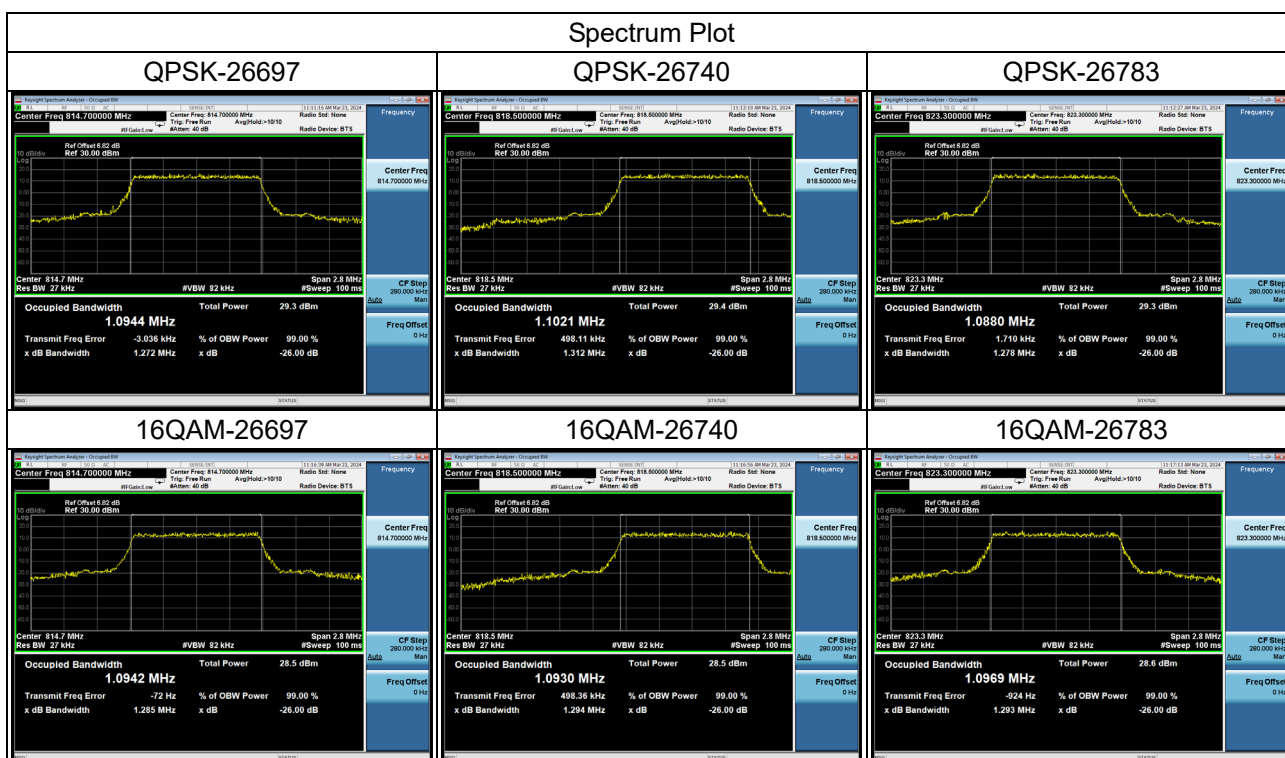


LTE Band 26_3MHz					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		26dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26705	815.5	2.7055	2.7034	2.975	3.006
26740	819	2.7008	2.6996	2.967	2.988
26775	822.5	2.7005	2.6966	2.979	2.978

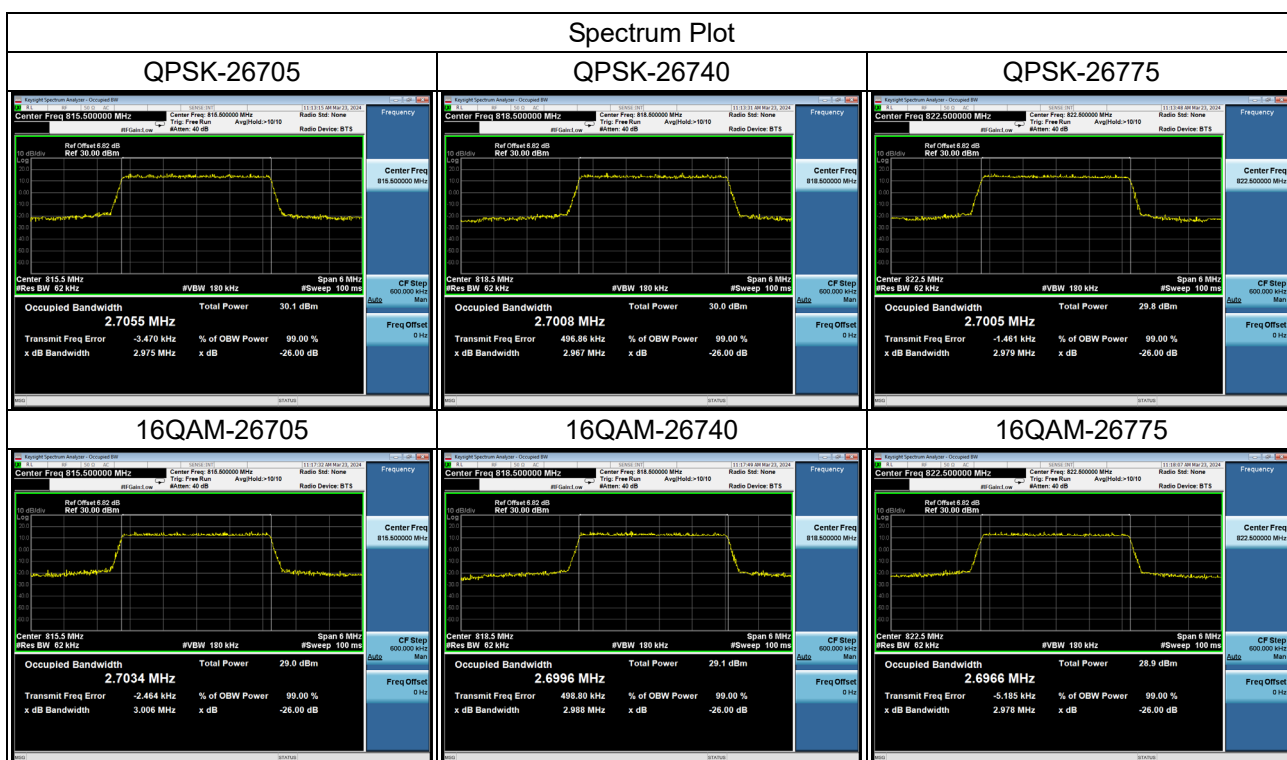

LTE Band 26_5MHz					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		26dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26715	816.5	4.5155	4.5066	5.036	5.004
26740	819	4.5126	4.5076	5.032	4.979
26765	821.5	4.5137	4.5043	4.996	4.957

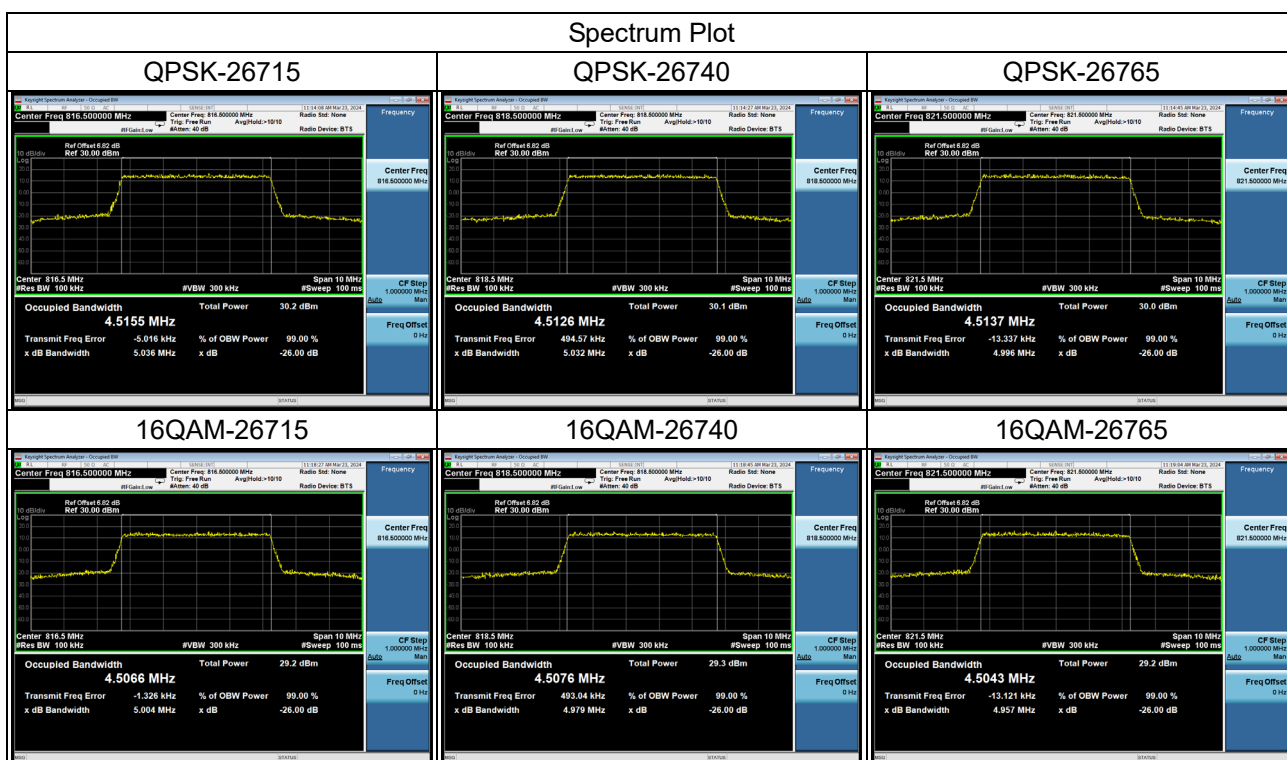


LTE Band 26_10MHz					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)		26dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26740	819	8.9653	8.9582	9.931	9.850

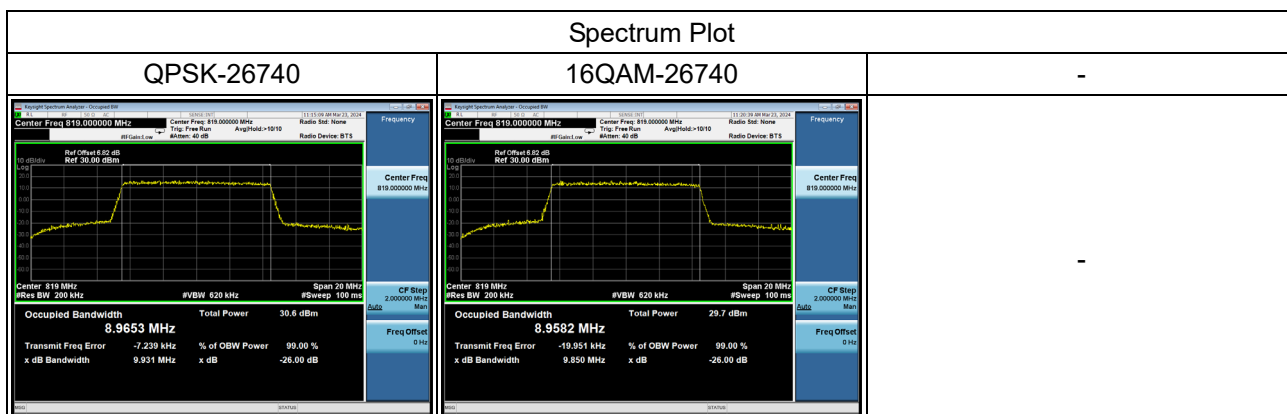


APPENDIX C - CONDUCTED SPURIOUS EMISSIONS


LTE Band 26_1.4MHz_CH26740 Spectrum Plot

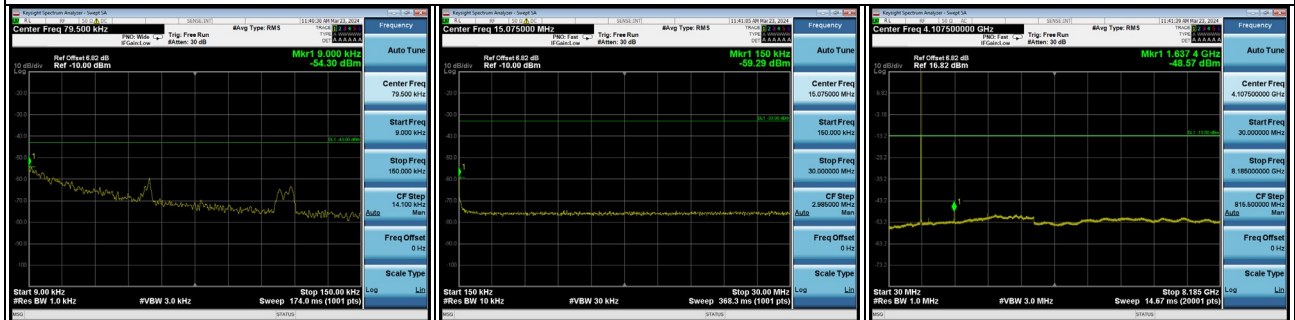

LTE Band 26_5MHz_CH26740 Spectrum Plot

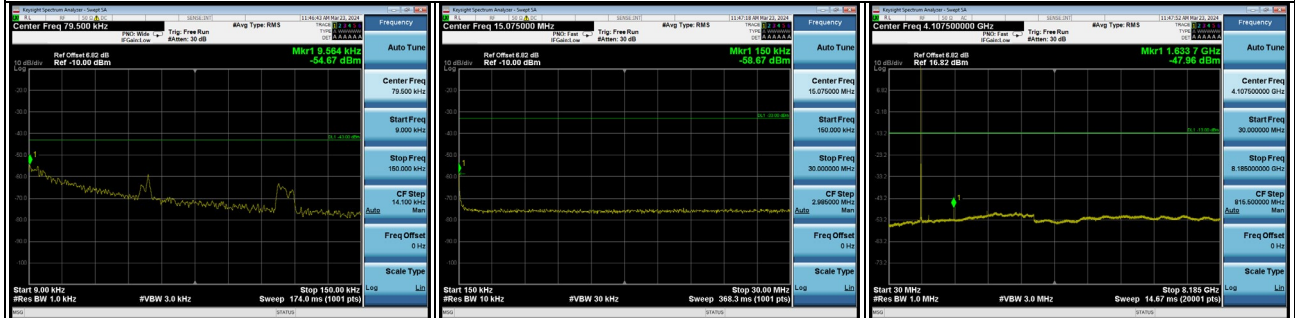


LTE Band 26_10MHz_CH26740 Spectrum Plot

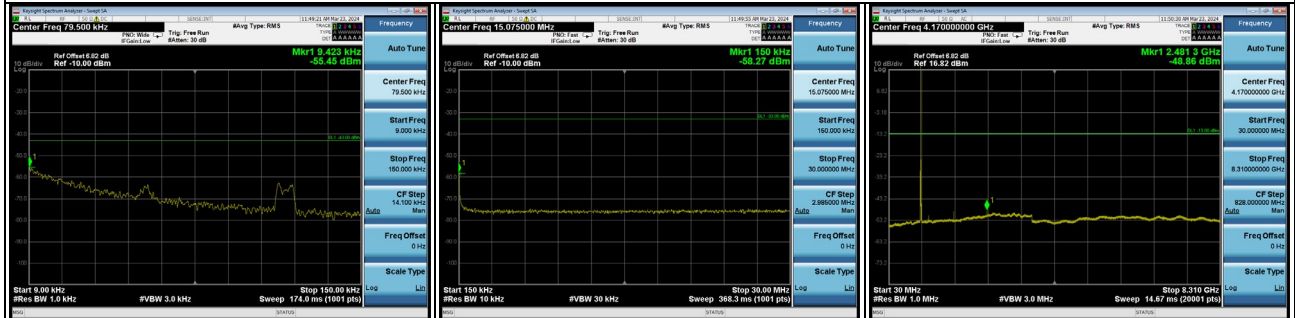

APPENDIX D - RADIATED SPURIOUS EMISSIONS (9KHZ TO 30MHZ)

Test Mode : TX Mode


Ant 0°

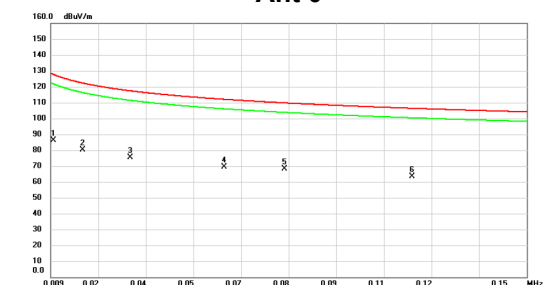

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.010	65.33	20.92	86.25	127.78	-41.53	peak	
2	0.018	59.01	21.03	80.04	122.31	-42.27	peak	
3	0.033	54.22	21.21	75.43	117.34	-41.91	peak	
4	0.060	48.11	21.30	69.41	111.97	-42.56	peak	
5	0.078	46.76	21.30	68.06	109.74	-41.68	peak	
6	0.116	42.29	21.31	63.60	106.32	-42.72	peak	

Test Mode : TX Mode


Ant 0°

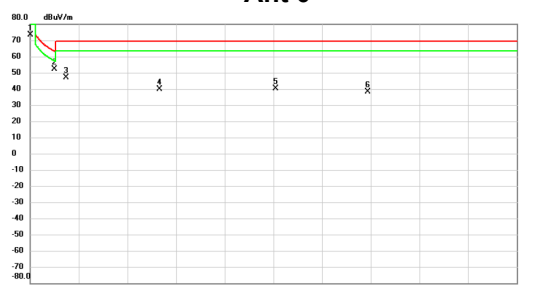

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.150	52.24	21.26	73.50	104.09	-30.59	peak	
2 *	1.643	30.96	21.18	52.14	63.29	-11.15	peak	
3	2.359	25.74	21.22	46.96	69.54	-22.58	peak	
4	8.075	18.16	21.58	39.74	69.54	-29.80	peak	
5	15.224	18.24	21.82	40.06	69.54	-29.48	peak	
6	20.866	16.33	21.96	38.29	69.54	-31.25	peak	

Test Mode : TX Mode


Ant 90°

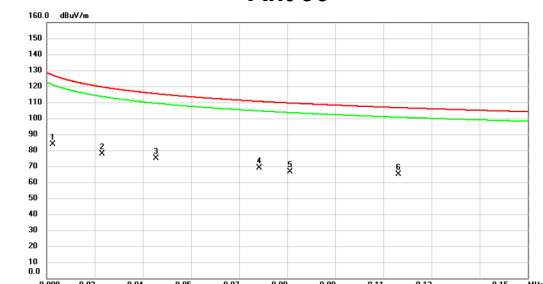

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.011	62.73	20.91	83.64	126.94	-43.30	peak	
2	0.025	56.78	21.13	77.91	119.54	-41.63	peak	
3 *	0.041	53.63	21.25	74.88	115.35	-40.47	peak	
4	0.071	47.57	21.30	68.87	110.54	-41.67	peak	
5	0.080	45.34	21.30	66.64	109.51	-42.87	peak	
6	0.112	43.52	21.31	64.83	108.62	-41.79	peak	

Test Mode : TX Mode

Ant 90°

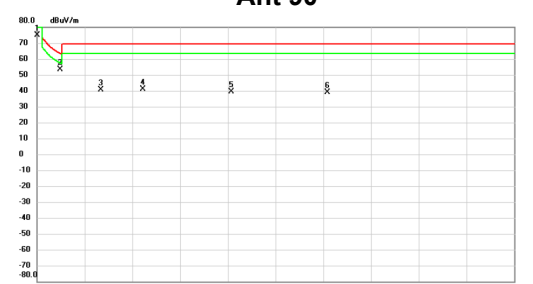


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.150	53.89	21.26	75.15	104.09	-28.94	peak	
2 *	1.613	32.37	21.18	53.55	63.45	-9.90	peak	
3	4.150	19.34	21.34	40.68	69.54	-28.86	peak	
4	6.777	19.57	21.51	41.08	69.54	-28.46	peak	
5	12.299	17.69	21.56	39.25	69.54	-30.29	peak	
6	18.329	17.23	21.89	39.12	69.54	-30.42	peak	

APPENDIX E - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1000MHZ)

Test Mode : LTE Band 26_TX CH26740_1.4MHz


Vertical

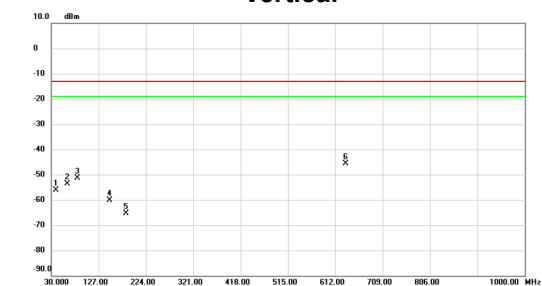

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	40.1850	-64.74	8.71	-56.03	-13.00	-43.03	peak	
2	62.4950	-61.77	8.27	-53.50	-13.00	-40.50	peak	
3	83.3500	-55.34	4.00	-51.34	-13.00	-38.34	peak	
4	149.7950	-69.34	9.20	-60.14	-13.00	-47.14	peak	
5	183.2600	-72.71	7.35	-65.36	-13.00	-52.36	peak	
6 *	633.8250	-61.58	16.03	-45.55	-13.00	-32.55	peak	

Test Mode : LTE Band 26_TX CH26740_1.4MHz


Horizontal

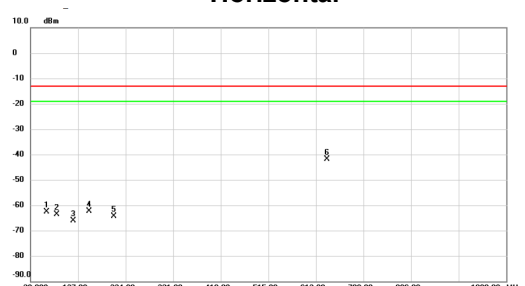

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	62.4950	-70.80	8.27	-62.53	-13.00	-49.53	peak	
2	83.3500	-67.64	4.00	-63.64	-13.00	-50.64	peak	
3	116.8150	-72.63	6.57	-66.06	-13.00	-53.06	peak	
4	149.7950	-71.67	9.20	-62.47	-13.00	-49.47	peak	
5	199.7500	-70.23	5.93	-64.30	-13.00	-51.30	peak	
6 *	634.3100	-58.01	16.04	-41.97	-13.00	-28.97	peak	

Test Mode : LTE Band 26_TX CH26740_5MHz


Vertical

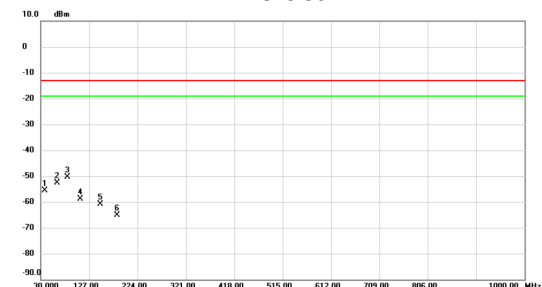

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	38.2450	-64.17	8.49	-55.68	-13.00	-42.68	peak	
2	62.4950	-61.00	8.27	-52.73	-13.00	-39.73	peak	
3 *	83.3500	-54.40	4.00	-50.40	-13.00	-37.40	peak	
4	110.0250	-64.81	5.95	-58.86	-13.00	-45.86	peak	
5	149.7950	-70.07	9.20	-60.87	-13.00	-47.87	peak	
6	183.2600	-72.50	7.35	-65.15	-13.00	-52.15	peak	

Test Mode : LTE Band 26_TX CH26740_5MHz

Horizontal

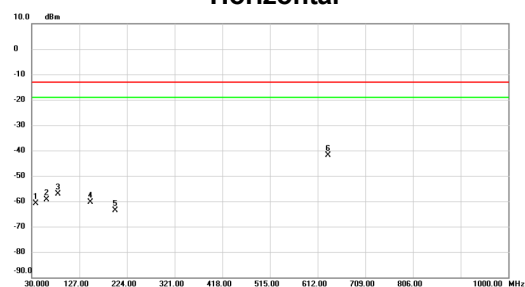


No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	38.2450	-69.27	8.49	-60.78	-13.00	-47.78	peak	
2	60.5550	-67.91	8.52	-59.39	-13.00	-46.39	peak	
3	83.3500	-61.15	4.00	-57.15	-13.00	-44.15	peak	
4	149.7950	-69.60	9.20	-60.40	-13.00	-47.40	peak	
5	200.2350	-69.55	5.91	-63.64	-13.00	-50.64	peak	
6 *	632.8550	-57.92	16.02	-41.90	-13.00	-28.90	peak	

Test Mode : LTE Band 26_TX CH26740_10MHz


Test Mode : LTE Band 26_TX CH26740_10MHz

Vertical

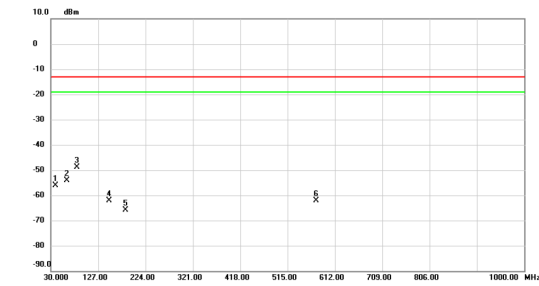

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	39.7000	-53.01	-3.08	-56.09	-13.00	-43.09	peak	
2	62.4950	-50.62	-3.47	-54.09	-13.00	-41.09	peak	
3 *	83.3500	-41.10	-7.74	-48.84	-13.00	-35.84	peak	
4	149.7950	-59.58	-2.54	-62.12	-13.00	-49.12	peak	
5	183.2600	-61.47	-4.39	-65.86	-13.00	-52.86	peak	
6	573.2000	-65.32	3.14	-62.18	-13.00	-49.18	peak	


Horizontal

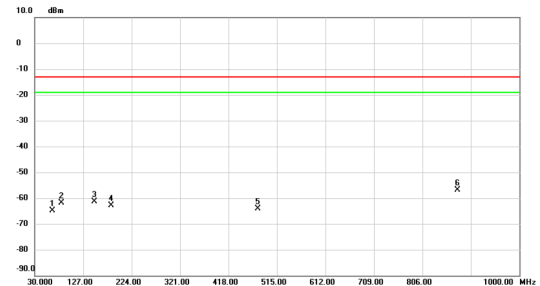

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1	65.4050	-60.88	-3.90	-64.78	-13.00	-51.78	peak	
2	83.3500	-54.14	-7.74	-61.88	-13.00	-48.88	peak	
3	149.7950	-58.89	-2.54	-61.43	-13.00	-48.43	peak	
4	183.2600	-58.36	-4.39	-62.75	-13.00	-49.75	peak	
5	476.2000	-65.51	1.45	-64.06	-13.00	-51.06	peak	
6 *	875.8400	-63.87	6.98	-56.89	-13.00	-43.89	peak	


APPENDIX F - RADIATED SPURIOUS EMISSIONS (ABOVE 1000MHZ)

Test Mode : LTE Band 26_TX CH26740_1.4MHz

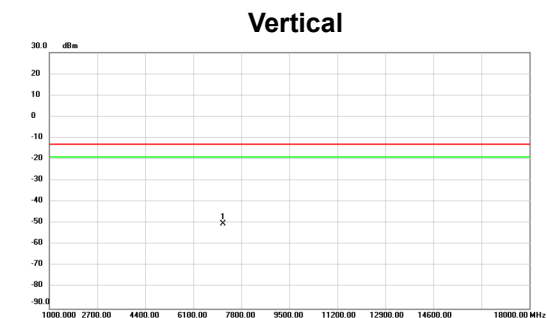


No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	7145.500	-69.46	19.28	-50.18	-13.00	-37.18	peak	

Test Mode : LTE Band 26_TX CH26740_1.4MHz

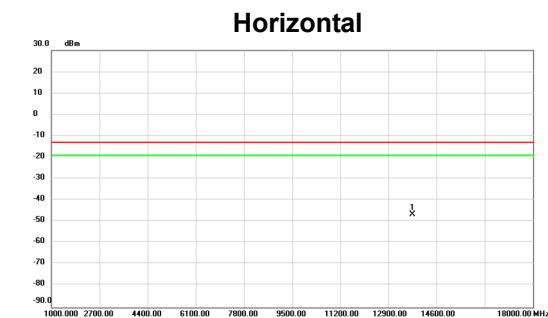


No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	13741.500	-68.83	22.24	-46.59	-13.00	-33.59	peak	

Test Mode : LTE Band 26_TX CH26740_5M

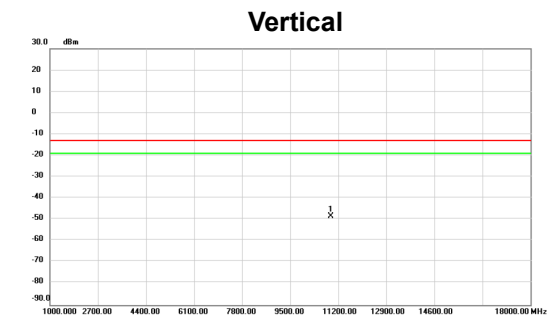

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	10945.000	-68.28	19.92	-48.36	-13.00	-35.36	peak	

Test Mode : LTE Band 26_TX CH26740_5M

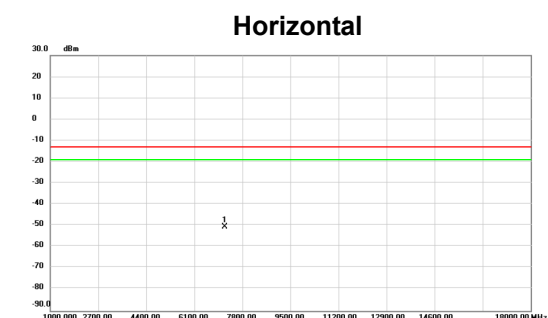


No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measurement dBm	Limit dBm	Margin dB	Detector	Comment
1 *	7179.500	-69.78	19.30	-50.48	-13.00	-37.48	peak	

Test Mode : LTE Band 26_TX CH26740_10MHz


Test Mode : LTE Band 26_TX CH26740_10MHz

Vertical

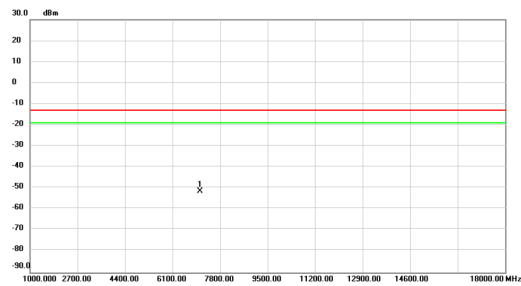

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	7094.500	-58.93	7.49	-51.44	-13.00	-38.44	peak	

Horizontal

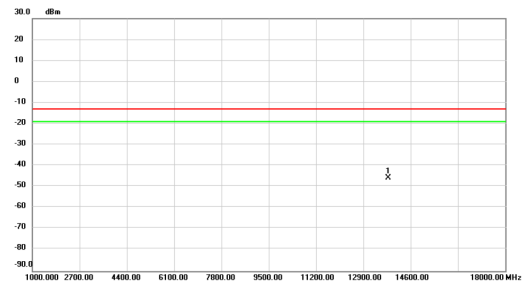

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	13801.00	-56.19	10.49	-45.70	-13.00	-32.70	peak	

APPENDIX G - MASK

