



**FCC CFR47 PART 22 SUBPART H  
FCC CFR47 PART 24 SUBPART E**

**CERTIFICATION TEST REPORT**

**FOR**

**CDMA Phone**

**MODEL NUMBER: LG109C**

**FCC ID: ZNF109C**

**REPORT NUMBER: 15I20516-E1**

**ISSUE DATE: MAY 8, 2015**

*Prepared for*

**LG ELECTRONICS MOBILECOMM U.S.A., INC  
1000 SYLVAN AVENUE  
ENGLEWOOD CLIFFS,  
NEW JERSEY, 07632, U.S.A**

*Prepared by*

**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	05/8/15	Initial Issue	D. Corona

## TABLE OF CONTENTS

<b>1.</b>	<b>ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2.</b>	<b>TEST METHODOLOGY .....</b>	<b>6</b>
<b>3.</b>	<b>FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4.</b>	<b>CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1.	<i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>6</i>
4.2.	<i>SAMPLE CALCULATION .....</i>	<i>6</i>
4.3.	<i>MEASUREMENT UNCERTAINTY .....</i>	<i>7</i>
<b>5.</b>	<b>EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1.	<i>DESCRIPTION OF EUT .....</i>	<i>8</i>
5.2.	<i>MAXIMUM OUTPUT POWER.....</i>	<i>8</i>
5.3.	<i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>9</i>
5.4.	<i>DESCRIPTION OF TEST SETUP.....</i>	<i>10</i>
<b>6.</b>	<b>TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>13</b>
<b>7.</b>	<b>SUMMARY TABLE .....</b>	<b>14</b>
<b>8.</b>	<b>RF POWER OUTPUT VERIFICATION.....</b>	<b>15</b>
8.1.	<i>CDMA2000 .....</i>	<i>15</i>
8.1.1.	<i>1xRTT .....</i>	<i>15</i>
8.1.2.	<i>CDMA2000 OUTPUT POWER RESULT .....</i>	<i>16</i>
<b>9.</b>	<b>PEAK TO AVERAGE RATIO .....</b>	<b>17</b>
9.1.	<i>CONDUCTED PEAK TO AVERAGE RESULT.....</i>	<i>18</i>
<b>10.</b>	<b>LIMITS AND CONDUCTED RESULTS.....</b>	<b>19</b>
10.1.	<i>OCCUPIED BANDWIDTH.....</i>	<i>19</i>
10.1.1.	<i>OCCUPIED BANDWIDTH RESULTS.....</i>	<i>20</i>
10.1.1.	<i>OCCUPIED BANDWIDTH PLOTS .....</i>	<i>21</i>
10.2.	<i>BAND EDGE EMISSIONS .....</i>	<i>22</i>
10.2.1.	<i>BAND EDGE PLOTS .....</i>	<i>23</i>
10.3.	<i>OUT OF BAND EMISSIONS .....</i>	<i>24</i>
10.3.1.	<i>OUT OF BAND EMISSIONS RESULT .....</i>	<i>25</i>
10.3.2.	<i>OUT OF BAND EMISSIONS PLOTS.....</i>	<i>26</i>
10.4.	<i>FREQUENCY STABILITY .....</i>	<i>27</i>
10.4.1.	<i>FREQUENCY STABILITY RESULTS.....</i>	<i>28</i>
<b>11.</b>	<b>RADIATED TEST RESULTS .....</b>	<b>30</b>

---

11.1.	<i>RADIATED POWER (ERP &amp; EIRP)</i> .....	30
11.1.1.	ERP/EIRP RESULTS.....	31
11.1.2.	LTE ERP/EIRP RESULTS.....	32
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i> .....	34
11.2.1.	SPURIOUS RADIATION PLOTS.....	35
<b>12.</b>	<b>SETUP PHOTOS</b> .....	<b>37</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** LG ELECTRONICS MOBILECOMM U.S.A., INC  
**EUT DESCRIPTION:** CDMA Phone  
**MODEL:** LG109C  
**SERIAL NUMBER:** 504CQVV0000183 (Conducted), 504CQRN0000182 (Radiated)  
**DATE TESTED:** APRIL 21-27, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H and 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



DAN CORONIA  
CONSUMER TECHNOLOGY DIVISION  
WISE PROJECT LEAD  
UL VERIFICATION SERVICES INC

Tested By:



OREN STOELTING  
CONSUMER TECHNOLOGY DIVISION  
WISE LAB EMC TECHNICIAN  
UL VERIFICATION SERVICES INC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss( between the SG and substitution antenna) + Substitution Antenna Factor (dBi)

ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss( between the SG and substitution antenna)

(Path loss = Signal generator output – PSA reading with substitution antenna)

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB
Radiated Disturbance, 1GHz to 40GHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a CDMA Phone

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			dBm	mW	dBm	mW
BC0	824~849	1xRTT	24.7	295.12	22.33	171.00
	824~849	EVDO REL. 0				
	824~849	EVDO REV. A				
BC1	1850~1910	1xRTT	25.3	338.84	23.68	233.35
	1850~1910	EVDO REL. 0				
	1850~1910	EVDO REV. A				



### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
BC0, 824~849MHz	-1.4
BC1, 1850~1910MHz	2.9

## 5.4. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WP	RB4Y2618606	N/A
Headset	LG	N/A	N/A	N/A

### I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


### I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	NA
2	Jack	1	Headset	Shielded	1m	NA
3	RF In/out	1	Communication Test Set	Un-shielded	2m	NA


### TEST SETUP

The EUT is continuously communicated to the call box during the tests.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

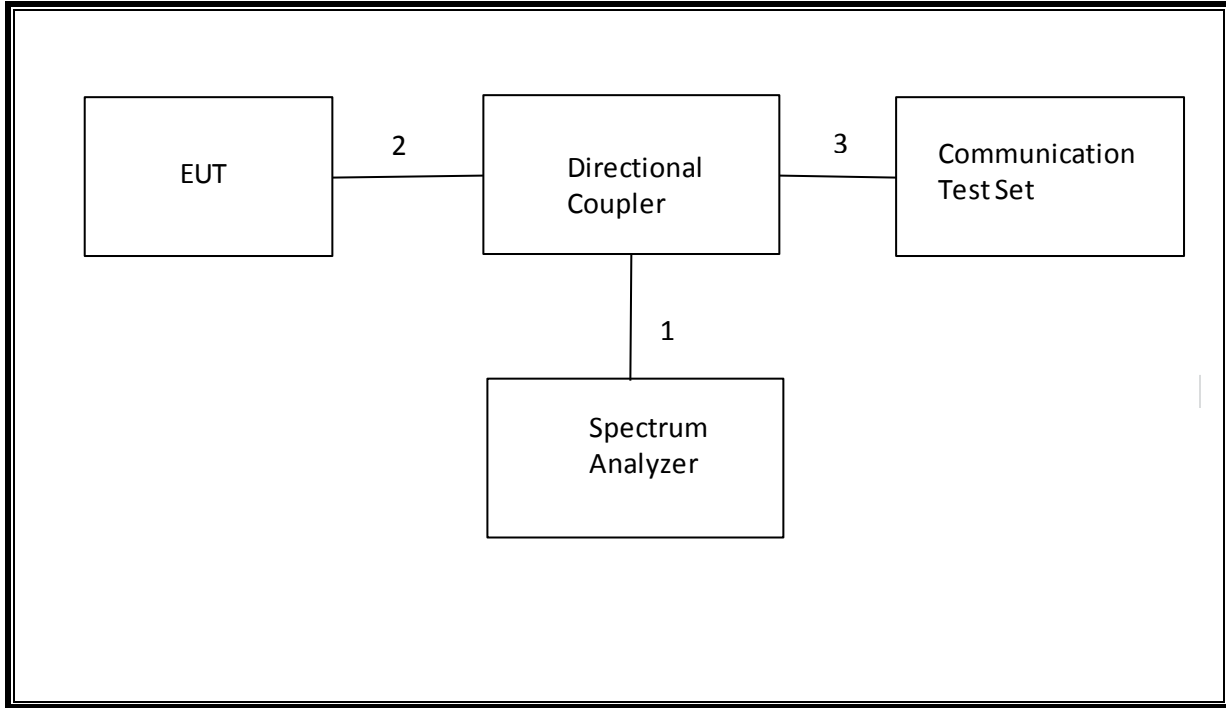

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

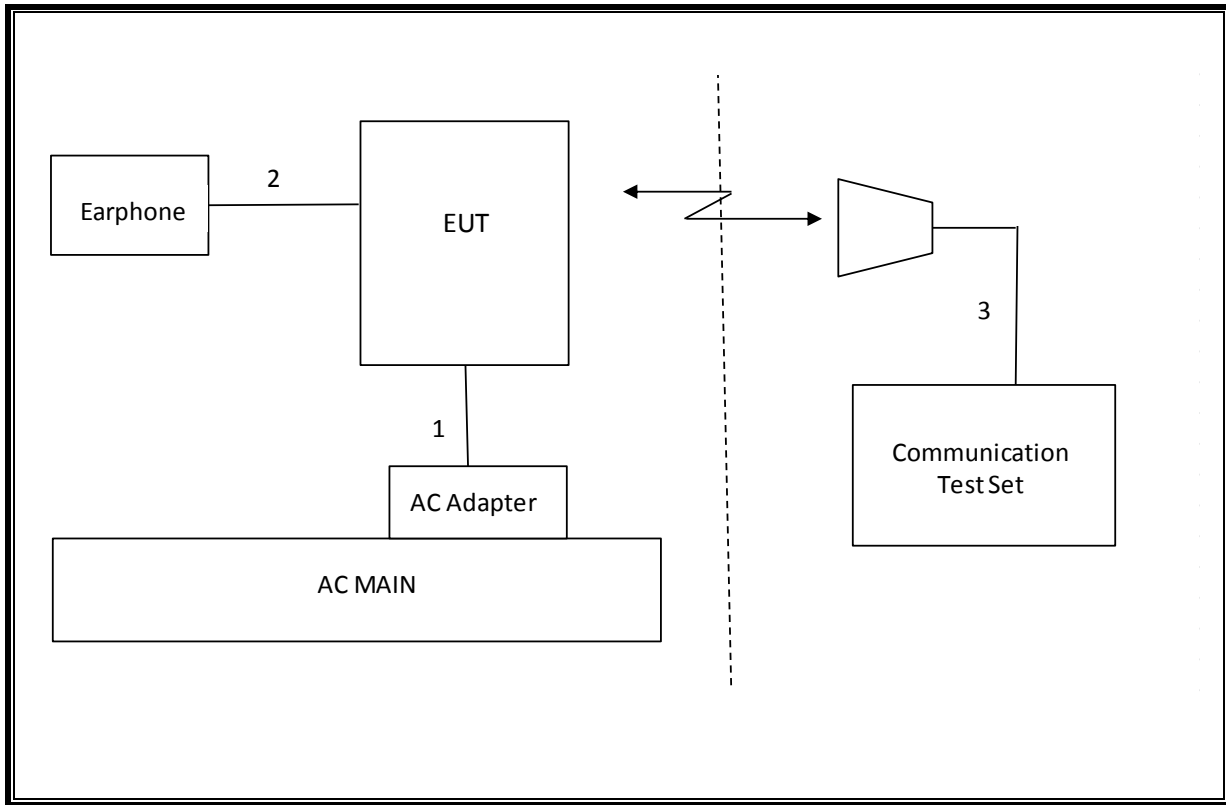

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	05/01/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	T43	03/06/16
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	05/12/15
Communications Test Set	R&S	CMW500	T159	07/02/15
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	06/18/15
Antenna, Tuned Dipole 400-1000	ETS	3121C DB4	C00993	02/11/16
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/15

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

## 7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	1.2892MHz
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-13.278dBm
2.1046	N/A	Conducted output power	N/A		Pass	24.70dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	0.018PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38.5 dBm	Radiated	Pass	22.33dBm
24.232(c )	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	23.68dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-42.60dBm

## 8. RF POWER OUTPUT VERIFICATION

### 8.1. CDMA2000

#### 8.1.1. 1xRTT

##### TEST PROCEDURE

This procedure assumes the Agilest 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobile Test	B.13.08, L

- Call Setup > Shift & Preset
- Cell Info > Cell Parameters > System ID (SID) > 7  
    > Network ID (NID) > 1
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > Please see following table or details
- FCH Service Option (SO) Setup > Please see following table or details
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps  
    > R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Rvs Power Ctrl > Active bits
  - Rvs Power Ctrl > All Up bits (Maximum TxPout)

**8.1.2. CDMA2000 OUTPUT POWER RESULT**

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC0	RC1, SO55 (Loopback)	1013	824.70	24.7
		384	836.52	24.7
		777	848.31	24.7
	RC3, SO55 (Loopback)	1013	824.70	24.7
		384	836.52	24.7
		777	848.31	24.7
	RC3, SO32 (+F-SCH)	1013	824.70	24.7
		384	836.52	24.7
		777	848.31	24.7

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC1	RC1, SO55 (Loopback)	25	1851.25	25.3
		600	1880.00	25.1
		1175	1908.75	25.2
	RC3, SO55 (Loopback)	25	1851.25	25.2
		600	1880.00	25.2
		1175	1908.75	25.2
	RC3, SO32 (+F-SCH)	25	1851.25	25.3
		600	1880.00	25.1
		1175	1908.75	25.2



## **9. PEAK TO AVERAGE RATIO**

### **TEST PROCEDURE**

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

### **TEST SPEC**



In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

### **MODES TESTED**

CDMA BC0, CDMA BC1

### **RESULTS**

### 9.1. CONDUCTED PEAK TO AVERAGE RESULT
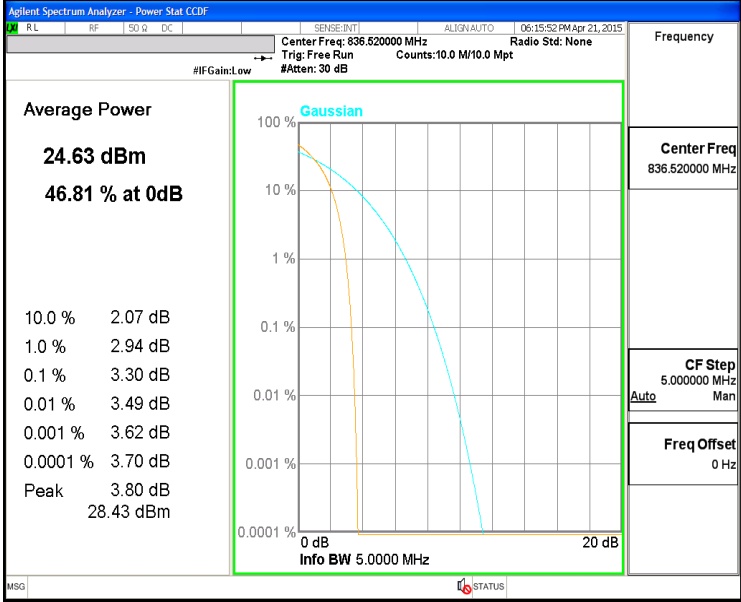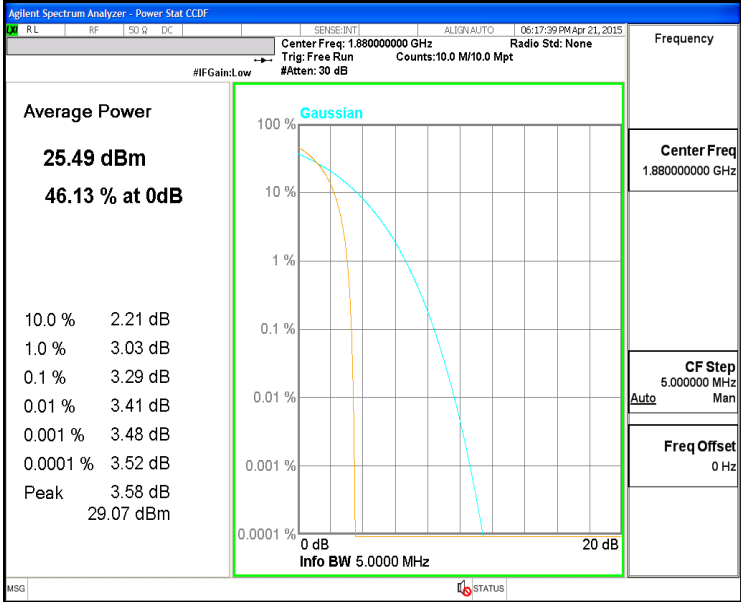
<p>Band BC0</p>	 <p style="text-align: center;">Band BC0 1xRTT OBW Mid channel</p>
<p>Band BC1</p>	 <p style="text-align: center;">Band BC1 1xRTT OBW Mid channel</p>

## **10. LIMITS AND CONDUCTED RESULTS**

### **10.1. OCCUPIED BANDWIDTH**

#### **RULE PART(S)**

FCC: §2.1049

#### **LIMITS**

For reporting purposes only

#### **TEST PROCEDURE**

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01)

#### **MODES TESTED**


CDMA BC0, CDMA BC1

#### **RESULTS**

**10.1.1. OCCUPIED BANDWIDTH RESULTS**

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
BC0	1xRTT	1013	824.7	1.28	1.41
		384	836.52	1.28	1.43
		777	848.31	1.28	1.42
	EVDO REL. 0	1013	824.7		
		384	836.52		
		777	848.31		
	EVDO REV. A	1013	824.7		
		384	836.52		
		777	848.31		
BC1	1xRTT	25	1851.25	1.28	1.44
		600	1880	1.29	1.43
		1175	1908.75	1.29	1.44
	EVDO REL. 0	25	1851.25		
		600	1880		
		1175	1908.75		
	EVDO REV. A	25	1851.25		
		600	1880		
		1175	1908.75		

### 10.1.1. OCCUPIED BANDWIDTH PLOTS
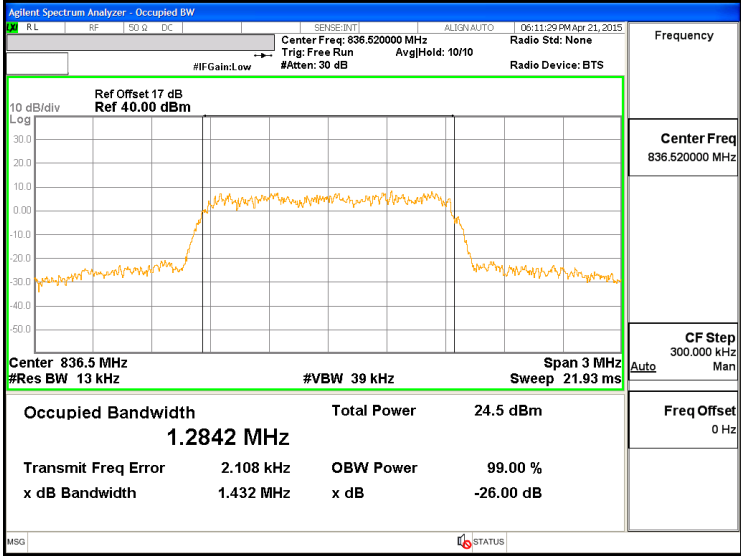
<p>Band BC0</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 836.520000 MHz      Trig: Free Run      #FGain: Low      #Atten: 30 dB</p> <p>Ref Offset 17 dB      Ref 40.00 dBm</p> <p>Center 836.5 MHz      #Res BW 13 kHz      #VBW 39 kHz      Span 3 MHz      Sweep 21.93 ms</p> <p>Occupied Bandwidth: <b>1.2842 MHz</b></p> <p>Total Power: 24.5 dBm</p> <p>Transmit Freq Error: 2.108 kHz</p> <p>x dB Bandwidth: 1.432 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -26.00 dB</p> <p>Band BC0 1xRTT OBW Mid channel</p>
<p>Band BC1</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 1.880000000 GHz      Trig: Free Run      #FGain: Low      #Atten: 30 dB</p> <p>Ref Offset 17 dB      Ref 40.00 dBm</p> <p>Center 1.88 GHz      #Res BW 30 kHz      #VBW 91 kHz      Span 3 MHz      Sweep 4.133 ms</p> <p>Occupied Bandwidth: <b>1.2891 MHz</b></p> <p>Total Power: 25.0 dBm</p> <p>Transmit Freq Error: -3.663 kHz</p> <p>x dB Bandwidth: 1.433 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -26.00 dB</p> <p>Band BC1 1xRTT OBW Mid channel</p>

## **10.2. BAND EDGE EMISSIONS**

### **RULE PART(S)**

FCC: §22.359, §24.238

### **LIMITS**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **TEST PROCEDURE**

Per KDB 971168 D01 Power Meas License Digital Systems v02r01


The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

### **MODES TESTED**

CDMA BC0, CDMA BC1

### **RESULTS**

10.2.1. BAND EDGE PLOTS

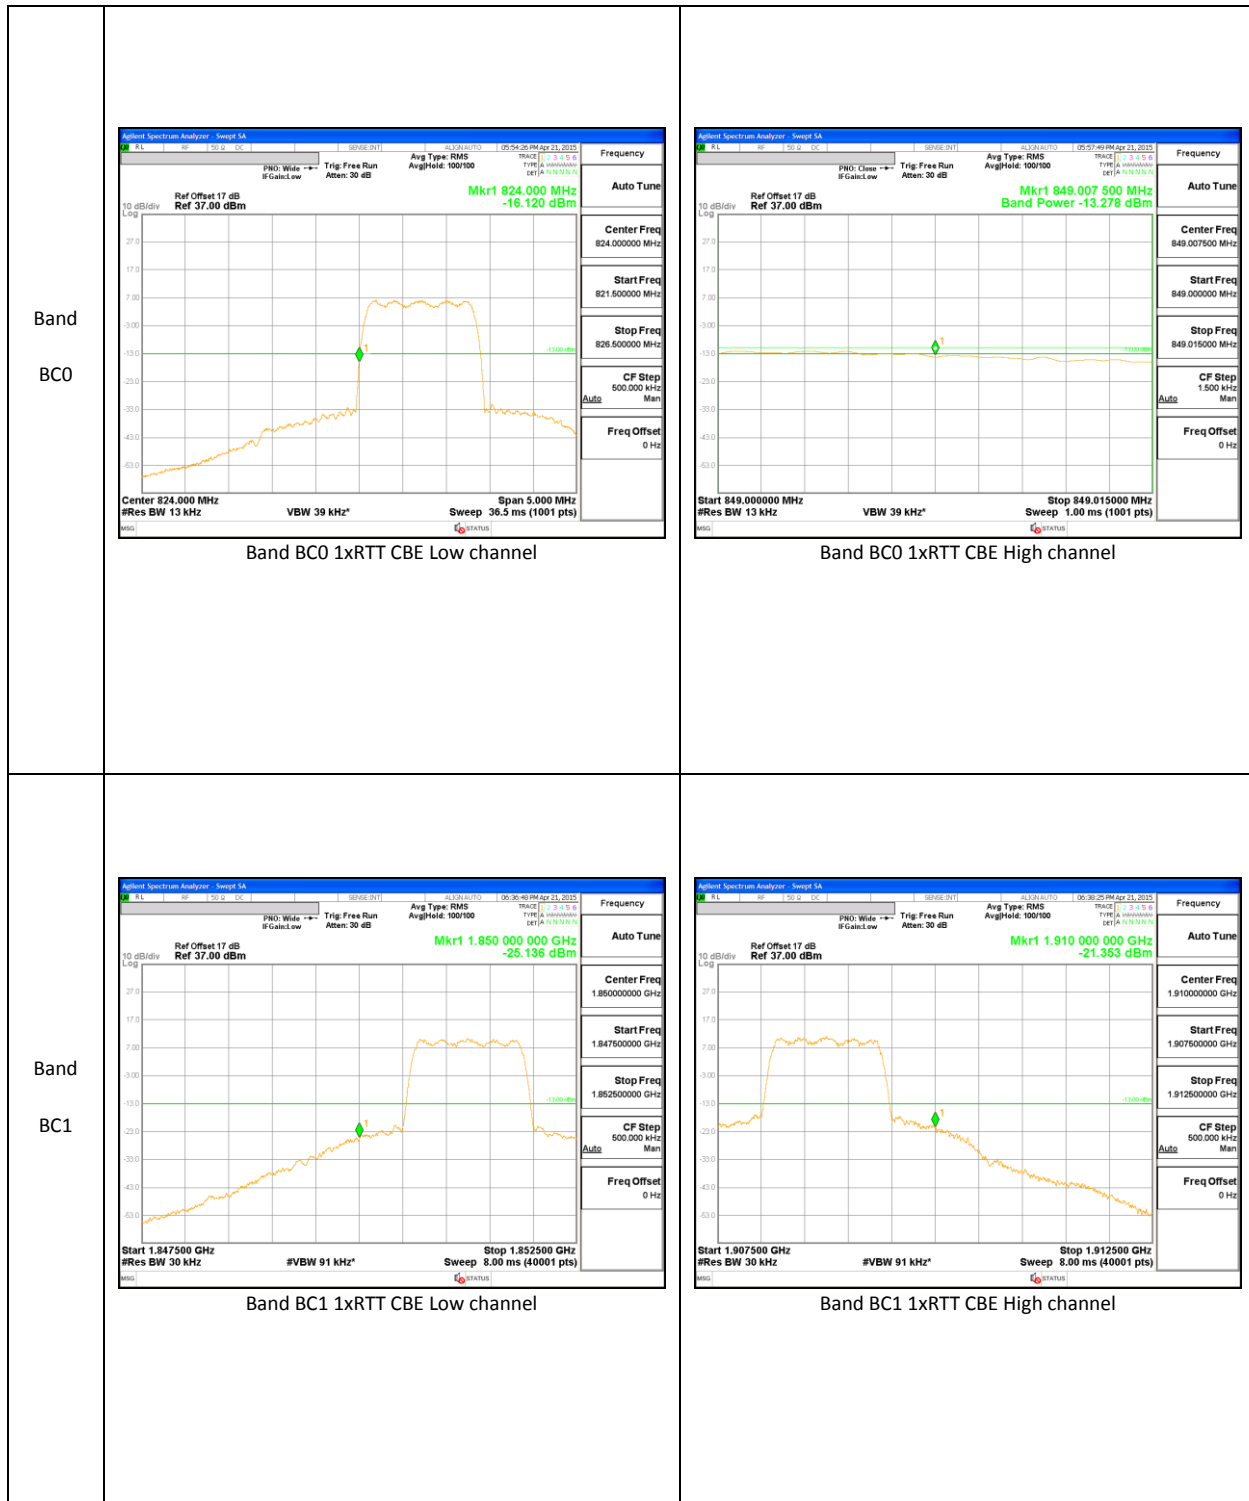

### **10.3. OUT OF BAND EMISSIONS**

#### **RULE PART(S)**

FCC: §2.1051, §22.901, §22.917, §24.238

#### **LIMITS**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### **TEST PROCEDURE**

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

#### **MODES TESTED**

CDMA BC0, CDMA BC1


#### **RESULTS**



### 10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
BC0	1xRTT	824.7	-30.507	-13	-17.507
		836.52	-30.551	-13	-17.551
		848.31	-29.646	-13	-16.646
BC1	1xRTT	1851.25	-28.049	-13	-15.049
		1880	-28.103	-13	-15.103
		1908.75	-27.992	-13	-14.992

### 10.3.2. OUT OF BAND EMISSIONS PLOTS

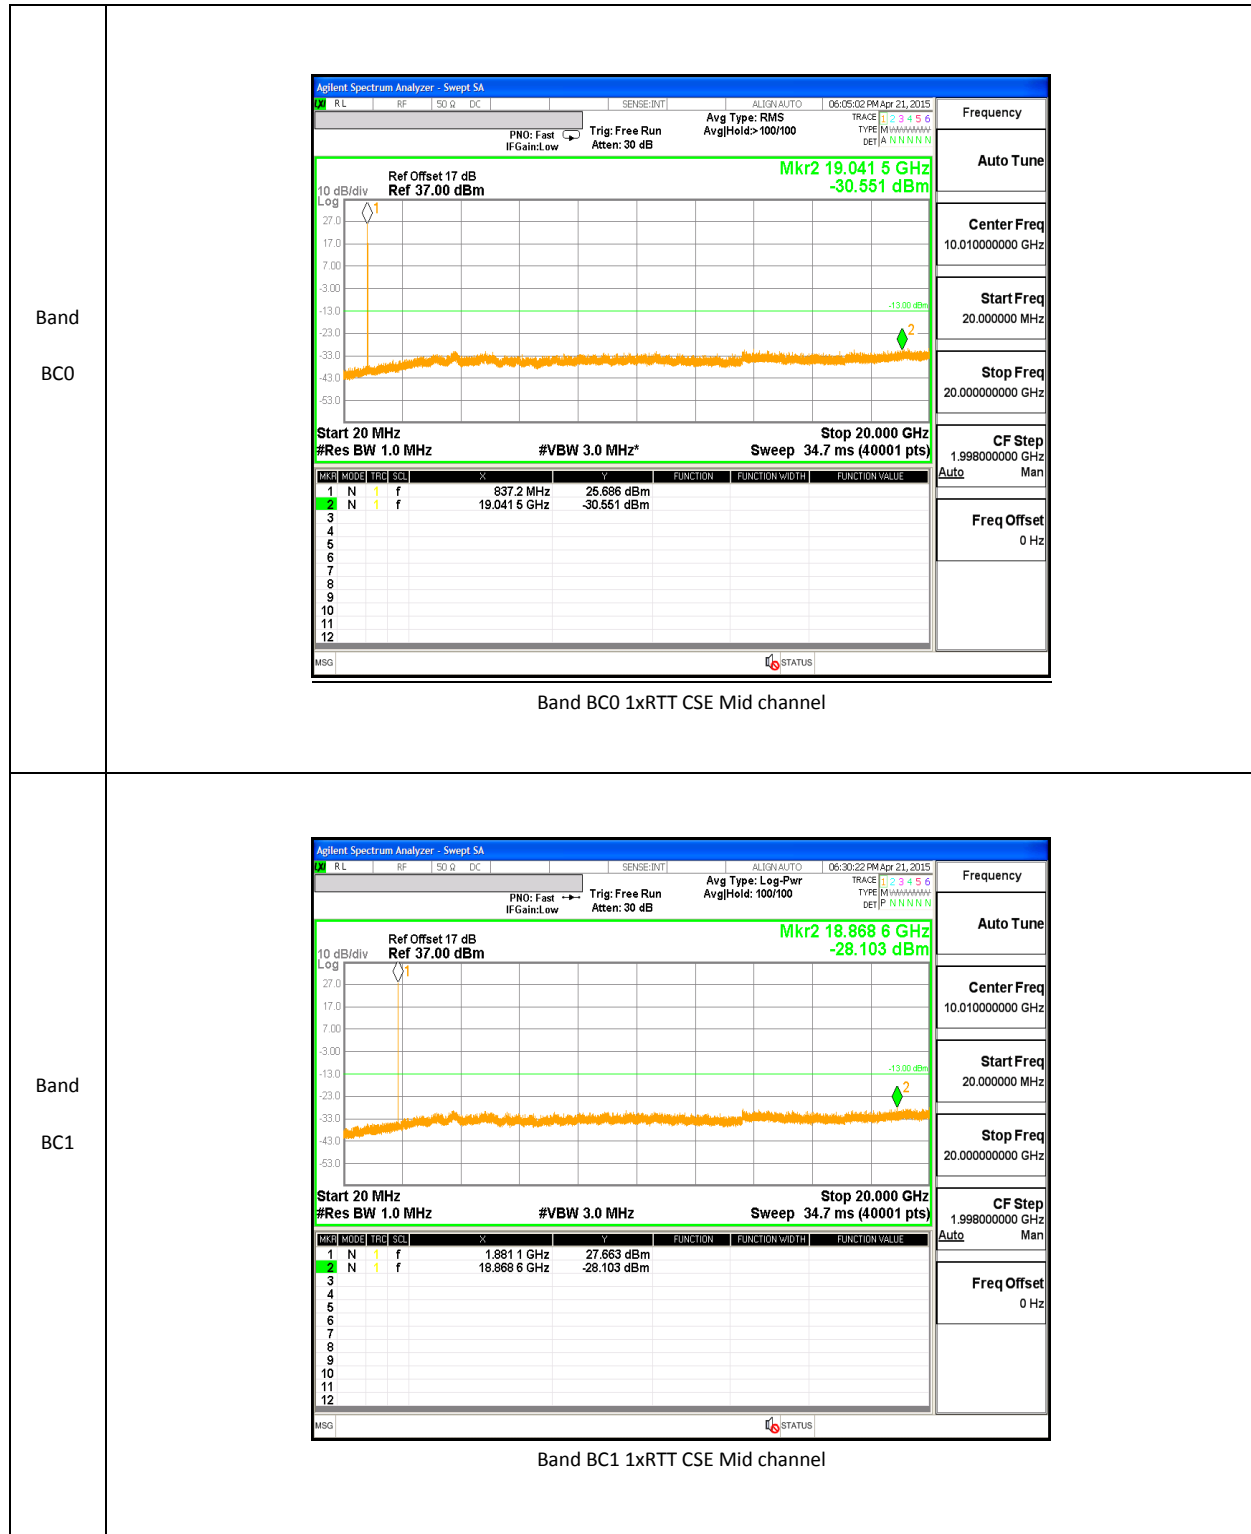

## **10.4. FREQUENCY STABILITY**

### **RULE PART(S)**

FCC: §2.1055, §22.355, §24.235

### **LIMITS**

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### **TEST PROCEDURE**

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

### **MODES TESTED**

CDMA BC0, CDMA BC1

### **RESULTS**

See the following pages.

### 10.4.1. FREQUENCY STABILITY RESULTS

**BC0 CELL BAND, – MID CHANNEL 384, Frequency 836.52 MHz**

Reference Frequency: PCS Mid Channel 836.52 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.300 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.519994	0.014	2.5
3.80	40	836.520004	0.002	2.5
3.80	30	836.520005	0.001	2.5
<b>3.80</b>	<b>20</b>	<b>836.520006</b>	<b>0</b>	<b>2.5</b>
3.80	10	836.519993	0.015	2.5
3.80	0	836.519994	0.014	2.5
3.80	-10	836.520004	0.002	2.5
3.80	-20	836.519991	0.018	2.5
3.80	-30	836.519996	0.012	2.5

Reference Frequency: PCS Mid Channel 836.52 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.300 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>3.80</b>	<b>20</b>	<b>836.520006</b>	<b>0</b>	<b>2.5</b>
4.30	20	836.5200123	-0.008	2.5
3.20	20	836.5199954	0.012	2.5

**BC1 CELL BAND, Mid Channel 600 Freq: 1880MHz**

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.999990	-0.001	2.5
3.80	40	1879.999989	-0.001	2.5
3.80	30	1879.999990	-0.002	2.5
<b>3.80</b>	<b>20</b>	<b>1879.999987</b>	<b>0</b>	<b>2.5</b>
3.80	10	1879.999991	-0.002	2.5
3.80	0	1879.999989	-0.001	2.5
3.80	-10	1879.999989	-0.001	2.5
3.80	-20	1879.999989	-0.001	2.5
3.80	-30	1879.999991	-0.002	2.5

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>3.80</b>	<b>20</b>	<b>1879.999987</b>	<b>0</b>	<b>2.5</b>
4.30	20	1879.999991	-0.002	2.5
3.20	20	1879.999991	-0.002	2.5

## 11. RADIATED TEST RESULTS

### 11.1. RADIATED POWER (ERP & EIRP)

#### RULE PART(S)

FCC: §2.1046, §22.913, §24.232

#### LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

#### TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r01

For peak power measurement with a PSA:

a) Set the RBW  $\geq$  OBW; b) Set VBW  $\geq 3 \times$  RBW; c) Set span  $\geq 2 \times$  RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points  $\geq$  span/RBW; g) Trace mode = max hold;

#### MODES TESTED

CDMA BC0, CDMA BC1

#### TEST RESULTS

**11.1.1. ERP/EIRP RESULTS**

**CDMA BC0**

Band	Mode	Channel	f(MHz)	ERP	
				dBm	mW
BC0	1xRTT	1013	824.7	20.91	123.31
		384	836.52	22.33	171.00
		777	848.31	22.16	164.44
	EVDO REL. 0	1013	824.7		
		384	836.52		
		777	848.31		
	EVDO REV. A	1013	824.7		
		384	836.52		
		777	848.31		

**CDMA BC1**

Band	Mode	Channel	f(MHz)	EIRP	
				dBm	mW
BC1	1xRTT	25	1851.25	22.79	190.11
		600	1880	23.68	233.35
		1175	1908.75	22.79	190.11
	EVDO REL. 0	25	1851.25		
		600	1880		
		1175	1908.75		
	EVDO REV. A	25	1851.25		
		600	1880		
		1175	1908.75		

**11.1.2. LTE ERP/EIRP RESULTS**

Band BC0	<b>High Frequency Substitution Measurement</b> <b>UL Verification Services, Inc. Chamber A</b>																																																																																																	
	<b>Company:</b>		LG																																																																																															
	<b>Project #:</b>		15I20516																																																																																															
	<b>Date:</b>		4/27/2015																																																																																															
	<b>Test Engineer:</b>		O. Stoelting																																																																																															
	<b>Configuration:</b>		X-pos EUT Only																																																																																															
	<b>Mode:</b>		CDMA RTT BC1																																																																																															
	<b>Test Equipment:</b>																																																																																																	
	Receiving: Sunol T130, and Chamber ASMA-type Cable																																																																																																	
	Substitution: Dipole T416, 6ft N-type Cable Warehouse.																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.70</td> <td>13.91</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>13.01</td> <td>38.5</td> <td>-25.4</td> <td></td> </tr> <tr> <td>824.70</td> <td>21.80</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>20.91</td> <td>38.5</td> <td>-17.5</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.52</td> <td>12.43</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>11.53</td> <td>38.5</td> <td>-26.9</td> <td></td> </tr> <tr> <td>836.52</td> <td>23.22</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.33</td> <td>38.5</td> <td>-16.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.31</td> <td>12.77</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>11.87</td> <td>38.5</td> <td>-26.6</td> <td></td> </tr> <tr> <td>848.31</td> <td>23.06</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>22.16</td> <td>38.5</td> <td>-16.3</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									824.70	13.91	V	0.9	0.0	13.01	38.5	-25.4		824.70	21.80	H	0.9	0.0	20.91	38.5	-17.5		Mid Ch									836.52	12.43	V	0.9	0.0	11.53	38.5	-26.9		836.52	23.22	H	0.9	0.0	22.33	38.5	-16.1		High Ch									848.31	12.77	V	0.9	0.0	11.87	38.5	-26.6		848.31	23.06	H	0.9	0.0	22.16	38.5	-16.3	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
Low Ch																																																																																																		
824.70	13.91	V	0.9	0.0	13.01	38.5	-25.4																																																																																											
824.70	21.80	H	0.9	0.0	20.91	38.5	-17.5																																																																																											
Mid Ch																																																																																																		
836.52	12.43	V	0.9	0.0	11.53	38.5	-26.9																																																																																											
836.52	23.22	H	0.9	0.0	22.33	38.5	-16.1																																																																																											
High Ch																																																																																																		
848.31	12.77	V	0.9	0.0	11.87	38.5	-26.6																																																																																											
848.31	23.06	H	0.9	0.0	22.16	38.5	-16.3																																																																																											
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																		



Band  BC1	<b>High Frequency Substitution Measurement UL Verification Services Chamber A</b>								
	<b>Company:</b>		LG						
	<b>Project #:</b>		15I20516						
	<b>Date:</b>		4/27/2015						
	<b>Test Engineer:</b>		O. Stoelting						
	<b>Configuration:</b>		X-pos EUT Only						
	<b>Mode:</b>		CDMA RTT BC1						
	<b>Test Equipment:</b>								
	Receiving: Horn T136, and Chamber A SMA Cables								
	Substitution: Horn T59 Substitution, 6ft N-type Cable								
	<b>f</b>	<b>SG reading</b>	<b>Ant. Pol.</b>	<b>Cable Loss</b>	<b>Antenna Gain</b>	<b>EIRP</b>	<b>Limit</b>	<b>Delta</b>	<b>Notes</b>
	<b>GHz</b>	<b>(dBm)</b>	<b>(H/V)</b>	<b>(dB)</b>	<b>(dBi)</b>	<b>(dBm)</b>	<b>(dBm)</b>	<b>(dB)</b>	
	<b>Low Ch</b>								
	1.8513	12.9	V	0.85	8.05	20.06	33.0	-12.9	
	1.8513	15.6	H	0.85	8.05	22.79	33.0	-10.2	
	<b>Mid Ch</b>								
	1.8800	10.4	V	0.85	8.03	17.54	33.0	-15.5	
	1.8800	16.5	H	0.85	8.03	23.68	33.0	-9.3	
	<b>High Ch</b>								
	1.9088	14.1	V	0.85	8.05	21.27	33.0	-11.7	
	1.9088	15.6	H	0.85	8.05	22.79	33.0	-10.2	
	Rev. 3.17.11								

## 11.2. FIELD STRENGTH OF SPURIOUS RADIATION

### **RULE PART(S)**

FCC: §2.1053, §22.917, §24.238

### **LIMIT**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **TEST PROCEDURE**

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### **MODES TESTED**

CDMA BC0, CDMA BC1

### **RESULTS**

### 11.2.1. SPURIOUS RADIATION PLOTS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		LG								
<b>Project #:</b>		15I20516								
<b>Date:</b>		4/27/2015								
<b>Test Engineer:</b>		O. Stoelting								
<b>Configuration:</b>		X-pos EUT, AC Charger								
<b>Location:</b>		Chamber A								
<b>Mode:</b>		CDMA 1xRTT BC0 Harmonics								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
<b>Low Ch, 824.7</b>										
1649.40	-21.6	V	3.0	37.4	1.0	-58.0	-13.0	-45.0		
2474.10	-26.3	V	3.0	36.4	1.0	-61.7	-13.0	-48.7		
3298.80	-22.7	V	3.0	35.8	1.0	-57.5	-13.0	-44.5		
1649.40	-23.0	H	3.0	37.4	1.0	-59.4	-13.0	-46.4		
2474.10	-24.9	H	3.0	36.4	1.0	-60.3	-13.0	-47.3		
3298.80	-22.1	H	3.0	35.8	1.0	-56.9	-13.0	-43.9		
<b>Mid Ch, 836.52</b>										
1673.04	-18.7	V	3.0	37.3	1.0	-55.0	-13.0	-42.0		
2509.56	-26.3	V	3.0	36.4	1.0	-61.7	-13.0	-48.7		
3346.08	-22.1	V	3.0	35.8	1.0	-56.9	-13.0	-43.9		
1673.04	-19.9	H	3.0	37.3	1.0	-56.2	-13.0	-43.2		
2509.56	-23.8	H	3.0	36.4	1.0	-59.2	-13.0	-46.2		
3346.08	-22.4	H	3.0	35.8	1.0	-57.2	-13.0	-44.2		
<b>High Ch, 848.31</b>										
1696.62	-18.0	V	3.0	37.3	1.0	-54.3	-13.0	-41.3		
2544.93	-26.6	V	3.0	36.3	1.0	-61.9	-13.0	-48.9		
3393.24	-22.4	V	3.0	35.7	1.0	-57.1	-13.0	-44.1		
1696.62	-19.1	H	3.0	37.3	1.0	-55.4	-13.0	-42.4		
2544.93	-24.5	H	3.0	36.3	1.0	-59.8	-13.0	-46.8		
3393.24	-22.2	H	3.0	35.7	1.0	-56.9	-13.0	-43.9		

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
<b>Company:</b>		LG							
<b>Project #:</b>		15I20516							
<b>Date:</b>		4/27/2015							
<b>Test Engineer:</b>		O. Stoelting							
<b>Configuration:</b>		X-pos EUT, AC Charger							
<b>Location:</b>		Chamber A							
<b>Mode:</b>		CDMA 1xRTT BC1 Harmonics							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1851.25									
3702.50	-16.2	V	3.0	35.9	1.0	-51.1	-13.0	-38.1	
5553.75	-18.5	V	3.0	35.5	1.0	-53.0	-13.0	-40.0	
7405.00	-17.4	V	3.0	35.7	1.0	-52.1	-13.0	-39.1	
3702.50	-8.0	H	3.0	35.9	1.0	-42.8	-13.0	-29.8	
5553.75	-17.9	H	3.0	35.5	1.0	-52.4	-13.0	-39.4	
7405.00	-16.5	H	3.0	35.7	1.0	-51.3	-13.0	-38.3	
Mid Ch, 1880									
3760.00	-7.8	V	3.0	35.8	1.0	-42.6	-13.0	-29.6	
5640.00	-18.2	V	3.0	35.5	1.0	-52.7	-13.0	-39.7	
7520.00	-16.9	V	3.0	35.7	1.0	-51.6	-13.0	-38.6	
3760.00	-9.9	H	3.0	35.8	1.0	-44.7	-13.0	-31.7	
5640.00	-17.8	H	3.0	35.5	1.0	-52.2	-13.0	-39.2	
7520.00	-16.1	H	3.0	35.7	1.0	-50.8	-13.0	-37.8	
High Ch, 1908.75									
3817.50	-12.7	V	3.0	35.8	1.0	-47.5	-13.0	-34.5	
5726.25	-17.9	V	3.0	35.5	1.0	-52.4	-13.0	-39.4	
7635.00	-16.4	V	3.0	35.8	1.0	-51.1	-13.0	-38.1	
3817.50	-17.7	H	3.0	35.8	1.0	-52.5	-13.0	-39.5	
5726.25	-17.8	H	3.0	35.5	1.0	-52.3	-13.0	-39.3	
7635.00	-15.6	H	3.0	35.8	1.0	-50.4	-13.0	-37.4	