

Attachment 1. – Dipole Validation Plots

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.887 \text{ mho/m}$; $\epsilon_r = 42.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-09; Ambient Temp: 21.3; Tissue Temp: 21.5

Dipole Validation

Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Power Drift = -0.049 dB
 Peak SAR (extrapolated) = 3.73 W/kg
 SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.63 W/kg

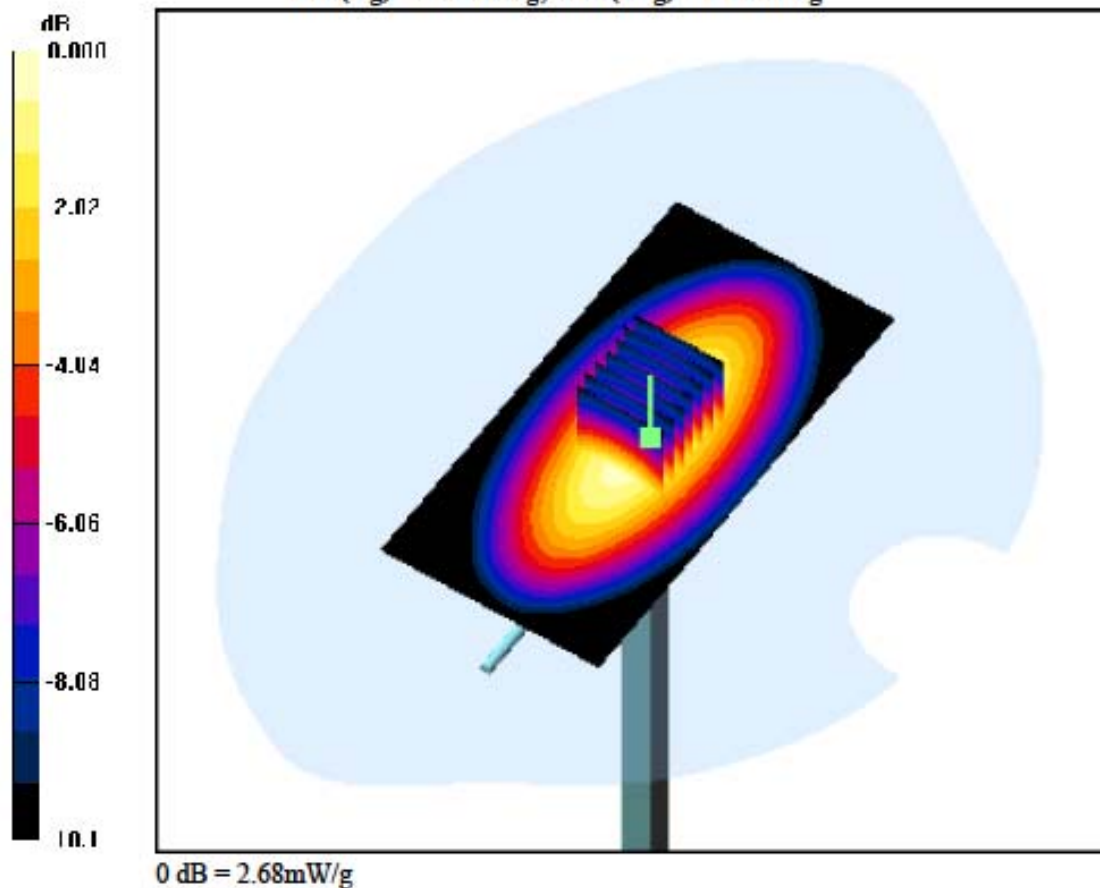

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:464

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.954$ mho/m; $\epsilon_r = 55.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.97, 8.97, 8.97); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-09; Ambient Temp: 21.3; Tissue Temp: 21.5

Dipole Validation

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Power Drift = 0.002 dB
Peak SAR (extrapolated) = 3.46 W/kg
SAR(1 g) = 2.3 W/kg; SAR(10 g) = 1.51 W/kg

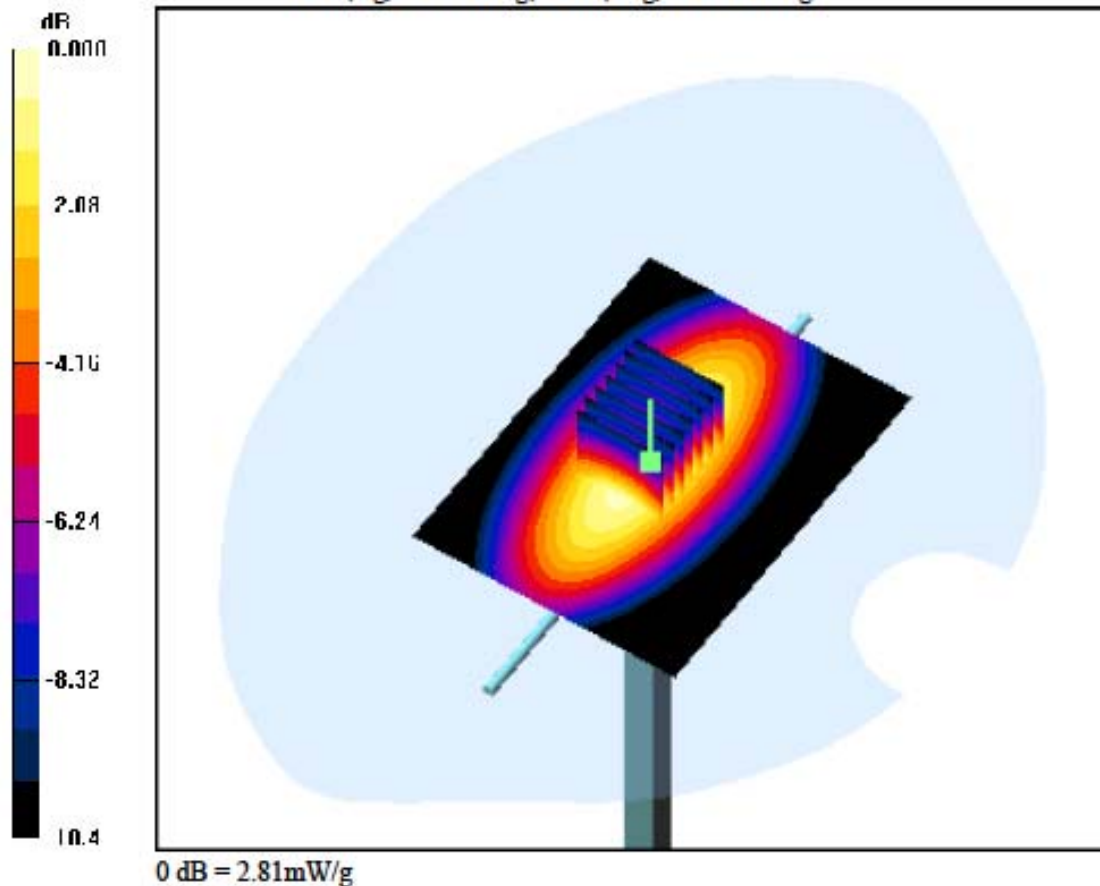

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-10; Ambient Temp: 21.9; Tissue Temp: 22.3

Dipole Validation


Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.091 dB

Peak SAR (extrapolated) = 21.0 W/kg

SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.14 W/kg

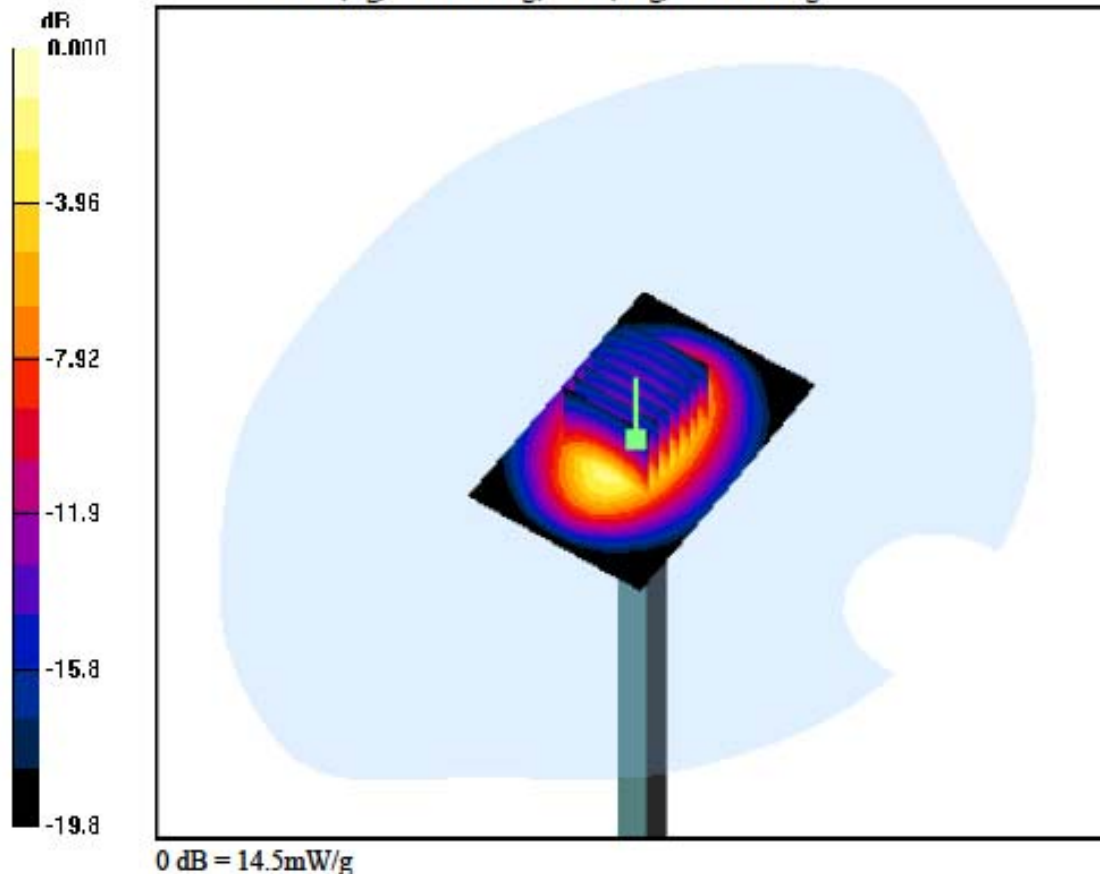

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d029

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(7.19, 7.19, 7.19); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-10; Ambient Temp: 21.9; Tissue Temp: 22.3

Dipole Validation


Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.020 dB

Peak SAR (extrapolated) = 19.5 W/kg

SAR(1 g) = 10.7 W/kg; SAR(10 g) = 5.56 W/kg

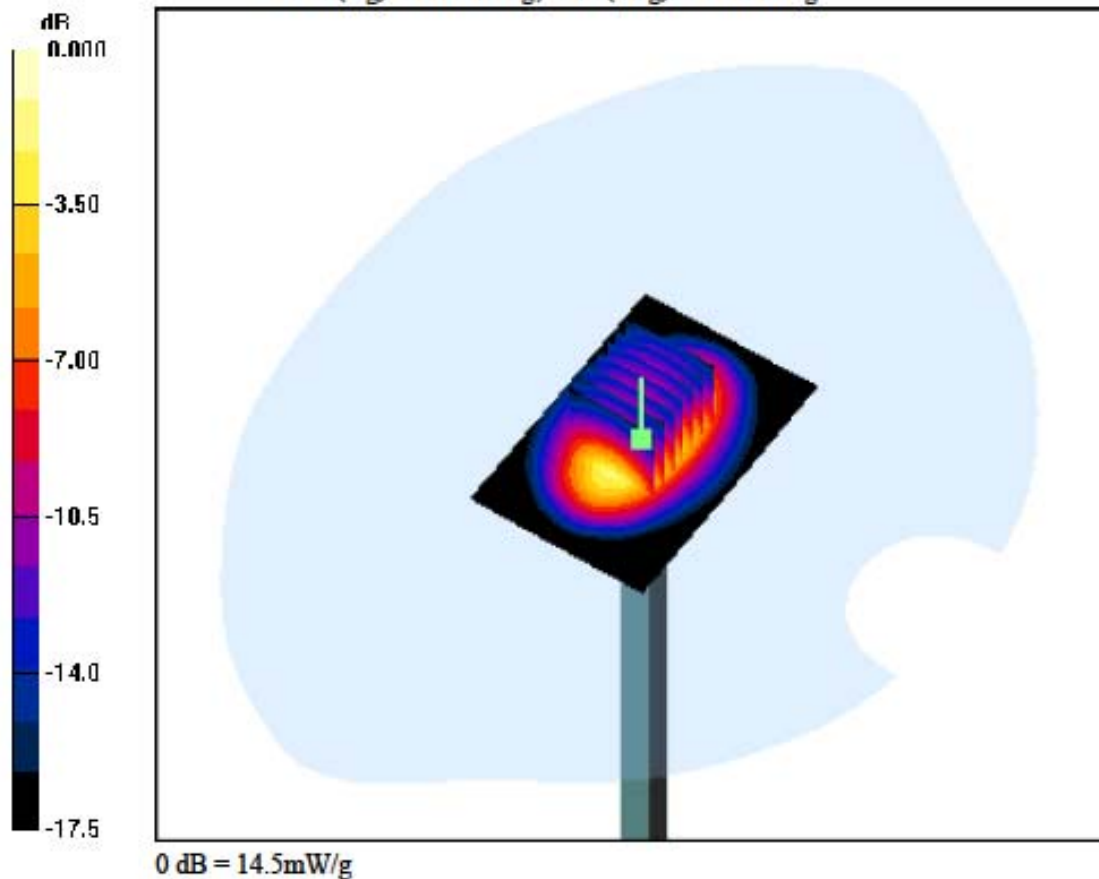

Attachment 2. – SAR Test Plots

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 824.333$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-09; Ambient Temp: 21.3; Tissue Temp: 21.5

Left Touch, GSM850 Ch. 128, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.011 dB
Peak SAR (extrapolated) = 0.687 W/kg
SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.392 W/kg

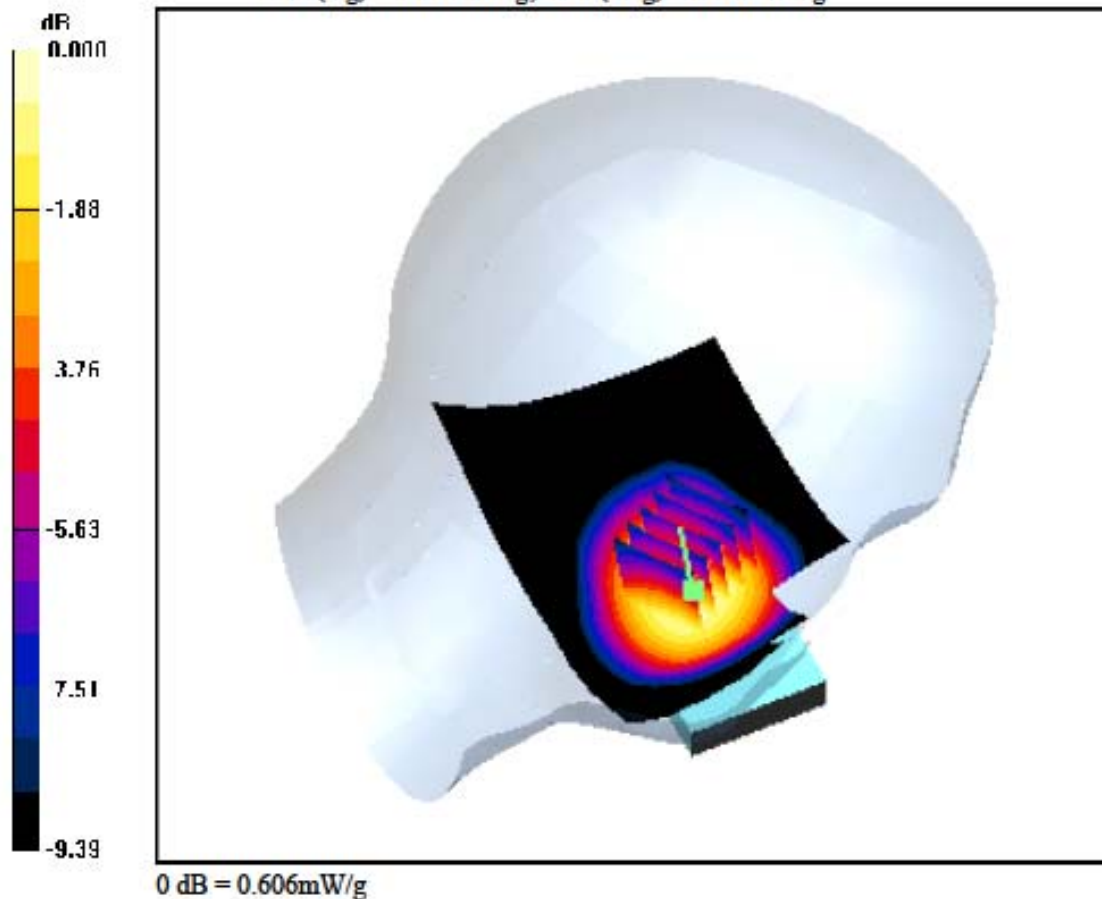

DIGITAL EMC CO., LTD

DUT: LG-A290; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.667$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-09; Ambient Temp: 21.3; Tissue Temp: 21.5

Left Touch, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.258 dB
Peak SAR (extrapolated) = 0.666 W/kg
SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.373 W/kg

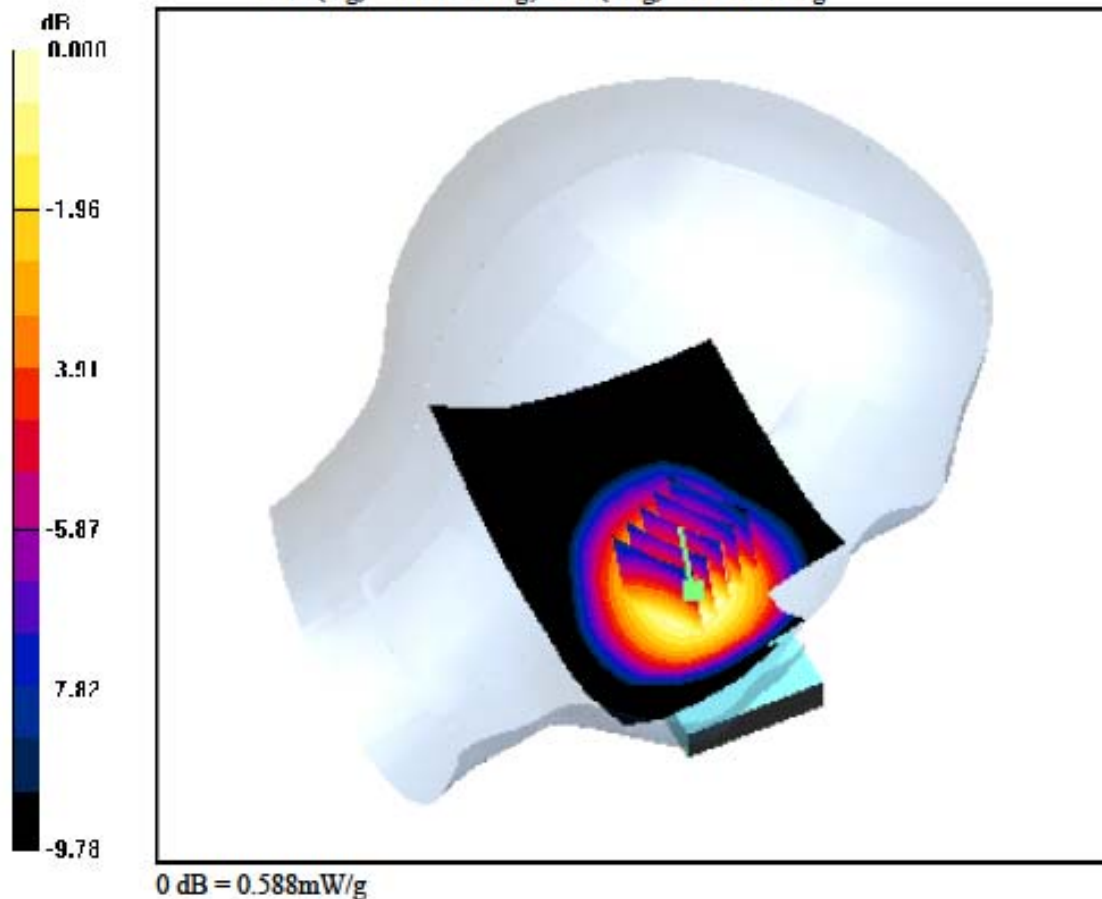

DIGITAL EMC CO., LTD

DUT: LG-A290; Type: Bar

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519

Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-09; Ambient Temp: 21.3; Tissue Temp: 21.5

Left Touch, GSM850 Ch. 251, Ant Internal, Standard Battery


Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.332 W/kg

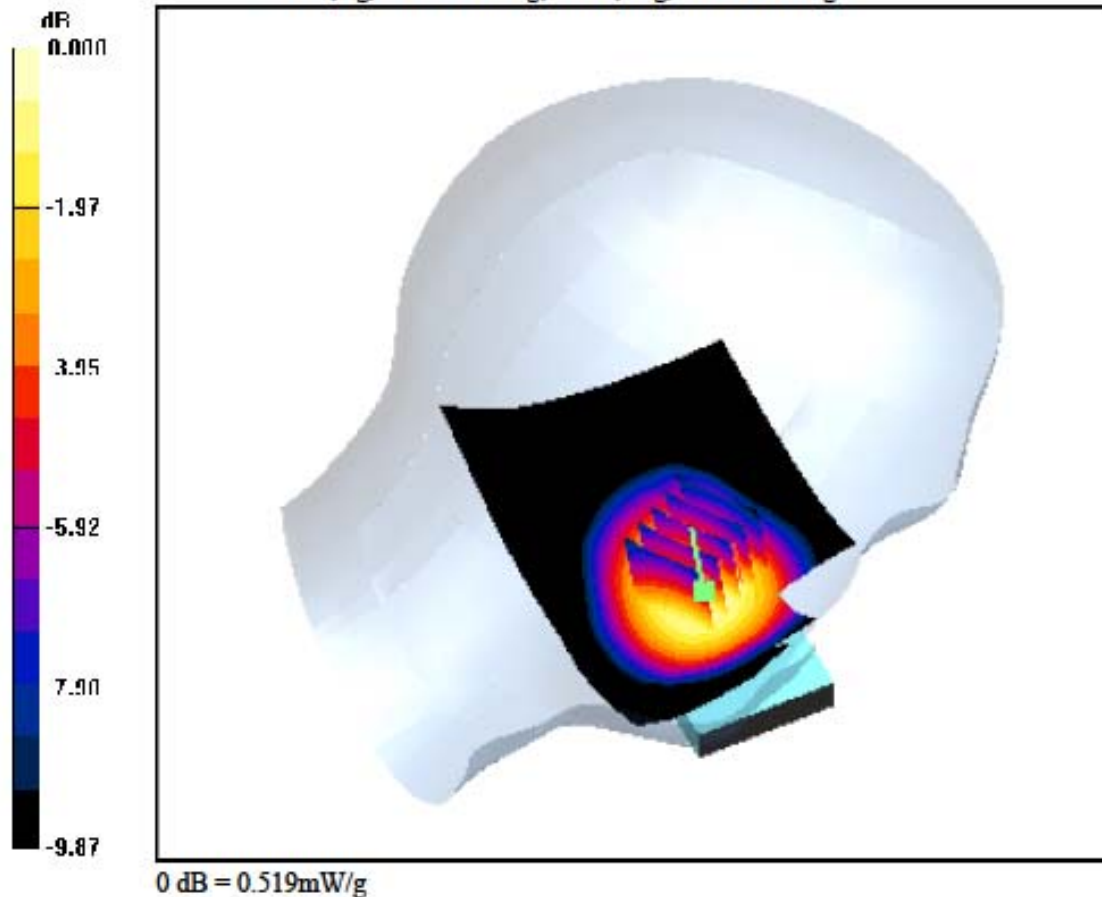

DIGITAL EMC CO., LTD

DUT: LG-A290; Type: Bar

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.667$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-09; Ambient Temp: 21.3; Tissue Temp: 21.5

Right Touch, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.013 dB
Peak SAR (extrapolated) = 0.601 W/kg
SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.329 W/kg

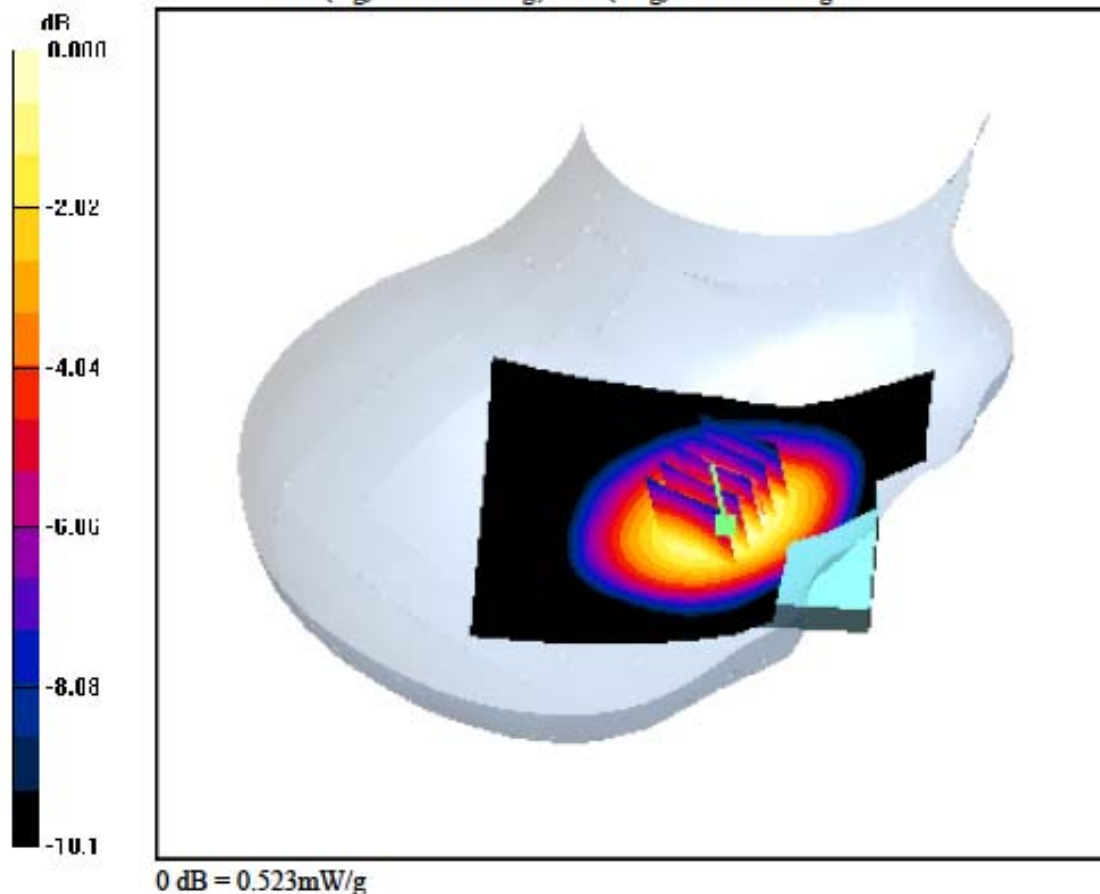

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 824.333$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Date: 2011-11-09; Ambient Temp: 21.3; Tissue Temp: 21.5

Left Touch , Sim2, GSM850 Ch. 128, Ant Internal, Standard Battery**Area Scan (71x101x1):** Measurement grid: dx=15mm, dy=15mm**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.675 W/kg

SAR(1 g) = 0.528 W/kg; SAR(10 g) = 0.386 W/kg

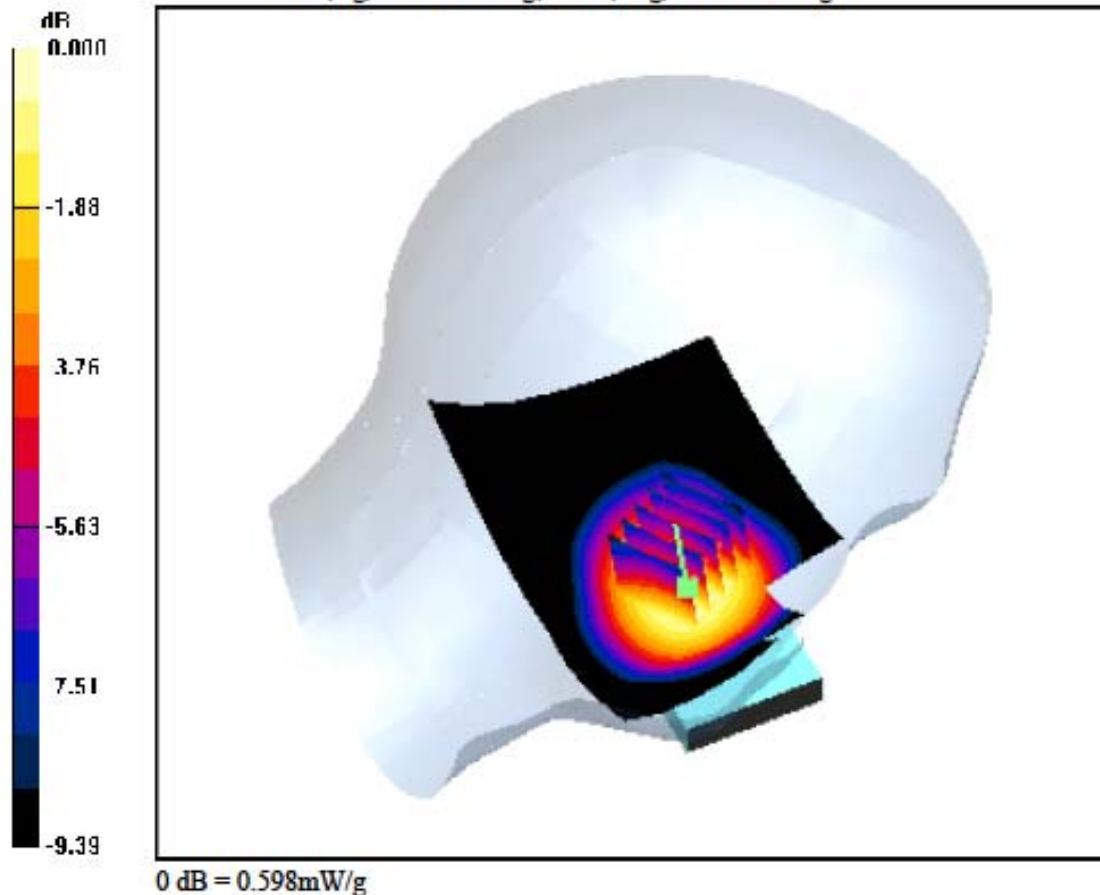

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 824.333$ MHz; $\sigma = 0.877$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³
 Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-09; Ambient Temp: 21.3; Tissue Temp: 21.5

Left Touch, Sim3, GSM850 Ch. 128, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = 0.058 dB
 Peak SAR (extrapolated) = 0.672 W/kg
 SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.386 W/kg

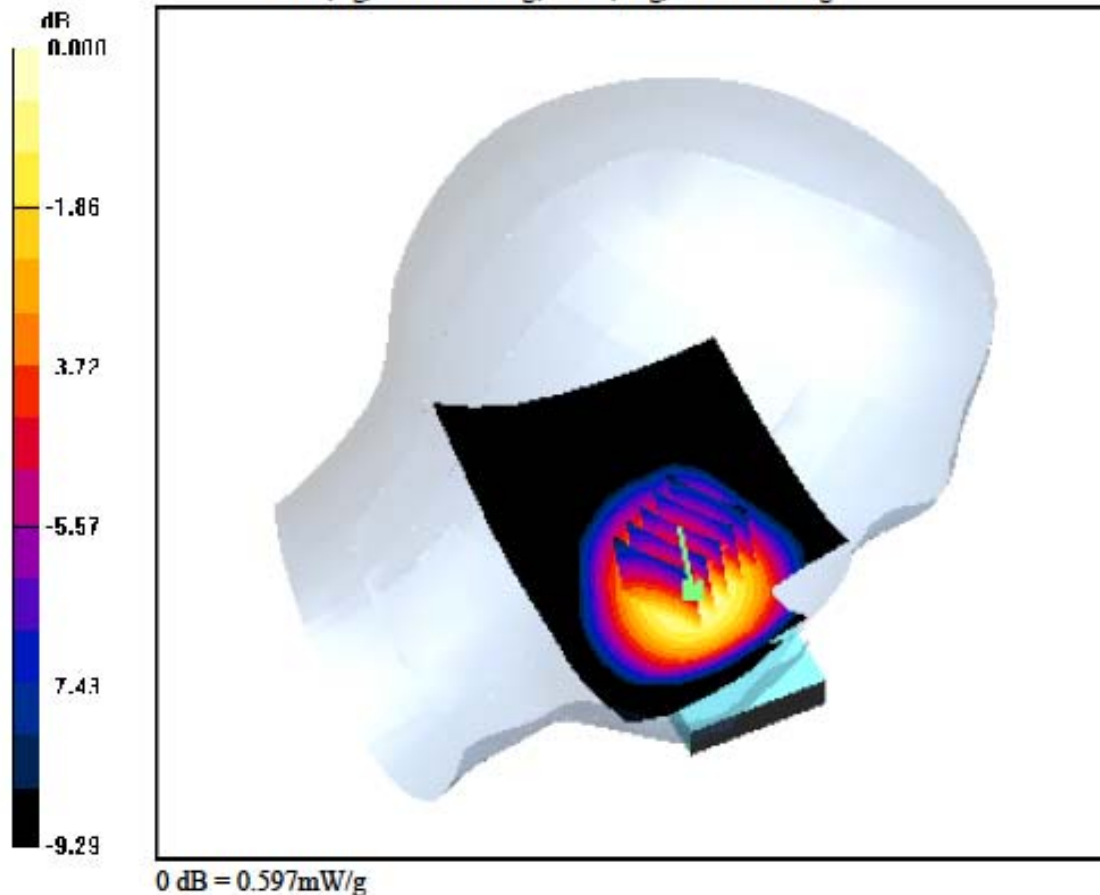

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 836.667$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³
 Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-09; Ambient Temp: 21.3; Tissue Temp: 21.5

Left Tilt, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = 0.076 dB
 Peak SAR (extrapolated) = 0.322 W/kg
 SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.184 W/kg

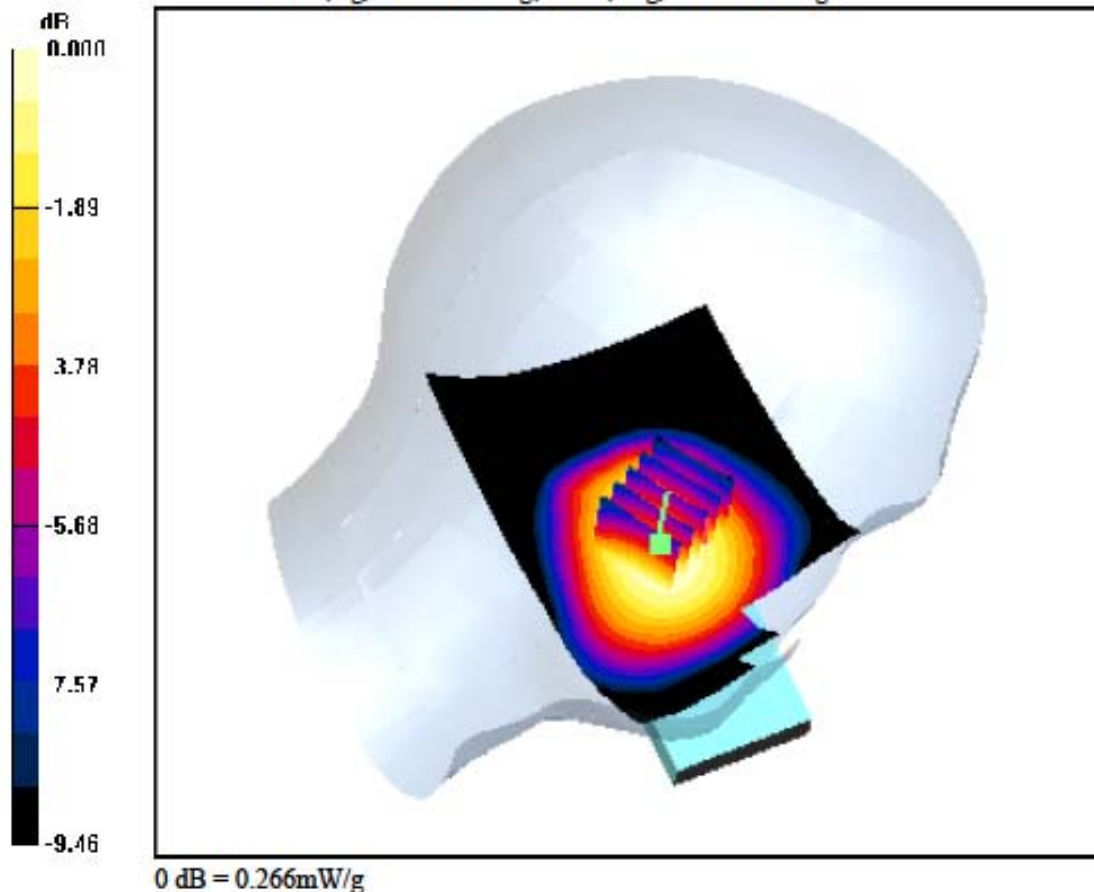

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.667$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 42.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.96, 8.96, 8.96); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM with 835MHz; Type: SAM; Serial: TP-1223
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-09; Ambient Temp: 21.3; Tissue Temp: 21.5

Right Tilt, GSM850 Ch. 190, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.071 dB
Peak SAR (extrapolated) = 0.301 W/kg
SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.169 W/kg

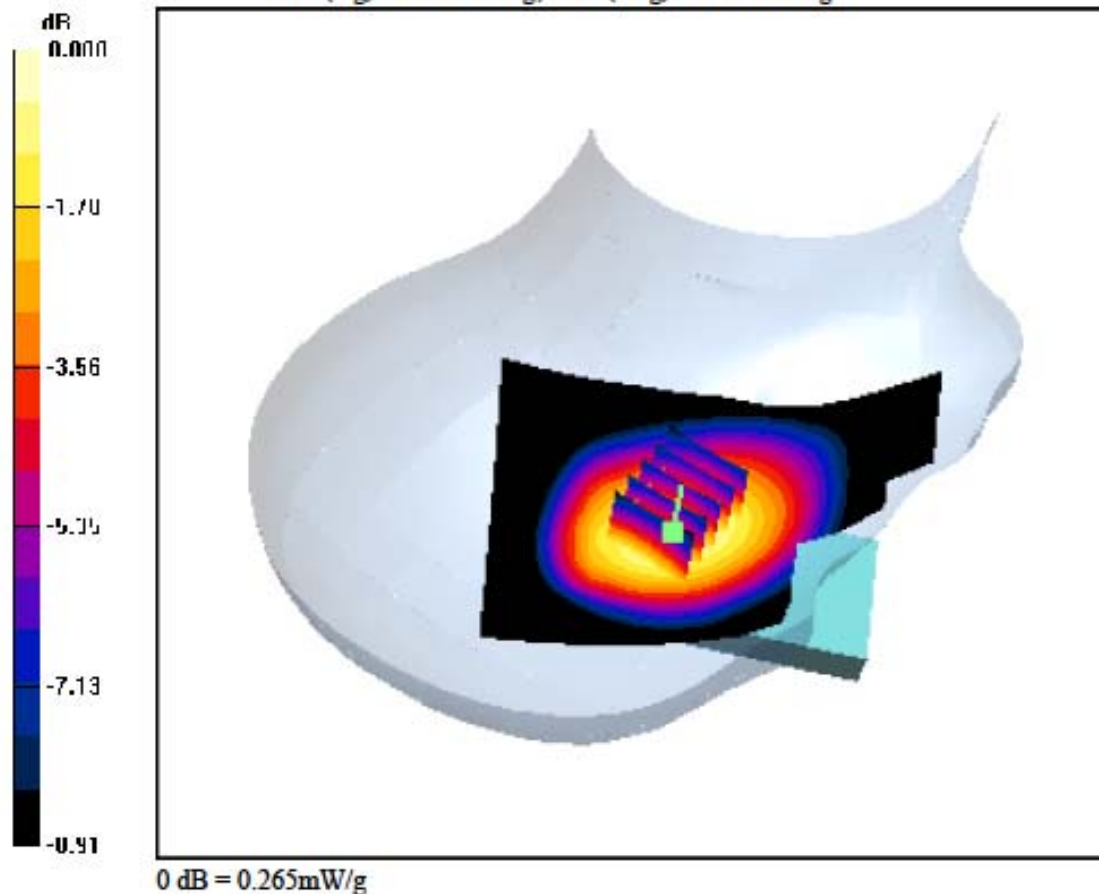

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-10; Ambient Temp: 21.9; Tissue Temp: 22.3

Left Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.041 dB
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.441 W/kg

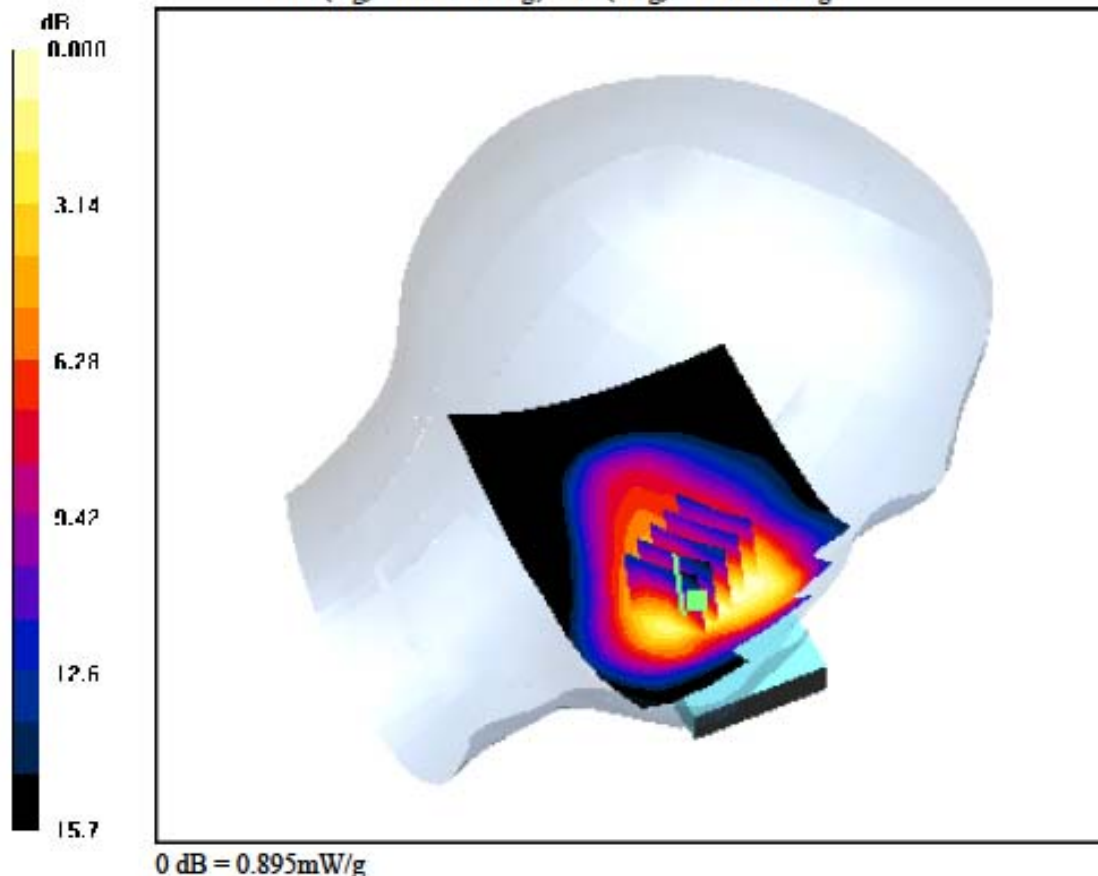

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1850.2 \text{ MHz}$, $\sigma = 1.36 \text{ mho/m}$, $\epsilon_r = 39$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-10; Ambient Temp: 21.9; Tissue Temp: 22.3

Right Touch, PCS1900 Ch. 512, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Power Drift = -0.004 dB
 Peak SAR (extrapolated) = 1.72 W/kg
 SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.578 W/kg

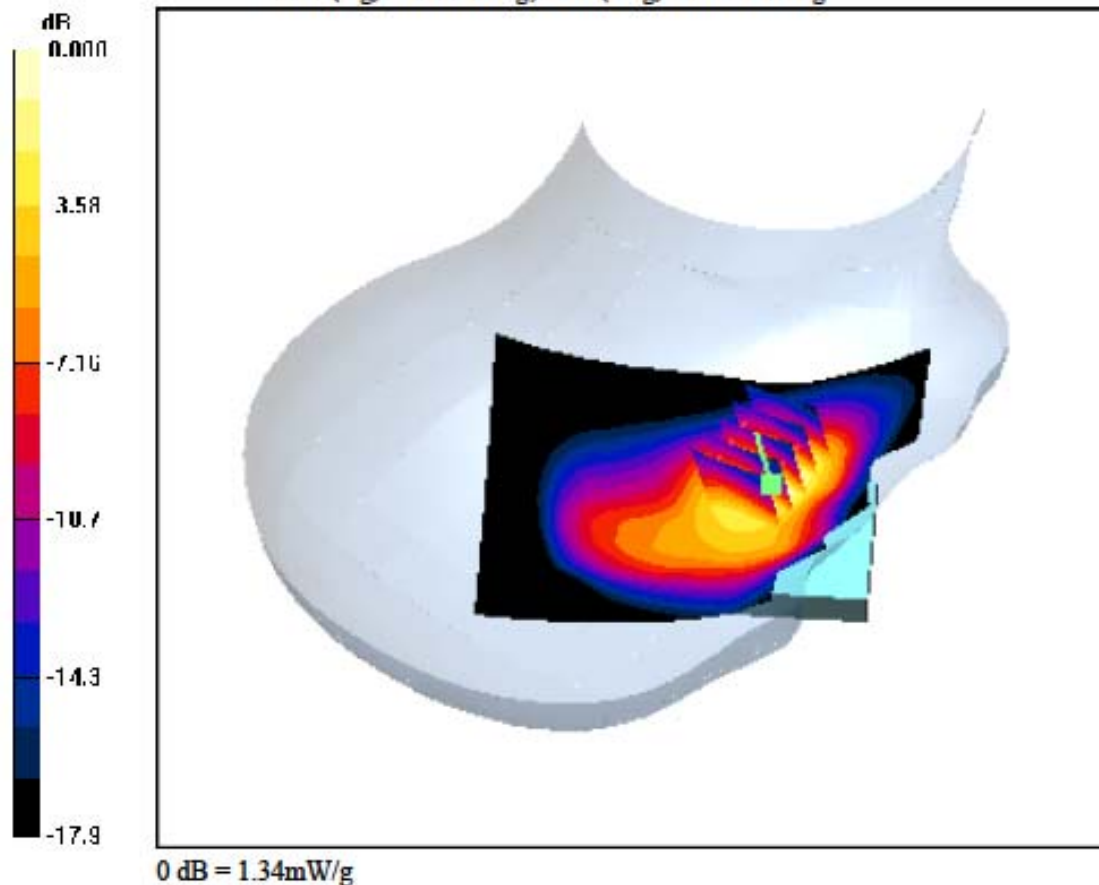

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-10; Ambient Temp: 21.9; Tissue Temp: 22.3

Right Touch, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.043 dB
Peak SAR (extrapolated) = 1.98 W/kg
SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.665 W/kg

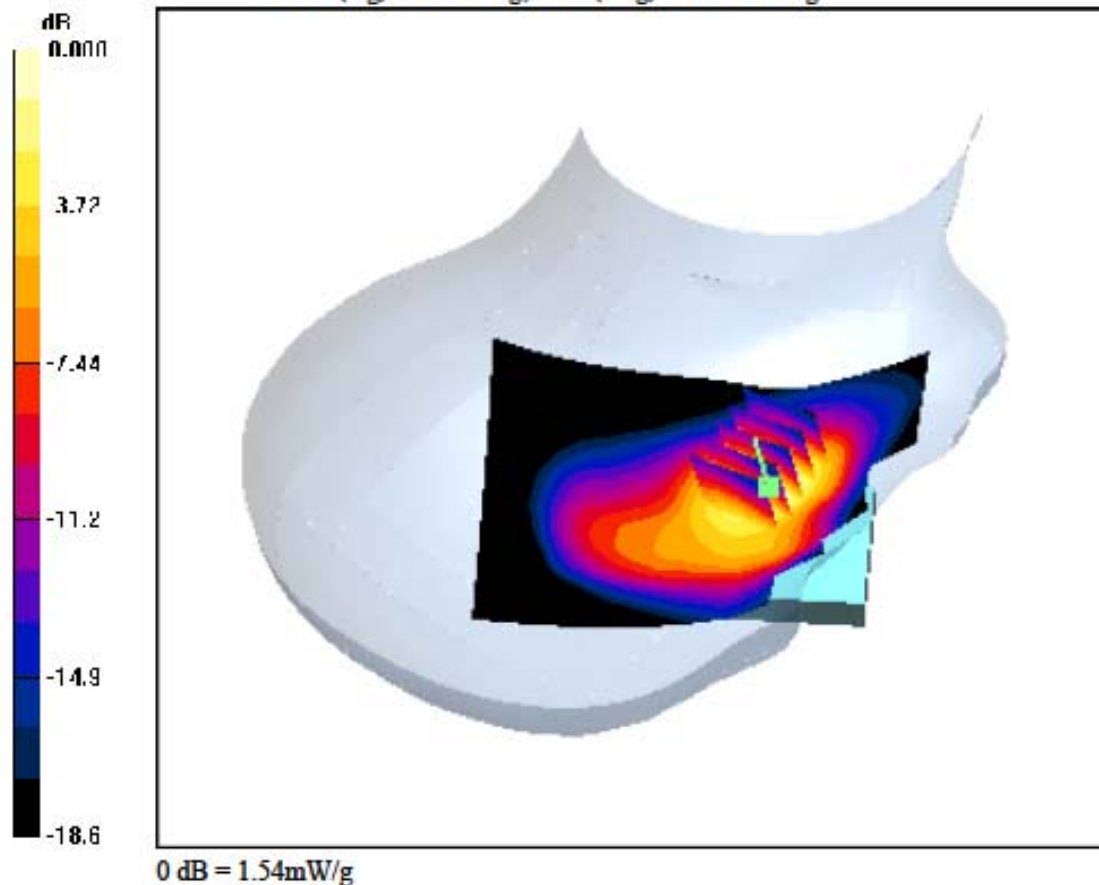

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-10; Ambient Temp: 21.9; Tissue Temp: 22.3

Right Touch, PCS1900 Ch. 810, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.044 dB
Peak SAR (extrapolated) = 1.80 W/kg
SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.593 W/kg

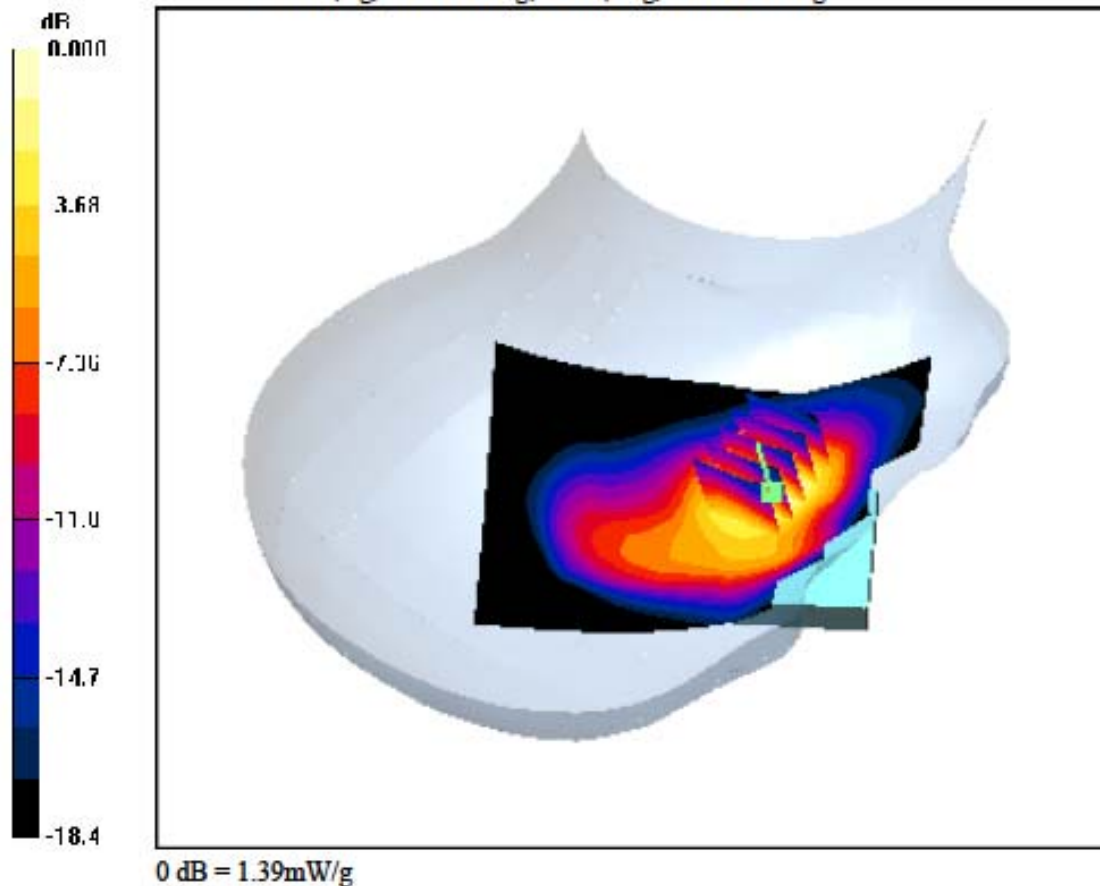

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-10; Ambient Temp: 21.9; Tissue Temp: 22.3

Right Touch, Sim2, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = -0.052 dB
Peak SAR (extrapolated) = 1.88 W/kg
SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.640 W/kg

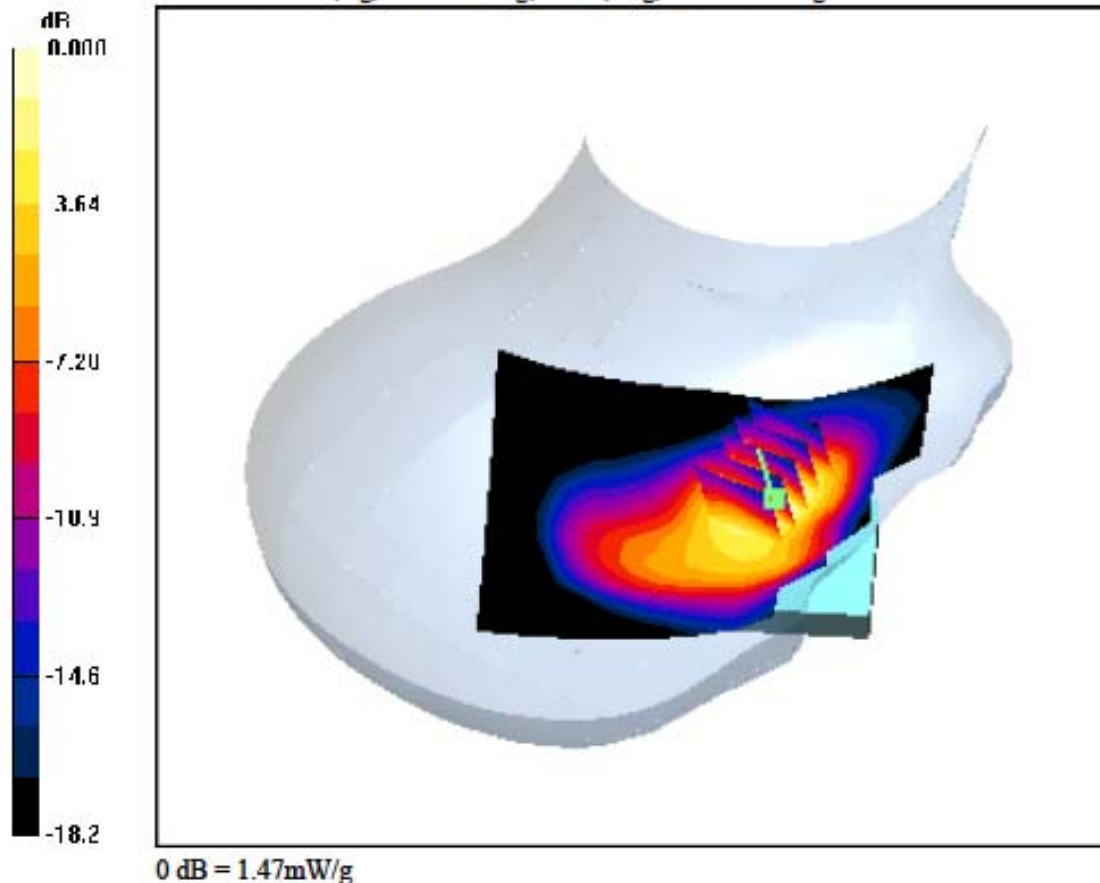

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³
Phantom section: Right Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-10; Ambient Temp: 21.9; Tissue Temp: 22.3

Right Touch, Sim3, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.040 dB
Peak SAR (extrapolated) = 1.91 W/kg
SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.657 W/kg

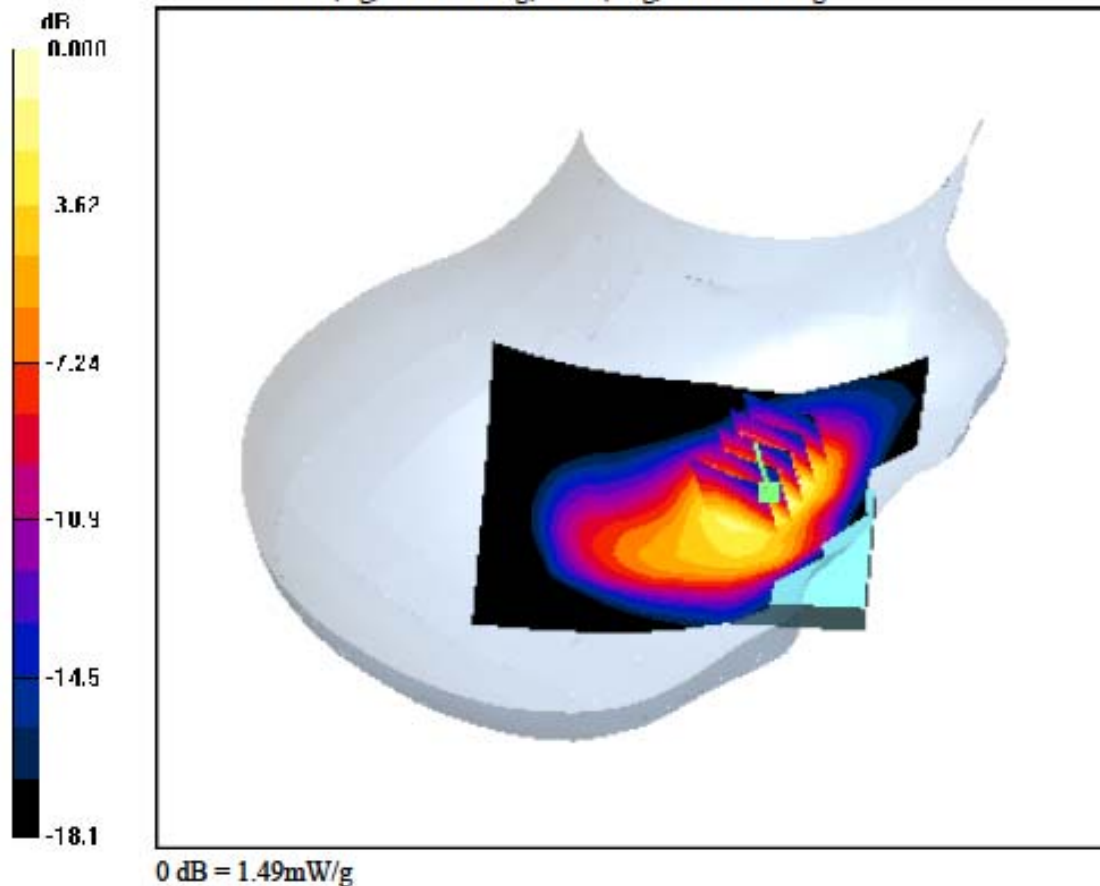

DIGITAL EMC CO., LTD

DUT: LG-A290; Type: Bar

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³
Phantom section: Left Section


DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-10; Ambient Temp: 21.9; Tissue Temp: 22.3

Left Tilt, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Power Drift = 0.024 dB
Peak SAR (extrapolated) = 0.269 W/kg
SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.109 W/kg

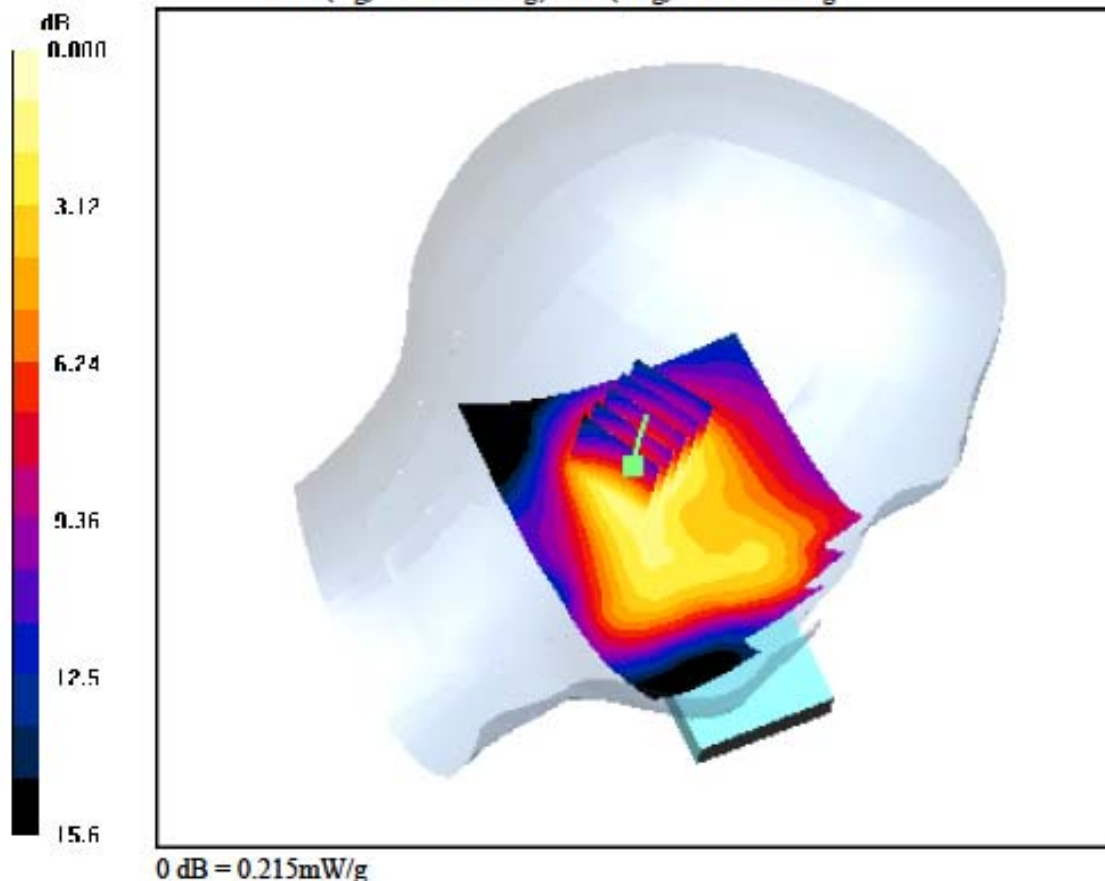

DIGITAL EMC CO., LTD**DUT: LG-A290; Type: Bar**

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY4 Configuration:

Probe: EX3DV4 - SN3643; ConvF(8.26, 8.26, 8.26); Calibrated: 2011-01-24; Electronics: DAE3 Sn519
 Phantom: SAM 1800/1900 MHz; Type: SAM; Serial: TP-1224
 Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Date: 2011-11-10; Ambient Temp: 21.9; Tissue Temp: 22.3

Right Tilt, PCS1900 Ch. 661, Ant Internal, Standard Battery

Area Scan (71x101x1): Measurement grid: dx=15mm, dy=15mm
Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Power Drift = -0.009 dB
 Peak SAR (extrapolated) = 0.329 W/kg
 SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.136 W/kg

