

EMC TEST REPORT

Test item : Mobile Handset
Model No. : LG-D160f
Order No. : DEMC1402-00519
Date of receipt : 2014-02-13
Test duration : 2014-02-24
Use of report : FCC CoC Marking
Date of Issue : 2014-02-28

Applicant : LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Test laboratory : Digital EMC Co., Ltd.
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test specification : ANSI C 63.4:2009
FCC Part 15 Subpart B
(Class B personal computers and peripherals)

Test environment : Temperature : (20 ~ 22) °C,
Humidity : (31 ~ 32) % R.H.

Test result : Comply Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose.
This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer
HyungJun Kim

Reviewed by:



Manager
MyungJin Song

PRESIDENT OF DIGITAL EMC CO., LTD.

CONTENTS

1. General Remarks	3
2. Test Laboratory	3
3. General Information of EUT	4
4. Test Summary	5
4.1 Applied standards and test results	5
4.2 Test environment and conditions	5
4.3 Test result Summary	5
5. Test Set-up and operation mode	6
5.1 Principle of Configuration Selection	6
5.2 Test Operation Mode	6
5.3 Support Equipment Used	6
6. Test Results : Emission	7
6.1 Conducted Disturbance	7
6.2 Radiated Disturbance	10
Appendix 1	18
List of Test and Measurement Instruments	18
Appendix 2	20
Report Revision History	20

1. General Remarks

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

<http://www.digitalemc.com>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

2. Test Laboratory

Digital EMC Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	101842 678747 596748	Test Facility list & NSA Data
	Canada	IC	5740A-1 5740A-2	Test Facility list & NSA Data
	Japan	VCCI	C-1427 R-1364, R-3385, R-4076, T-1442, G-338, G754	Test Facility list & NSA Data
Certification	Korea	KC	KR0034	Test Facility list & NSA Data
	Germany	TUV	CARAT 13 11 86721 001	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

3. General Information of EUT

Model No.	LG-D160f
Serial No	NONE
FCC ID	ZNFD160F
Supplied Power for Test	AC 120 V, 60 Hz
Clock Frequency	NONE
Applicant	LG Electronics MobileComm U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
Manufacturer	LG Electronics MobileComm U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Related Submittal(s) / Grant(s)

Original submittal only.

4. Test Summary

4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2009	C
Radiated Disturbance	ANSI C63.4:2009	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		

The data in this test report are traceable to the national or international standards.

4.2 Test environment and conditions

Test Items	Test date (YYYY-MM-DD)	Temp (°C)	Humidity (% R.H.)
Conducted Disturbance	2014-02-24	20	31
Radiated Disturbance	2014-02-24	22	32
	2014-02-24	22	32

4.3 Test result Summary

(1) Conducted Emission

Frequency [MHz]	Phase	Result [dB μ V]	Detector	Limit [dB μ V]	Margin [dB]
4.73420	L1	34.1	Average-Peak	46.0	11.9

(2) Radiated Emission

Frequency [MHz]	Pol.	Result [dB(μ V/m)]	Detector	Limit [dB(μ V/m)]	Margin [dB]
3000.000	V	50.9	Quasi-Peak	54.0	3.1

5. Test Set-up and operation mode

5.1 Principle of Configuration Selection

Emission : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

5.2 Test Operation Mode

- PC link mode (The measurement was made of the maximized by: data exchange speed; moving the cable)

5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE			Backshell	FCC ID
				Connect type	Length (m)	shield		
PC	DC8M	D8FQFBX	DELL	POWER	1.8	Non-shield	Plastic	DOC
				DVI	2.0	Shield	Plastic	
				USB	1.7	Shield	Plastic	
				USB	1.6	Shield	Plastic	
				USB	1.2	Shield	Plastic	
				USB	1.0	Shield	Plastic	
				STEREO	2.0	Non-shield	Plastic	
				PARALLEL	2.0	Shield	Plastic	
ETHERNET	15.0	Non-shield	Plastic					
LCD Monitor	U2312HM1	CN-036N7K-74445-199-358L	DELL	POWER	1.6	Non-shield	Plastic	DOC
				DVI	2.0	Shield	Plastic	
Printer	SRP-770	NONE	BIXOLON	POWER	1.6	Non-shield	Plastic	DOC
				PARALLEL	2.0	Shield	Plastic	
Keyboard	SKG-3000UB	NONE	MONTEREY INTERNATIONAL CORP.	USB	1.7	Shield	Plastic	DOC
MOUSE	1094	X817158-002	MICROSOFT CORPORATION	USB	1.6	Shield	Plastic	DOC
HEADSET1	COV909	NONE	COSY	STEREO	2.0	Non-shield	Plastic	-
HEADSET2	EAB62808211	NONE	I-SOUND	AUDIO	1.1	Non-shield	Plastic	-
External HDD	9ZR8N1	NA0H2L7Z	Seagate	USB	1.2	Shield	Plastic	DOC

6. Test Results : Emission

6.1 Conducted Disturbance

6.1.1 Measurement Procedure

In the range of 0.15 MHz to 30 MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 0.4 m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Connect the EUT's power source lines to the appropriate power mains / peripherals through the LISN. All the other peripherals are connected to the 2nd LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50

Note 1 The lower limit shall apply at the transition frequencies.
 Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

- Note) 1. Emission Level = Reading Value + Correction Factor.
 2. Correction Factor = Cable Loss + Insertion Loss of LISN
 3. Margin = Limit - Emission level

Test Result





Results of Conducted Emission

Digital EMC
Date : 2014-02-24

Model No.	: LG-D160f	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi.	: 20°C 31% R.H
Test Condition	: PC LINK	Operator	:

Memo :

LIMIT : CISPR22_B QP
CISPR22_B AV

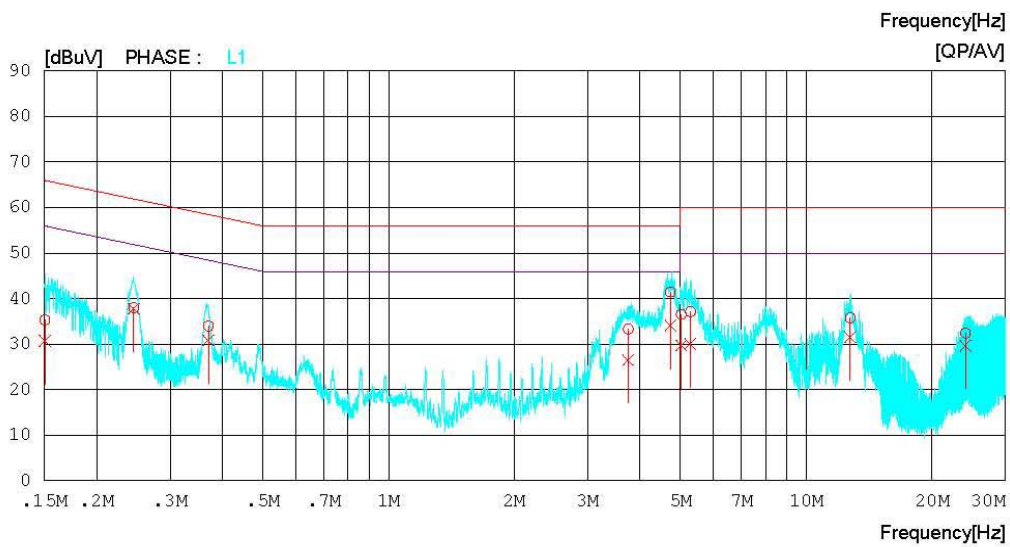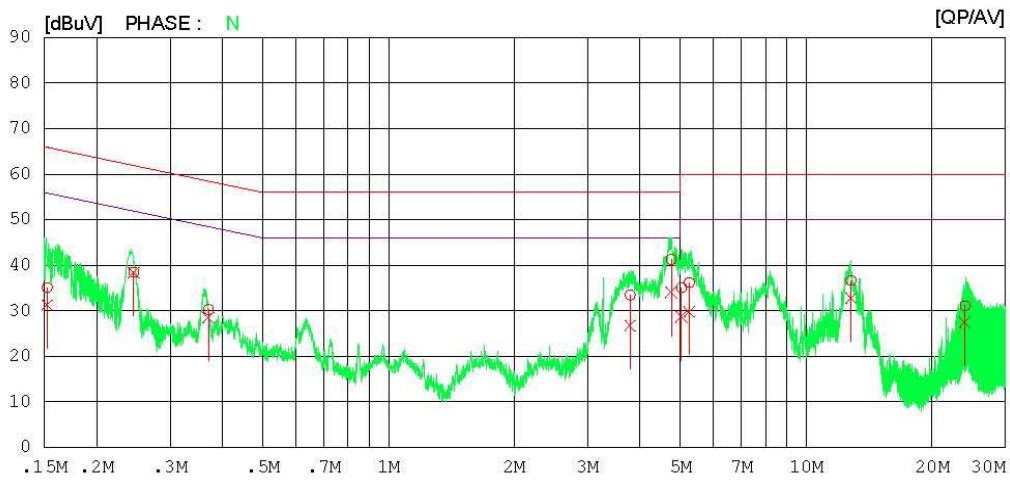

Results of Conducted Emission

Digital EMC
 Date : 2014-02-24

Model No.	: LG-D160f	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi.	: 20 °C 31 % R.H
Test Condition	: PC LINK	Operator	:

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15239	35.0	31.1	0.1	35.1	31.2	65.9	55.9	30.8	24.7	N
2	0.24550	38.4	38.3	0.1	38.5	38.4	61.9	51.9	23.4	13.5	N
3	0.37050	30.2	28.4	0.1	30.3	28.5	58.5	48.5	28.2	20.0	N
4	3.78920	33.0	26.3	0.4	33.4	26.7	56.0	46.0	22.6	19.3	N
5	4.75340	40.8	33.5	0.5	41.3	34.0	56.0	46.0	14.7	12.0	N
6	5.02940	34.6	28.1	0.5	35.1	28.6	60.0	50.0	24.9	21.4	N
7	5.25360	35.7	29.3	0.5	36.2	29.8	60.0	50.0	23.8	20.2	N
8	12.81040	36.1	32.3	0.5	36.6	32.8	60.0	50.0	23.4	17.2	N
9	24.00020	30.4	26.7	0.7	31.1	27.4	60.0	50.0	28.9	22.6	N
10	0.15049	35.2	30.6	0.1	35.3	30.7	66.0	56.0	30.7	25.3	L1
11	0.24550	37.9	37.7	0.1	38.0	37.8	61.9	51.9	23.9	14.1	L1
12	0.37050	33.9	30.8	0.1	34.0	30.9	58.5	48.5	24.5	17.6	L1
13	3.74920	32.9	26.1	0.4	33.3	26.5	56.0	46.0	22.7	19.5	L1
14	4.73420	40.9	33.6	0.5	41.4	34.1	56.0	46.0	14.6	11.9	L1
15	5.02180	36.0	29.3	0.5	36.5	29.8	60.0	50.0	23.5	20.2	L1
16	5.28640	36.6	29.5	0.5	37.1	30.0	60.0	50.0	22.9	20.0	L1
17	12.74880	35.3	31.1	0.5	35.8	31.6	60.0	50.0	24.2	18.4	L1
18	24.06660	31.7	29.0	0.7	32.4	29.7	60.0	50.0	27.6	20.3	L1

6.2 Radiated Disturbance

6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 3 m or 10 m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Rotate the EUT from (0 - 360)° and position the receiving antenna at heights from (1 - 4) m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1 GHz frequency range, Quasi-Peak detector with 120 kHz RBW was used.

Also Peak and Average detector with 1 MHz RBW were used for above 1 GHz frequency range.

For further description of the configuration refer to the picture of the test set-up.

6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1 000
108 – 500	2 000
500 – 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

(1) Limit for Radiated Emission below 1 000MHz

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (3 m distance)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1 000	49.5	54

Note 1 The lower limit shall apply at the transition frequency.

Note 2 Additional provisions may be required for cases where interference occurs.

Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (10 m distance)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 to 230	40	30
230 to 1 000	47	37

(2) Limits for Radiated Emission above 1 000MHz at a measuring distance of 3 m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	Peak (dB μ V/m)	Average (dB μ V/m)	Peak (dB μ V/m)	Average (dB μ V/m)
1 to 40	80	60	74	54

Note) 1. Emission Level = Reading Value + Correction Factor.

2. Correction Factor = Cable loss - Amp gain + Antenna Factor

3. Margin = Limit - Emission level

Test Result

< 30 MHz ~ 1 GHz >



RADIATED EMISSION

Date : 2014-02-24

Model Name	: LG-D160f	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 22 °C 32 % R.H
Test Condition	: PC LINK	Operator	:

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

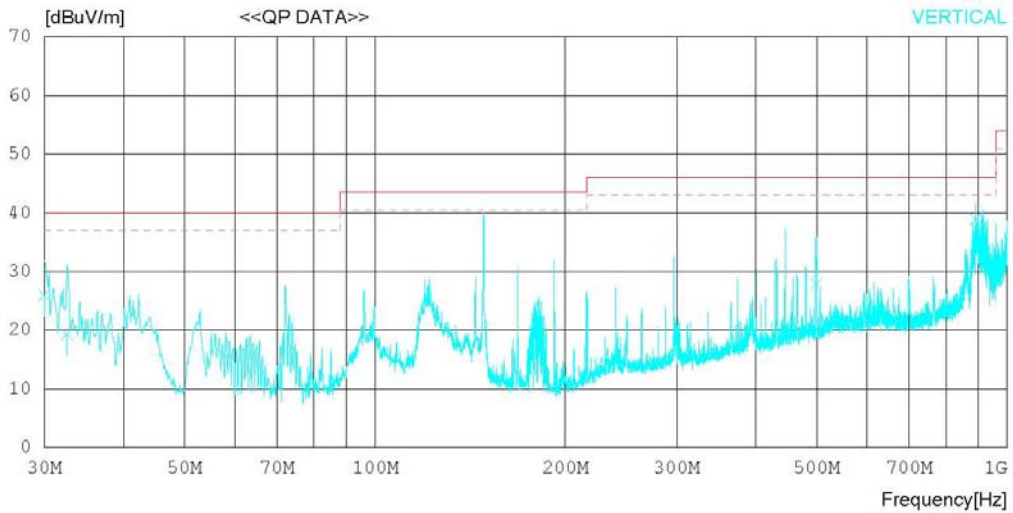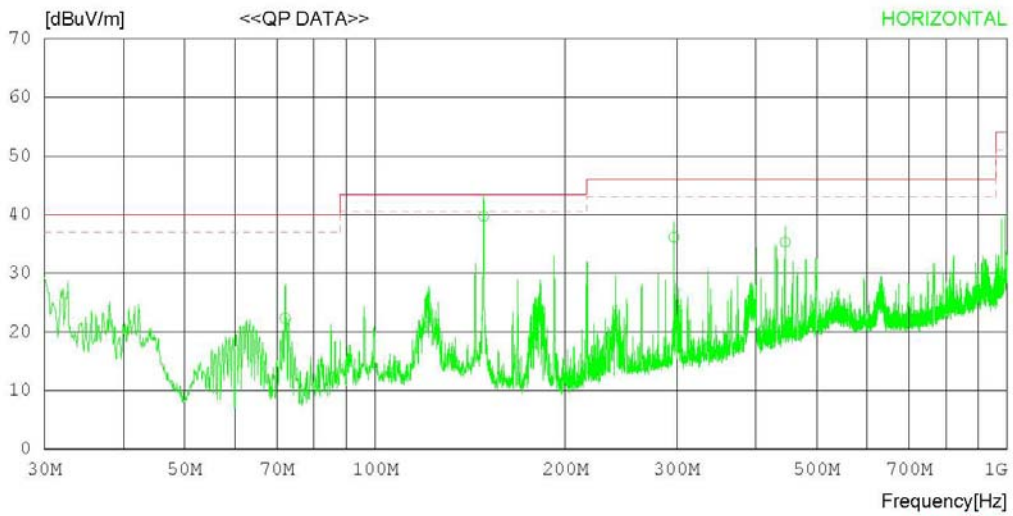

RADIATED EMISSION

Date : 2014-02-24

Model Name : LG-D160f	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 22 °C 32 % R.H
Test Condition : PC LINK	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	72.074	37.2	6.5	1.3	22.7	22.3	40.0	17.7	250	224
2	148.459	50.3	10.5	1.7	22.8	39.7	43.5	3.8	212	114
3	296.986	43.7	13.7	2.3	23.6	36.1	46.0	9.9	190	306
4	445.512	40.1	16.6	2.9	24.3	35.3	46.0	10.7	145	358
----- Vertical -----										
5	30.000	29.8	17.9	0.9	22.6	26.0	40.0	14.0	269	275
6	32.546	24.5	16.5	0.9	22.6	19.3	40.0	20.7	191	97
7	499.709	31.9	17.3	3.1	24.4	27.9	46.0	18.1	141	154
8	891.916	36.8	20.7	4.2	22.8	38.9	46.0	7.1	100	354
9	913.746	31.8	21.0	4.2	22.6	34.4	46.0	11.6	100	1



< (1 ~ 6) GHz_Peak >

RADIATED EMISSION

Date : 2014-02-24

Model Name	: LG-D160f	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 22 °C 32 % R.H
Test Condition	: PC LINK	Operator	:
Memo	:		

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

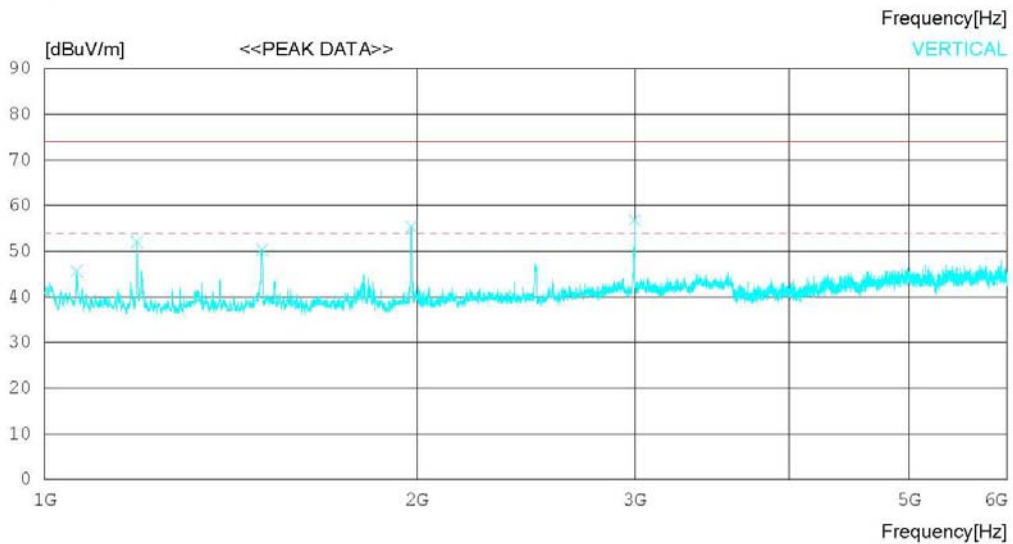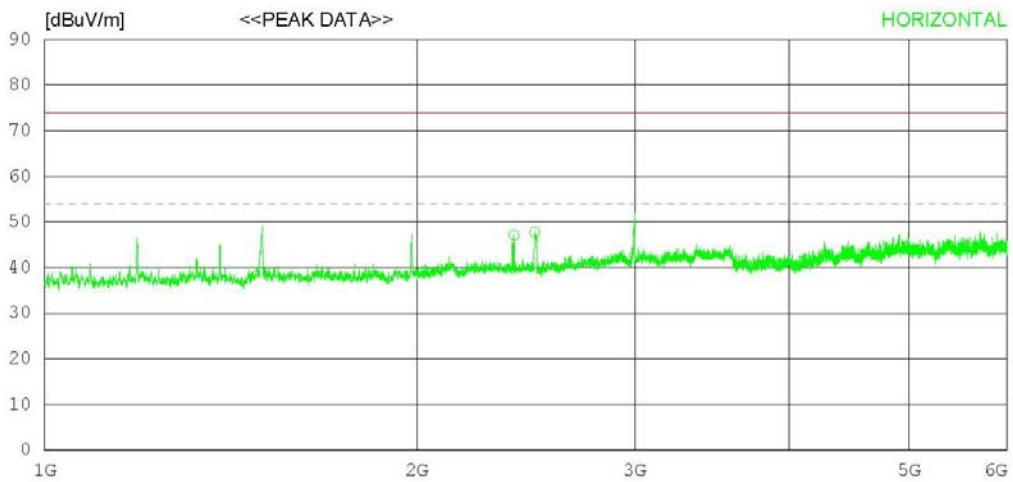

RADIATED EMISSION

Date : 2014-02-24

Model Name : LG-D160f	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 22 °C 32 % R.H
Test Condition : PC LINK	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	2395.625	54.3	27.0	5.1	39.3	47.1	74.0	26.9	100	284
2	2490.625	54.6	27.3	5.2	39.3	47.8	74.0	26.2	100	337
----- Vertical -----										
3	1061.875	58.6	24.7	3.4	41.0	45.7	74.0	28.3	100	1
4	1188.125	64.4	24.9	3.6	40.8	52.1	74.0	21.9	100	8
5	1499.375	61.2	25.3	4.1	40.1	50.5	74.0	23.5	100	1
6	1979.375	64.3	25.9	4.7	39.5	55.4	74.0	18.6	100	296
7	3000.000	61.6	28.8	5.7	39.3	56.8	74.0	17.2	100	1


< (1 ~ 6) GHz_Average >

RADIATED EMISSION

Date : 2014-02-24

Model Name	: LG-D160f	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 22 °C 32 % R.H
Test Condition	: PC LINK	Operator	:
Memo	:		

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

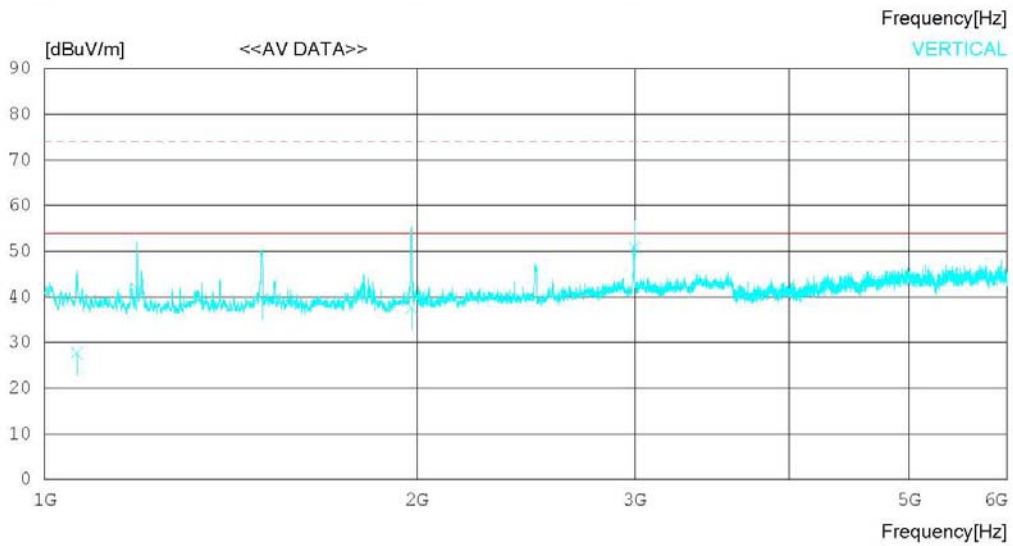

RADIATED EMISSION

Date : 2014-02-24

Model Name : LG-D160f	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 22 °C 32 % R.H
Test Condition : PC LINK	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	2395.625	35.6	27.0	5.1	39.3	28.4	54.0	25.6	100	284
2	2490.625	39.8	27.3	5.2	39.3	33.0	54.0	21.0	100	337
----- Vertical -----										
3	1061.875	40.6	24.7	3.4	41.0	27.7	54.0	26.3	100	1
4	1188.125	54.0	24.9	3.6	40.8	41.7	54.0	12.3	100	8
5	1499.375	50.4	25.3	4.1	40.1	39.7	54.0	14.3	100	1
6	1979.375	46.5	25.9	4.7	39.5	37.6	54.0	16.4	100	296
7	3000.000	55.7	28.8	5.7	39.3	50.9	54.0	3.1	100	1

Appendix 1

List of Test and Measurement Instruments

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment is identified by the Test Laboratory.

1. Conducted Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input type="checkbox"/> SPECTRUM ANALYZER	8591E	H/P	3649A05889	2013.02.28	2014.02.28
<input type="checkbox"/> RFI/FIELD INTENSITY METER	KNM-2402	KYORITSU	4N-170-3	2013.06.28	2014.06.28
<input type="checkbox"/> LISN	KNW-407	KYORITSU	8-317-8	2014.01.08	2015.01.08
<input type="checkbox"/> LISN	PMM L2-16B	NARDA S.T.S. / PMM	000WX20305	2013.06.27	2014.06.27
<input type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2014.01.08	2015.01.08
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2013.02.27	2014.02.27
<input checked="" type="checkbox"/> LISN	ESH2-Z5	ROHDE & SCHWARZ	828739/006	2013.09.12	2014.09.12
<input checked="" type="checkbox"/> LISN	LISN1600	TTI	197204	2013.06.28	2014.06.28
<input checked="" type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2014.01.08	2015.01.08

2. Radiated Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESU	ROHDE & SCHWARZ	100014	2014.01.08	2015.01.08
<input checked="" type="checkbox"/> BILOG ANTENNA	CBL6112B	SCHAFFNER	2737	2012.11.06	2014.11.06
<input checked="" type="checkbox"/> HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1014	2012.10.21	2014.10.21
<input checked="" type="checkbox"/> AMPLIFIER	8447E	H/P	2945A02865	2014.01.08	2015.01.08
<input checked="" type="checkbox"/> AMPLIFIER	8447B	AGILENT	3008A01590	2013.02.27	2014.02.27
<input type="checkbox"/> SPECTRUM ANALYZER	E4411B	AGILENT	US41062735	2013.06.27	2014.06.27
<input type="checkbox"/> AMPLIFIER	8447D	AGILENT	2443A03690	2013.06.28	2014.06.28
<input type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2013.02.27	2014.02.27
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91032789	2012.04.10	2014.04.10
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108A	SCHWARZBECK	590	2012.10.04	2014.10.04
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91031946	2013.05.16	2015.05.16
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108-A1	SCHWARZBECK	0411	2013.05.16	2015.05.16
<input type="checkbox"/> AMPLIFIER	MLA-100K01-B01-26	TSJ	1252741	2013.02.28	2014.02.28

Appendix 2

Report Revision History

Revision Date	Description	Revised By	Revision Reviewed By
None	Original	N/A	N/A