

# RF TEST REPORT

Test item : Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA  
Phone with Bluetooth and WLAN  
Model No. : LG-D165g, LG-D165G, LG-D165AR, D165g, D165G,  
D165AR, LGD165g, LGD165G, LGD165AR  
Order No. : DEMC1401-00241  
Date of receipt : 2014-01-20  
Test duration : 2014-02-03 ~ 2014-02-09  
Date of issue : 2014-02-10  
Use of report : FCC Original Grant

Applicant : LG Electronics MobileComm U.S.A., Inc.  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Test laboratory : Digital EMC Co., Ltd.  
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test specification : FCC Part 15 Subpart C 247  
Test environment : See appended test report  
Test result :  Pass  Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer  
JaeJin Lee

Witnessed by:

N/A

Reviewed by:



General Manager  
Geunki Son

## Test Report Version

Test Report No.	Date	Description
DRTFCC1402-0167	Feb. 10, 2014	Initial issue
DRTFCC1402-0167(1)	Feb. 17, 2014	Include duty cycle measurement procedure

# Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>4</b>
<b>3. SUMMARY OF TESTS .....</b>	<b>5</b>
<b>4. TEST METHODOLOGY .....</b>	<b>6</b>
4.1 EUT CONFIGURATION .....	6
4.2 EUT EXERCISE .....	6
4.3 GENERAL TEST PROCEDURES .....	6
4.4 DESCRIPTION OF TEST MODES .....	6
<b>5. INSTRUMENT CALIBRATION .....</b>	<b>7</b>
<b>6. FACILITIES AND ACCREDITATIONS .....</b>	<b>7</b>
6.1 FACILITIES .....	7
6.2 EQUIPMENT .....	7
<b>7. ANTENNA REQUIREMENTS .....</b>	<b>7</b>
<b>8. TEST RESULT .....</b>	<b>8</b>
8.1 6dB Bandwidth .....	8
8.2 Maximum Peak Conducted Output Power .....	15
8.3 Maximum Power Spectral Density .....	17
8.4 Out of Band Emissions at the Band Edge / Conducted Spurious Emissions .....	24
8.5 Radiated Spurious Emissions .....	49
8.6 Power-line Conducted Emissions .....	54
8.7 Occupied Bandwidth .....	57
<b>9. LIST OF TEST EQUIPMENT .....</b>	<b>58</b>
<b>APPENDIX I .....</b>	<b>59</b>
<b>APPENDIX II .....</b>	<b>60</b>

## 1. GENERAL INFORMATION

**Applicant** : LG Electronics MobileComm U.S.A., Inc.  
**Address** : 1000 Sylvan Avenue, Englewood Cliffs NJ 07632  
**FCC ID** : ZNFD165G  
**EUT** : Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth and WLAN  
**Model** : LG-D165g  
**Additional Model(s)** : LG-D165G, LG-D165AR, D165g, D165G, D165AR, LGD165g, LGD165G, LGD165AR  
**Data of Test** : 2014-02-03 ~ 2014-02-09  
**Contact person** : Cheol Goo Lee

## 2. EUT DESCRIPTION

<b>Product</b>	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA Phone with Bluetooth and WLAN
<b>Model Name</b>	LG-D165g, LG-D165G, LG-D165AR, D165g, D165G, D165AR, LGD165g, LGD165G, LGD165AR ※ 9 models are same mechanical, electrical and functional. ※ The only difference is the model name, which are changed for marketing purpose.
<b>Power Supply</b>	DC 3.8 V
<b>Battery type</b>	Standard Battery: Lithium Ion Battery
<b>Frequency Range</b>	2.4GHz Band ▪ 802.11b/g/n(20MHz): 2412 MHz ~ 2462 MHz
<b>Max. RF Output Power</b>	2.4GHz Band ▪ 802.11b: 18.08 dBm ▪ 802.11g: 20.54 dBm ▪ 802.11n (HT20): 19.53 dBm
<b>Modulation Type</b>	802.11b: DSSS/CCK 802.11g/n: OFDM
<b>Antenna Specification</b>	Internal Antenna (1TX ,1RX) ▪ 2.4GHz Band Max. peak gain : 3.03 dBi

### 3. SUMMARY OF TESTS

FCC Part Section(s)	RSS Section(s)	Parameter	Limit	Test Condition	Status Note 1
<b>I. Transmitter Mode (TX)</b>					
15.247(a)	RSS-210 [A8.2]	6 dB Bandwidth	> 500 kHz	Conducted	<b>C</b>
15.247(b)	RSS-210 [A8.4]	Transmitter Output Power	< 1Watt		<b>C</b>
15.247(d)	RSS-210 [A8.5]	Out of Band Emissions / Band Edge	20 dBc in any 100kHz BW		<b>C</b>
15.247(e)	RSS-210 [A8.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz		<b>C</b>
-	RSS Gen [4.6.1]	Occupied Bandwidth (99%)	RSS-Gen(4.6.1)		<b>NA</b>
15.205 15.209	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< FCC 15.209 limits	Radiated	<b>C</b> <sup>Note2</sup>
15.207	RSS-Gen [7.2.4]	AC Conducted Emissions	< FCC 15.207 limits	AC Line Conducted	<b>C</b>
15.203	-	Antenna Requirements	FCC 15.203	-	<b>C</b>
Note 1: <b>C</b> =Comply <b>NC</b> =Not Comply <b>NT</b> =Not Tested <b>NA</b> =Not Applicable Note 2: This test item was performed in each axis and the worst case data was reported.					

## 4. TEST METHODOLOGY

Generally the tests were performed according to the KDB558074 v03r1. And ANSI C63.10-2009 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing

### 4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 4.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### 4.3 GENERAL TEST PROCEDURES

#### Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB 558074 v03r1. So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10.

The EUT is placed on the turntable, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15MHz and 30MHz using CISPR Quasi-peak and Average detector.

#### Radiated Emissions

Basically the radiated tests were performed with KDB 558074 v03r1. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10 as stated on section 12.1 of the KDB 558074 v03r1.

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axes..

### 4.4 DESCRIPTION OF TEST MODES

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics. A test program is used to control the EUT for staying in continuous transmitting mode.

## 5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 6. FACILITIES AND ACCREDITATIONS

### 6.1 FACILITIES

The open area test site(OATS) or semi anechoic chamber and conducted measurement facility used to collect the radiated and conducted test data are located at the 38, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935. The site is constructed in conformance with the requirements.

**- Semi anechoic chamber registration Number : 678747**

### 6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 7. ANTENNA REQUIREMENTS

**According to FCC 47 CFR §15.203& RSS-Gen [7.1.2]:**

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

**The internal antenna is attached on the main PCB using the special spring tension.**

**Therefore this E.U.T Complies with the requirement of §15.203**

## 8. TEST RESULT

### 8.1 6dB Bandwidth

#### Test Requirements and limit, §15.247(a) & RSS-210 [A8.2]

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

**The minimum permissible 6dB bandwidth is 500 kHz.**

#### ■ TEST CONFIGURATION

Refer to the APPENDIX I.

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB558074 v03r1**.

1. Set resolution bandwidth (RBW) = 100 KHz
2. Set the video bandwidth (VBW) ≥ 3 x RBW.  
**(RBW:100KHz/VBW:300KHz)**
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outer most amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### ■ TEST RESULTS: **Comply**


Test Mode	Data Rate	Frequency [MHz]	Test Results[MHz]
802.11b	1Mbps	2412	7.118
		2437	7.127
		2462	7.152
802.11g	6Mbps	2412	16.410
		2437	16.390
		2462	16.390
802.11n (20MHz)	MCS0	2412	17.610
		2437	17.610
		2462	17.620



RESULT PLOTS


6 dB Bandwidth

Test Mode: 802.11b & 1Mbps & 2412MHz

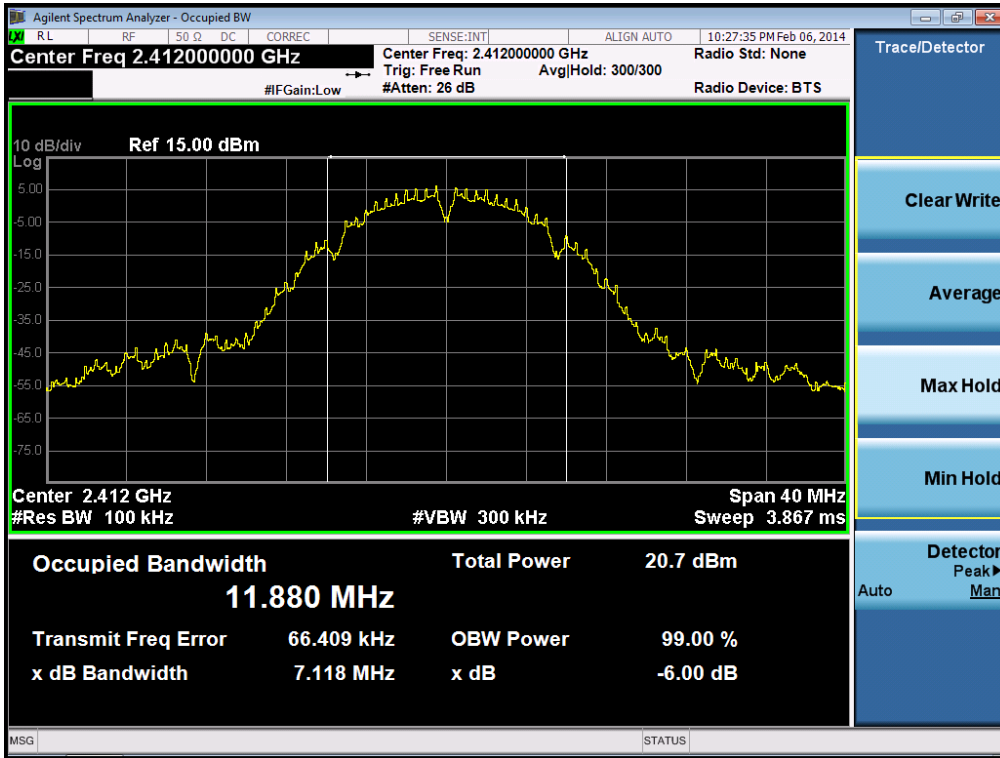


6 dB Bandwidth

Test Mode: 802.11b & 1Mbps & 2437MHz

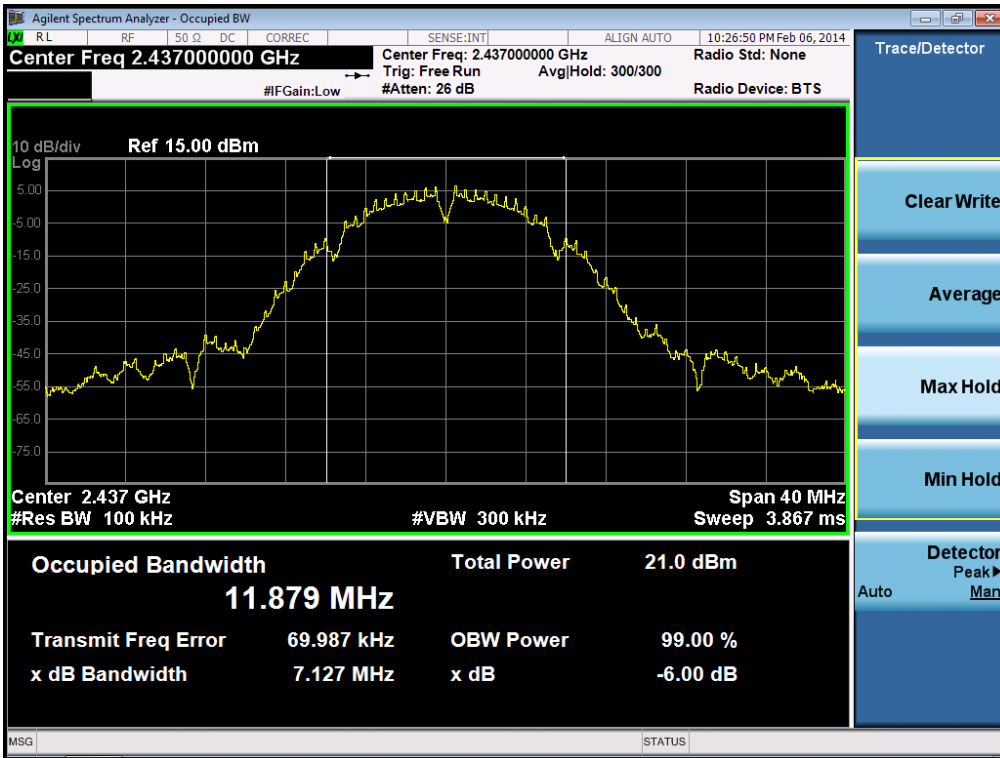


6 dB Bandwidth

Test Mode: 802.11b & 1Mbps & 2462MHz

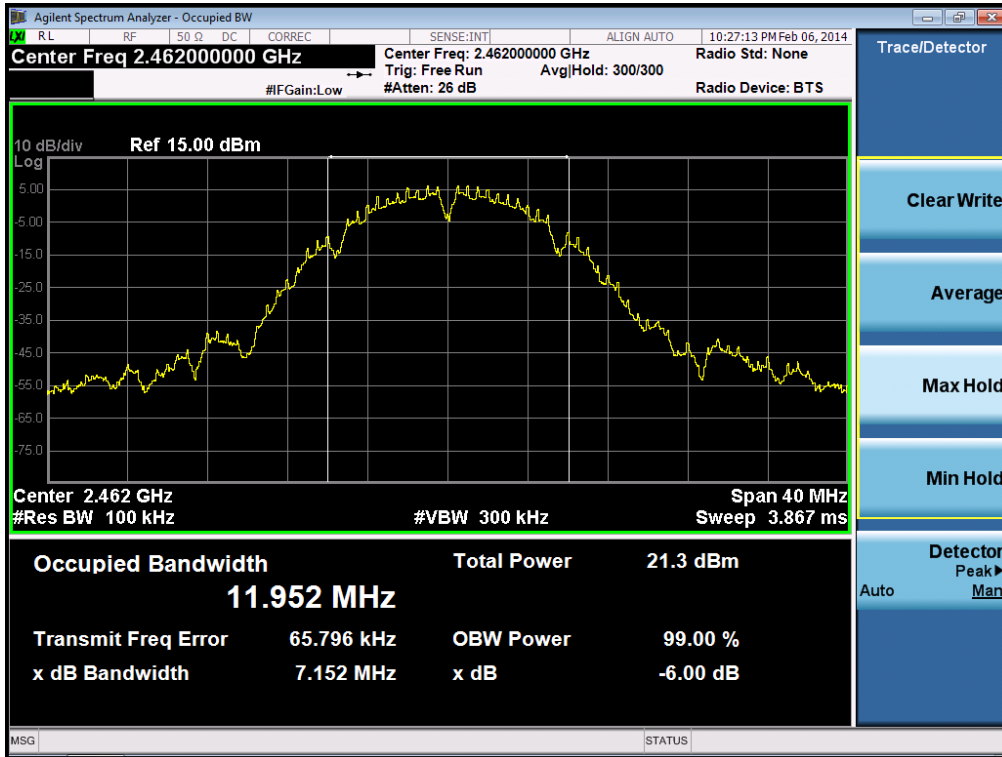


6 dB Bandwidth

Test Mode: 802.11g & 6Mbps & 2412MHz

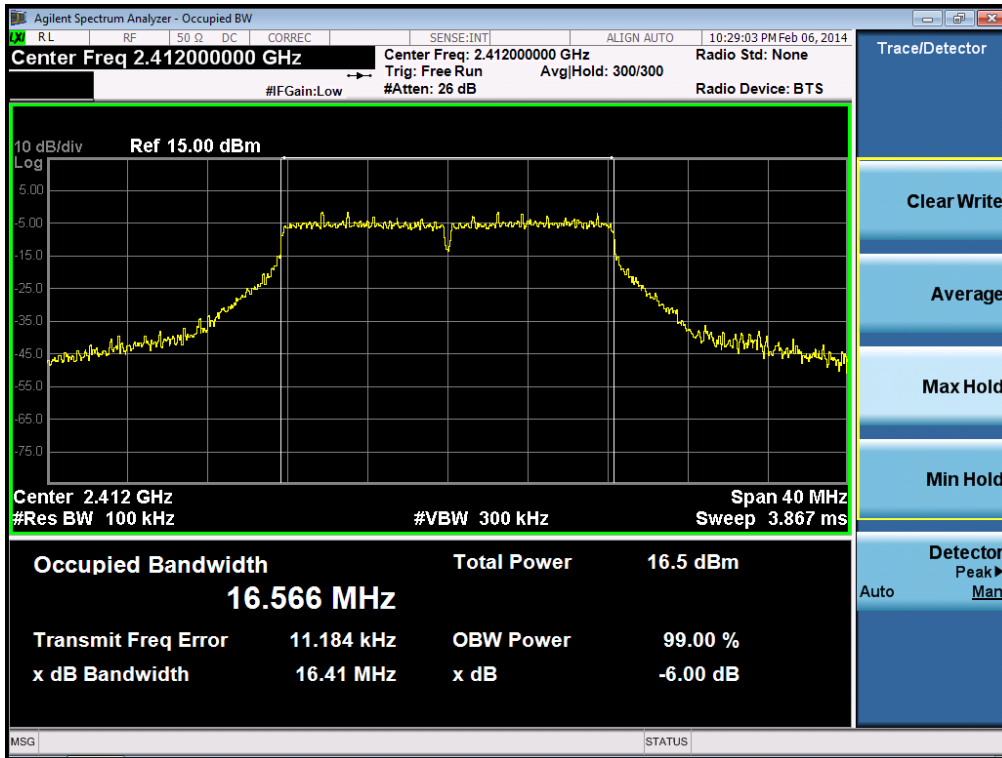


6 dB Bandwidth

Test Mode: 802.11g & 6Mbps & 2437MHz

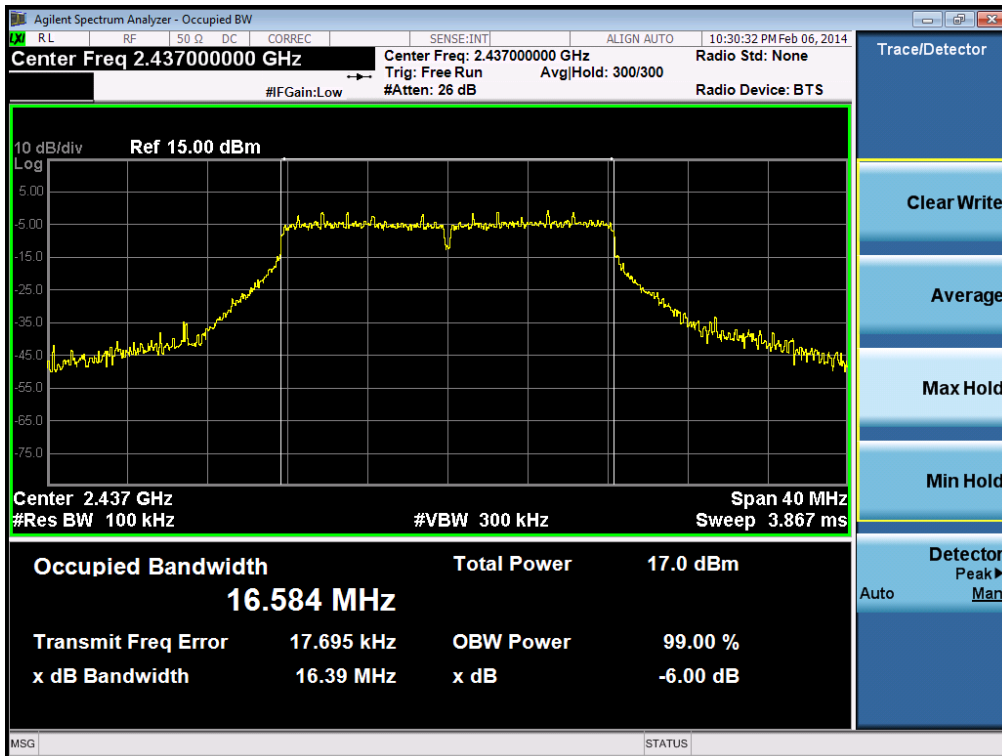


6 dB Bandwidth

Test Mode: 802.11g & 6Mbps & 2462MHz

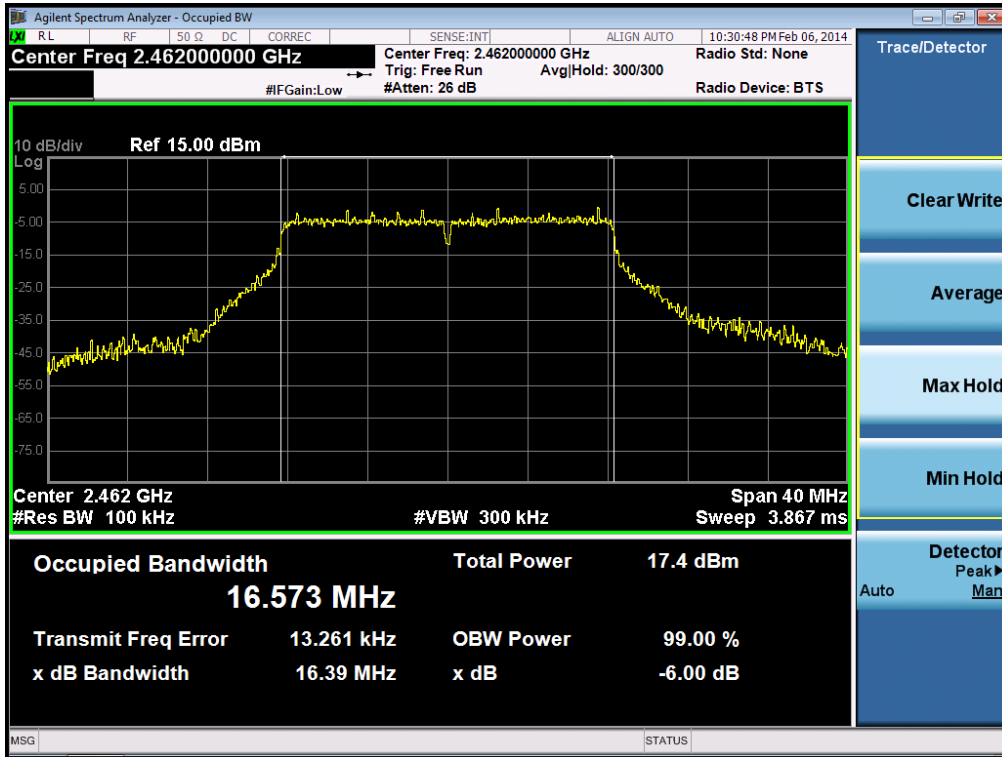


6 dB Bandwidth

Test Mode: 802.11n & MCS0 & 2412MHz

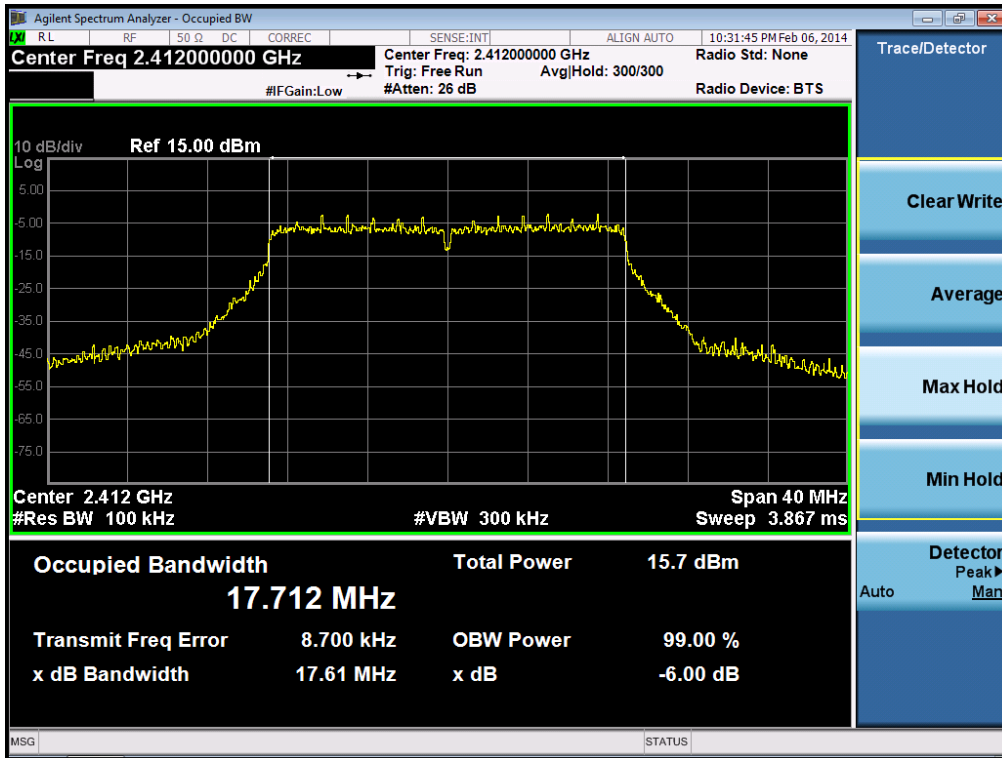


6 dB Bandwidth

Test Mode: 802.11n & MCS0 & 2437MHz

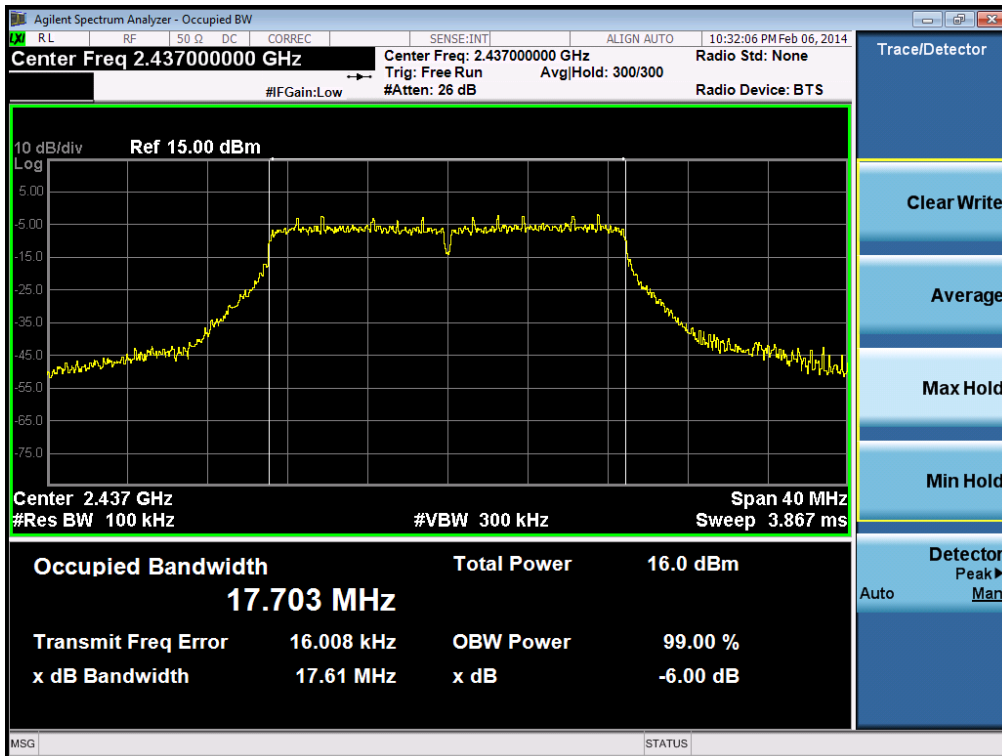

6 dB Bandwidth

Test Mode: 802.11n & MCS0 & 2462MHz

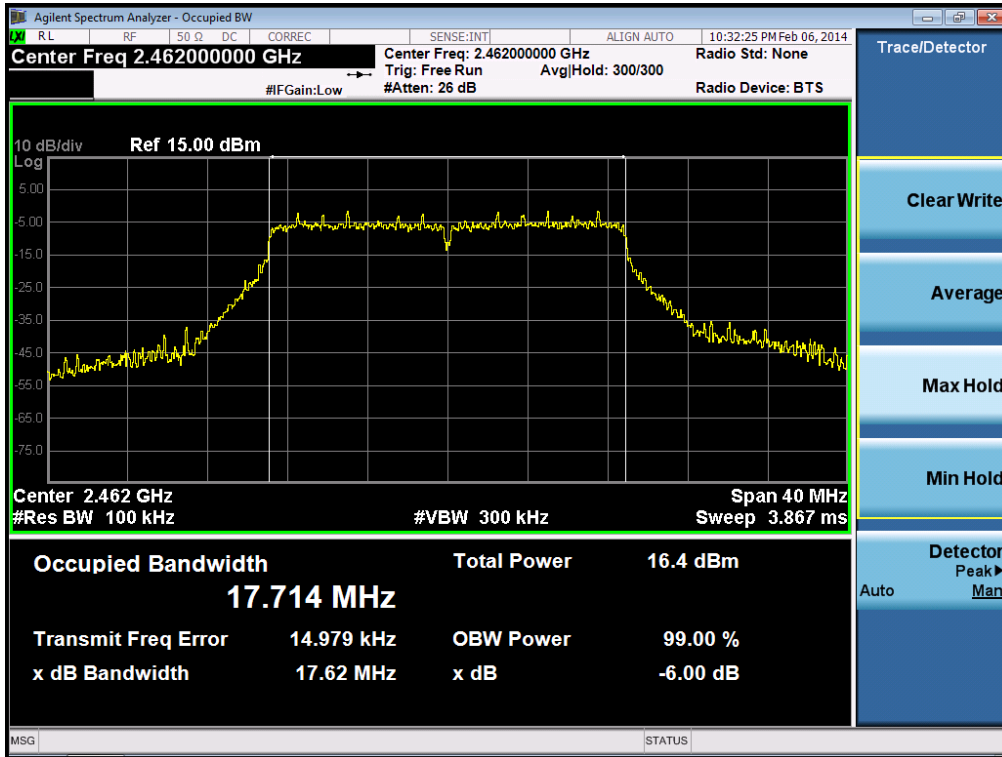


## 8.2 Maximum Peak Conducted Output Power

### Test Requirements and limit, §15.247(b) & RSS-210 [A8.4]

The maximum permissible conducted output power is **1 Watt**.

#### ■ TEST CONFIGURATION

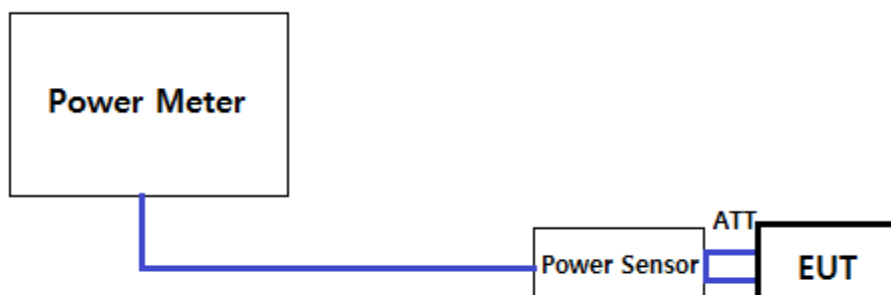

#### ■ TEST PROCEDURE:

##### 1. PKPM1 Peak power meter method of KDB558074 v03r1

The maximum conducted output powers were measured using a broadband peak RF power meter which has greater video bandwidth than DUT's DTS bandwidth and utilize a fast-responding diode detector.

##### 2. Method AVGPM-G (Measurement using a gated RF average power meter) of KDB558074 v03r1

The average conducted output powers were measured using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

■ **TEST RESULTS: Comply**

- Measurement Data: **Comply**

- Test Results

Mode	Channel	Frequency [MHz]	Detector	Test Result [dBm]							
				DATA RATE [Mbps]							
				1	2	5.5	11	N/A	N/A	N/A	N/A
802.11b	1	2412	PK	17.18	17.18	17.20	17.22	-	-	-	-
			AV	13.88	13.82	13.74	13.78	-	-	-	-
	6	2437	PK	17.60	17.49	17.52	17.62	-	-	-	-
			AV	14.29	14.14	14.02	14.12	-	-	-	-
	11	2462	PK	<b>18.08</b>	17.87	17.79	18.06	-	-	-	-
			AV	14.67	14.58	14.48	14.56	-	-	-	-

Mode	Channel	Frequency [MHz]	Detector	Test Result [dBm]							
				DATA RATE [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	1	2412	PK	19.85	19.86	19.82	19.78	19.69	19.80	19.69	19.80
			AV	10.50	10.52	10.52	10.46	10.40	10.43	10.47	10.44
	6	2437	PK	20.05	19.91	19.93	19.95	19.91	20.02	20.00	20.04
			AV	10.79	10.73	10.68	10.83	10.84	10.81	10.83	10.71
	11	2462	PK	<b>20.54</b>	20.50	20.38	20.54	20.37	20.46	20.44	20.39
			AV	11.39	11.37	11.33	11.35	11.39	11.24	11.30	11.22

Mode	Channel	Frequency [MHz]	Detector	Test Result [dBm]							
				DATA RATE [MCS]							
				0	1	2	3	4	5	6	7
802.11n (HT20)	1	2412	PK	19.14	19.13	19.07	19.08	18.92	19.08	18.94	18.96
			AV	9.37	9.36	9.35	9.37	9.27	9.36	9.37	9.27
	6	2437	PK	19.33	19.35	19.37	19.39	19.38	19.30	19.25	19.29
			AV	9.67	9.61	9.62	9.64	9.61	9.69	9.61	9.57
	11	2462	PK	<b>19.53</b>	19.49	19.40	19.47	19.49	19.51	19.50	19.52
			AV	10.04	10.01	9.95	10.00	9.97	10.02	10.02	10.04



### 8.3 Maximum Power Spectral Density

#### Test requirements and limit, §15.247(e) & RSS-210 [A8.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

**Minimum Standard –specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.**

■ **TEST CONFIGURATION**

Refer to the APPENDIX I.

■ **TEST PROCEDURE:**

Method PKPSD of KDB558074 v03r1 is used.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW to: **3 kHz ≤ RBW ≤ 100 kHz**.
4. Set the VBW ≥ **3 x RBW**.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


■ **TEST RESULTS: Comply**

Test Mode	Data Rate	Frequency [MHz]	RBW	PKPSD [dBm]
802.11b	1Mbps	2412	3 kHz	- 6.73
		2437	3 kHz	- 7.00
		2462	3 kHz	- 7.03
802.11g	6Mbps	2412	3 kHz	- 13.42
		2437	3 kHz	- 14.15
		2462	3 kHz	- 13.45
802.11n HT20	MCS0	2412	3 kHz	- 15.01
		2437	3 kHz	- 15.07
		2462	3 kHz	- 15.13

RESULT PLOTS

Maximum PKPSD

Test Mode: 802.11b & 1Mbps & 2412MHz

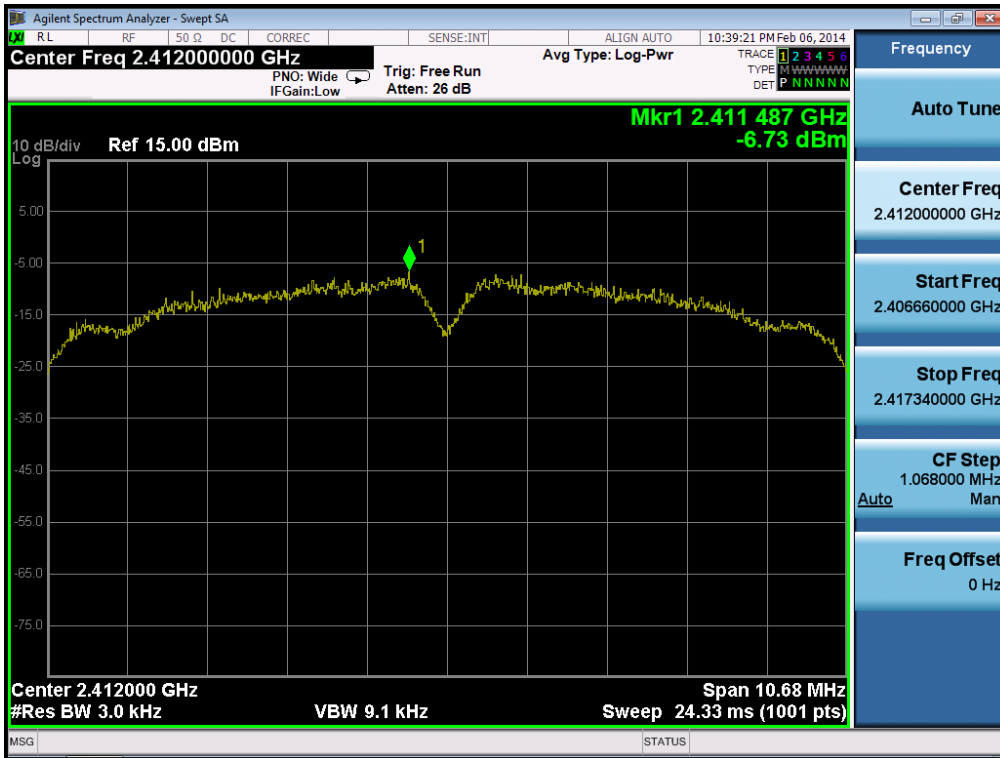

Maximum PKPSD

Test Mode: 802.11b & 1Mbps & 2437MHz




Maximum PKPSD

Test Mode: 802.11b & 1Mbps & 2462MHz




Maximum PKPSD

Test Mode: 802.11g & 6Mbps & 2412MHz

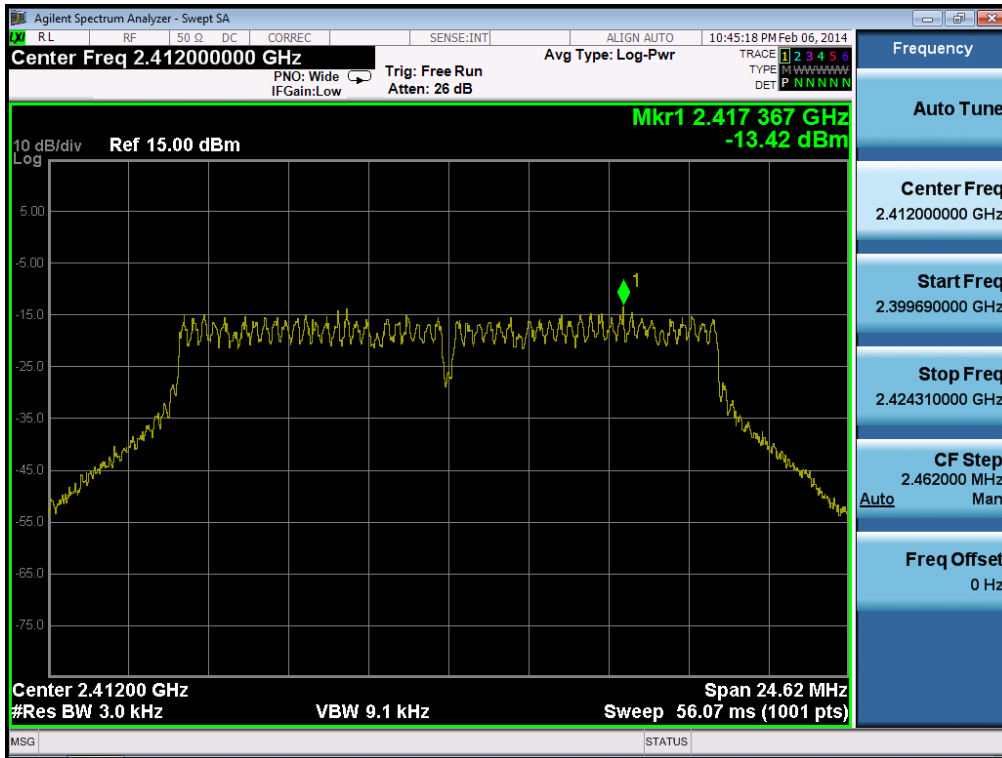


Maximum PKPSD

Test Mode: 802.11g & 6Mbps & 2437MHz

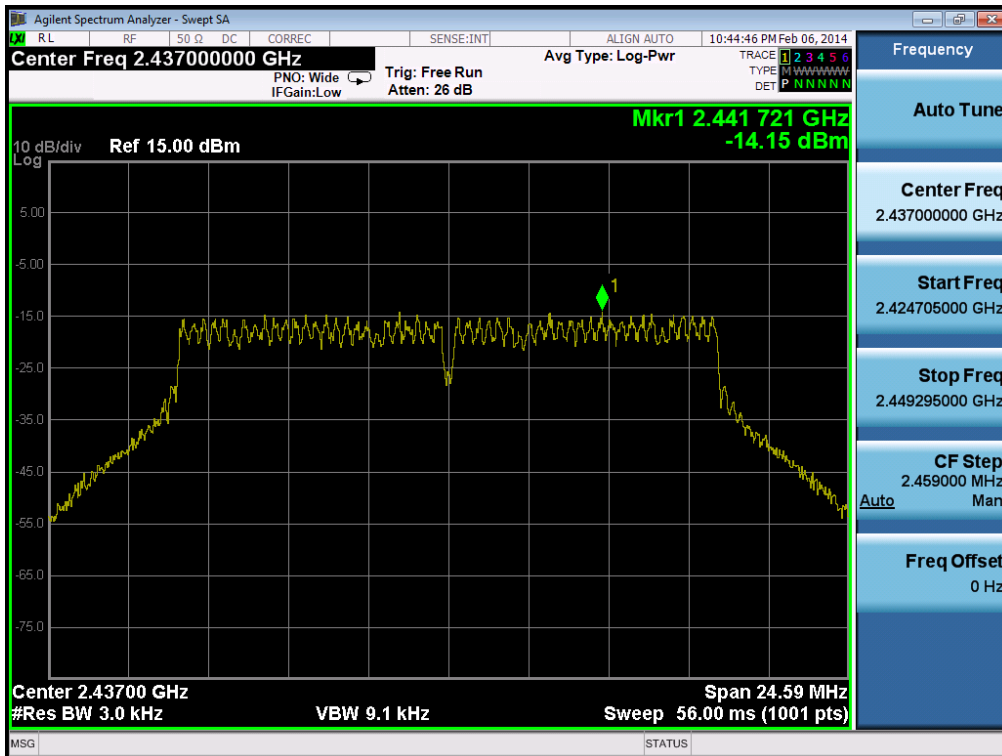


Maximum PKPSD

Test Mode: 802.11g & 6Mbps & 2462MHz

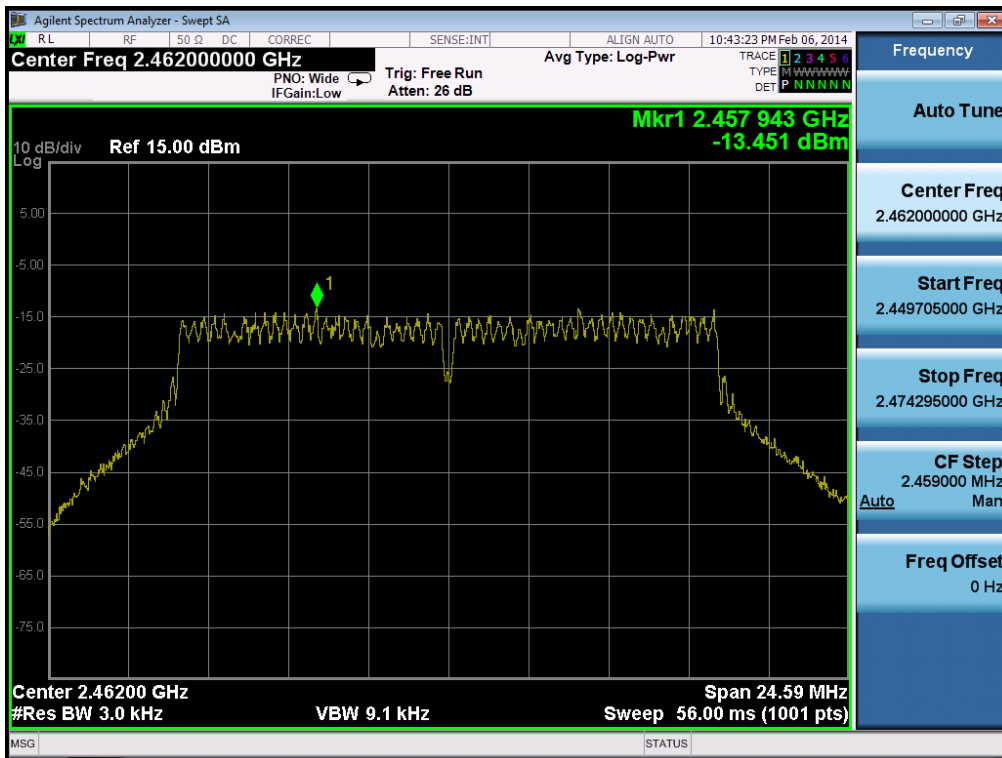


Maximum PKPSD

Test Mode: 802.11n(HT20) & MCS0 & 2412MHz

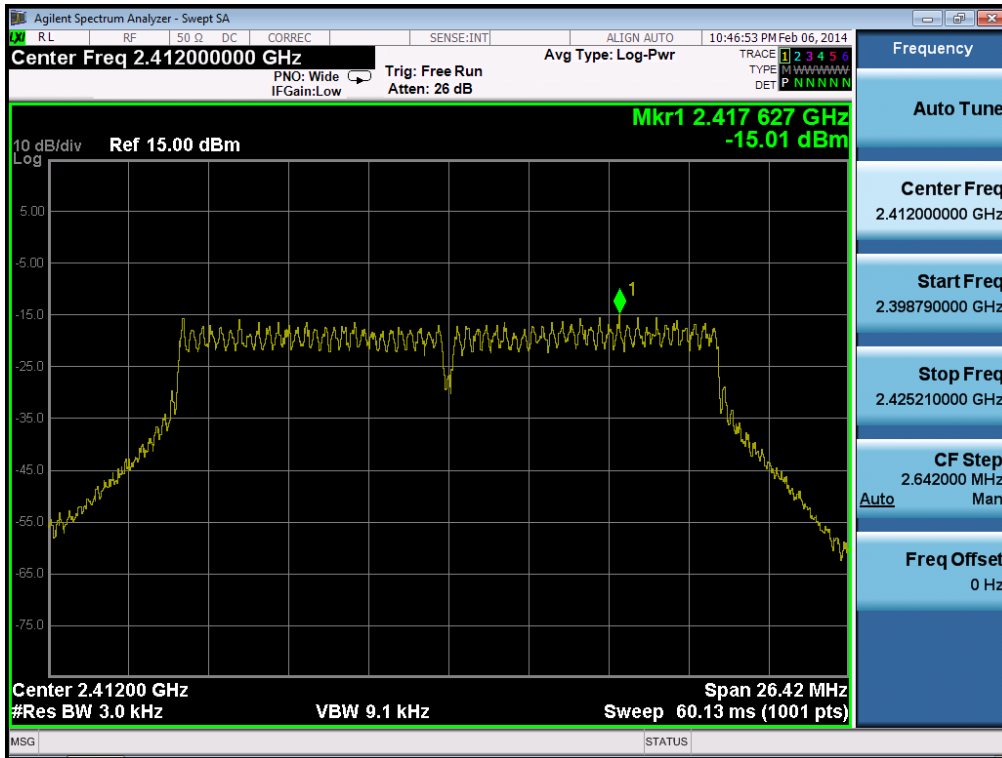


Maximum PKPSD

Test Mode: 802.11n(HT20) & MCS0 & 2437MHz

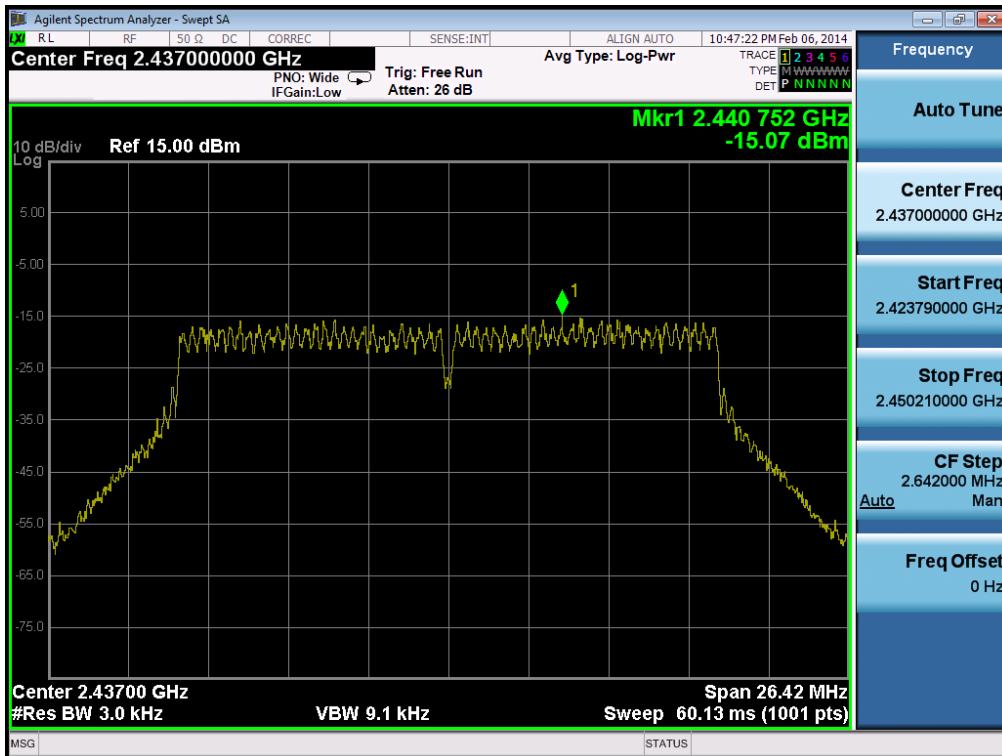

Maximum PKPSD

Test Mode: 802.11n(HT20) & MCS0 & 2462MHz

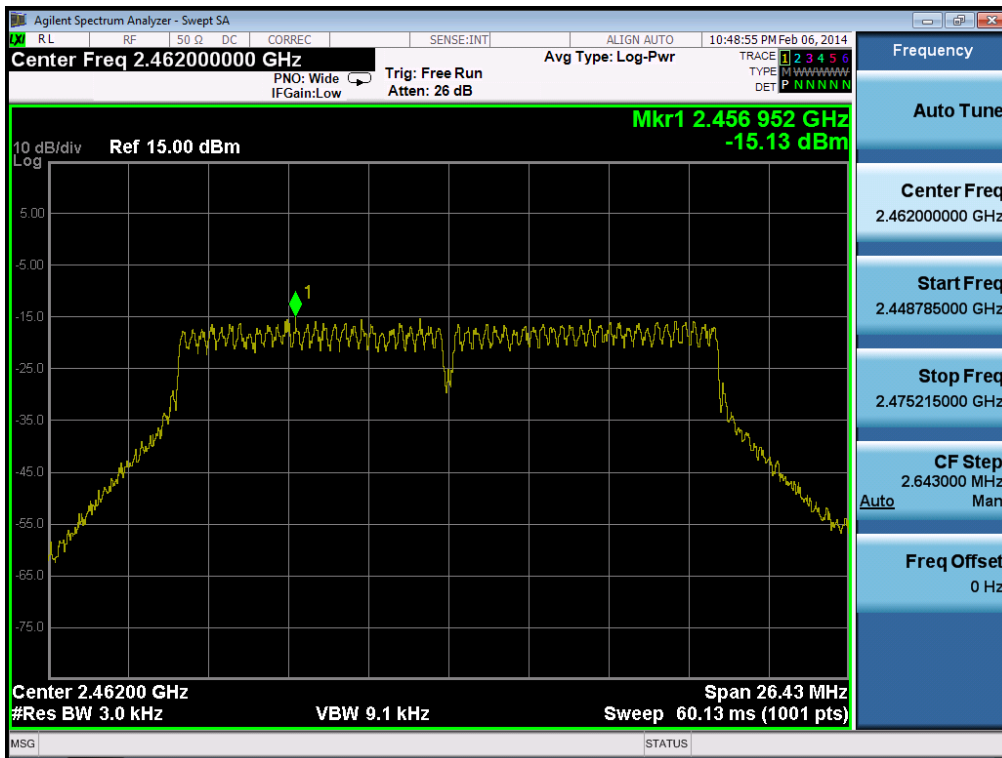

## 8.4 Out of Band Emissions at the Band Edge / Conducted Spurious Emissions

### Test requirements and limit, §15.247(d)

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If **the peak output power procedure** is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated **by at least 20 dB** relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in band average PSD level.

In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

#### ■ TEST CONFIGURATION

Refer to the APPENDIX I.

#### ■ TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer.

##### - Measurement Procedure 1 – Reference Level

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to  $\geq 1.5$  times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level

##### - Measurement Procedure 2 - Unwanted Emissions

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = **100 kHz.( Actual 1 MHz , See below note)**
3. Set the VBW  $\geq 3 \times$  RBW.(Actual 3 MHz, See below note)
4. Detector = **peak**.
5. Ensure that the number of measurement points  $\geq$  span/RBW
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. **Allow the trace to stabilize** (this may take some time, depending on the extent of the span).
9. Use the peak marker function to determine the maximum amplitude level.

**Note:** The conducted spurious emission was tested with below settings.

**Frequency range: 9 KHz ~ 30 MHz**

**RBW= 100kHz, VBW= 300kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT: 3001**

**Frequency range: 30 MHz ~ 10 GHz, 10 GHz~25 GHz**

**RBW= 1MHz, VBW= 3MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT: 40001**

**LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 KHz, VBW = 300 KHz)**

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 KHz, VBW = 300 KHz, SAPN = 100 MHz and BINS = 2001 to get accurate emission level within 100 KHz BW.


Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.




RESULT PLOTS

802.11b & 1Mbps & 2412MHz



Reference

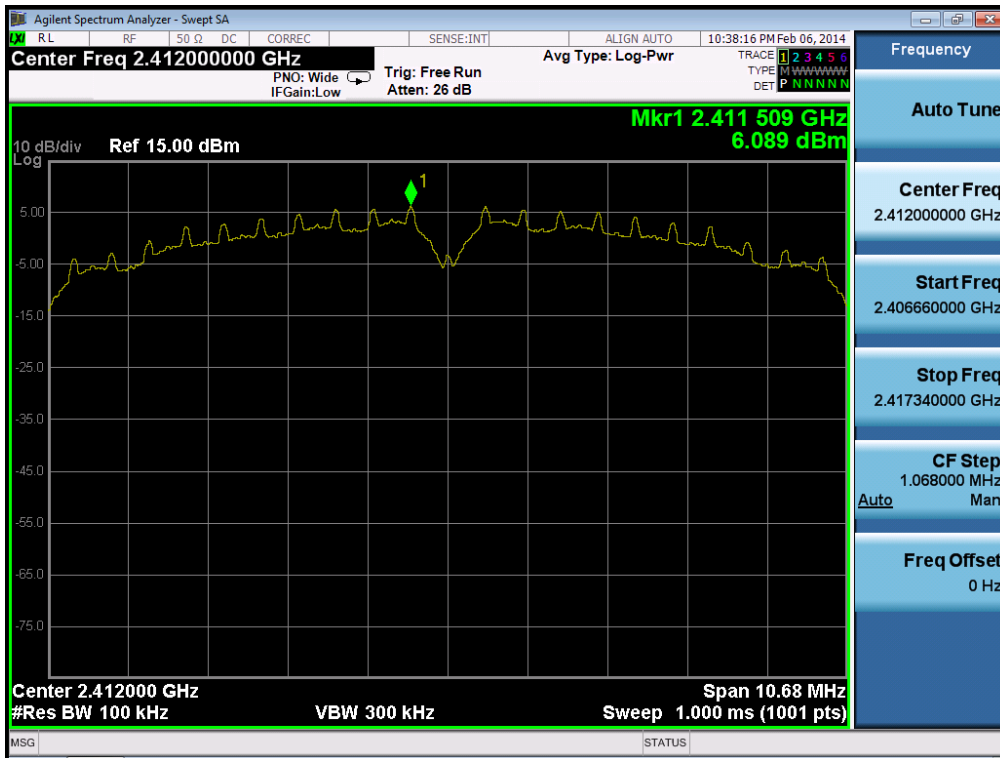


Low Band-edge

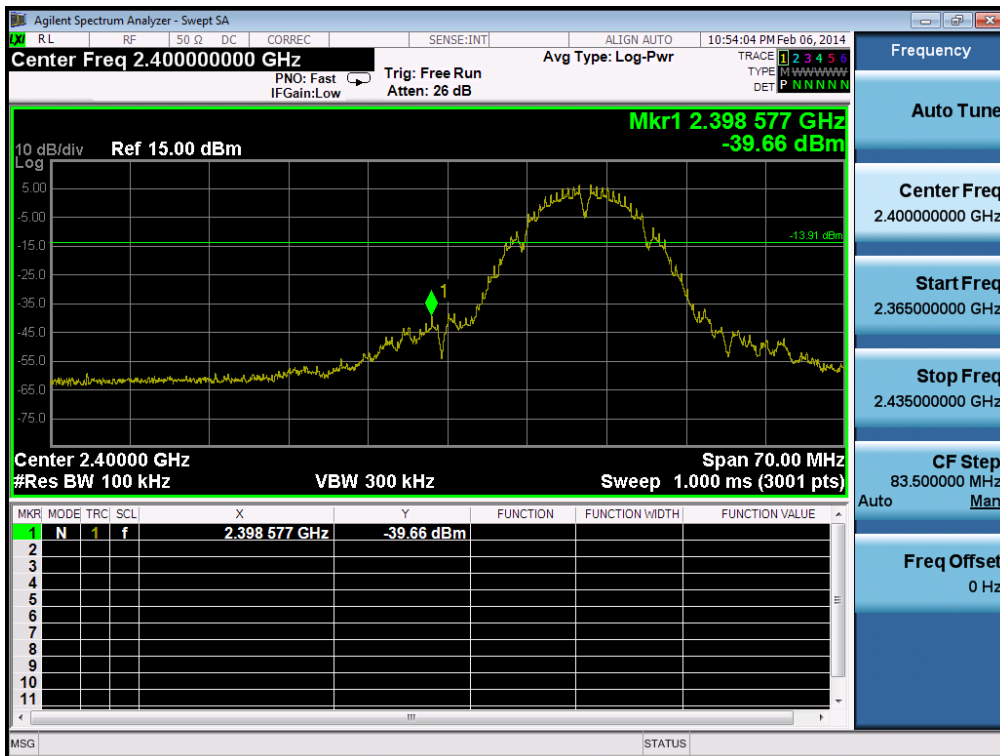

### Conducted Spurious Emissions

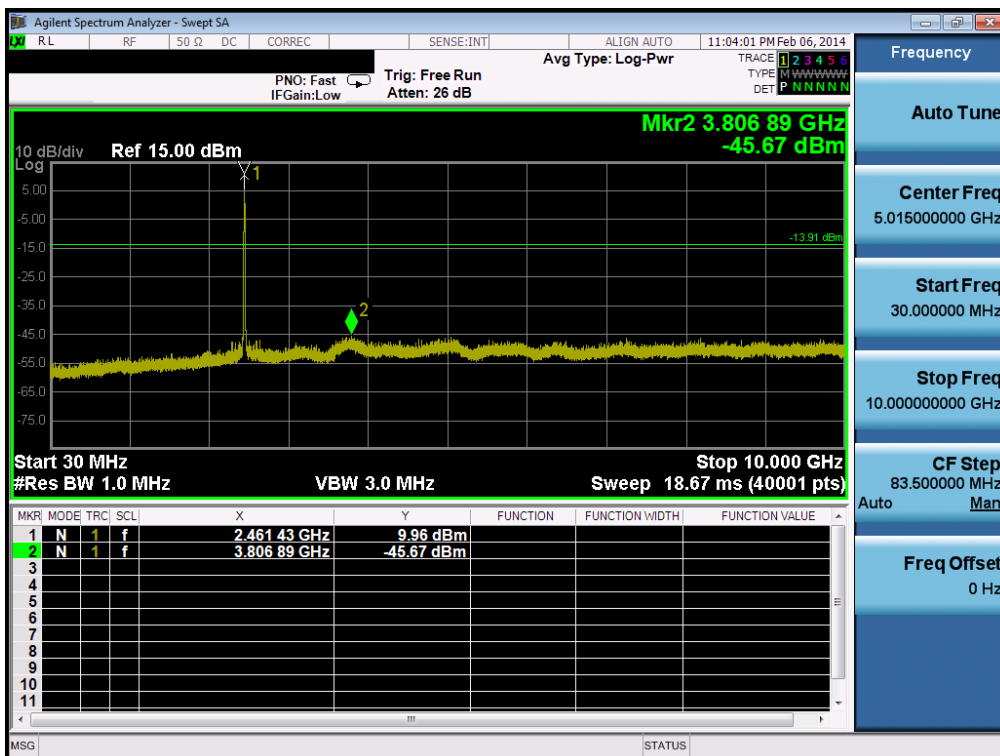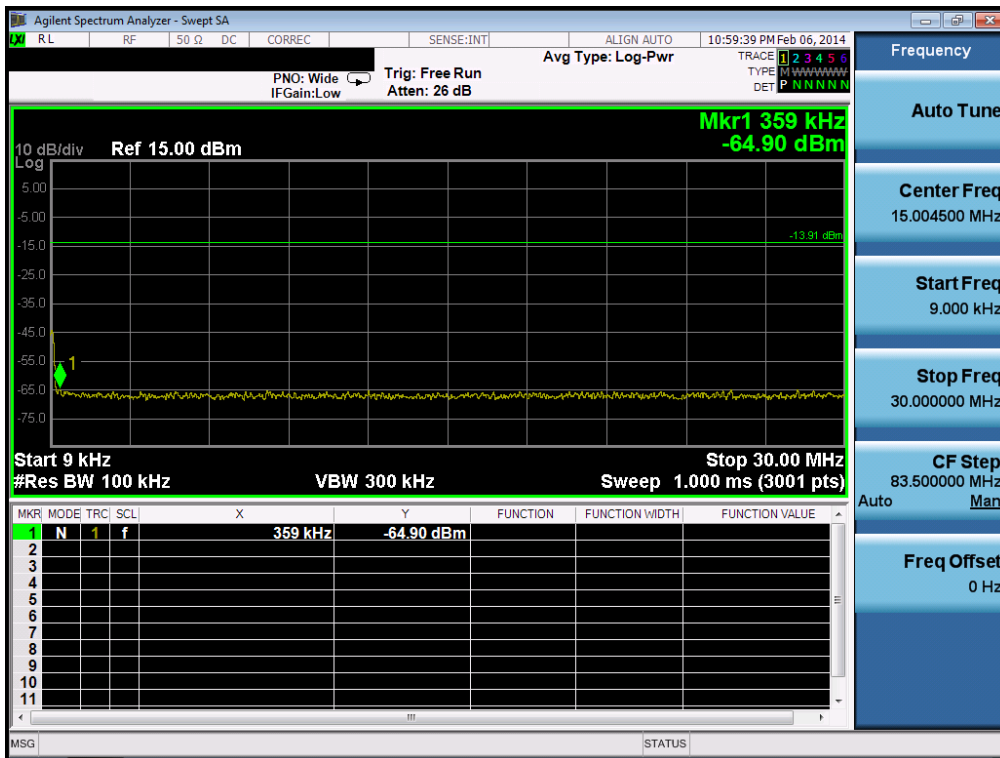


### Conducted Spurious Emissions

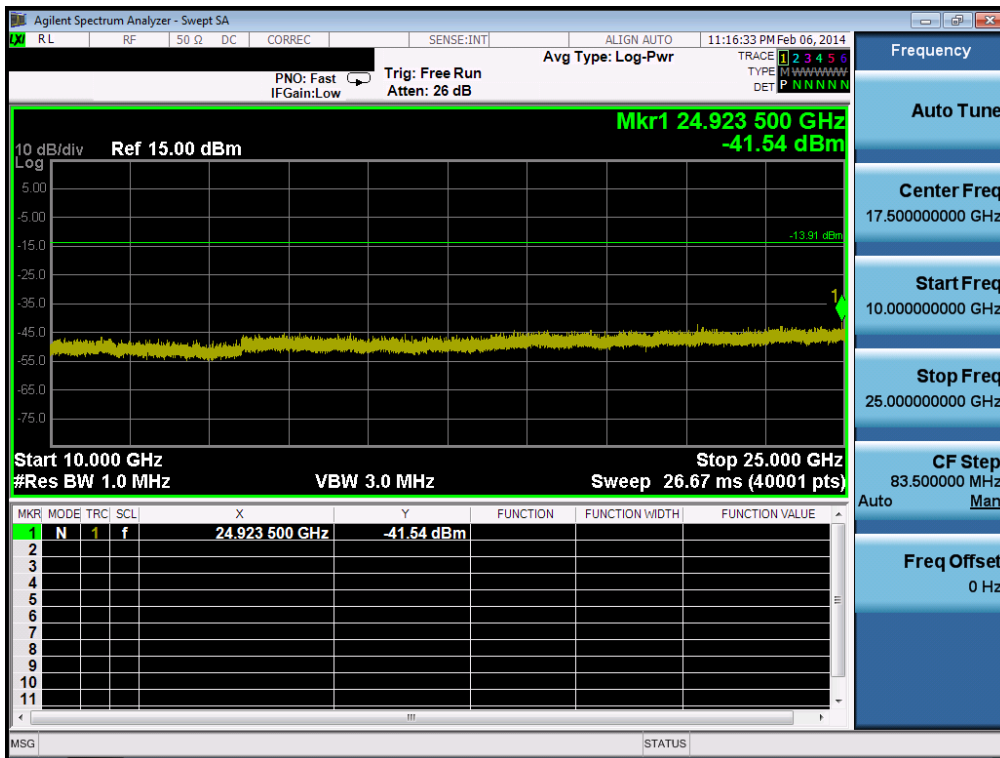


802.11b & 1Mbps & 2437MHz



Reference

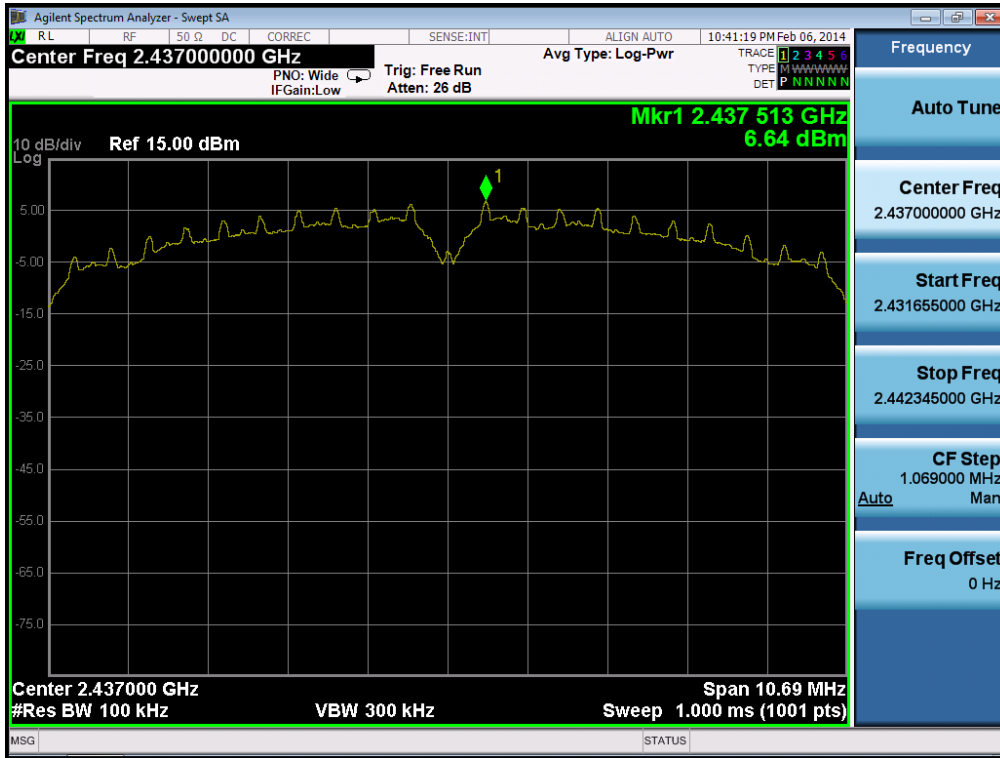

Conducted Spurious Emissions

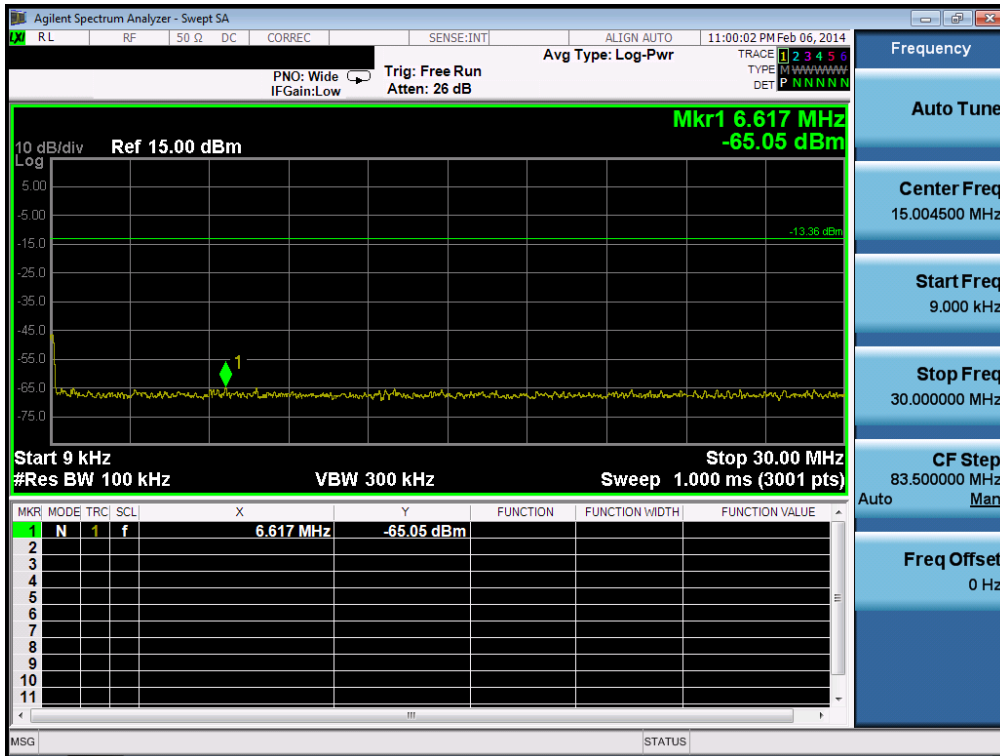


### Conducted Spurious Emissions

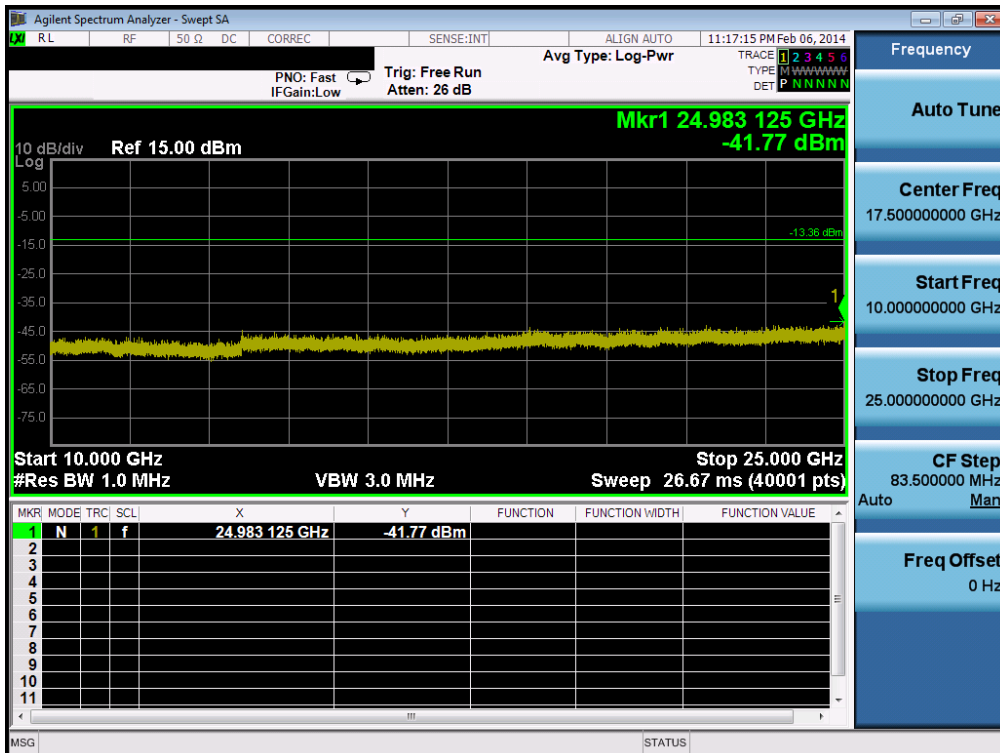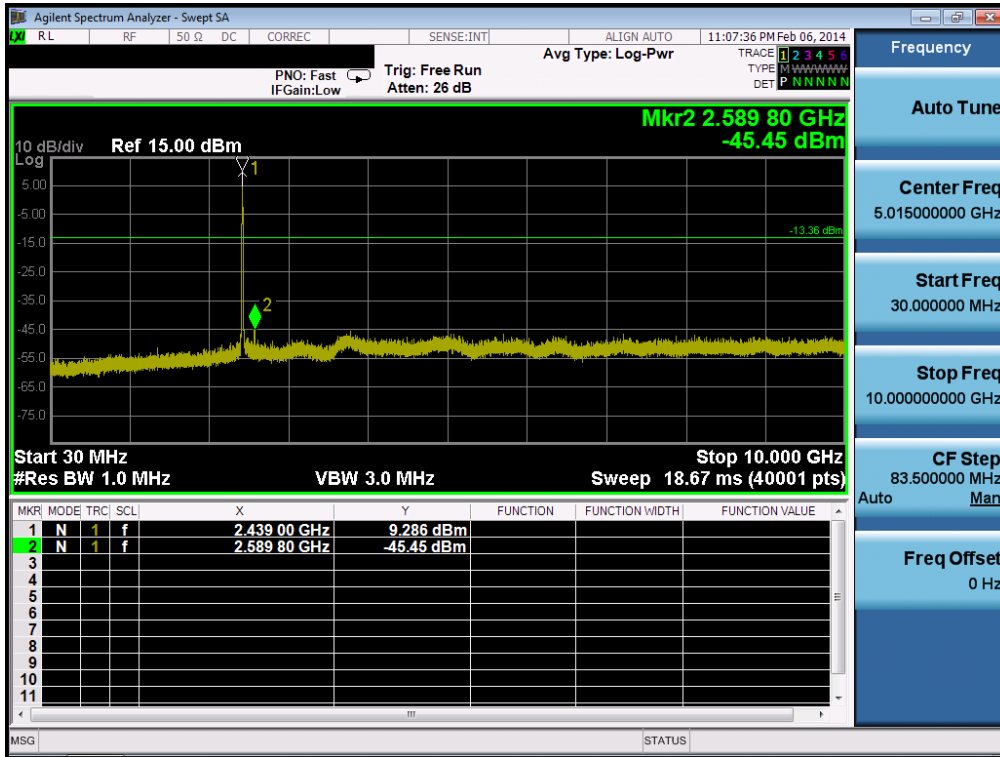


802.11b & 1Mbps & 2462MHz



Reference

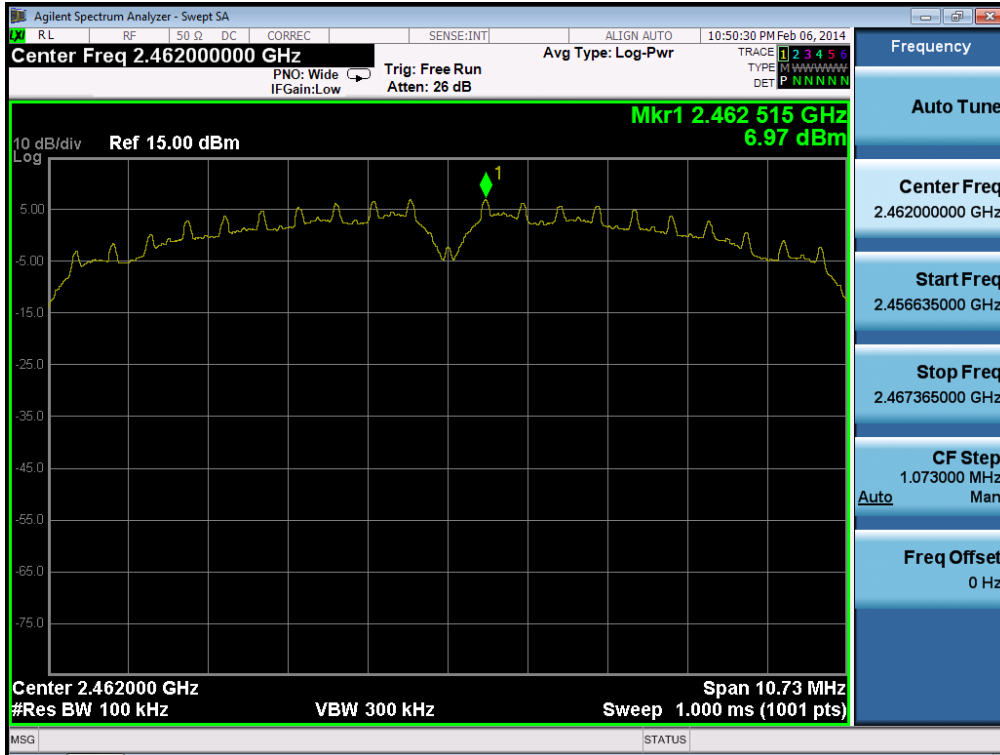

High Band-edge

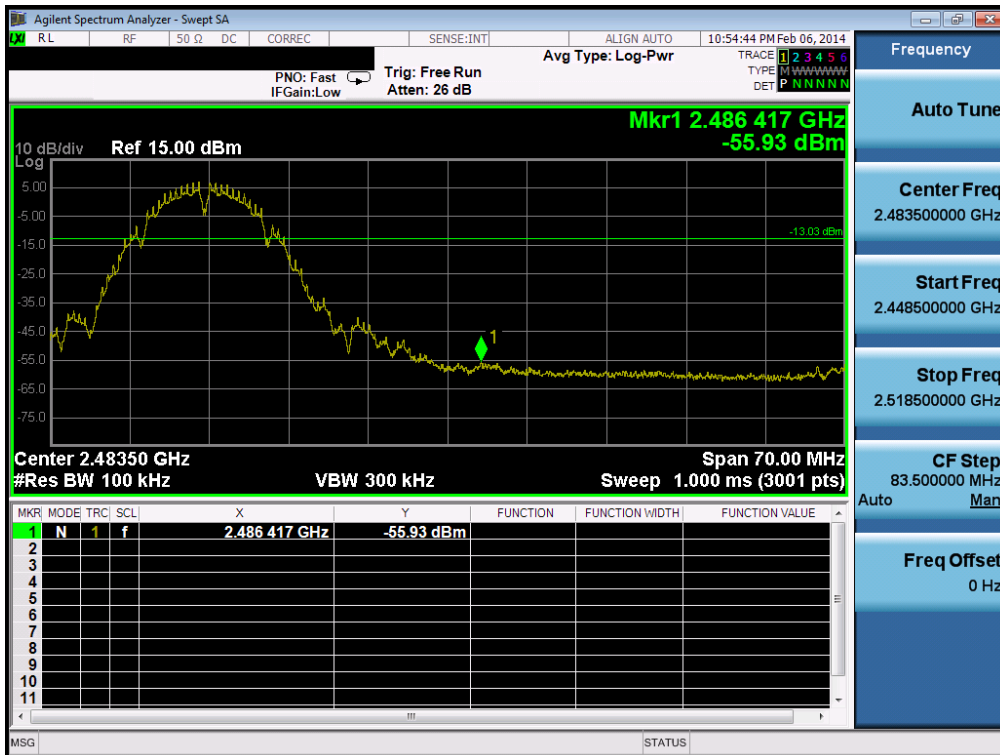

### Conducted Spurious Emissions

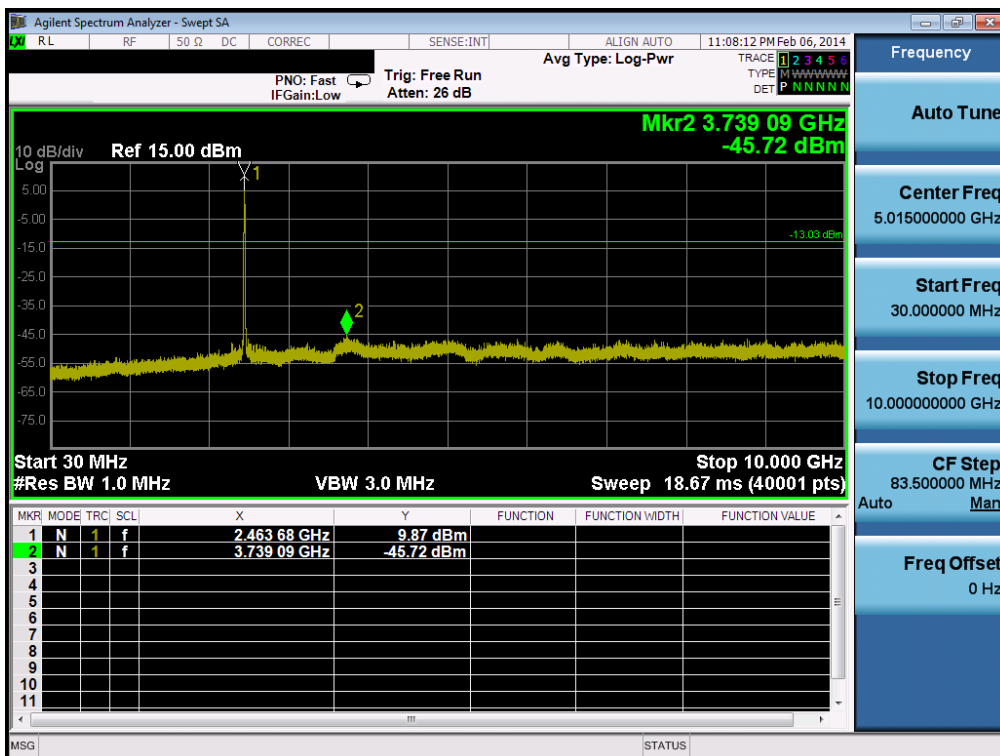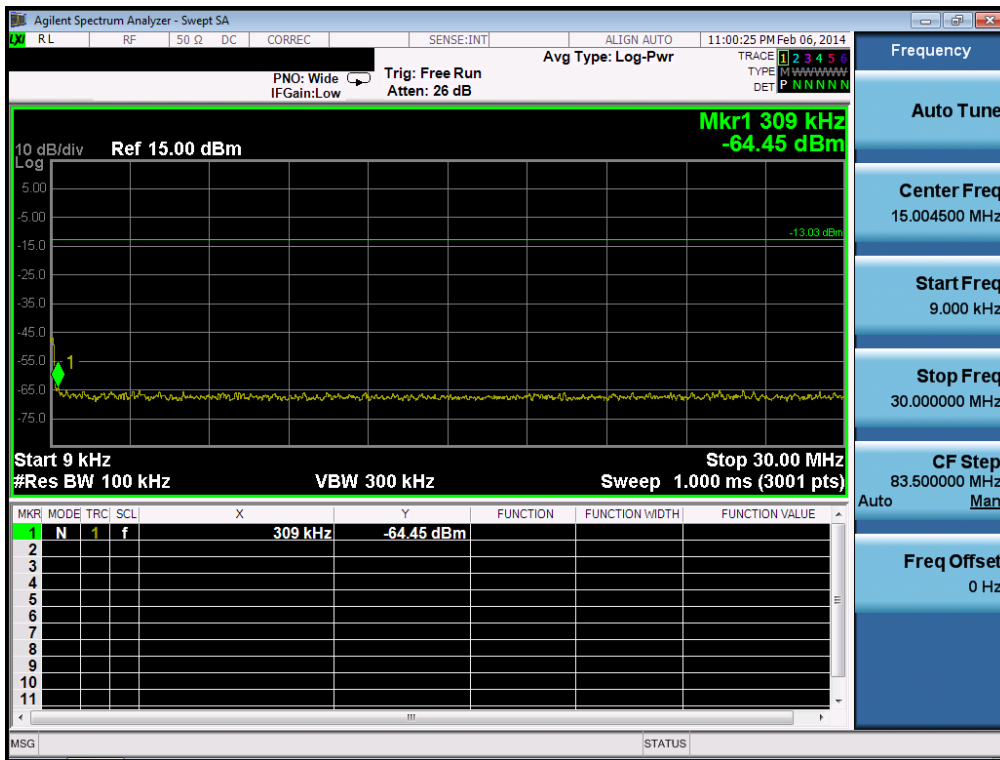

### Conducted Spurious Emissions

