

# HCT CO., LTD.

## CERTIFICATE OF COMPLIANCE FCC Certification

**Applicant Name:**  
LG Electronics MobileComm U.S.A., Inc.

**Address:**  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**Date of Issue:**  
July 31, 2014

**Test Site/Location:**  
HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-  
myeon, Icheon-si, Gyeonggi-do, Korea

**Report No.:** HCT-R-1407-F055

**HCT FRN:** 0005866421

**FCC ID** : ZNFD390N

**APPLICANT** : LG Electronics MobileComm U.S.A., Inc.

**FCC Model(s):** LG-D390n  
**EUT Type:** GSM/WCDMA/LTE phone with Bluetooth/WLAN/NFC  
**RF Output Field Strength** 3.82 dBuV/m  
**Frequency of Operation:** 13.5608 MHz  
**Modulation type** ASK  
**FCC Classification:** Low Power Communication Device – Transmitter  
**FCC Rule Part(s):** FCC Part 15.225 Subpart C

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

**HCT CO., LTD.** Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



**Report prepared by**  
**: Jong Seok Lee**  
**Test Engineer of RF Team**



**Approved by**  
**: Chang Seok Choi**  
**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1407-F055	July 31, 2014	- First Approval Report

# Table of Contents

- 1. GENERAL INFORMATION ..... 4
- 2. EUT DESCRIPTION ..... 4
- 3. TEST METHODOLOGY ..... 5
  - 3.1 EUT CONFIGURATION ..... 5
  - 3.2 EUT EXERCISE ..... 5
  - 3.3 GENERAL TEST PROCEDURES ..... 5
  - 3.4 DESCRIPTION OF TEST MODES ..... 5
  - 3.5 STANDARDS ..... 6
- 4. INSTRUMENT CALIBRATION..... 7
- 5. FACILITIES AND ACCREDITATIONS ..... 7
  - 5.1 FACILITIES ..... 7
  - 5.2 EQUIPMENT ..... 7
- 6. ANTENNA REQUIREMENTS ..... 7
- 7. TEST SUMMARY ..... 8
- 5. TEST SUMMARY ..... 8
- 8. RADIATED EMISSION MEASUREMENT ..... 9
  - 8.1. RADIATED EMISSION 9 kHz – 30 MHz ..... 10
  - 8.2. RADIATED EMISSION 30 MHz – 1000 MHz ..... 13
- 9. EMISSION BANDWIDTH PLOT..... 14
- 10. FREQUENCY TOLERANCE ..... 15
- 11. POWERLINE CONDUCTE EMISSIONS..... 16
- 12. LIST OF TEST EQUIPMENT ..... 25
  - 12.1 LIST OF TEST EQUIPMENT(Conducted Test) ..... 25
  - 12.2 LIST OF TEST EQUIPMENT(Radiated Test)..... 26

## 1. GENERAL INFORMATION

**Applicant:** LG Electronics MobileComm U.S.A., Inc.  
**Address:** 1000 Sylvan Avenue, Englewood Cliffs NJ 07632  
**FCC ID:** ZNFD390N  
**EUT Type:** GSM/WCDMA/LTE phone with Bluetooth/WLAN/NFC  
**Model name(s):** LG-D390n  
**Date(s) of Tests:** July 18, 2014 ~ July 31, 2014  
**Place of Tests:** HCT Co., Ltd.  
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea  
(IC Recognition No. : 5944A-3)

## 2. EUT DESCRIPTION

<b>FCC Model Name</b>	LG-D390n
<b>EUT Type</b>	GSM/WCDMA/LTE phone with Bluetooth/WLAN/NFC
<b>Power Supply</b>	DC 3.8 V
<b>Battery Type</b>	Li-ion Battery(Standard)
<b>Frequency of Operation</b>	13.5608 MHz
<b>Transmit Power</b>	3.82 dBuV/m
<b>Modulation Type</b>	ASK
<b>Antenna Specification</b>	Manufacturer: IM-Tech Antenna type: FPCB Antenna

### **3. TEST METHODOLOGY**

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009).

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2009) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2009).

#### **3.4 DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### 3.5 STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance With  
 FCC Part 15.Subpart C

Regulation	Measurement standard	Range
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(a)	ANSI C63.10:2009	13.553MHz to 13.567MHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(d)	ANSI C63.10:2009	outside of the 13.110-14.010 MHz band
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2009	9kHz to 30MHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209	ANSI C63.10:2009	30MHz to 1GHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.207	ANSI C63.10:2009	150kHz to 30MHz
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(e)	ANSI C63.10:2009	0.01% of nominal
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.215(c)	ANSI C63.10:2009	-

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The 10 m semi anechoic chamber used to collect the Conducted and Radiated data is located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4. Detailed description of test facilities was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned loop, dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203

## 7. TEST SUMMARY

The results in this report apply only to sample tested

Regulation	Test Type	Range	Result
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(a)	Radiated Electric Field Emissions	13.553MHz to 13.567MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(b)	Radiated Electric Field Emissions	13.410MHz to 13.553MHz and 13.567MHz to 13.710MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(c)	Radiated Electric Field Emissions	13.110 MHz to 13.410 MHz and 13.710 MHz to 14.010 MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209 (d)	Radiated Electric Field Emissions	9kHz to 30MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.209	Radiated Electric Field Emissions	30MHz to 1GHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.207	AC power conducted emissions	150kHz to 30MHz	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.225(e)	Frequency Stability	0.01% of nominal	Pass
Title 47 of the CFR:2012, Part 15 Subpart (c), Clause 15.215(c)	20 dB Bandwidth	-	Pass



## 8. RADIATED EMISSION MEASUREMENT

### Requirement(s): 15.209, 15.225

Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

**Minimum Standard: FCC Part 15.225 / 15.209**

Rule Part	Frequency (MHz)	Limit
Part 15.209	0.009 ~ 0.490	2400/F(kHz)uV/m@300
	0.490 ~1.705	24000/F(kHz)uV/m@30
	1.705 ~ 30	30 uV/m@30
	30 ~ 88	100 ** uV/m@3m
	88 ~ 216	150 ** uV/m@3m
	216 ~ 960	200 ** uV/m@3m
	Above 960	500 uV/m@3m

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

### 15.225 Operation within the band 13.110 – 14.010 MHz.

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dBuV/m) at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5dBuV/m) at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dBuV/m) at 30 meters.


(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

(f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device.

## 8.1. RADIATED EMISSION 9 kHz – 30 MHz

### Test Set-up

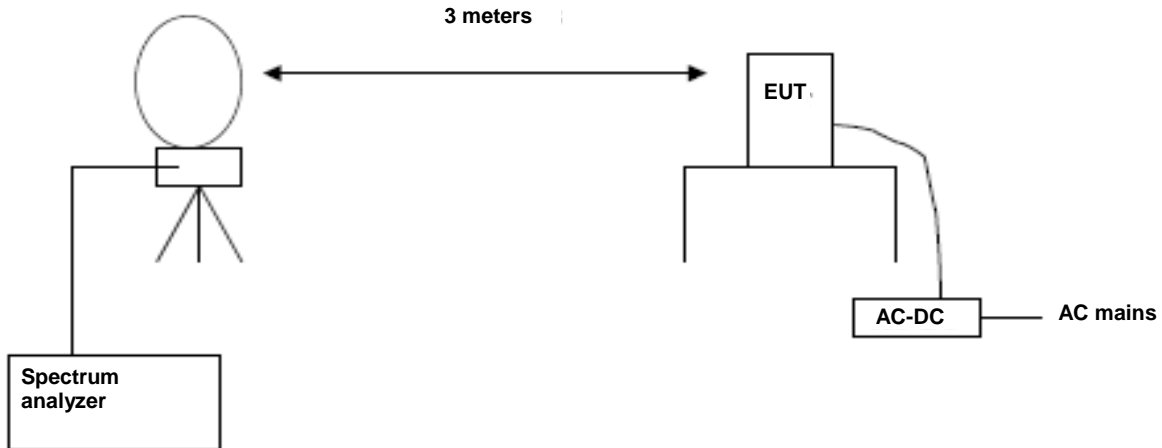

### Test Procedure

The EUT was placed on a non-conductive table located on a large open test site. The loop antenna was placed at a location 3m from the EUT. Radiated emissions were measured with the loop antenna both parallel and perpendicular to the plane of the EUT loop antenna and with x, y, z planes in EUT.

The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:

Corrected Amplitude = Raw Amplitude(dB $\mu$ V/m) + ACF(dB) + Cable Loss(dB) – Distance Correction Factor

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 1GHz

RBW = 9 kHz (9 kHz ~ 30MHz)

= 120 kHz (30 MHz ~ 1 GHz)

Trace Mode = max hold

Detector Mode = peak / Quasi-peak

Sweep time = auto

**Test Results**

13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5608	24.24(H)*	19.58	-40	3.82	84	80.18
13.5610	20.17(V)*	19.58	-40	-0.25	84	84.25

13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5530	12.51	19.58	-40	-7.91	50.47	58.38
13.5670	12.93	19.58	-40	-7.49	50.47	57.96

13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.1790	7.63	19.58	-40	-12.79	40.51	53.30
13.8480	6.91	19.58	-40	-13.51	40.51	54.02


9 kHz -30 MHz						
Frequency (MHz)	Read Level (dBuV)@3m	Ant.Factor+Cable Loss (dB/m)	Distance Correction (dB)	Result Level (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
7.5289	7.98	19.58	-40	-12.44	29.54	41.98
19.0628	6.46	18.58	-40	-14.96	29.54	44.50
27.0258	5.68	18.58	-40	-15.74	29.54	45.28
27.3456	4.92	18.58	-40	-16.50	29.54	46.04

Note :

1. Distance Correction Below 30MHz =  $40\log(3m/30m) = -40$  dB  
Measurement Distance : 3 m (Below 30 MHz)
2. Factor = Antenna Factor + Cable Loss
3. Result Level = Read Level + Factor + Distance Correction
4. Margin = Limit – Result Level
5. We have done x, y, z planes in EUT
6. Antenna rotated about its vertical/horizontal axis for maximum response at each azimuth position around the EUT.
7. Worst case of operating mode is type A, analog mode and 106 kbps.

## 8.2. RADIATED EMISSION 30 MHz – 1000 MHz

### Test Set-up

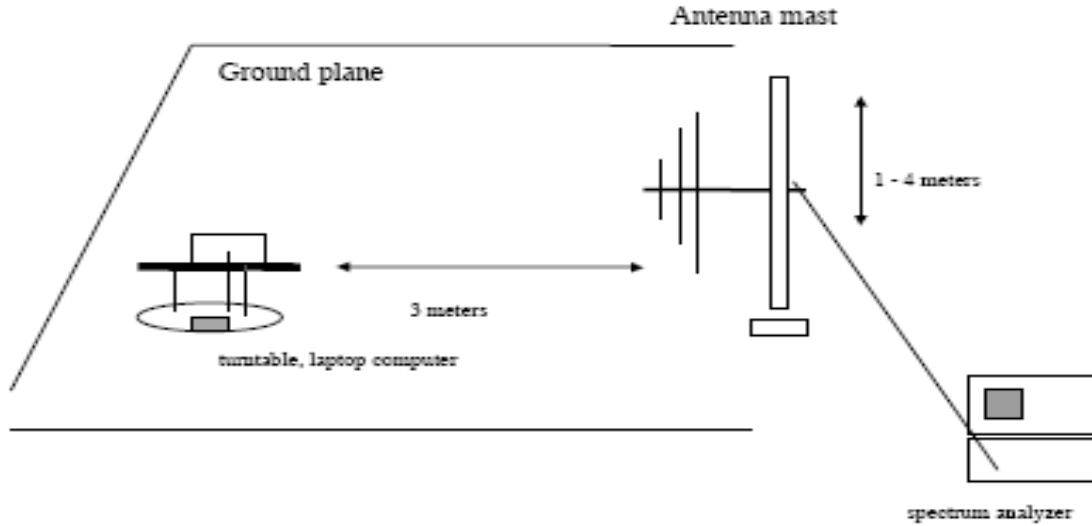

Test Procedures: Radiated emissions were measured according to ANSI C63.10.

The EUT was set to transmit at the highest output power.

The EUT was set 3 meter away from the measuring antenna.

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
34.68	19.87	12.01	0.97	H	32.85	40.0	7.15
41.85	20.21	12.79	1.08	H	34.08	40.0	5.92
52.77	20.78	13.25	1.17	V	35.20	40.0	4.80
79.86	23.24	9.16	1.46	H	33.86	40.0	6.14
124.39	22.68	12.01	1.89	H	36.58	43.5	6.92
167.28	21.42	13.26	2.12	V	36.80	43.5	6.70

### Remark


1. Result Level = Read Level + (Antenna Factor+ Cable Loss)
2. Margin = Limit – Result Level

## 9. EMISSION BANDWIDTH PLOT.

### Requirement(s):

Test Set-up: The EUT was connected to a spectrum analyzer.

Test Procedure: The 20 dB bandwidth was measured by using a spectrum analyzer.

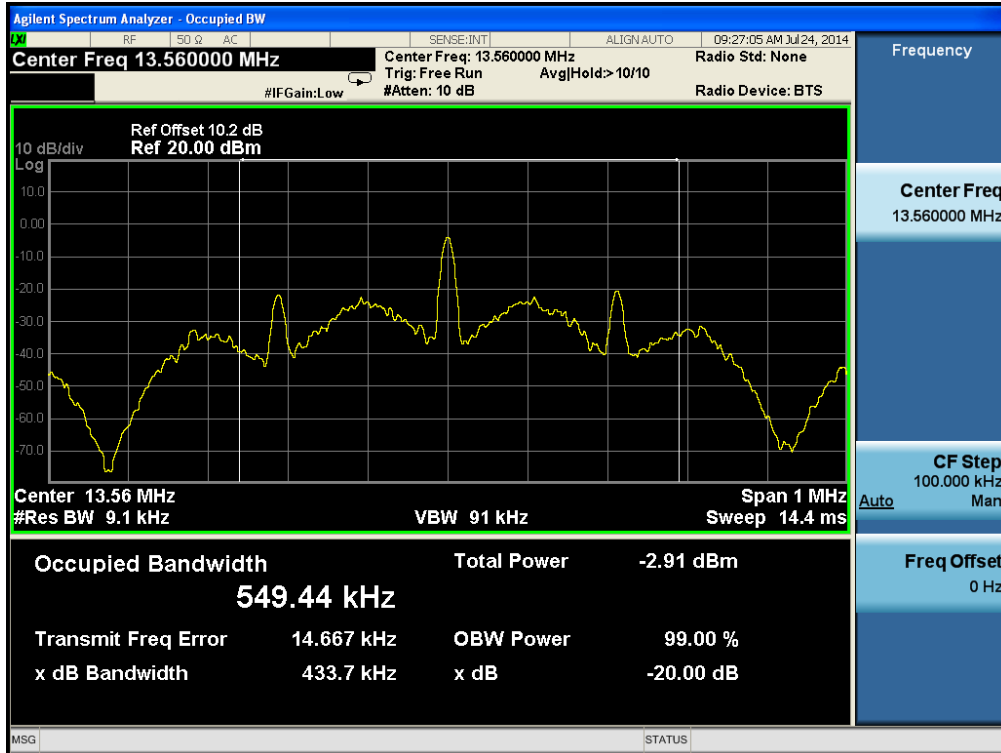

## 10. FREQUENCY TOLERANCE

Procedure: Part 15.225, ANSI 63.10

If required, the operating or transmitting frequency of an intentional radiator should be measured in accordance with the following procedure to ensure that the device operates outside certain precluded frequency bands and within the frequency range. No modulation needs to be supplied to the intentional radiator during these tests, unless modulation is required to produce an output, e.g., single-sideband suppressed carrier transmitters.

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -20°C to + 50°C using an environmental chamber.
- b) For battery operated equipment, the equipment tests shall be performed using a new battery.

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

Measurement Result:

VOLTAGE	POWER	Temperature	Frequency	Frequency Error
(%)		(°C)	(MHz)	(Hz)
100%	3.8 V	-20	13.560760	60
100%		-10	13.560738	38
100%		0	13.560733	33
100%		10	13.560718	18
100%		20	13.560700	0
100%		30	13.560686	-14
100%		40	13.560679	-21
100%		50	13.560663	-37
115%		4.37	20	13.560717
Batt. Endpoint	3.23	20	13.560725	25

## 11. POWERLINE CONDUCTE EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. The EUT is the device with a detachable antenna operating below 30 MHz.
  - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
  - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.



**Test Plots**  
**Unterminate the Antenna**  
**Conducted Emissions (Line 1)**

EMI Auto Test(2)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: LG-D390n  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: NFC MODE(UNTERMINATED)  
 Operator Name: KH-SEO

FCC CLASS B

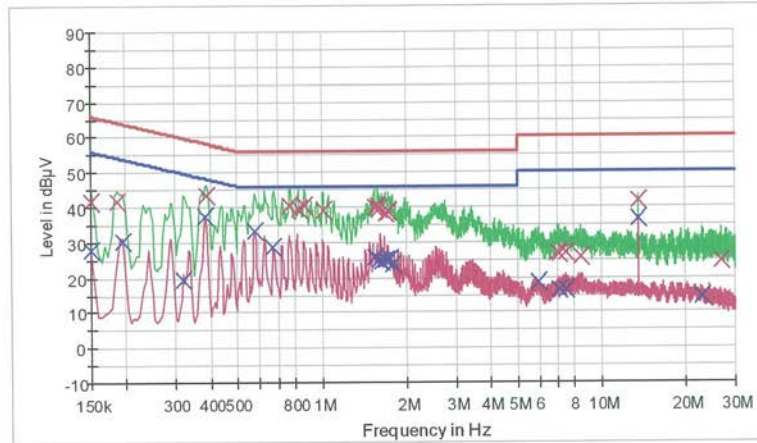

— FCC.CLASS B\_QP      — FCC.CLASS B\_AV      — Preview Result 1-PK  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	41.5	9.000	Off	N	9.6	24.5	66.0
0.186000	41.7	9.000	Off	N	9.7	22.5	64.2
0.388500	43.5	9.000	Off	N	9.7	14.6	58.1
0.770000	40.4	9.000	Off	N	9.7	15.6	56.0
0.828500	39.6	9.000	Off	N	9.7	16.4	56.0
0.869000	40.4	9.000	Off	N	9.7	15.6	56.0
1.013000	39.0	9.000	Off	N	9.7	17.0	56.0
1.544000	40.1	9.000	Off	N	9.8	15.9	56.0
1.589000	40.4	9.000	Off	N	9.8	15.6	56.0
1.607000	39.5	9.000	Off	N	9.8	16.5	56.0
1.683500	38.4	9.000	Off	N	9.8	17.6	56.0
1.733000	38.6	9.000	Off	N	9.8	17.4	56.0
6.930500	26.9	9.000	Off	N	10.0	33.1	60.0
7.074500	26.6	9.000	Off	N	10.0	33.4	60.0
7.412000	26.8	9.000	Off	N	10.0	33.2	60.0
8.469500	25.8	9.000	Off	N	10.0	34.2	60.0

7/25/2014

2:19:46

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
13.559000	41.8	9.000	Off	N	10.1	18.2	60.0
26.847500	24.5	9.000	Off	N	10.5	35.5	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	27.7	9.000	Off	N	9.6	28.3	56.0
0.195000	30.5	9.000	Off	N	9.7	23.3	53.8
0.321000	19.3	9.000	Off	N	9.7	30.4	49.7
0.384000	37.7	9.000	Off	N	9.7	10.6	48.2
0.576500	33.2	9.000	Off	N	9.6	12.8	46.0
0.671000	28.7	9.000	Off	N	9.7	17.3	46.0
1.548500	25.7	9.000	Off	N	9.8	20.3	46.0
1.602500	24.9	9.000	Off	N	9.8	21.1	46.0
1.638500	24.3	9.000	Off	N	9.8	21.7	46.0
1.692500	25.0	9.000	Off	N	9.8	21.0	46.0
1.742000	25.1	9.000	Off	N	9.8	20.9	46.0
1.787000	23.5	9.000	Off	N	9.8	22.5	46.0
5.967500	18.5	9.000	Off	N	9.9	31.5	50.0
7.029500	16.3	9.000	Off	N	10.0	33.7	50.0
7.074500	16.6	9.000	Off	N	10.0	33.4	50.0
7.412000	16.3	9.000	Off	N	10.0	33.7	50.0
13.559000	36.8	9.000	Off	N	10.1	13.2	50.0
22.905500	14.4	9.000	Off	N	10.4	35.6	50.0

**Conducted Emissions (Line 2)**

EMI Auto Test(2)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: LG-D390n  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: NFC MODE(UNTERMINATED)  
 Operator Name: KH-SEO

FCC CLASS B

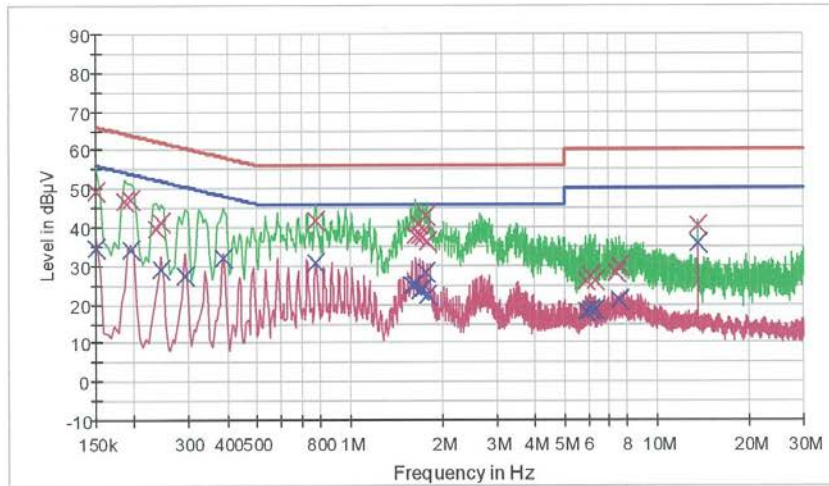

— FCC CLASS B\_OP      — FCC CLASS B\_AV      — Preview Result 1-PK\*  
 — Preview Result 2-AVG      × Final Result 1-CPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	49.4	9.000	Off	L1	9.6	16.6	66.0
0.186000	46.7	9.000	Off	L1	9.6	17.5	64.2
0.195000	47.2	9.000	Off	L1	9.6	16.6	63.8
0.235500	39.6	9.000	Off	L1	9.7	22.7	62.3
0.244500	41.3	9.000	Off	L1	9.7	20.6	61.9
0.774500	41.6	9.000	Off	L1	9.7	14.4	56.0
1.643000	37.9	9.000	Off	L1	9.8	18.1	56.0
1.679000	40.6	9.000	Off	L1	9.8	15.4	56.0
1.692500	37.8	9.000	Off	L1	9.8	18.2	56.0
1.737500	37.5	9.000	Off	L1	9.8	18.5	56.0
1.778000	42.8	9.000	Off	L1	9.8	13.2	56.0
1.787000	36.3	9.000	Off	L1	9.8	19.7	56.0
5.895500	26.0	9.000	Off	L1	9.9	34.0	60.0
6.084500	27.2	9.000	Off	L1	9.9	32.8	60.0
6.278000	26.0	9.000	Off	L1	9.9	34.0	60.0
7.385000	28.4	9.000	Off	L1	10.0	31.6	60.0

7/25/2014

2:11:35

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
7.578500	29.9	9.000	Off	L1	10.0	30.1	60.0
13.559000	40.6	9.000	Off	L1	10.2	19.4	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	34.6	9.000	Off	L1	9.6	21.4	56.0
0.195000	34.1	9.000	Off	L1	9.6	19.7	53.8
0.244500	29.1	9.000	Off	L1	9.7	22.8	51.9
0.294000	27.2	9.000	Off	L1	9.7	23.2	50.4
0.388500	32.2	9.000	Off	L1	9.7	15.9	48.1
0.774500	30.6	9.000	Off	L1	9.7	15.4	46.0
1.598000	24.8	9.000	Off	L1	9.8	21.2	46.0
1.643000	25.5	9.000	Off	L1	9.8	20.5	46.0
1.692500	23.5	9.000	Off	L1	9.8	22.5	46.0
1.737500	24.0	9.000	Off	L1	9.8	22.0	46.0
1.773500	28.4	9.000	Off	L1	9.8	17.6	46.0
1.787000	22.5	9.000	Off	L1	9.8	23.5	46.0
5.846000	18.1	9.000	Off	L1	9.9	31.9	50.0
5.895500	18.0	9.000	Off	L1	9.9	32.0	50.0
6.084500	18.4	9.000	Off	L1	9.9	31.6	50.0
6.278000	18.4	9.000	Off	L1	9.9	31.6	50.0
7.578500	21.1	9.000	Off	L1	10.0	28.9	50.0
13.559000	35.9	9.000	Off	L1	10.2	14.1	50.0

**Terminate the Antenna  
Conducted Emissions (Line 1)**

EMI Auto Test(2)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: LG-D390n  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: NFC MODE(TERMINATED)  
 Operator Name: KH-SEO

FCC CLASS B

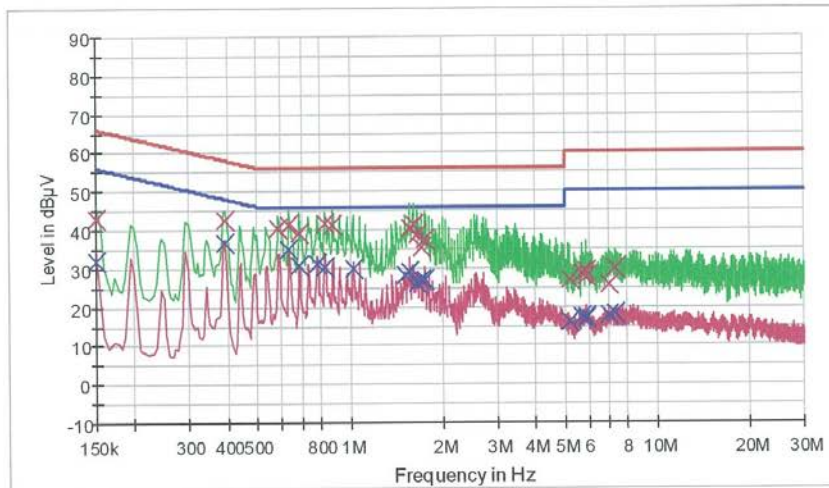

— FCCCLASS B\_OP      — FCCCLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	42.9	9.000	Off	N	9.6	23.1	66.0
0.393000	42.5	9.000	Off	N	9.7	15.5	58.0
0.585500	40.5	9.000	Off	N	9.6	15.5	56.0
0.635000	41.3	9.000	Off	N	9.7	14.7	56.0
0.684500	39.2	9.000	Off	N	9.7	16.8	56.0
0.828500	41.5	9.000	Off	N	9.7	14.5	56.0
0.878000	41.3	9.000	Off	N	9.7	14.7	56.0
1.562000	40.5	9.000	Off	N	9.8	15.5	56.0
1.611500	41.4	9.000	Off	N	9.8	14.6	56.0
1.661000	38.7	9.000	Off	N	9.8	17.3	56.0
1.710500	35.6	9.000	Off	N	9.8	20.4	56.0
1.755500	37.7	9.000	Off	N	9.8	18.3	56.0
5.171000	27.1	9.000	Off	N	9.9	32.9	60.0
5.657000	28.8	9.000	Off	N	9.9	31.2	60.0
5.846000	27.8	9.000	Off	N	9.9	32.2	60.0
5.900000	29.1	9.000	Off	N	9.9	30.9	60.0

7/25/2014

9:55:38

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
6.948500	25.9	9.000	Off	N	10.0	34.1	60.0
7.326500	30.0	9.000	Off	N	10.0	30.0	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	32.1	9.000	Off	N	9.6	23.9	56.0
0.393000	36.6	9.000	Off	N	9.7	11.4	48.0
0.635000	34.8	9.000	Off	N	9.7	11.2	46.0
0.684500	30.9	9.000	Off	N	9.7	15.1	46.0
0.783500	31.2	9.000	Off	N	9.7	14.8	46.0
0.833000	30.2	9.000	Off	N	9.7	15.8	46.0
1.026500	29.7	9.000	Off	N	9.7	16.3	46.0
1.512500	28.4	9.000	Off	N	9.8	17.6	46.0
1.562000	29.2	9.000	Off	N	9.8	16.8	46.0
1.661000	26.0	9.000	Off	N	9.8	20.0	46.0
1.706000	26.8	9.000	Off	N	9.8	19.2	46.0
1.755500	26.9	9.000	Off	N	9.8	19.1	46.0
5.171000	15.9	9.000	Off	N	9.9	34.1	50.0
5.657000	17.4	9.000	Off	N	9.9	32.6	50.0
5.846000	17.5	9.000	Off	N	9.9	32.5	50.0
5.900000	16.8	9.000	Off	N	9.9	33.2	50.0
6.948500	17.7	9.000	Off	N	10.0	32.3	50.0
7.326500	18.3	9.000	Off	N	10.0	31.7	50.0

7/25/2014

9:55:38



**Conducted Emissions (Line 2)**

EMI Auto Test(2)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: LG-D390n  
 Manufacturer: LG  
 Test Site: SHIELD ROOM  
 Operating Conditions: NFC MODE(TERMINATED)  
 Operator Name: KH-SEO

FCC CLASS B

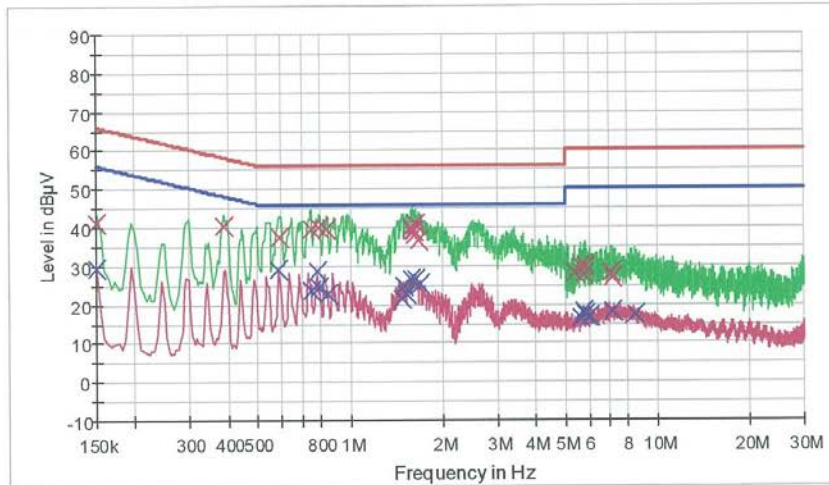

— FCCCLASS B\_QP      — FCCCLASS B\_AV      — Preview Result 1-PK+  
— Preview Result 2-AVG      x Final Result 1-QPK      x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	41.3	9.000	Off	L1	9.6	24.7	66.0
0.388500	40.3	9.000	Off	L1	9.7	17.8	58.1
0.590000	37.5	9.000	Off	L1	9.6	18.5	56.0
0.747500	39.5	9.000	Off	L1	9.7	16.5	56.0
0.792500	39.9	9.000	Off	L1	9.7	16.1	56.0
0.842000	39.5	9.000	Off	L1	9.7	16.5	56.0
1.584500	39.9	9.000	Off	L1	9.8	16.1	56.0
1.593500	39.3	9.000	Off	L1	9.8	16.7	56.0
1.616000	39.0	9.000	Off	L1	9.8	17.0	56.0
1.625000	38.1	9.000	Off	L1	9.8	17.9	56.0
1.638500	40.7	9.000	Off	L1	9.8	15.3	56.0
1.679000	36.7	9.000	Off	L1	9.8	19.3	56.0
5.351000	28.0	9.000	Off	L1	9.9	32.0	60.0
5.594000	29.9	9.000	Off	L1	9.9	30.1	60.0
5.724500	27.7	9.000	Off	L1	9.9	32.3	60.0
5.841500	29.9	9.000	Off	L1	9.9	30.1	60.0

7/25/2014

10:02:03

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
7.056500	28.1	9.000	Off	L1	10.0	31.9	60.0
7.092500	26.8	9.000	Off	L1	10.0	33.2	60.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	29.3	9.000	Off	L1	9.6	26.7	56.0
0.585500	29.0	9.000	Off	L1	9.6	17.0	46.0
0.747500	23.5	9.000	Off	L1	9.7	22.5	46.0
0.779000	28.7	9.000	Off	L1	9.7	17.3	46.0
0.792500	24.5	9.000	Off	L1	9.7	21.5	46.0
0.846500	22.8	9.000	Off	L1	9.7	23.2	46.0
1.472000	21.4	9.000	Off	L1	9.7	24.6	46.0
1.490000	25.0	9.000	Off	L1	9.7	21.0	46.0
1.526000	22.6	9.000	Off	L1	9.8	23.4	46.0
1.584500	26.7	9.000	Off	L1	9.8	19.3	46.0
1.638500	26.4	9.000	Off	L1	9.8	19.6	46.0
1.697000	25.1	9.000	Off	L1	9.8	20.9	46.0
5.643500	16.5	9.000	Off	L1	9.9	33.5	50.0
5.724500	18.1	9.000	Off	L1	9.9	31.9	50.0
5.841500	17.3	9.000	Off	L1	9.9	32.7	50.0
6.030500	16.9	9.000	Off	L1	9.9	33.1	50.0
7.092500	18.3	9.000	Off	L1	10.0	31.7	50.0
8.465000	17.2	9.000	Off	L1	10.0	32.8	50.0

7/25/2014

10:02:03



## 12. LIST OF TEST EQUIPMENT

### 12.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/29/2014	Annual	01/29/2015	100073
Agilent	E4440A/ Spectrum Analyzer	04/09/2014	Annual	04/09/2015	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	05/23/2014	Annual	05/23/2015	MY51110063
Agilent	N1911A/Power Meter	01/24/2014	Annual	01/24/2015	MY45100523
Agilent	N1921A /POWER SENSOR	07/11/2013	Annual	07/11/2014	MY45241059
Hewlett Packard	11636B/Power Divider	10/22/2013	Annual	10/22/2014	11377
Agilent	87300B/Directional Coupler	12/18/2013	Annual	12/18/2014	3116A03621
Hewlett Packard	11667B / Power Splitter	01/27/2014	Annual	01/27/2015	10545
DIGITAL	EP-3010 /DC POWER SUPPLY	10/29/2013	Annual	10/29/2014	3110117
ITECH	IT6720 / DC POWER SUPPLY	11/05/2013	Annual	11/05/2014	0100021562870011 99
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	04/11/2015	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	05/07/2015	100422
Agilent	8493C / Attenuator(10 dB)	07/21/2013	Annual	07/21/2015	76649
WEINSCHEL	2-3 / Attenuator(3 dB)	10/28/2013	Annual	10/28/2014	BR0617
Note: This equipment (8493C / Attenuator(10 dB)) is used after 07/21/2014 and actual calibration date is 07/21/2014					

**12.2 LIST OF TEST EQUIPMENT(Radiated Test)**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	12/17/2012	Biennial	12/17/2014	3150
Rohde & Schwarz	ESCI / EMI TEST RECEIVER	01/24/2014	Annual	01/24/2015	100584
HD	MA240/ Antenna Position Tower	N/A	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/10/2013	Annual	09/10/2014	10094
CERNECX	CBL18265035 / POWER AMP	07/23/2014	Annual	07/23/2015	22966
CERNECX	CBL26405040 / POWER AMP	04/04/2014	Annual	04/04/2015	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	07/05/2015	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	10/30/2012	Biennial	10/30/2014	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/24/2014	Annual	01/24/2015	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	02/03/2014	Annual	02/03/2015	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	04/09/2015	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	04/04/2015	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	06/24/2014	Annual	06/17/2015	1
TESCOM	TC-3000C / BLUETOOTH TESTER	04/11/2014	Annual	04/11/2015	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	05/07/2015	100422
Rohde & Schwarz	LOOP ANTENNA	08/14/2012	Biennial	08/14/2014	100179
CERNECX	CBL06185030 / POWER AMP	07/21/2014	Annual	07/21/2015	22965
CERNECX	CBLU1183540 / POWER AMP	07/21/2014	Annual	07/21/2015	22964
<p>Note: This equipment ( CBL18265035 / POWER AMP ) is used after 07/23/2014 and actual calibration date is 07/23/2014</p> <p>This equipment ( CBL06185030 / POWER AMP ) is used after 07/21/2014 and actual calibration date is 07/21/2014</p> <p>This equipment ( CBLU1183540 / POWER AMP ) is used after 07/21/2014 and actual calibration date is 07/21/2014</p>					